

Electric Vehicle Routing and Charging/Discharging under Time-Variant Electricity Prices

Bo Lin

University of Toronto, 5 King's College Rd, Toronto, ON M5S 3G8, Canada
blin@mie.utoronto.ca

Bissan Ghaddar

Ivey Business School, University of Western Ontario, 1255 Western Road, London, ON N6G 0N1, Canada
bghaddar@uwaterloo.ca

Jatin Nathwani

University of Waterloo, 200 University Avenue W., Waterloo, ON N2L 3G1, Canada
jnathwani@uwaterloo.ca

The integration of electric vehicles (EVs) with the energy grid has become an important area of research due to the increasing EV penetration in today's transportation systems. Under appropriate management of EV charging and discharging, the grid can currently satisfy the energy requirements of a considerable number of EVs. Furthermore, EVs can help enhance the reliability and stability of the energy grid through ancillary services such as energy storage. This paper proposes the EV routing problem with time windows under time-variant electricity prices (EVRPTW-TP) which optimizes the routing of a fleet of electric vehicles that are delivering products to customers, jointly with the scheduling of the charging and discharging of the vehicles from/to the grid. The proposed model is a multiperiod vehicle routing problem where electric vehicles can stop at charging stations to either recharge their batteries or inject stored energy to the grid. Given the energy costs that vary based on time-of-use, the charging and discharging schedules of the EVs are optimized to benefit from the capability of storing energy by shifting the demand from peak hours to off-peak hours when the price of energy is lower. The vehicles can recover the cost of energy and potentially realize profits by injecting energy back to the grid at high price periods. EVRPTW-TP is formulated as an optimization problem and a Lagrangian relaxation approach as well as a hybrid variable neighborhood search/tabu search heuristic are proposed to obtain high quality solutions. Numerical experiments on instances from the literature are provided. The proposed model is also evaluated on the case study of a grocery delivery service at the region of Kitchener-Waterloo in Ontario, Canada. Insights on the impacts of energy pricing, service time slots, as well as fleet size are presented.

Key words: Electric vehicles, vehicle routing, energy storage, metaheuristics.

1. Introduction

Over the recent years, sustainability has become a paramount global concern. In the transportation sector, public and private institutions are attempting to increase the penetration of electric vehicles due to their ability to mitigate greenhouse gas emission and their direct impact on reduc-

ing particulate matter pollution (Boulanger et al. 2011, Waraich et al. 2013). Companies are also investigating the use of new green technologies due the potential brand benefits given the growing demands for green products (Kleindorfer et al. 2005, Dekker et al. 2012). UPS, FedEx, and Walmart are among the leading companies that have deployed electric vehicle fleets in their operations (Winston 2018). As a consequence, the past decade has seen a rapid expansion of electric vehicle adoption (Hertzke et al. 2019). According to Statistics Canada (2019), the number of new motor vehicle registrations for electric vehicles has increased from 25,163 in 2014 to 69,010 in 2018. As projected by Canada Energy Board (National Energy Board 2018), electric vehicles will account for over 60% of the new motor vehicles registration in Canada by 2040.

Not surprisingly, the growing penetration of electric vehicles (EVs) has a significant impact on the power system. Previous studies have shown that, without proper management, the EVs will represent a sizable fraction of the total demand for energy (Triviño-Cabrera et al. 2019, Dyke et al. 2010). As a result, the gap between peak and off-peak demand will increase, and the ramp requirements will affect the stability and reliability of the power network (Villar et al. 2012). With optimized scheduling of the charging, the existing power systems infrastructure can accommodate the energy requirements of a considerable number of EVs (Razeghi and Samuelsen 2016, Kintner-Meyer et al. 2007, Letendre et al. 2008). In doing so, the need for installing new capacity, which is expensive, time-consuming, and harmful to the environment, can be minimized (Villar et al. 2012). Furthermore, EVs can be incorporated into the power grid as a reliable and cost-effective distributed power storage (Kempton and Letendre 1997). By optimizing the charging and discharging to the grid, an EV fleet connected to the energy grid can assist to level out peaks in the overall electricity consumption and support the utilization of intermittent renewable energy.

Although the vehicle-to-grid connectivity represents an enticing idea, it nonetheless remains in the pilot stages of development (Sovacool et al. 2018), and is mainly focused around a centralized architecture where a controller manages the ancillary services of a large group of EVs that are charging and discharging energy from/to the grid (Guille and Gross 2009, Sortomme and El-Sharkawi 2010). Commercial EV fleet owners such as logistics and e-commerce companies are naturally strong candidates for realizing the benefits of EV integration in the energy grid as they aggregate a large number of EVs.

This paper considers a delivery service system that operates a fleet of EVs that are primarily used to deliver products to customers. The EVs can be charged or discharged at the home depot or at charging stations in the network. When charging, a cost is paid according to the energy price at the time of use. If energy is discharged to the grid, a profit is credited to the EV. We thus propose the electric vehicle routing problem with time windows under time-variant electricity

prices (EVRPTW-TP) which optimizes the monetary cost of the EV fleet operation while allowing the charging and discharging of EVs at time-of-use electricity prices. EVRPTW-TP extends the electric vehicle routing problem with time windows (Schneider et al. 2014) by incorporating additional operational constraints, allowing the partial charging and discharging of the EVs, and accounting for the time-varying electricity prices. In order to efficiently solve EVRPTW-TP, a hybrid Variable Neighborhood Search/Tabu Search (VNS/TS) heuristic that can generate high quality feasible solutions efficiently is developed. A Lagrangian Relaxation that is solved by a cutting plane approach is also proposed to obtain lower bounds. The results are evaluated using a variation of the widely-used vehicle routing instances of Solomon (1987). Finally, the model is evaluated using a case study of an EV fleet performing grocery delivery in the Kitchener-Waterloo region in Ontario, Canada. Managerial insights are drawn with respect to electricity pricing, time slots design, and fleet size.

This paper is the first to investigate the joint optimization of routing and charge/discharge scheduling of multiple EVs under time-variant electricity prices. The proposed model provides operational decisions to support commercial EV fleet operators in order to lower the overall energy costs. The proposed model also offers important implications for policy makers and can assist the power system regulators to better understand the impact of EV fleets on energy markets, and to predict and estimate the market reaction to energy price adjustments. The managerial insights extracted can help policy makers in creating more efficient energy pricing schemes to maximize the environmental and economic benefits from the widespread adoption of commercial EV fleets.

The rest of this paper is organized as follows. Following this introductory section, Section 2 reviews the related literature. The proposed problem is formulated in Section 3. The Lagrangian relaxation is presented in Section 4 and the proposed VNS/TS heuristic is then discussed in Section 5. Computational results and the case study are presented in Sections 6 and 7, respectively. Finally, Section 8 concludes and highlights future research directions.

2. Literature Review

The vehicle routing problem (VRP) was first proposed by Dantzig and Ramser (1959) as a generalization of the well-known travelling salesman problem. In general, given a set of geographically scattered customers each associated with a demand, the VRP seeks to assign customers to vehicles in such a manner that the demand of each customer is satisfied while the total distance travelled by the fleet of vehicles to serve all the customers is minimized.

Since the introduction of the classical VRP, numerous variants were developed and investigated to account for realistic constraints and objectives. One of the most common variants is the VRP with time windows where visits to individual customers are restricted to fixed time intervals (Russell

1977). Another variation is the green vehicle routing problem introduced by Erdoğan and Miller-Hooks (2012) which particularly models alternative fuel vehicles and accounts for the opportunity to extend a vehicle’s distance limitation by visiting an en-route station facility to replenish. Schneider et al. (2014) tailors this framework specifically to electric vehicles and proposes the electric vehicle routing problem with time windows (EVRPTW). Instead of using a constant replenishment time as in Erdoğan and Miller-Hooks (2012), EVRPTW assumes a linear energy charging time that is associated with the battery level of the electric vehicle upon arrival to a station.

While both Erdoğan and Miller-Hooks (2012) and Schneider et al. (2014) assume that an EV can only fully recharge its battery at a station, Felipe et al. (2014) and Keskin and Çatay (2016) consider partial charging strategies with multiple types of chargers, each with a different charging speed and unit cost. Yang et al. (2015) optimizes the monetary cost of one EV seeking to provide delivery/pickup services for a series of customers. The proposed model only models EV charging while energy discharging is not considered. James and Lam (2017) models a fleet of autonomous electric vehicles that provide charging and discharging services to the energy grid. A quadraticly-constrained mixed integer program is formulated and three objective functions are proposed to either minimize the total driving distance, to maximize the amount of energy charged from renewable sources, or to minimize the amount of time until the vehicles reach the final destinations. Tang et al. (2017) considers a set of EVs travelling from their origin locations to the corresponding destinations without en-route customers. EVs can detour for en-route charging and discharging to two types of stations, one associated with renewable energy while the other is a normal station. An optimization problem is formulated to provide routing and charging/discharging decisions. Triviño-Cabrera et al. (2019) proposes a mixed integer programming formulation for a single EV providing energy delivery service between locations while taking into account battery degradation and time-dependent energy prices. The model optimizes the routing and the charging/discharging schedule so as to maximize the overall benefit for the EV owner.

The model proposed in this paper differs from the existing literature as it considers charging and discharging under time of use energy pricing. The proposed model extends the work of Schneider et al. (2014) to include energy discharging to the grid in a multi-period framework that also accounts for the changing energy prices. Thus the proposed model can be seen as a bi-directional vehicle to grid system where the fleet of electric vehicles whose primary purpose is to deliver products to customers can also be used to store and redistribute energy from/to the energy grid. The electric vehicle routing problem with time windows under time-variant electricity prices is presented next.

3. EV Routing under Time-Variant Electricity Prices

3.1. Framework and Assumptions

To formulate EVRPTW-TP, a complete directed graph $G(V_{c,s,od}, E)$ is considered where $V_{c,s,od}$ denotes the set of all nodes and E is the set of all edges. The nodes are partitioned into three

distinct categories: customer nodes, station nodes, and a depot. Let $V_c = \{1, 2, \dots, N\}$ denote the set of N customers where each node is associated with a demand q_i , a service time s_i , and a time window $[e_i, l_i]$ during which an EV should arrive to node i . Let $V_s = \{N+1, \dots, N+S\}$ be the set of S en-route stations where an EV can charge or discharge energy. The depot is denoted by two nodes 0 and $N+S+1$, i.e. $V_{od} = \{0, N+S+1\}$, where node 0 is the start of the vehicle route and $N+S+1$ is the end of the route. Each edge (i, j) is associated with a distance a_{ij} that denotes the travel distance between nodes i and j . Assuming a constant energy consumption rate g and a constant travel speed v , the travel time is given by $t_{ij} = \frac{a_{ij}}{v}$ and the energy consumption is given by $c_{ij} = ga_{ij}$. Furthermore, assuming a constant charging speed $\frac{1}{\alpha}$, the time required to recharge the energy consumed by traveling along edge (i, j) is given by $f_{ij} = \alpha c_{ij}$.

We assume a commercial EV fleet consisting of K homogeneous EVs, each with a load capacity Q and a battery capacity C . The time required to fully recharge the battery from 0 is defined as $B = \alpha C$. At the beginning of the planning horizon, all the EVs are at the depot (node 0) with a full battery. All EVs should return to the depot (node $N+S+1$) before the end of the planning horizon. During each visit to a station or to the depot, an EV can either pay to charge its battery or make profits by injecting energy back to the grid from its battery. The charging cost and discharging reward vary according to the time period (time-of-use energy pricing). We assume that EVs are allowed to perform either charging or discharging during their station visits, but are not allowed to perform both during the same time period.

The planning horizon is formed of $|T|$ consecutive discrete periods, each of length δ . Each time period t is associated with a charging cost P_{re}^t and a discharging reward P_{dis}^t . We assume that if an EV is to charge or discharge during a time period, then it has to do so for the full time period. EVs are recharged back to full battery capacity during the night using the lower energy price P_{night} . The notations are summarized in Table 1.

The problem formulation that is proposed next optimizes the routes of the K vehicles by minimizing the net electricity cost given that all customer demands are satisfied.

3.2. Problem Formulation

To formulate EVRPTW-TP, the following binary variables are introduced:

$$\begin{aligned} x_{ijk} &= \begin{cases} 1 & \text{if edge } (i, j) \text{ is traveled by vehicle } k, \\ 0 & \text{otherwise,} \end{cases} \\ r_{itk} &= \begin{cases} 1 & \text{if vehicle } k \text{ charges its battery at node } i \text{ at time } t, \\ 0 & \text{otherwise,} \end{cases} \\ d_{itk} &= \begin{cases} 1 & \text{if vehicle } k \text{ discharges its battery at node } i \text{ at time } t, \\ 0 & \text{otherwise.} \end{cases} \end{aligned}$$

Table 1 Summary of the Notation

	Definition
V_c	Customer nodes $V_c = \{1, 2, \dots, N\}$
V_s	Station nodes $V_s = \{N + 1, \dots, N + S\}$
V_{od}	Depot node $V_{od} = \{0, N + S + 1\}$
$V_{c,s}$	$V_{c,s} = V_c \cup V_s$
$V_{c,s,o}$	$V_{c,s,o} = V_c \cup V_s \cup \{0\}$
$V_{c,s,d}$	$V_{c,s,d} = V_c \cup V_s \cup \{N + S + 1\}$
$V_{s,d}$	$V_{s,d} = V_s \cup \{N + S + 1\}$
$V_{s,od}$	$V_{s,od} = V_s \cup V_{od}$
$V_{c,od}$	$V_{c,od} = V_c \cup V_{od}$
$V_{c,s,od}$	$V_{c,s,od} = V_c \cup V_s \cup V_{od}$
p	Depot $p = N + S + 1$
E	Set of all edges
T	Set of charging/discharging periods
N	Number of customers
S	Number of stations
K	Number of EVs
δ	Length of each charging/discharging period
Q	Cargo capacity
C	Battery capacity
B	Amount of time required to fully charge the EV battery
α	The reciprocal of the constant charging speed
g	Energy consumption rate with respect to distance traveled
v	Constant travel speed
a_{ij}	Travel distance of edge (i, j)
t_{ij}	Travel time of edge (i, j)
c_{ij}	Energy consumption along edge (i, j)
f_{ij}	The amount of time required to charge the energy consumed along edge (i, j)
e_i	Earliest service start time at node i
l_i	Latest service start time at node i
s_i	Required service time at node i
q_i	The demand at node i
P_{re}^t	Cost of charging during period t
P_{dis}^t	Reward for discharging during period t
P_{night}	Cost of charging during the night

The continuous variables are

τ_{ik} : arrival time of vehicle k at node i ,

b_{ik} : remaining energy (in terms of charging time) in vehicle k upon arrival to node i ,

u_{ik} : remaining cargo in vehicle k upon arrival to node i .

The decision variables r_{itk} and d_{itk} are only associated with the station and depot nodes, while the remaining variables are associated with all the nodes. EVRPTW-TP is formulated as

$$\min \sum_{k=1}^K \sum_{i \in V_{s,od}} \sum_{t \in T} \delta[r_{itk}P_{re}^t - d_{itk}P_{dis}^t] + \sum_{k=1}^K P_{night}[B - b_{pk} - \sum_{t \in T} \delta(r_{ptk} - d_{ptk})], \quad (1)$$

$$\text{s.t.} \quad \sum_{k=1}^K \sum_{j \in V_{c,s,d}} x_{ijk} = 1, \quad \forall i \in V_c, \quad (2)$$

$$\sum_{i \in V_{c,s,o}} x_{ipk} = 1, \quad \forall k \in \{1, 2, \dots, K\}, \quad (3)$$

$$\sum_{j \in V_{c,s,o}} x_{jik} - \sum_{j \in V_{c,s,d}} x_{ijk} = 0, \quad \forall i \in V_{c,s}, k \in \{1, 2, \dots, K\}, \quad (4)$$

$$\tau_{ik} + (t_{ij} + s_i)x_{ijk} - M(1 - x_{ijk}) \leq \tau_{jk}, \quad \forall i \in V_{c,s,o}, j \in V_{c,s,d}, k \in \{1, 2, \dots, K\}, \quad (5)$$

$$t\delta(r_{itk} + d_{itk}) + t_{ij}x_{ijk} - M(1 - x_{ijk}) \leq \tau_{jk}, \quad \forall i \in V_{s,o}, j \in V_{c,s,d}, t \in T, k \in \{1, 2, \dots, K\}, \quad (6)$$

$$e_i \leq \tau_{ik} \leq l_i, \quad \forall i \in V_{c,s,od}, k \in \{1, 2, \dots, K\}, \quad (7)$$

$$b_{0k} = B, \quad \forall k \in \{1, 2, \dots, K\}, \quad (8)$$

$$b_{jk} \leq b_{ik} - f_{ij}x_{ijk} + M(1 - x_{ijk}), \quad \forall i \in V_c, j \in V_{c,s,d}, k \in \{1, 2, \dots, K\}, \quad (9)$$

$$b_{jk} \leq b_{ik} + \sum_{t \in T} \delta r_{itk} - \sum_{t \in T} \delta d_{itk} - f_{ij}x_{ijk} + M(1 - x_{ijk}), \quad \forall i \in V_{s,o}, j \in V_{c,s,d}, k \in \{1, 2, \dots, K\}, \quad (10)$$

$$\sum_{t \in T} \delta r_{itk} \leq B - b_{ik}, \quad \forall i \in V_{s,od}, k \in \{1, 2, \dots, K\}, \quad (11)$$

$$\sum_{t \in T} \delta d_{itk} \leq b_{ik}, \quad \forall i \in V_{s,od}, k \in \{1, 2, \dots, K\}, \quad (12)$$

$$r_{itk} + d_{itk} \leq 1, \quad \forall i \in V_{s,od}, t \in T, k \in \{1, 2, \dots, K\}, \quad (13)$$

$$\tau_{ik} - (t - 1)\delta \leq M(1 - d_{itk} - r_{itk}), \quad \forall i \in V_{s,d}, t \in T, k \in \{1, 2, \dots, K\}, \quad (14)$$

$$u_{jk} \leq u_{ik} - q_i x_{ijk} + M(1 - x_{ijk}), \quad \forall i \in V_{c,s,o}, j \in V_{c,s,d}, k \in \{1, 2, \dots, K\}, \quad (15)$$

$$u_{0k} = Q, \quad k \in \{1, 2, \dots, K\}, \quad (16)$$

$$0 \leq b_{jk} \leq B \sum_{i \in V_{c,s,o}} x_{ijk}, \quad \forall j \in V_s, k \in \{1, 2, \dots, K\}, \quad (17)$$

$$u_{ik}, \tau_{ik} \geq 0, \quad \forall i \in V_{c,s,od}, k \in \{1, 2, \dots, K\}, \quad (18)$$

$$x_{ijk} \in \{0, 1\}, \quad \forall i \in V_{c,s,o}, \forall j \in V_{c,s,d}, k \in \{1, 2, \dots, K\}, \quad (19)$$

$$r_{itk}, d_{itk} \in \{0, 1\}, \quad \forall i \in V_{c,od}, t \in T, k \in \{1, 2, \dots, K\}. \quad (20)$$

The objective function (1) minimizes the net cost, i.e. the total cost of charging the batteries minus the total reward earned from discharging the batteries. The first part of the objective function corresponds to the net cost during the planning horizon, while the second part is the cost of fully recharging back all EVs at night. Constraints (2) ensure that every customer is served by exactly one EV. Constraints (3) force all the EVs to return to the depot by the end of the

planning horizon. Constraints (4) guarantee that no route ends at a customer or a station node. Constraints (5) ensure time feasibility of the edges leaving the customer and the depot nodes, while Constraints (6) deal with the edges originating from charging stations (M is a very large constant number). Constraints (7) ensure that the time windows of all the nodes are not violated. Constraints (8) indicate that every EV is fully charged before leaving the depot. Constraints (9)–(10) track the battery capacity along the route. Constraints (11) indicate that an EV battery cannot be recharged to a level that exceeds its capacity, while Constraints (12) state that an EV battery cannot be discharged to a level below 0. Constraints (13) indicate that an EV is allowed to discharge or recharge its battery at a station or the depot nodes but is not allowed to discharge and recharge during the same time period. Constraints (14) ensure that an EV cannot start charging/discharging at a station/depot before arrival and before the start of the time period. Constraints (15) ensure that the demands along a route are all satisfied, whereas Constraints (16) state that all EVs have a full cargo at the start of the planning horizon. Constraints (17)–(20) indicate the variables types and limits.

4. Lagrangian Relaxation for the EVRPTW-TP

As shown in Section 6.3, solving EVRPTW-TP to optimality is computationally very challenging. Lagrangian relaxation is a well known algorithm that has been used to address many complex optimization problems. Particularly, in the context of vehicle routing, Lagrangian relaxation has been used to address several variants of VRP (Fisher et al. 1997, Kallehauge et al. 2006).

For the EVRPTW-TP, all the constraints other than Constraints (2) are associated with a particular vehicle k . Given this special structure which is common in vehicle routing problems, Constraints (2) are relaxed and the violation is penalized in the objective function using the Lagrangian multipliers λ_i . The resulting relaxed problem is

$$\begin{aligned}
Z_{LR}(\lambda) = \min \quad & \sum_{k=1}^K \sum_{i \in V_{s,od}} \sum_{t \in T} \delta[r_{itk}P_{re}^t - d_{itk}P_{dis}^t] \\
& + \sum_{k=1}^K P_{night}[B - b_{pk} - \sum_{t \in T} \delta(r_{ptk} - d_{ptk})] \\
& + \sum_{i \in V_c} \lambda_i (1 - \sum_{k=1}^K \sum_{j \in V_{c,s,d}} x_{ijk}), \\
\text{s.t.} \quad & (3) - (20).
\end{aligned}$$

Since the EV fleet is homogeneous, problem $Z_{LR}(\lambda)$ decomposes into K identical sub-problems

$$Z_{SP}(\lambda) = \min \quad \sum_{i \in V_{s,od}} \sum_{t \in T} \delta[r_{it}P_{re}^t - d_{it}P_{dis}^t] + P_{night}[B - b_p - \sum_{t \in T} \delta(r_{pt} - d_{pt})]$$

$$\begin{aligned}
& - \sum_{i \in V_c} \lambda_i \sum_{j \in V_{c,s,d}} x_{ij}, \\
\text{s.t. } & (3) - (20).
\end{aligned}$$

Note that the vehicle index k is dropped since $Z_{SP}(\lambda)$ is identical for the $k \in K$ sub-problems.

The value of the Lagrangian bound $Z_{LR}(\lambda)$ is

$$Z_{LR}(\lambda) = K \times Z_{SP}(\lambda) + \sum_{i \in V_c} \lambda_i,$$

and the best Lagrangian bound is given by $\max_{\lambda \in \mathbb{R}^{|V_c|}} Z_{LR}(\lambda)$. Given H , the set of feasible solutions of $Z_{SP}(\lambda)$, the best Lagrangian bound can be found by solving

$$\max_{\lambda \in \mathbb{R}^{V_c}} \left\{ K \times \min_{h \in H} \left\{ \sum_{i \in V_{s,od}} \sum_{t \in T} \delta[r_{it}^h P_{re}^t - d_{it}^h P_{dis}^t] + P_{night}[B - b_p^h - \sum_{t \in T} \delta(r_{pt}^h - d_{pt}^h)] - \sum_{i \in V_c} \lambda_i \sum_{j \in V_{c,s,d}} x_{ij}^h \right\} + \sum_{i \in V_c} \lambda_i \right\}$$

which is equivalent to the Lagrangian master problem

$$\begin{aligned}
Z_{MP} &= \max_{\lambda \in \mathbb{R}^{V_c}} \sum_{i \in V_c} \lambda_i + K\theta, \\
\text{s.t. } & \theta + \sum_{i \in V_c} \lambda_i \sum_{j \in V_{c,s,d}} x_{ij}^h \leq \sum_{i \in V_{s,od}} \sum_{t \in T} \delta[r_{it}^h P_{re}^t - d_{it}^h P_{dis}^t] + P_{night}[B - b_p^h - \sum_{t \in T} \delta(r_{pt}^h - d_{pt}^h)], \forall h \in H.
\end{aligned}$$

Since the set H is not known beforehand, the Lagrangian bound Z_{MP} is calculated iteratively starting with an empty set H . Given fixed values of the Lagrangian multipliers λ_i , problem $Z_{SP}(\lambda)$ is solved to obtain a new feasible solution $h \in H$. The relaxed master problem is updated and solved to obtain new values for the Lagrangian multipliers. The solution of the relaxed master problem provides an upper bound on the optimal Lagrangian bound while the optimal solution of $Z_{SP}(\lambda)$ provides a lower bound. The iterations are stopped when the gap between the upper and lower bounds is sufficiently small.

The sub-problem $Z_{SP}(\lambda)$ has similar structure as the column generation sub-problem introduced by Desaulniers et al. (2016) for EVRPTW. However, the labeling algorithm in Desaulniers et al. (2016) is not applicable to $Z_{SP}(\lambda)$ because of the difference between their objective functions. Although the EV's energy consumption along the route is linear with respect to the total distance, the cost of a unit distance in $Z_{SP}(\lambda)$ depends on the time of charging which introduces extra complexity to the problem. In addition, the decision about discharging is independent of the travelling distance and hence we can not formulate $Z_{SP}(\lambda)$ as a elementary shortest path problem with resource constraints. For these reasons, we use a standard MIP solver to solve $Z_{SP}(\lambda)$.

5. VNS/TS Hybrid Heuristic for EVRPTW-TP

The Lagrangian relaxation presented in Section 4 provides lower bounds on the optimal solution of problem (1)–(20). To obtain upper bounds and very importantly to implement in practice, good quality feasible solutions are needed relatively quickly. Following the framework presented in Schneider et al. (2014) for EVRPTW, this section presents a hybrid variable neighborhood search and tabu search (VNS/TS) meta-heuristic with an annealing mechanism to solve EVRPTW-TP.

Hybrid VNS/TS meta-heuristics have been previously applied successfully for routing problems (Melechovský et al. 2005, Tarantilis et al. 2008). The overall framework of the VNS/TS is shown in Algorithm 1. VNS/TS consists of three main components: (1) an initialization step which identifies an initial solution, (2) a variable neighborhood search (VNS) to diversify the search process from the current solution, and (3) a tabu search (TS) component that runs for each candidate solution of VNS for local intensification. VNS/TS stops when the iterations limit is reached or when no improving solution is identified after a fixed number of consecutive VNS iterations. The details of each component are presented next.

Algorithm 1 VNS/TS Heuristic For EVRPTW-TP

```

1:  $S = initialization()$ 
2:  $counter \leftarrow 0$ 
3: for  $i = 1, 2, \dots, \eta_{vns}$  do
4:    $S' = Move2Neighbor(S)$ 
5:   for  $j = 1, 2, \dots, \eta_{tabu}$  do
6:      $S'' = Tabu(S')$ 
7:     if  $f_{gen}(S) > f_{gen}(S'')$  then
8:        $counter \leftarrow 0$ 
9:     else
10:       $counter \leftarrow counter + 1$ 
11:     if  $counter \geq \eta_{early}$  then
12:       Break
13:     else if  $Accept(S, S'')$  then  $S \leftarrow S''$ 

```

5.1. Initialization

In the initialization step, routes are constructed such that each customer with a positive demand is visited exactly once. For that, the well known sweep heuristic is used to obtain the initial feasible solution (Cordeau et al. 2001). The pseudo-code for the sweep heuristic is presented in Algorithm 2.

Customers are first sorted according to an increasing order of the geometric angle using as a reference a randomly selected point. Then, starting from the customer with the smallest angle, customers are inserted to the active route at the position resulting in the minimal increase of the travel distance of the route. Once the battery or cargo constraints of the active route are violated, a new route is initiated until the number of routes used so far is equal to the EV fleet size. Then, all the remaining customers are inserted into the last route.

Algorithm 2 Initialization

```

1:  $V_c \leftarrow \text{SortByAngle}(V_c)$ 
2:  $i \leftarrow 1$ 
3:  $R^i \leftarrow [0, N + S]$ 
4: for  $c$  in  $V_c$  do
5:    $R^i \leftarrow \text{insert}(R^i, c)$ 
6:   if  $\text{BattOrCargoVio}(R^i)$  and  $i < K$  then
7:      $i \leftarrow i + 1$ 
8:      $R^i \leftarrow [0, N + S]$ 

```

5.2. Generalized Cost Function

The VNS/TS meta-heuristic considers infeasible solutions during the search. Similar to Schneider et al. (2014), a cost function is used to evaluate the quality of a solution S . The generalized cost function $f_{gen}(S)$ is given by

$$f_{gen}(S) = f_{elec}(S) + \beta_{tw}\Phi_{tw}(S) + \beta_{batt}\Phi_{batt}(S) + \beta_{cargo}\Phi_{cargo}(S) \quad (21)$$

where $f_{elec}(S)$ is the net cost of electricity (charging cost minus discharging reward); $\Phi_{tw}(S)$, $\Phi_{batt}(S)$, and $\Phi_{cargo}(S)$ are the violations of the time window, battery, and cargo constraints, respectively; and β_{tw} , β_{batt} and β_{cargo} are penalty factors corresponding to each violation. The cumulative net cost $f_{elec}(S)$, and the cumulative violations $\Phi_{tw}(S)$, $\Phi_{batt}(S)$, and $\Phi_{cargo}(S)$ are the sum of the net costs of the individual routes $f_{elec}(R)$ and the individual violations for each route $\Phi_{tw}(R)$, $\Phi_{batt}(R)$, and $\Phi_{cargo}(R)$, respectively.

5.2.1. Electricity Cost and Violation Evaluation In order to evaluate the electricity cost and the violations, let r_i denote the i^{th} node along route R . The following metrics are then defined for every node along a given route

$$T_i^E = \begin{cases} 0, & i = 1 \\ \max \{ \min (T_{i-1}^E, l_{r_{i-1}}) + s_{r_{i-1}} + t_{r_{i-1}r_i}, e_{r_i} \}, & \forall i = 2, 3, \dots, n \end{cases} \quad (22)$$

$$T_i^L = \begin{cases} \min \{T_{i+1}^L - t_{r_i r_{i+1}}, l_{r_i} + s_{r_i}\}, & \forall i = 1, 2, \dots, n-1 \\ |T|\delta, & i = n \end{cases} \quad (23)$$

$$T_i^{FS} = \begin{cases} 0, & i = 0 \\ T_{i-1}^{FS} + \max \{e_{r_i} - (T_{i-1}^E + s_{r_{i-1}} + t_{r_{i-1} r_i}), 0\}, & \text{if } r_{i-1} \in V_c \\ \max \{e_{r_i} - (T_{i-1}^E + s_{r_{i-1}} + t_{r_{i-1} r_i}), 0\}, & \text{otherwise} \end{cases} \quad (24)$$

$$T_i^{BS} = \begin{cases} 0, & i = n \\ T_{i+1}^{BS} + \max \{T_{i+1}^L - t_{r_i r_{i+1}} - l_{r_i} - s_{r_i}, 0\}, & \text{if } r_{i+1} \in V_c \\ \max \{T_{i+1}^L - t_{r_i r_{i+1}} - l_{r_i} - s_{r_i}, 0\}, & \text{otherwise} \end{cases} \quad (25)$$

$$F_i = \begin{cases} 0, & \text{if } i = 0 \\ F_{i-1} + f_{r_{i-1} r_i}, & \text{if } r_{i-1} \in V_c \\ f_{r_{i-1} r_i}, & \text{otherwise.} \end{cases} \quad (26)$$

T_i^E is the earliest service start time at node r_i without violating any time window constraints before it. Similarly, T_i^L is the latest departure time from r_i that will not result in any time window violations after it. T_i^{FS} is the forward cumulative slack time, i.e. the difference between earliest arrival time and the earliest service start time, from the last station/depot to r_i . T_i^{BS} is the backward cumulative slack time, i.e. the difference between the latest departure time and the latest service time, from r_i to the preceding station/depot. F_i is the energy consumption from the last station/depot to r_i .

Cargo Capacity Violation The cargo capacity violation $\Phi_{cargo}(R)$ of a route R is calculated as

$$\Phi_{cargo}(R) = \max \left\{ \sum_{i=1}^n q_{r_i} - Q, 0 \right\}. \quad (27)$$

Time Window Violation To calculate the time window violation for route R , we assume that the arrival time at a node before r_i is no later than its latest service start time. This assumption is similar to that of Schneider et al. (2014) to avoid penalizing a good customer only because the time windows have been violated due to the customers before. The time window violation $\Phi_{tw}(R)$ for a route R is

$$\Phi_{tw}(R) = \sum_{i=1}^n \max \{T_i^E - l_{r_i}, 0\}. \quad (28)$$

Battery Capacity Violation The battery violations $\Phi_{batt}(R)$ for a route R is

$$\Phi_{batt}(R) = \sum_{r \in R \cap V_s} \max \{F_r - B, 0\}. \quad (29)$$

5.2.2. Net Electricity Cost To calculate the electricity cost of a given route, a feasible charging/discharging schedule for each route is computed. Due to the complexity of the problem, the following assumptions are made to limit the number of potential feasible schedules:

1. The maximum number of station visits is limited to two. In practice, it is likely that this assumption is reasonable as the EV fleet needs to primarily service customers, and charging activities are to make sure that the vehicle has enough energy to complete the route and/or to offer the ancillary service of discharging for additional gain. Furthermore, frequent battery charging and discharging have a negative impact on the battery health and as such in practice it is expected that charging and discharging activities are limited to a few station visits.

2. If a vehicle visits a station to recharge, then the vehicle recharges the battery just enough to be able to complete the route to reach the depot. This assumption is applicable to the two-station visit case and excludes the possibility of over-charging at one station to discharge at another station later.

Given a depot or a station node which is the i^{th} node on route R denoted by $r_i \in R$, the time window during which a vehicle can charge or discharge is $[T_{r_i}^E, T_{r_i}^L]$. Given that the planning horizon is discretized, then the set of time periods during which the vehicle can charge/discharge is given by $T_i = \left\{ \lceil \frac{T_{r_i}^E}{\delta} \rceil, \lceil \frac{T_{r_i}^E}{\delta} \rceil + 1, \dots, \lfloor \frac{T_{r_i}^L}{\delta} \rfloor \right\}$, namely the *connected periods* for r_i .

Given the i^{th} and the j^{th} node ($i < j$) of route R where a vehicle can charge/discharge (station or depot node) and T_i and T_j are the connected periods corresponding to i and j respectively, if a vehicle charges/discharges at time period $t \in T_i$, then this might make it impossible for the vehicle to arrive at time period t' to node j . Thus M_i^t is defined as the *mutually exclusive set* for $t \in T_i$ which is the set of all the time periods $t' \in T_j$ where the vehicle cannot reach node j if it is charging/discharging during time period t . The mutually exclusive set M_i^t is given by

$$M_i^t = \begin{cases} \emptyset, & \text{if } \delta t \leq T_{r_i}^E + T_{r_j}^{FS} \\ \left\{ t' : \delta(t' - 1) < T_{r_j}^E + \delta t - (T_{r_i}^E + T_{r_j}^{FS}) \right\}, & \text{otherwise.} \end{cases} \quad (30)$$

Given that at most two stations are allowed in each route, three different cases are analyzed to find a feasible charging/discharging schedule corresponding to the three special cases of zero stations, one station, and two stations routes, respectively.

Zero stations If there are no stations along the vehicle's route and given that the EV is fully charged at the starting depot, then the only potential activities are to discharge the EV at the starting and/or ending depot. The maximum amount of time periods during which the EV can discharge while ensuring that there is enough energy available to cover the full route is given by $\Omega = \lfloor \frac{B - F_n}{\delta} \rfloor$ where n is the number of nodes in the route R . Given the connected periods T_1 and T_n at the two depot nodes (the first and the last node along R) and the set of mutually exclusive

time periods M_1^t for each time period $t \in T_1$, the following mixed integer program maximizes the revenue from energy discharge

$$\Upsilon^* = \max_d \sum_{t \in T_1} P_{dis}^t d_1^t + \sum_{t \in T_n} P_{dis}^t d_n^t \quad (31)$$

$$\text{s.t.} \quad \sum_{t \in T_1} d_1^t + \sum_{t \in T_n} d_n^t \leq \Omega, \quad (32)$$

$$d_1^t + d_n^k \leq 1, \quad \forall k \in M_1^t, \forall t \in T_1 \quad (33)$$

where d_j^m is a binary decision variable indicating if the EV discharges at node j during time period m . Given the optimal solution d^* , the net cost of electricity for route R is given by

$$f_{elec}(R) = -\Upsilon^* + \left(\frac{F_n}{\delta} + \sum_{t \in T_1} d_1^{t*} + \sum_{k \in T_n} d_n^{k*} \right) \times P_{re}^{night}. \quad (34)$$

One station Given that an EV is visiting a station (k^{th} node along route R), then one possibility is that the EV has to recharge the battery at the station node to make sure there is enough energy to reach the end-of-route depot (n^{th} node along route R). This case occurs if $\Delta = F_k + F_n - B > 0$. Otherwise, the EV can either discharge energy at the station or recharge in order to discharge later at the depot. Given the sets of connected time periods T_1 , T_k , and T_n , for the 1^{st} , k^{th} , and last node along route R , respectively, and the mutually exclusive sets M_1^t for each time period $t \in T_1$, and M_k^t for each time period $t \in T_k$, the following mixed integer program maximizes the revenue from energy charging and discharging

$$\Upsilon^* = \max_{d,r} \sum_{t \in T_1} P_{dis}^t d_1^t + \sum_{t \in T_k} P_{dis}^t d_k^t + \sum_{t \in T_n} P_{dis}^t d_n^t - \sum_{t \in T_k} P_{re}^t r_k^t, \quad (35)$$

$$\text{s.t.} \quad \sum_{t \in T_1} d_1^t + \sum_{t \in T_k} d_k^t + \sum_{t \in T_n} d_n^t - \sum_{t \in T_k} r_k^t \begin{cases} \leq \lfloor \frac{-\Delta}{\delta} \rfloor & \text{if } \Delta < 0, \\ = \lceil \frac{\Delta}{\delta} \rceil & \text{otherwise,} \end{cases} \quad (36)$$

$$\delta \sum_{t \in T_k} r_k^t \leq F_k + \delta \sum_{t \in T_1} d_1^t, \quad (37)$$

$$\delta \left(\sum_{t \in T_1} d_1^t + \sum_{t \in T_k} d_k^t \right) + F_k + F_n \leq B + \delta \sum_{t \in T_k} r_k^t, \quad (38)$$

$$\sum_{t \in T_k} d_k^t \leq |T_k| y, \quad (39)$$

$$\sum_{t \in T_k} r_k^t \leq |T_k| (1 - y), \quad (40)$$

$$d_1^{t_1} + r_k^{t_2} + d_k^{t_2} \leq 1, \quad \forall t_2 \in M_1^{t_1}, \forall t_1 \in T_1, \quad (41)$$

$$r_k^{t_1} + d_k^{t_1} + d_n^{t_2} \leq 1, \quad \forall t_2 \in M_k^{t_1}, \forall t_1 \in T_k. \quad (42)$$

r_j^m is a binary decision variable indicating if the EV recharges at node j during time period m , d_j^m is a binary decision variable indicating if the EV discharges, and y is a binary decision variable

indicating if the EV discharges at node r_k . Given the optimal solution d^* and r^* , the net cost of electricity for route R is given by

$$f_{elec}(R) = -\Upsilon^* + \left(\frac{F_k + F_n}{\delta} + \sum_{i \in T_1} d_1^{i*} + \sum_{j \in T_k} d_k^{j*} + \sum_{t \in T_n} d_n^{t*} - \sum_{j \in T_k} r_k^{j*} \right) \times P_{re}^{night}. \quad (43)$$

Two stations Given an EV route that includes visits to two stations k_1 and k_2 with $k_1 < k_2$. If $\Delta = F_{k_1} + F_{k_2} + F_n - B > 0$ then the EV needs to recharge en-route in order to complete the trip to the final depot. In order to formulate the problem to minimize the cost of energy recharging, we first define the sets of connected time periods T_{k_1} and T_{k_2} corresponding to stations k_1 and k_2 respectively. Furthermore, let $M_{k_1}^t$ be the mutually exclusive sets for each time period $t \in T_{k_1}$. Given the binary variables

$$r_{k_j}^t = \begin{cases} 1 & \text{if EV recharges at station } k_1 \text{ during time period } t, \\ 0 & \text{otherwise,} \end{cases}$$

the problem that minimizes the cost of energy recharging is given by

$$\Upsilon^* = \min_r \sum_{t \in T_{k_1}} P_{re}^t r_{k_1}^t + \sum_{t \in T_{k_2}} P_{re}^t r_{k_2}^t, \quad (44)$$

$$\text{s.t.} \quad \sum_{t \in T_{k_1}} r_{k_1}^t + \sum_{t \in T_{k_2}} r_{k_2}^t = \Omega, \quad (45)$$

$$F_{k_1} + F_{k_2} - B \leq \delta \sum_{t \in T_{k_1}} r_{k_1}^t \leq F_{k_1}, \quad (46)$$

$$F_{k_2} + F_n - B \leq \delta \sum_{t \in T_{k_2}} r_{k_2}^t \leq F_{k_1} + F_{k_2} - \delta \sum_{t \in T_{k_1}} r_{k_1}^t, \quad (47)$$

$$r_{k_1}^{t_1} + r_{k_2}^{t_2} \leq 1, \quad \forall t_2 \in M_{k_1}^{t_1}, \forall t_1 \in T_{k_1}. \quad (48)$$

The objective function (44) minimizes the en-route electricity recharging cost. Constraints (45) make sure the EV has enough energy to complete the trip. Constraints (46) ensure that the amount of recharged energy at the first station does not exceed the available battery capacity and will allow the EV to reach the next station. Similarly, Constraints (47) enforce the capacity limits at the second station. Finally, Constraints (48) enforce the mutual exclusive conditions for the time periods. Given r^* , the optimal solution of problem (44)–(48), the route's cost is then given by

$$f_{elec}(R) = \Upsilon^* + \left(\frac{F_{k_1} + F_{k_2} + F_n}{\delta} - \sum_{t \in T_{k_1}} r_{k_1}^t - \sum_{t \in T_{k_2}} r_{k_2}^t \right) \times P_{re}^{night}. \quad (49)$$

If $\Delta < 0$, then the EV can discharge energy at the depots (nodes 1 and n) or the stations (nodes k_1 and k_2). To formulate the problem that maximizes the value of the discharged energy, the following variable binary variable is defined

$$d_k^t = \begin{cases} 1 & \text{if EV discharges energy at node } k \text{ during time period } t, \\ 0 & \text{otherwise.} \end{cases}$$

Given the connected time periods T_1, T_{k_1}, T_{k_2} , and T_n corresponding to the starting depot, stations k_1 and k_2 , and the ending depot, respectively, and $M_1^t, M_{k_1}^t$, and $M_{k_2}^t$ the mutually exclusive sets for each time period $t \in T_1, t \in T_{k_1}$, and $t \in T_{k_2}$, the problem is formulated as

$$\Upsilon^* = \max_d \sum_{t \in T_1} P_{dis}^t d_1^t + \sum_{t \in T_{k_1}} P_{dis}^t d_{k_1}^t + \sum_{t \in T_{k_2}} P_{dis}^t d_{k_2}^t + \sum_{t \in T_n} P_{dis}^t d_n^t \quad (50)$$

$$\text{s.t.} \quad \sum_{t \in T_1} d_1^t + \sum_{t \in T_{k_1}} d_{k_1}^t + \sum_{t \in T_{k_2}} d_{k_2}^t + \sum_{t \in T_n} d_n^t \leq \Omega \quad (51)$$

$$d_1^{t_1} + d_{k_1}^{t_2} \leq 1, \quad \forall t_2 \in M_1^{t_1}, \forall t_1 \in T_1 \quad (52)$$

$$d_{k_1}^{t_1} + d_{k_2}^{t_2} \leq 1, \quad \forall t_2 \in M_{k_1}^{t_1}, \forall t_1 \in T_{k_1} \quad (53)$$

$$d_{k_2}^{t_1} + d_n^{t_2} \leq 1, \quad \forall t_2 \in M_{k_2}^{t_1}, \forall t_1 \in T_{k_2}. \quad (54)$$

Given the optimal solution d^* , the net cost of electricity for route R is given by

$$f_{elec}(R) = -\Upsilon^* + \left(\frac{F_{k_1} + F_{k_2} + F_n}{\delta} + \sum_{t \in T_1} d_1^t + \sum_{t \in T_{k_1}} d_{k_1}^t + \sum_{t \in T_{k_2}} d_{k_2}^t + \sum_{t \in T_n} d_n^t \right) \times P_{re}^{night}. \quad (55)$$

5.3. Variable Neighborhood Search

The variable neighborhood search heuristic has been proposed in Mladenović and Hansen (1997). Given the current solution S , the neighborhood structure is defined by a cyclic-exchange operator which selects N_r routes from S to form an exchange cycle. The cyclic-exchange selects in each route R^i , a random number v_i of consecutive nodes which form an exchange block. These blocks are then reversed and exchanged between the routes. Each exchange of blocks forms a new neighboring solution S' which may be feasible or infeasible. Figure 1 shows an example of the cyclic exchange operator where $N_r = 3$. The selected routes are R^i, R^j and R^k with $v_i = 2, v_j = 3, v_k = 2$, respectively. The three blocks on the left form an exchange cycle. The blocks are reversed and transferred forming the three new routes $R^{i'}, R^{j'}$, and $R^{k'}$ on the right.

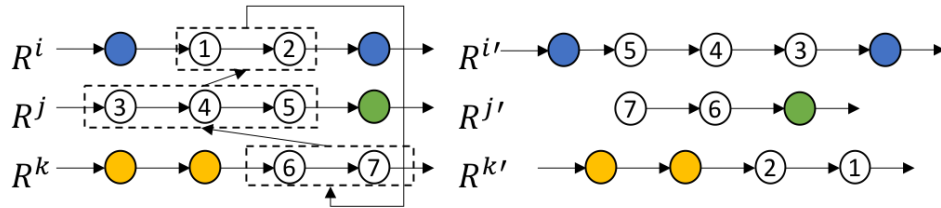


Figure 1 An Example of the Cyclic Exchange Operator

Given a neighboring solution S' , instead of the commonly used approach of applying local descent to improve the solution, a tabu search is applied similar to Schneider et al. (2014) to find a local

optima S'' which is accepted if it is better than the current solution S . To further diversify the search, S'' is also accepted with a probability of $e^{\left[\frac{f_{gen}(S)-f_{gen}(S'')}{Temp}\right]}$ if it is worse than the current solution S (Schneider et al. 2014, Hemmelmayr et al. 2009, Stenger et al. 2013). The temperature $Temp$ of this annealing phase is initialized to $Temp_0$ such that a solution with cost $f_{gen}(S'')$ that is κ times worse than the current best solution will be accepted with a probability of 50%. The temperature is then linearly decreased by a factor after each VNS iteration so that in the last 20% of the iterations, the temperature is below 0.0001. These parameters are the same as the ones used in Schneider et al. (2014).

5.4. Tabu Component

Tabu search (TS) is applied to every solution S' generated by VNS. The neighborhood solutions are generated using the three widely-used operators for tabu search: 2-opt*, exchange, and relocate, as well as the stationInRe operator that is discussed in Schneider et al. (2014). The operators are visualized in Figure 2 where the nodes that are on the same row are travelled by an EV before the operator is applied, the dashed arrows are edges to be removed, and the stripped and shadowed nodes are the nodes that are selected by the algorithm. The operators are applied as follows:

- **2-opt*:** Select two routes and remove one edge from each of them. Connect the first part of the first route with the second part of the second route and vice versa.
- **Exchange:** Exchange the positions of two nodes. The two nodes could either be in the same route or in different routes.
- **Relocate:** Select one route and remove one node from this route. Reinsert the selected node at another position. The new position could either be in the same route or in another route.
- **StationInRe:** Perform insertion or removal of a station node.

At each TS iteration, the four operators are applied on S' and the candidate solutions are filtered against the tabu list. The solution that results in the maximal decrease in the generalized cost $f_{gen}(S)$ is selected. The reinsertion of the removed edges which led to the selected solution, is prohibited for a fixed number of tabu iterations called tabu tenure. The tabu tenure for each deleted edge is randomly selected from an interval $[v_{min}, v_{max}]$. The procedure is repeated until no improvement can be made or for at most η_{tabu} iterations. The best solution that is obtained is denoted as S'' .

6. Computational Experiments

This section presents extensive computational results to evaluate the proposed Lagrangian relaxation approach and the VNS/TS hybrid heuristic.

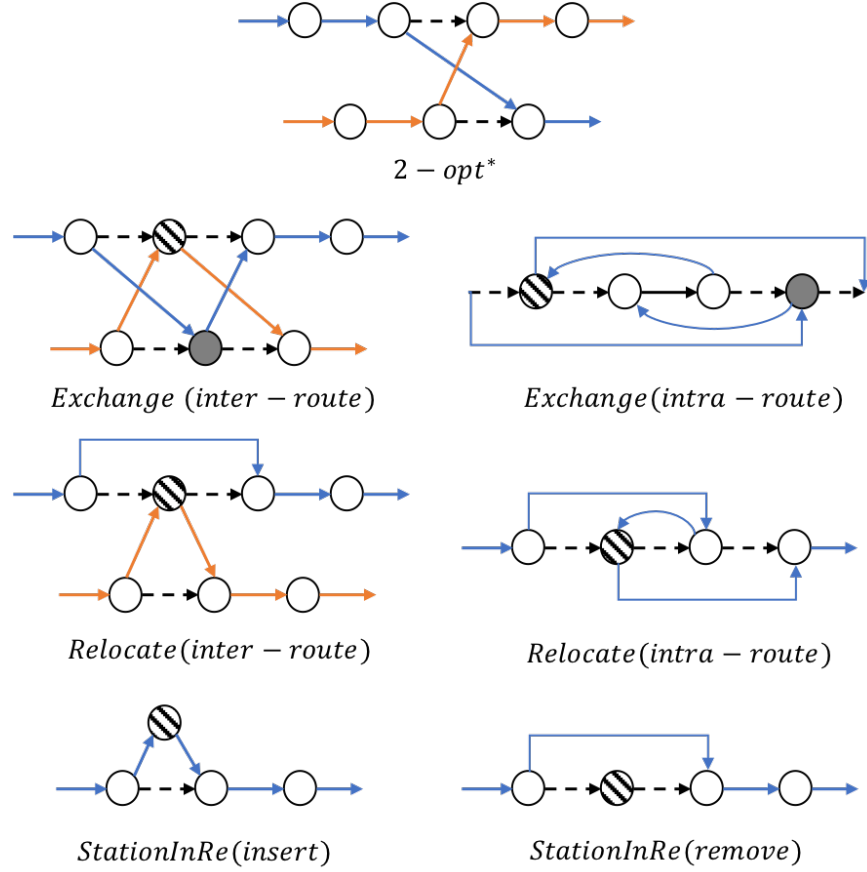


Figure 2 Tabu Search Operators

6.1. Test Instances

The test instances that are used in the evaluation are based on the ones developed by Schneider et al. (2014) which were constructed using the instances proposed by Solomon (1987). Particularly, we consider instances with 5, 10, and 15 customers with up to 6 stations which we refer to as the Schneider instances.

The instances are classified into 3 categories based on the geographical distribution of the customer nodes (see first column of Table 3). The instances that start with “R” are random instances where customers are uniformly distributed, and those that start with “C” are clustered instances in which customers are clustered into small groups. The customer distribution of the “RC” instances is a mixture of random and clustered distributions. The EV fleet is homogeneous, each with a cargo capacity $Q = 200$, a battery capacity $B = 270$, and a constant energy consumption rate $g = 1$. The travel speed v is set to a constant value of 1 unit, and the batteries are recharged at a constant speed $\alpha = 3.39$. The discharging speed is assumed the same as the charging speed.

Since fully charging an EV requires $B = 270$ minutes (4.5 hours), we set the planning horizon as $5am - 12am$ ($[0, 1140]$ in minutes) so that an EV has enough time to recharge at night. We note

Table 2 Time-of-Use Electricity Prices

From	To	Charging Cost	Discharging Reward
12:00 AM	7:00 AM	6.5	6.5
7:00 AM	11:00 AM	9.4	8.0
11:00 AM	5:00 PM	13.4	10.0
5:00 PM	7:00 PM	9.4	8.0
7:00 PM	12:00 AM	6.5	6.5

that the time windows in the Schneider instances are relatively tight which prevent vehicles from detouring to perform charging and discharging activities. We thus set the time windows to three periods: morning (5am – 12pm), afternoon (12pm – 6pm), and evening (6pm – 12am).

For charging and discharging, the length of each period is set to one hour, i.e. $\delta = 60$. The charging costs which are shown in Table 2 are based on the real time-of-use hydro rate in Ontario, Canada in effect between May 1, 2019 and October 31, 2019. The reward rates are chosen such that an EV can make profits by discharging at peak hours (11:00 AM - 5:00 PM) and recharging the battery later. Note that the reward rates are also economically beneficial to the grid because the discharging reward that the grid pays to the EV owner is lower than the corresponding market price.

6.2. Experimental Setup

All the tests are performed on a workstation running Ubuntu 18.04.4, using a single 2.20 GHZ CPU and 64 GB of RAM and CPLEX 12.8.0.0 is used as an optimization solver. The time limit is set to 7200 seconds and the memory limit is set to 40 GB.

For the VNS/TS hybrid heuristic, the penalty parameters β_{tw} , β_{batt} , β_{cargo} are set to 10 and the number of tabu iterations per round is set as $\eta_{tabu} = 30$. The number of VNS iterations η_{vns} and the early stopping criterion η_{early} are varied with respect to the number of customers included. For the instances with 5, 10, and 15 customers, η_{vns} is set to 10, 20, and 30 respectively. η_{early} is set to 10 for instances with more than 10 customers and 5 otherwise. For the cyclic operator, N_r is set to 2 when the fleet consists of 3 EVs or less and to 3 otherwise. The length of each exchange block is randomly selected from $\{1, 2, 3\}$. The upper and lower bounds of the tabu tenure are $v_{min} = 5$ and $v_{max} = 15$. Parameter κ for the annealing mechanism is set to 0.5.

6.3. Computational Results

The results for CPLEX, the Lagrangian relaxation, and the VNS/TS heuristic are presented in Table 3. The upper and lower bounds achieved by the three algorithms are presented in the “UB” and “LB” columns, respectively. The “Time” column indicates the computational time in seconds. The “Gap” column indicates the gap between the upper bound obtained by VNS/TS and the lower

Instance		Cplex			Lagrangian		Heuristic			
Name	K	UB	Time	Gap	LB	Time	UB	Time	best iter	Gap
C101-5	2	82.61	3.27	0.00%	82.61	4.63	82.61	13.34	2	0.00%
C103-5	2	50.49	1.26	0.00%	50.49	3.06	50.49	9.36	3	0.00%
C206-5	2	87.19	76.41	0.00%	87.19	91.47	87.19	22.64	5	0.00%
C208-5	1	63.26	1.03	0.00%	63.26	19.25	63.26	4.34	1	0.00%
R104-5	2	40.35	64.06	0.00%	40.35	30.50	40.35	13.23	3	0.00%
R105-5	2	45.93	33.81	0.00%	45.93	44.89	45.93	15.07	3	0.00%
R202-5	1	52.86	3.58	0.00%	52.86	35.45	53.09	5.67	1	0.44%
R203-5	1	71.56	6.05	0.00%	71.56	87.17	72.47	7.11	2	1.27%
RC105-5	2	82.22	121.62	0.21%	82.05	99.07	84.21	25.07	3	2.64%
RC108-5	2	101.96	38.18	0.00%	101.96	8.75	101.96	18.56	1	0.00%
RC204-5	1	70.61	7.41	0.00%	70.61	96.11	73.51	8.12	1	4.11%
RC208-5	1	69.55	1.80	0.00%	69.55	9.88	69.55	5.94	2	0.00%
C101-10	3	164.03(*)	3527.81	28.74%	127.41	5641.83	131.15	144.73	2	2.94%
C104-10	2	113.90	>7200.00	0.00%	113.90	>7200.00	113.90	113.95	15	0.00%
C202-10	2	89.65(*)	3529.64	2.35%	87.59	>7200.00	89.65	89.30	2	2.35%
C205-10	2	90.03	4693.57	0.00%	90.03	503.84	90.03	82.63	1	0.00%
R102-10	4	81.22(*)	2910.64	-	-	>7200.00	57.66	110.57	2	-
R103-10	2	54.75	>7200.00	3.66%	52.82	>7200.00	54.75	124.55	12	3.66%
R201-10	1	105.02	2741.33	-	-	>7200.00	105.02	18.56	9	-
R203-10	2	82.75	1515.83	-	-	>7200.00	83.49	163.54	7	-
RC102-10	4	165.67(*)	2383.08	14.68%	144.47	3684.50	144.47	168.12	4	0.00%
RC108-10	3	153.99(*)	2776.38	8.63%	141.76	1708.13	142.48	113.62	1	0.51%
RC201-10	2	125.40(*)	5295.07	0.00%	125.40	3362.22	125.40	98.32	6	0.00%
RC205-10	2	161.15	1288.87	0.00%	161.15	814.86	162.36	71.43	2	0.75%
C103-15	3	*	1443.57	-	-	>7200.00	108.22	367.32	1	-
C106-15	3	111.94(*)	2638.52	-	-	>7200.00	96.21	465.78	12	-
C202-15	2	-	>7200.00	-	-	>7200.00	151.83	652.23	21	-
C208-15	2	-	>7200.00	-	-	>7200.00	118.58	277.66	2	-
R102-15	5	-	>7200.00	-	-	>7200.00	65.17	172.19	2	-
R105-15	4	90.28	>7200.00	-	-	>7200.00	75.63	769.23	22	-
R202-15	2	*	1096.87	-	-	>7200.00	145.99	337.82	3	-
RC103-15	4	*	1755.29	-	-	>7200.00	126.20	699.84	11	-
RC108-15	3	*	1953.75	-	-	>7200.00	147.52	768.09	23	-
RC202-15	3	*	1824.96	-	-	>7200.00	143.80	471.38	3	-
RC204-15	2	*	934.20	-	-	>7200.00	142.20	332.50	2	-

Instances that violate the memory and time limits are labeled with * and – respectively

Table 3 Performance of CPLEX, Lagrangian relaxation, and VNS/TS heuristic on small instances

bound obtained by the Lagrangian relaxation. Column “Best Iter” indicates the VNS iteration during which the best solution was found.

For the small instances with 5 customers, CPLEX outperforms the VNS/TS heuristic and the Lagrangian relaxation in terms of solution time for the majority of the tested instances. In terms of bound quality, the Lagrangian relaxation obtains the optimal solution for every instance except for “RC105-5” where the gap is 0.21%. The VNS/TS heuristic obtains the optimal solution for 8 out of 12 instances with the largest gap being 4.11%.

As the number of customers increases to 10, the performance of CPLEX worsens significantly where only 6 out of the 12 instances are solved to optimality within the time and memory limits. For instances where CPLEX is able to find an optimal solution, the average solution time is 3789 seconds, which is significantly higher than the 91 seconds average solution time of VNS/TS which obtains a better solution for all the tested instances with 10 customers except RC205-10. The

Instance		Heuristic			Instance		Heuristiic		
Name	K	UB	Time	Best iter	Name	K	UB	Time	Best iter
C103-20	2	130.82	526.37	9	C103-30	4	193.93	2543.05	3
C106-20	4	157.66	971.22	8	C106-30	5	246.40	3814.46	17
C202-20	2	166.72	424.52	19	C202-30	3	175.64	2199.63	16
C208-20	3	151.69	792.73	14	C208-30	3	214.90	2219.27	11
R102-20	3	183.74	796.05	5	R102-30	3	165.27	1937.64	6
R105-20	2	128.43	422.01	9	R105-30	4	179.70	3536.91	12
R202-20	2	109.61	445.36	6	R202-30	3	178.04	1778.14	4
RC103-20	3	168.47	825.58	7	RC103-30		213.82	3618.11	11
RC108-20	3	165.33	688.23	5	RC108-30	5	284.37	2932.07	4
RC202-20	3	173.15	790.23	14	RC202-30	3	252.88	3449.84	35
RC204-20	3	144.82	1584.51	15	RC204-30	3	240.47	3244.16	25
C103-25	3	177.98	1876.41	20	C103-35	4	208.58	3944.74	6
C106-25	3	194.05	1377.42	10	C106-35	4	171.86	5006.20	14
C202-25	4	187.72	1863.75	7	C202-35	3	252.97	6814.42	48
C208-25	4	196.98	2074.28	18	C208-35	4	184.92	3693.89	4
R102-25	3	183.96	896.25	2	R102-35	4	220.46	4542.37	6
R105-25	3	170.62	1004.59	1	R105-35	4	175.82	6491.67	12
R202-25	3	156.28	1727.05	14	R202-35	4	179.67	5340.89	18
RC103-25	4	223.48	1254.00	2	RC103-35	4	234.04	3090.37	3
RC108-25	3	197.38	1104.66	3	RC108-35	4	212.87	3800.69	6
RC202-25	4	211.30	2013.67	11	RC202-35	4	169.02	4568.45	13
RC204-25	4	152.06	2801.86	10	RC204-35	4	282.35	5007.65	17

Instances that violate the memory and time limits are labeled with * and – respectively

Table 4 Performance of VNS/TS heuristic on medium instances

Lagrangian relaxation obtains bounds for 9 out of the 12 instances and the gap compared to the upper bound that is found by the heuristic is no more than 3.66%. We note that solving the Lagrangian subproblem is computationally challenging for the instances with 10 customers and no solution is obtained within the time limits for 3 out of the 12 tested instances.

For the instances with 15 customers, both CPLEX and the Lagrangian relaxation fail to solve the majority of the instances. CPLEX finds a feasible solution for only 2 out of the 11 instances. VNS/TS identifies solutions for all the instances within 483 seconds on average.

The results for the VNS/TS heuristic on medium instances are shown in Table 4. The VNS/TS heuristic is able to solve all the instances with less than 35 customers within 2 hours. For implementation in practice, VNS/TS is capable of identifying high quality solutions within reasonable time. In the following section, the applicability of EVRPTW-TP in practice is evaluated using a realistic case study of online grocery delivery in the Kitchener-Waterloo area, in Canada.

7. Case Study - Online Grocery Delivery in Kitchener-Waterloo

In this section, the proposed EVRPTW-TP model along with the VNS/TS solution heuristic are evaluated on a case study of an EV fleet providing online grocery delivery services, which attracted great attention amid the COVID-19 pandemic in the Kitchener-Waterloo (KW) region in Ontario, Canada. Through computational experiments, we particularly investigate the impact of electricity pricing schemes, time windows, and fleet size on the fleet’s routing and charging/discharging behaviors based on which we provide managerial insights.

7.1. Case Setup

We consider a local grocery store that uses EVs to provide online grocery delivery services. This business model has been increasingly popular in recent years (Begley et al. 2020), especially during the COVID-19 pandemic where people avoided going to supermarkets and local stores.

In the KW region, retail giants, such as Walmart, Zehrs, and T&T Supermarket, as well as local small businesses are all providing such services. Customers would browse available items online and place the orders. Delivery providers perform touch-free delivery during the predetermined time slot. In this case study, we only consider orders that are scheduled for delivery on the next day and accordingly apply EVRPTW-TP to optimize the routing and charging/discharging of the EV fleet for the planning horizon of *5am - 12am*.

For the purpose of the case study, we first consider a small fleet consisting of 3 EVs. The fleet size is then increased to 6 in order to investigate the impact on fleet operations (Section 7.4). Service is provided to 30 customers in the designated area, which reflects a real situation for a small business. The EVs in the fleet are homogeneous with identical range and cargo capacity. The EV that is considered has a range of 150 kilometers with a 32.4 kWh battery and a cargo capacity of 200 order units. The travel time between locations is calculated based on Google Maps.

The geographical locations of the actual customers, the stations, and the depot are shown in Figure 3 as blue, red, and green dots, respectively. The planning horizon is first divided into 3 time periods: morning (*5am - 12pm*), afternoon (*12pm - 6pm*), and evening (*6pm - 12am*). Results with different time windows are presented in Section 7.3. The service time at each customer location is set to 10 minutes. The 7 selected stations are level-2 stations which are compatible with most EV models. The power supply of a level-2 charger is $240VAC/30A$. One hour of charge using a level-2 station adds 30 kilometers of range for the EV model that is considered in this case, i.e. $B = 270$ and $\alpha = 1.8$.

7.2. Assessing the Impact of the Electricity Pricing Scheme

In this section, we study the impact of the electricity pricing on the EV fleet operations. As shown in Table 5, we consider four electricity pricing schemes:

Scheme A: The price varies between on-peak, mid-peak, and off-peak hours.

Scheme B: The reward for energy discharging is the same as the price for energy charging.

Scheme C: The price is only lower in the evening hours.

Scheme D: Only energy charging is allowed (energy discharging to the grid is not allowed).

In scheme A, the charging rates are the real hydro rates that were in effect between May 1, 2018 and Nov 1, 2019. We note that the province of Ontario currently does not have a set reward for injecting electricity to the grid. Thus we evaluate the case where the reward for discharging is lower

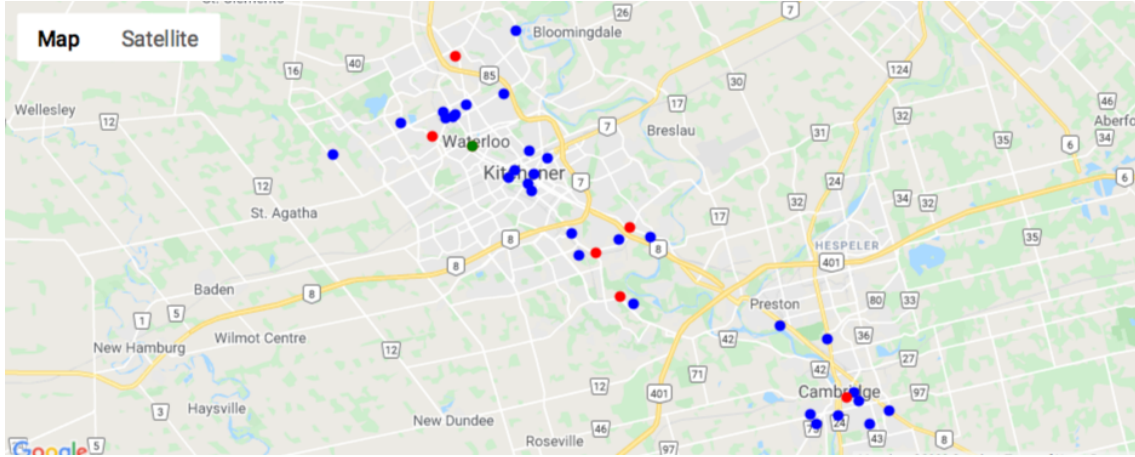


Figure 3 Selected Customers and Stations

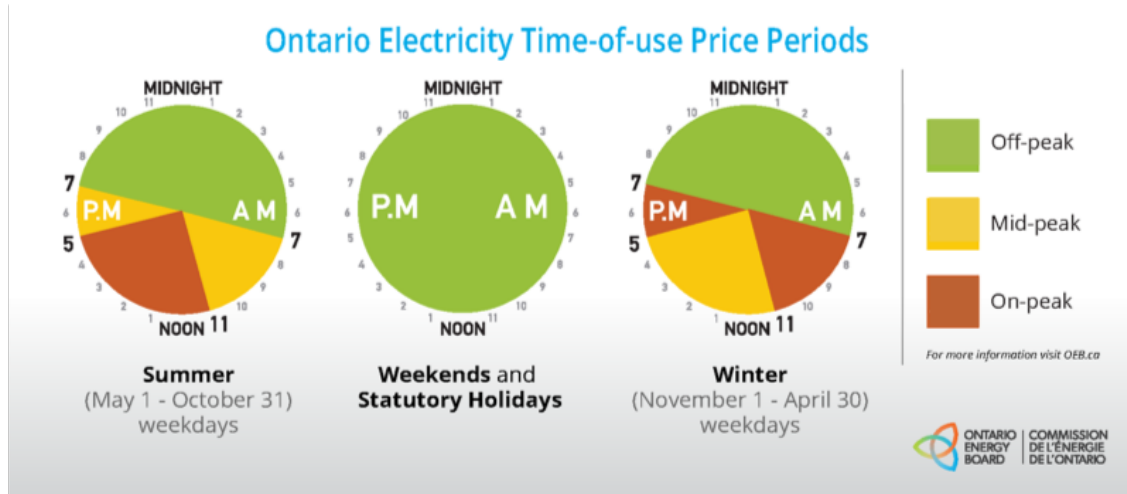


Figure 4 Time-of-Use Electricity Price Periods

Table 5 Electricity Prices

Scheme	On-Peak (¢/kWh)		Mid-Peak (¢/kWh)		Off-Peak (¢/kWh)	
	Charge	Discharge	Charge	Discharge	Charge	Discharge
A	13.40	10.00	9.40	8.00	6.50	6.50
B	13.40	13.40	9.40	9.40	6.50	6.50
C	9.40	8.00	9.40	8.00	6.50	6.50
D	13.40	0.00	9.40	0.00	6.50	0.00

than the price of electricity (Scheme A) and the case where the reward is the same as the price of energy (Scheme B). We also evaluate the case where discharging is not allowed (Scheme D). The electricity price periods are defined by the Ontario Energy Board differently for the summer and the winter (see Figure 4). We thus evaluate both summer and winter periods.

Table 6 Overall Electricity Cost and Charging/Discharging Hours under Pricing Schemes

Scheme	Distance (km)	Electricity Cost (¢)	Charging (hr)	Discharging (hr)
A (summer)	154.89	-9.36	2	9
A (winter)	148.60	-18.14	2	9
B (summer)	187.29	-233.86	3	10
B (winter)	180.75	-279.72	5	12
C	148.24	132.55	0	8
D	143.88	202.03	0	0

The results obtained by applying EVRPTW-TP under the different electricity pricing schemes are shown in Table 6. The first two columns present the total distance traveled and the total electricity cost of the fleet. The last two columns present the number of hours spent by the fleet on charging and discharging electricity while on route. The negative numbers in the “Cost” column indicate that the EV fleet makes a net profit due to selling energy.

The first insight is that allowing energy discharging is economically positive to EV fleet owners. When discharging is not allowed (Scheme D), the cost of energy per day is ¢202.03 while the gain reaches ¢279.72 per day (Scheme B, winter) when discharging is allowed. Under the dynamic pricing of schemes A and B, the fleet always generates a profit from energy discharging. The monthly energy cost difference could be as large as 144.53 dollars. Considering that the EV drivers are not paid on a hourly basis, the additional profits assist to reduce the EV fleet’s operational cost.

Not surprisingly, electricity prices impact fleet operations. In particular, since the reward rate in scheme B is much higher than in scheme A, EVs are more willing to discharge during peak hours and detour to recharge their batteries later. The travel distance under scheme B is, on average 32 kilometers longer than under scheme A. EVs also spend 1 to 3 more hours discharging energy under scheme B than under scheme A. Moreover, the overall electricity cost varies significantly between these two cases.

For schemes A and B, the total electricity cost is lower in winter than in summer. Taking scheme B as an example, in Figure 5 each blue line depicts one EV battery level through the day and the charging/discharging behaviors are highlighted in red. The green dashed lines represent the discharging reward rates. In summer, in order to perform discharging during peak hours (11am - 5pm), at least one EV has to detour during the day because some customers should be served before 12pm (the end of the morning period). However, in winter, since the on-peak periods are 7am - 11am and 5pm - 7pm all the EVs can stay at the depot before 11am to perform discharge and leave to perform delivery services after that. As a consequence, the travel distance in winter is shorter than in summer for both schemes. Accordingly, EV operators can adjust their time slot settings with respect to the season. For instance, reducing the morning service period may decrease the overall electricity cost. Accounting for the changes in time-of-use prices and the corresponding

time between the seasons is therefore important when designing the service time slots. Thus, next we evaluate the impact of the time windows on the EV operations.

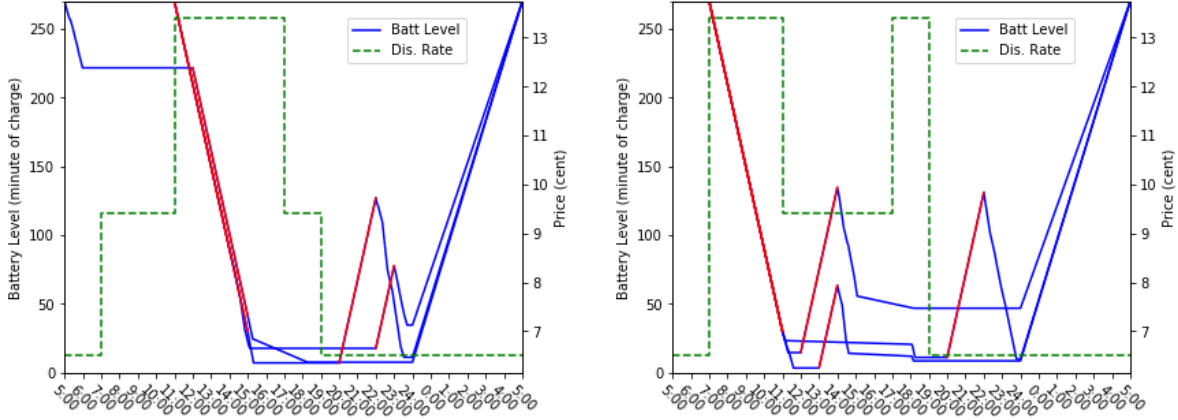


Figure 5 EVs' Battery Levels through a Day ($K = 3$, left: summer, right: winter)

7.3. The Impact of Time Windows

In this section, we consider three variations of the time windows. We first consider 2-hours time windows, then the 3-periods presented in the previous section, and finally eliminate the time windows. Currently, 2-hours time windows are the most commonly used for grocery delivery in the KW area to allow customers to know the time that they would be served more precisely, thus reducing their waiting times and enhancing user experience. This of course comes at the expense of the flexibility of the EV fleet in terms of routing and scheduling.

The results presented in Table 7 and Figure 6 reflect the trade-off between timely service and operational flexibility. Under the 2-hours setting, customers that are geographically close might book time slots that are very far away from each other. In that case, an EV cannot always wait at a customer's location until the beginning of the time slot of the nearest customer. Instead, the EV will travel to a customer that is relatively distant but with a time slot starting earlier, leaving the nearest customer to be served by another EV. When a 3-period time window is used, more EVs are able to serve the customers in an order based on their geographical locations. As shown in Figure 6, two EVs have to travel to Cambridge under the 2-periods setting, while only one has to do so under the other two settings. The increased flexibility leads to a decrease in the total travel distance from over 210 kilometers in the 2-hours setting to around 150 kilometers in the 3-period setting. The driving distance decreases to 131.81 kilometers for the case of no time window constraints.

In terms of charging and discharging activities, intuitively the fleet has the greatest flexibility in scheduling discharging in the case where no time windows are used. In both winter and summer, the fleet is able to discharge for 12 hours in total during the planning horizon. For the "3-period" case,

Table 7 Overall Electricity Cost under Time Window Settings

Season	TW Setting	Distance (km)	Electricity Cost (¢)	Charging (hr)	Discharging (hr)
Summer	2-hours	229.19	184.90	0	6
	3-periods	154.89	-9.36	2	9
	no-tw	131.81	-117.36	4	12
Winter	2-hours	212.78	164.09	2	7
	3-periods	148.60	-18.14	2	9
	no-tw	135.95	-111.53	4	12

Table 8 Overall Electricity Cost of EV fleets of Different Sizes

TW	Season	Number of EVs			
		3	4	5	6
2-hours	Summer	184.90	-67.75	-168.55	-
	Winter	164.09	-91.15	-199.30	-
3-periods	Summer	-9.36	-150.05	-265.97	-366.77
	Winter	-18.14	-186.98	-296.42	-

the fleet performs 9 hours of discharging, while for the 2-hours time windows, the fleet performs 6 hours of discharging in summer, and 7 hours in winter. As a consequence, as shown in Table 7, the cost of electricity is ¢184.90 and ¢164.09 for summer and winter respectively under the 2-hours setting. A profit of ¢117.36 and ¢111.53 is generated when not time windows are enforced in summer and winter, respectively. This difference can be seen as the price of providing “timely service” delivery.

7.4. The Impact of EV Fleet Size

In this section, we consider the impact of EV fleet size on the overall electricity cost under the two restrictive time window settings, 2-hours and 3-periods. The number of EVs is varied from 3 to 6 and the corresponding results are shown in Table 8 and Figure 8. Intuitively, increasing fleet size reduces the overall travel distance and provides more spare time to discharge energy to the grid.

However, given the high acquisition cost, using an EV solely for the purpose of trading energy with the grid is currently not economical. Table 7 shows the battery levels of an EV during summer and winter hours. In summer, the EV discharges its battery during the on-peak rate for 4 hours and recharges under the off-peak rate at night, bringing a profit of 100.8¢. Similarly in winter, the EV makes a profit of 109.44¢ by discharging for 6 hours under on-peak rates and recharging for 2 and 4 hours under mid-peak and off-peak rates respectively. Adding one additional EV increases the profit by 100.8¢ in summer hours and 109.44¢ in winter hours. In that case the additional EV is acting as a static battery storage.

The impact of fleet size on the travel distance is shown in Figure 9. Each bar consists of several sub-bars highlighted in different colors each representing the travel distance of an EV in the fleet.

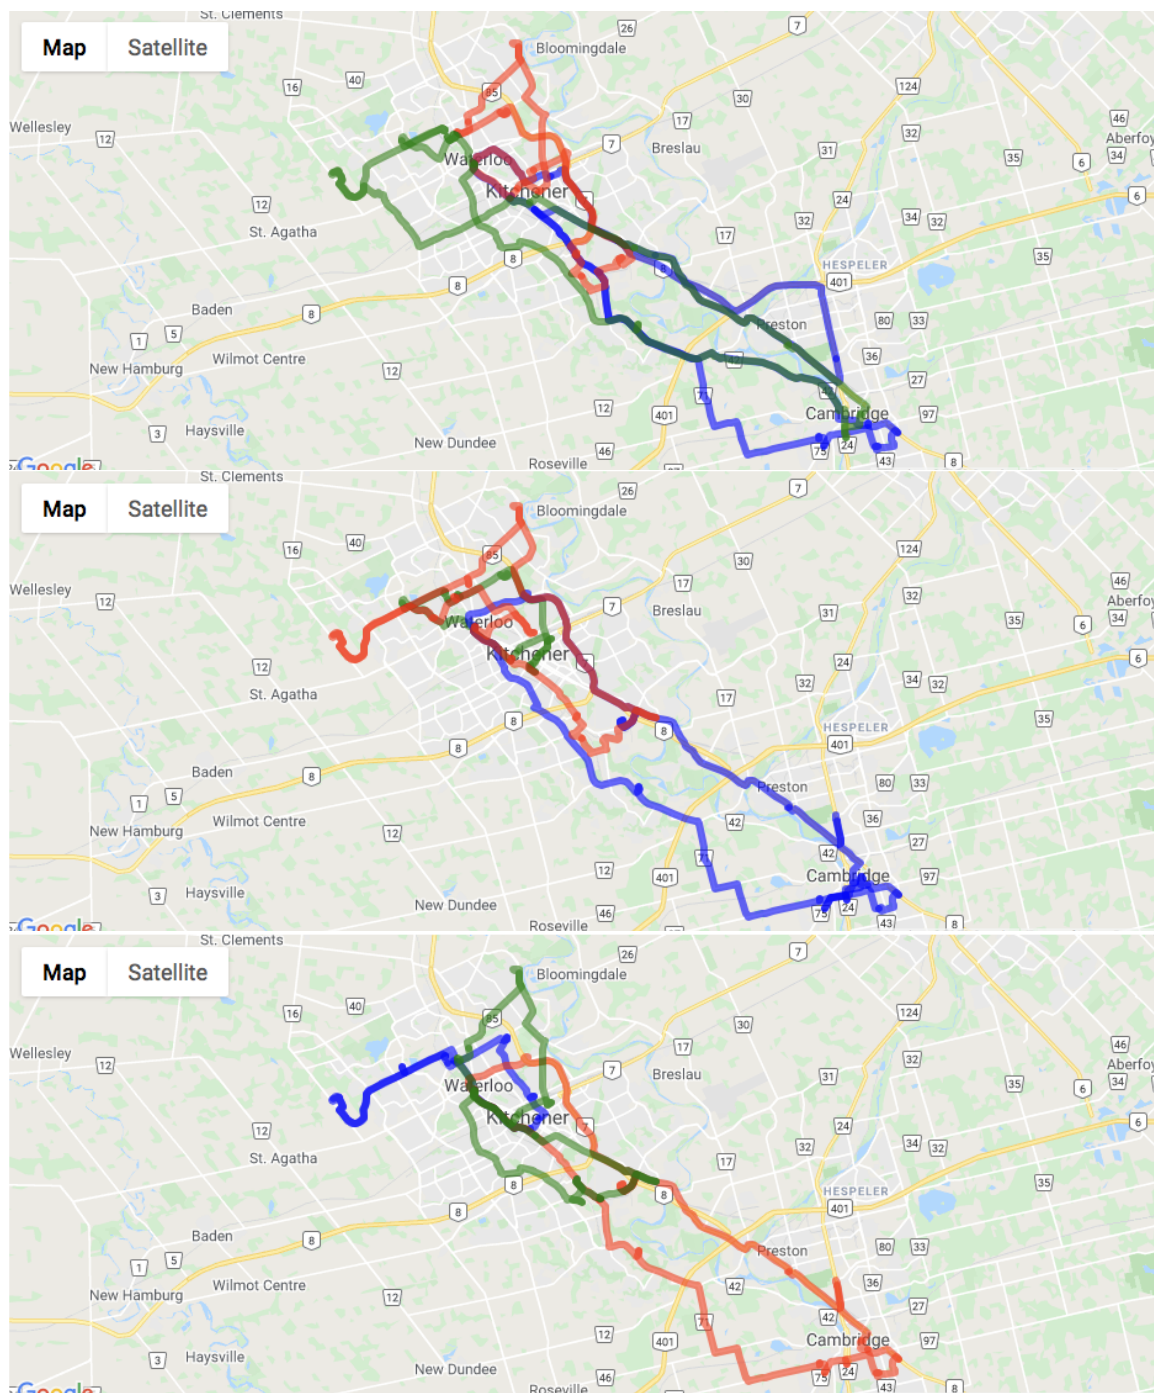


Figure 6 EV Routes (from top to bottom: 2-hours, 3-periods and no-tw)

As shown, for all the four cases, when the fleet size is 3, the fleets' overall travel distance is the highest. As the fleet size increases, the overall travel distance decreases. For the "2-hours" time window cases (red and blue bars), increasing the fleet size from 3 to 4 results in a relatively large reduction in the overall travel distance, while for other cases, the distance reductions are marginal. This observation suggests that the newly added EVs contribute to reducing the overall electricity

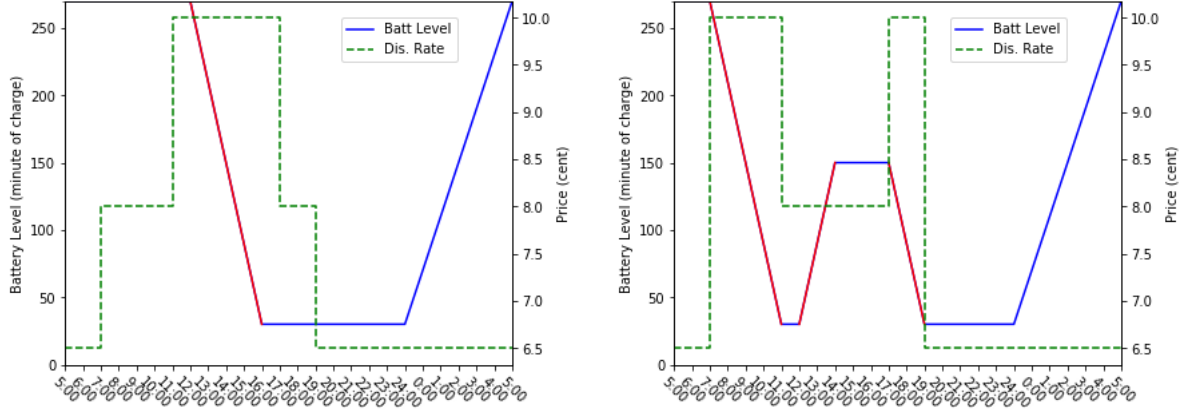


Figure 7 Battery Level of an EV without Logistic Service (left: summer, right: winter)

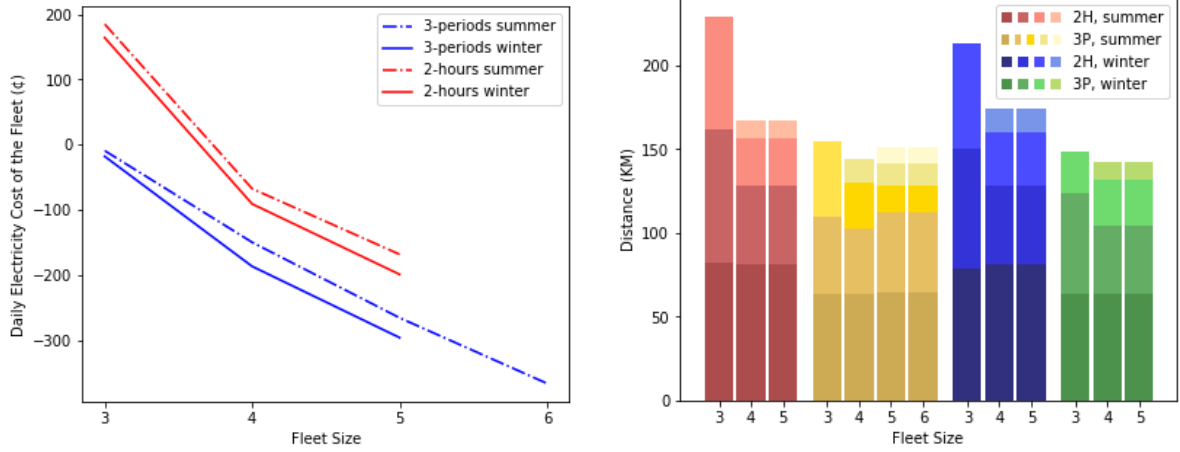


Figure 8 Electricity Cost under Different Fleet Sizes Figure 9 Overall Travelling Distance under Different Fleet Sizes

cost mainly through grid ancillary services instead of improving the routing. Additional EVs thus are increasingly playing the role of a battery storage which is not economical under current energy prices.

8. Conclusion

This paper presented the EV routing problem with time windows under time-variant electricity prices. The formulated problem jointly optimizes the routing of a fleet of electric vehicles along with the scheduling of the charging and discharging activities. The proposed framework permits the EV fleet to provide the primary service of delivering products to customers while minimizing the energy costs by scheduling energy charging while taking into consideration the varying energy prices throughout the planning horizon. Furthermore, the electric vehicles can store energy at periods with relatively low energy prices and inject it back to the grid at high price periods which helps in cost recovery and potentially realize profits. This framework demonstrates the capabilities of EV fleets

in helping energy grids to smooth out the demand and reduce the gap between on-peak and off-peak by acting as energy storage. The proposed problem is formulated as a multiperiod optimization model that is challenging to solve to optimality. A Lagrangian relaxation that provides lower bounds is proposed. To find feasible solutions quickly which is important for implementation in practice, a hybrid variable neighborhood search/tabu search heuristic which finds high quality solutions in relatively short amount of computational time is presented. Numerical results on commonly used instances from the literature demonstrated the capabilities of the proposed heuristic in finding high quality solutions. A case study on a grocery delivery service from the region of Kitchener-Waterloo in Ontario Canada further illustrates the impact of energy prices, time windows design, and the size of the EV fleet on operations and costs.

The proposed framework is a step towards realizing the full integration of transportation and energy networks. The joint optimization of both systems promises increasing opportunities to improve reliability and reduce costs. While in the framework that is proposed in this paper, the energy prices in a period are constant, a model that integrates dynamic and uncertain prices of energy will be investigated in future work. Furthermore, future work will particularly focus on integrating energy generated from renewable sources to further advance the development of green logistics systems.

References

- S. Begley, E. Marohn, S. Mikha, and A. Rettaliata. Digital disruption at the grocery store. Technical report, McKinsey, 2020. URL <https://www.mckinsey.com/industries/retail/our-insights/digital-disruption-at-the-grocery-store>.
- A. G. Boulanger, A. C. Chu, S. Maxx, and D. L. Waltz. Vehicle electrification: Status and issues. *Proceedings of the IEEE*, 99(6):1116–1138, 2011.
- J.-F. Cordeau, G. Laporte, and A. Mercier. A unified tabu search heuristic for vehicle routing problems with time windows. *Journal of the Operational research society*, 52(8):928–936, 2001.
- G. B. Dantzig and J. H. Ramser. The truck dispatching problem. *Management science*, 6(1):80–91, 1959.
- G. Desaulniers, F. Errico, S. Irnich and M. Schneider Exact algorithms for electric vehicle routing problems with time windows. *Operations Research*, 64(6):1388–1405, 2016.
- R. Dekker, J. Bloemhof, and I. Mallidis. Operations research for green logistics—An overview of aspects, issues, contributions and challenges. *European Journal of Operational Research*, 219(3):671–679, 2012.
- K. J. Dyke, N. Schofield, and M. Barnes. The impact of transport electrification on electrical networks. *IEEE Transactions on Industrial Electronics*, 57(12):3917–3926, 2010.
- S. Erdoğan and E. Miller-Hooks. A green vehicle routing problem. *Transportation Research Part E: Logistics and Transportation Review*, 48(1):100–114, 2012.

-
- Á. Felipe, M. T. Ortuño, G. Righini, and G. Tirado. A heuristic approach for the green vehicle routing problem with multiple technologies and partial recharges. *Transportation Research Part E: Logistics and Transportation Review*, 71:111–128, 2014.
- M. L. Fisher, K. O. Jörnsten, and O. B. Madsen. Vehicle routing with time windows: Two optimization algorithms. *Operations research*, 45(3):488–492, 1997.
- C. Guille and G. Gross. A conceptual framework for the vehicle-to-grid (V2G) implementation. *Energy policy*, 37(11):4379–4390, 2009.
- V. C. Hemmelmayr, K. F. Doerner, and R. F. Hartl. A variable neighborhood search heuristic for periodic routing problems. *European Journal of Operational Research*, 195(3):791–802, 2009.
- P. Hertzke, N. Müller, P. Schaufuss, S. Schenk, and T. Wu. Expanding electric-vehicle adoption despite early growing pains. Technical report, McKinsey, 2019. URL <https://www.mckinsey.com/industries/automotive-and-assembly/our-insights/expanding-electric-vehicle-adoption-despite-early-growing-pains>.
- J. James and A. Y. Lam. Autonomous vehicle logistic system: Joint routing and charging strategy. *IEEE Transactions on Intelligent Transportation Systems*, 19(7):2175–2187, 2017.
- B. Kallehauge, J. Larsen, and O. B. Madsen. Lagrangian duality applied to the vehicle routing problem with time windows. *Computers & Operations Research*, 33(5):1464–1487, 2006.
- W. Kempton and S. E. Letendre. Electric vehicles as a new power source for electric utilities. *Transportation Research Part D: Transport and Environment*, 2(3):157–175, 1997.
- M. Keskin and B. Çatay. Partial recharge strategies for the electric vehicle routing problem with time windows. *Transportation Research Part C: Emerging Technologies*, 65:111–127, 2016.
- M. Kintner-Meyer, K. Schneider, and R. Pratt. Impacts assessment of plug-in hybrid vehicles on electric utilities and regional us power grids, part 1: Technical analysis. *Pacific Northwest National Laboratory*, 1, 2007.
- P. R. Kleindorfer, K. Singhal, and L. N. Van Wassenhove. Sustainable operations management. *Production and operations management*, 14(4):482–492, 2005.
- S. Letendre, R. Watts, M. Cross, et al. Plug-in hybrid vehicles and the vermont grid: a scoping analysis. Technical report, University of Vermont. Transportation Research Center, 2008.
- J. Melechovský, C. Prins, and R. W. Calvo. A metaheuristic to solve a location-routing problem with non-linear costs. *Journal of Heuristics*, 11(5-6):375–391, 2005.
- N. Mladenović and P. Hansen. Variable neighborhood search. *Computers & operations research*, 24(11):1097–1100, 1997.
- National Energy Board. Canada’s energy future. Technical report, National Energy Board, 2018.
- G. Razeghi and S. Samuelson. Impacts of plug-in electric vehicles in a balancing area. *Applied Energy*, 183:1142–1156, 2016.

-
- R. A. Russell. An effective heuristic for the m-tour traveling salesman problem with some side conditions. *Operations research*, 25(3):517–524, 1977.
- M. Schneider, A. Stenger, and D. Goeke. The electric vehicle-routing problem with time windows and recharging stations. *Transportation Science*, 48(4):500–520, 2014.
- M. M. Solomon. Algorithms for the vehicle routing and scheduling problems with time window constraints. *Operations research*, 35(2):254–265, 1987.
- E. Sortomme and M. A. El-Sharkawi. Optimal charging strategies for unidirectional vehicle-to-grid. *IEEE Transactions on Smart Grid*, 2(1):131–138, 2010.
- B. K. Sovacool, L. Noel, J. Axsen, and W. Kempton. The neglected social dimensions to a vehicle-to-grid (V2G) transition: a critical and systematic review. *Environmental Research Letters*, 13(1):013001, 2018.
- Statistics Canada. Table 20-10-0021-01 new motor vehicle registrations. Available at: <https://www150.statcan.gc.ca/n1/daily-quotidien/191118/dq191118c-cansim-eng.htm>, 2019.
- A. Stenger, D. Vigo, S. Enz, and M. Schwind. An adaptive variable neighborhood search algorithm for a vehicle routing problem arising in small package shipping. *Transportation Science*, 47(1):64–80, 2013.
- W. Tang, S. Bi, Y. J. Zhang, and X. Yuan. Joint routing and charging scheduling optimizations for smart-grid enabled electric vehicle networks. In *2017 IEEE 85th Vehicular Technology Conference (VTC Spring)*, pages 1–5. IEEE, 2017.
- C. D. Tarantilis, E. E. Zachariadis, and C. T. Kiranoudis. A hybrid guided local search for the vehicle-routing problem with intermediate replenishment facilities. *INFORMS Journal on Computing*, 20(1):154–168, 2008.
- A. Triviño-Cabrera, J. A. Aguado, and S. de la Torre. Joint routing and scheduling for electric vehicles in smart grids with V2G. *Energy*, 175:113–122, 2019.
- J. Villar, C. A. Díaz, J. Arnau, and F. A. Campos. Impact of plug-in-electric vehicles penetration on electricity demand, prices and thermal generation dispatch. In *2012 9th International Conference on the European Energy Market*, pages 1–8. IEEE, 2012.
- R. A. Waraich, M. D. Galus, C. Dobler, M. Balmer, G. Andersson, and K. W. Axhausen. Plug-in hybrid electric vehicles and smart grids: Investigations based on a microsimulation. *Transportation Research Part C: Emerging Technologies*, 28:74–86, 2013.
- A. Winston. Inside ups’s electric vehicle strategy. Technical report, UPS, 2018. URL <https://www.ups.com/us/es/services/knowledge-center/article.page?kid=ac91f520>.
- H. Yang, S. Yang, Y. Xu, E. Cao, M. Lai, and Z. Dong. Electric vehicle route optimization considering time-of-use electricity price by learnable partheno-genetic algorithm. *IEEE Transactions on smart grid*, 6(2):657–666, 2015.