Is 30 MHz Enough for C-V2X?

Dhruba Sunuwar, Seungmo Kim, Senior Member, IEEE, and Zachary Reyes

Abstract—Connected vehicles are no longer a futuristic dream coming out of a science fiction, but they are swiftly taking a bigger part of one's everyday life. One of the key technologies actualizing the connected vehicles is vehicle-to-everything communications (V2X). Nonetheless, the United States (U.S.) federal government decided to reallocate the spectrum band that used to be dedicated to V2X uses (namely, the "5.9 GHz band") and to leave only 40% of the original chunk (i.e., 30 MHz of bandwidth) for V2X. It ignited concern of whether the 30-MHz spectrum suffices key V2X safety messages and the respective applications. This paper aims at addressing this issue with the particular focus on the New Radio (NR)-V2X Mode 1. We lay out an extensive study on the safety message types and their latency requirements. Then, we present our simulation results examining whether they can be supported in the 30-MHz spectrum setup.

Index Terms—Connected vehicles, C-V2X, NR-V2X, 5.9 GHz

I. Introduction

1) Background: V2X technology allows vehicles to communicate with other vehicles, infrastructure, and vulnerable road users to enhance safety, thereby preventing traffic crashes, mitigating fatalities, alleviating congestion, and reducing the environmental impact of the transportation system [1]. This capability gives V2X communications the central role in the constitution of intelligent transportation systems (ITS) for connected vehicle environments.

The full 75 MHz of the 5.9 GHz spectrum band (5.850-5.925 GHz) has long been reserved for intelligent transportation services such as V2X technologies. Nonetheless, the U.S. Federal Communications Commission (FCC) voted to allocate the lower 45 MHz (i.e., 5.850-5.895 GHz) for unlicensed operations to support high-throughput broadband applications (e.g., Wireless Fidelity, or Wi-Fi) [3]. Moreover, the reform went further to dedicating the upper 30 MHz (i.e., 5.895-5.925 GHz) for cellular V2X (C-V2X) as the only technology facilitating ITS.

To this line, we deem it prudent to evaluate *what is* possible in a limited 30 MHz spectrum to ensure that the ITS stakeholders can continue to develop and deploy these traffic safety applications.

2) Related Work: Obviously, C-V2X has been forming a massive body of literature. Nonetheless, only little attention was paid to the feasibility of C-V2X in the reduced 30 MHz spectrum for safety applications.

The end-to-end per-packet latency, defined as the time spent by a successful packet to travel from its source to final destination, is a classical networking metric. An advanced latency metric—namely, the inter-reception time (IRT)—was proposed, which measures the time length between successful

D. Sunuwar, S. Kim, and Z. Reyes are with the Department of Electrical and Computer Engineering, Georgia Southern University, Statesboro, GA, USA. The corresponding author is S. Kim who can be reached at seungmokim@georgiasouthern.edu. This work is supported by the Georgia Department of Transportation (GDOT) via grant RP21-08 and the National Science Foundation (NSF) via award ECCS-2138446.

packet deliveries [4]. However, we find the IRT to have limited applicability as it becomes efficient in broadcast-based safety applications only. Considering the variety of our target applications, this paper employs the classical latency as the main metric, as shall be detailed in Section III.

Now, in regard to the characterization of a V2X system, the literature introduced a wide variety of proposals. Several approaches were compounded into large bodies such as theoretical/mathematical approaches [5]-[7], simulation-based [8][9], and channel sounding-based [10]. Even reinforcement learning has been applied as a means to characterize a highly dynamic vehicular network [11]-[14]. The prior art certainly provides profound insights, yet is not directly conclusive whether the reduced 30-MHz bandwidth makes it feasible to operate C-V2X on realistic road and traffic scenarios.

The same limitation can be found in the current literature of V2X safety-critical applications [15]-[18]: the proposals lay out approaches to support such applications but leave it unaddressed what the influence will be after the C-V2X got deprived of 60% of its bandwidth.

- 3) Contributions: This paper is a preliminary study as a starting point for discussions within the ITS literature in regard to operating C-V2X technologies in such an environment. As such, rather than final nor conclusive, this work should be regarded an initiative, igniting further tests and assessments on the impact of 30 MHz environment on the application deployment. Provided that, we extend the C-V2X literature on the following fronts:
 - Pioneer to clarify the feasibility of safety-critical applications in the reduced 30 MHz spectrum setting
 - Develop a quantification framework for C-V2X performance in a comprehensive but easy manner to maneuver
 - Identify message types associated with safety-critical applications

II. SYSTEM MODEL

A. Spatial Setup

Fig. 1 illustrates an urban environment setup that was used in this paper's simulations [19]. A two-dimensional space \mathbb{R}^2 is supposed, which is defined by the dimensions of 520 m and 240 m for the north-south and the east-west axes, respectively.

Here is the summary of our spatial model shown in Fig. 1. The RSUs are marked as green squares. The range of operation of each RSU is set to 150 m, indicated by a black circle around each RSU. There are two types of physical obstacles: trailer trucks (marked as black rectangles) and buildings (drawn as big gray squares).

We suppose *two junctions* (rather than just one) as an effort to examine any possible interference between roadside units (RSUs) on the C-V2X performance as each junction is equipped with a RSU.

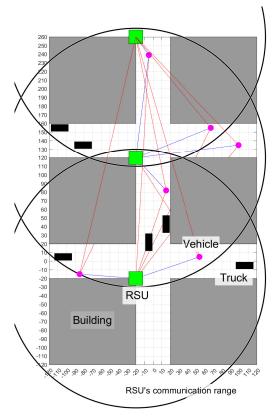


Fig. 1: Geometrical setup of the proposed simulator (with vehicle density of $\lambda = 6$ in the entire system space \mathbb{R}^2)

The connection from a RSU to a vehicle is shown by either a red or blue line: the red indicates a "blocked" connection whereas the blue means a "connected" link. The blockage can be caused by physical obstacles, viz., a building or a large trailer truck that are displayed by a large gray square and a black rectangle, respectively.

The distribution of the vehicles follows a *homogeneous* PPP in \mathbb{R}^2 . We define a general situation where a safety-critical application disseminates a message of its respective type over a C-V2X network. (See Section III-A for details on the message types.) Unlike vehicles, locations of RSUs are fixed each junction [20].

By λ and θ , we denote the densities of vehicles and trucks per road segment, respectively. According to the densities λ and θ , the probability of signal being blocked varies, which, in turn, influences the end-to-end latency of a message. For instance, a large λ and a large θ yield a higher level of competition for medium and an increased level of physical signal blockage, which therefore elevates the latency accordingly.

It is also noteworthy that each vehicle, upon reaching the end of a road, starts over from the opposite end of the same lane. This setup is to keep the total number of vehicles constant at all times, as a means to maintain the same level of competition for the medium at any given time and thus guarantee the accuracy for further stochastic analyses.

B. Communications Parameters

This paper adopts the 3rd Generation Partnership Project (3GPP) Release 17 NR-V2X for the physical-layer (PHY)

[25] and radio resource control (RRC) functions [26]. We assume *Mode 1* where a NR base station (also known as "Next Generation Node B" or "gNB") schedules sidelink resources to be used by the user equipment (UE) (i.e., vehicle) for sidelink transmissions. Nonetheless, we claim that the versatility of our simulation framework can easily be extended to accommodate Mode 2 as well.

To elaborate on the sidelink of NR-V2X, our simulation implements all the key channels [27] including: the Physical Sidelink Broadcast Channel (PSBCH) for sending broadcast information (i.e., synchronization of the sidelink); the PSCCH for sending control information; the PSSCH for sending control; data and Channel State Information (CSI) in case of unicast; and the Physical Sidelink Feedback Channel (PSFCH) for sending HARQ feedback in case of unicast and groupcast modes.

We suppose that all the vehicles distributed in \mathbb{R}^2 have the same ranges of carrier sensing and communication. The NR-V2X supports $\{10, 15, 20, 25, 50, 75, 100\}$ resource blocks (RBs) per subchannel [24]. As shall be elaborated in Section IV, this paper supposes 50 RBs per subchannel, which matches our assumption of 10 MHz per channel.

Our simulation also features a very high level of precision in implementing the spatial environment. Since a city road environment is considered for the simulation as shown in Fig. 1, the Urban Micro (UMi)-Street Canyon path loss model [25] is implemented. However, we reiterate that our simulation can easily accommodate other path loss models defined in the standard [25].

III. PROPOSED NR-V2X PERFORMANCE EVALUATION FRAMEWORK

A. Message Types

Table I categorizes several representative message types (i.e., as the last row) according to the "traffic families" (i.e., as the 3rd row). We particularly highlight that the ongoing SAE J3161 standardization activity [19] is primarily based on the end-to-end latency, namely, the packet delay budget (PDB). Discussion on the metric selection shall be revisited in Section III-C.

We assign different ProSe per-packet priorities (PPPP) [21] based on the importance of a message type. This proposition is to further extension to optimization of C-V2X via assigning different communication profiles (viz., number of subchannels, modulation and coding scheme (MCS), number of retransmissions, etc.) for the packets based on packet size, velocity, and channel busy ratio (CBR).

Here is elaboration of Table I [22][23]: basic safety (BSM), emergency vehicle alert (EVA), road safety (RSM), map data (MAP), signal phase and timing (SPaT), Radio Technology Commission for Maritime Services corrections (RTCM), signal status (SSM), signal requeset (SRM), traveler information (TIM), and road weather (RWM), as well as even transportlayer protocols such as transmission control (TCP) and user datagram (UDP). These types of messages support a broad set of vehicle-to-vehicle (V2V) and vehicle-to-infrastructure (V2I) applications, e.g., forward collision warning, pre-crash

Service Type Safety Services Mobility Services V2V Traffic Direction V2I-I2V V2I-I2V Critical V2I-I2V Traffic Families Critical V2V Essential V2 Essential V2I-I2V Transactional Low-priority Background Minimum PPPP 2 5 6 Minimum PDB 20 msec 100 msec 100 msec 100 msec 100 msec 100 msec 100 msec Example Messages BSM, EVA BSM RSM, MAP SPaT, RTCM SSM, SRM TIM, RWM TCP, UDP

TABLE I: Mapping of message types to traffic priority levels




Fig. 2: Structure of the proposed simulator

sensing, emergency vehicle warning and signal preemption, and infrastructure-to-vehicle warning messages.

As found from the "V2V" column of Table I, some applications operate based on the same message types, allowing numerous applications to be operated without requiring additional spectrum. However, different applications using the same message types can have vastly different spectrum needs due to differing message sizes and frequency of message transmission, so there are scenarios in which some applications using the same message types could and could not be deployed. Additionally, available spectrum will be dependent in part on the number of vehicles within communication range and the types of applications operating in a given area. Because of this, it will likely be necessary to establish a scheme that prioritizes safety-critical applications while underrating non-safety-critical applications in such situations.

B. Simulator Development

This proposed research features *integration* of the NR-V2X PHY and RRC simulator with two other major simulators: namely, the geometrical simulator and the driving simulator. Fig. 2 illustrates how this integration is achieved.

First of all, the NR-V2X PHY and RRC simulator implements the communications functions that were mostly explained earlier in Section II-B. As such, it effectuates the sidelink communications among the vehicles and RSUs, following major TRs and TSs [24]-[27] of the 3GPP Release 17 standard. This NR-V2X simulator forms the basis for two other major components of the proposed simulation framework.

On top of the NR-V2X simulator, the spatial environment simulator facilitates an urban environment shown in Section II-A. As Fig. 2 depicts, the existence of this spatial environment component adds the context of the NR-V2X performance in different road/traffic settings. We emphasize that this com-

ponent will be strengthened by adding a wider variety of road environments and traffic scenarios.

Now, we highlight that our simulation framework features the driving simulator that actually puts a human user into a 1st-person driving setup. That way, the user can have *live experience of connected vehicles*: the experience can actualize the user on how car-to-car connections can promote the safety in various traffic scenarios and road conditions. As shall be elaborated in Section IV-B, this driving simulator will also play the role of adding realistic contexts to V2X simulations, which clearly highlights the unique contribution of this research.

We combine all of those so the user can not only (i) deploy vehicles, RSUs, and obstacles but (ii) promptly quantify the C-V2X performance out of the scenario.

C. Metrics

What it takes to call the V2X performance "enough"? It is critical to address to this question in order to address what this paper's title asks: is 30 MHz enough for NR-V2X Mode 1? We stress that this paper adopts the end-to-end latency as the primary performance metric measuring a C-V2X system.

The end-to-end latency is the length of maximum allowed time between the generation of a message at the transmitter's application and the reception of the message at the receiver's application [28]. As this paper focuses on Mode 1 of the NR-V2X, we implement the the latency as the length of time taken from the generation of a message at an application (of those listed in Table I) at a RSU to the reception of the message by a vehicle.

Here is the justification of "why" the latency is chosen as the key performance metric in this paper over other metrics. First and foremost, the 3GPP 5G Service Requirement also identifies the end-to-end latency as one of the most critical performance indicators [29], based on which other requirement factors are defined. Not only that, the ongoing SAE J3161 standardization activity [19] is almost solely based on the latency, i.e., PDB.

However, in addition to the delay, we also reiterate that this paper features the integration with driving simulator. We measure the *near crash rate* after a sufficiently large number of driving simulations on human subjects. Notice that a nearcrash is defined as any circumstance that requires a rapid, evasive maneuver by the subject vehicle, or any other vehicle, pedestrian, cyclist, or animal to avoid a crash [30]. A rapid, evasive maneuver is defined as a steering, braking, accelerating, or any combination of control inputs that approaches the limits of the vehicle capabilities. This helps add contexts on how the improved performance of C-V2X can *actually affect the road safety*. More details on the simulation scenario follows in Section IV-B.

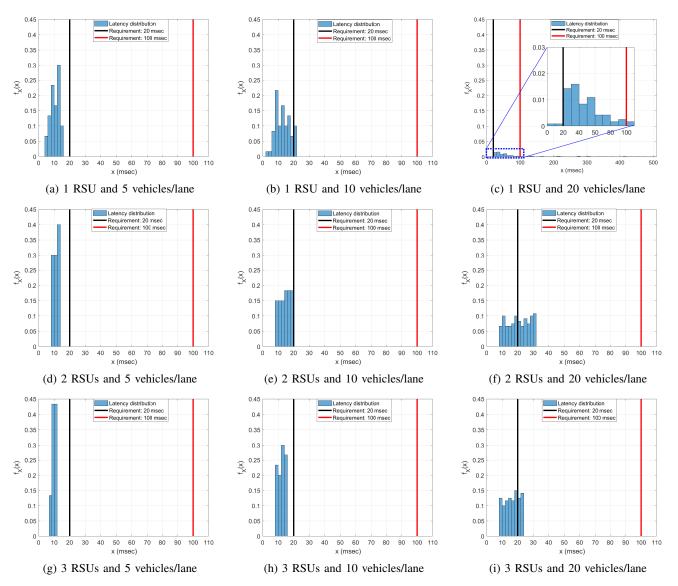


Fig. 3: Distribution of RSU-to-vehicle latency according to number of RSUs (compared column-wise) and traffic density (compared row-wise) compared to latency requirements of {20,100} msec as {black,red} vertical lines

TABLE II: Key parameters for simulation

Parameter	Value
Inter-broadcast interval	100 msec [26]
Bandwidth per channel	10 MHz [3]
Number of RBs per subchannel	50 [24]
Payload length	40 bytes [22]
Vehicle density	{5,10,20} vehicles/lane

IV. NUMERICAL RESULTS

A. NR-V2X RSU-to-Vehicle Latency

Table II summarizes the key parameters that were used in our NR-V2X simulation. Notice from the table that we assume 50 RBs per subchannel, which occupies 180 kHz/RB \times 50 RBs/subchannel \approx 9 MHz and thus takes up most of an entire 10-MHz channel considering 1.25 MHz of a guard band [29]. The vehicle density is another noteworthy parameter: $\lambda = \{5, 10, 20\}$ vehicles per lane equal $\{30, 60, 120\}$ vehicles

in \mathbb{R}^2 , which in turn indicate $\{48,24,12\}$ m of minimum and $\{76,38,19\}$ m of maximum inter-vehicle distance. As such, we intend that the $\lambda = \{5,10,20\}$ vehicles per lane represent the $\{\text{low, medium, high}\}$ vehicle density, respectively.

Fig. 3 demonstrates the result of this simulation. Each subfigure presents $f_X(x)$, the probability density function (pdf) of the RSU-to-vehicle latency x in miliseconds (msec). The pdf is compared to the latency requirements of $\{20,100\}$ msec as ($\{black,red\}$ vertical lines) that have earlier been discussed in Table I. Via the comparison, Fig. 3 displays very clearly how much proportion of vehicles generated on the \mathbb{R}^2 is able to support which message types and applications.

Horizontal comparison in a single row indicates that a higher vehicle density yields a higher latency and thus a higher chance of exceeding the 20-msec latency requirement. Vertical comparison in a single column implies that a larger number of RSUs (each taking a full 10-MHz channel) gives a lower latency and thus a lower probability of exceeding the latency



Fig. 4: "Do not pass" warning scenario for V2V BSM test

requirement.

We deem it a safe statement if one finds that even in the 30-MHz setting, the applications requiring the latency of 100 msec can be supported in most scenarios. The only exception from this study was the "1 RSU and 20 vehicles/lane" case; Fig. 3c implies that such high vehicle density may cause some portions of vehicles to be served at a higher latency than the 100-msec requirement. Henceforth, it translates that in the 30-MHz spectrum setting, while almost all other message types defined in Table I can be supported, the "V2V critical BSM" may not function with only one RSU in a high traffic density scenario.

B. Verification via Driving Simulation

We are developing various driving simulation scenarios for testing the message types identified in Table I. As has been mentioned in Fig. 2, such *integration* of a driving simulator and a NR-V2X simulator forms key merit of this research.

A usual setup for our driving simulator is as follows. A human subject is located in front of a driving simulator that we built. There are 4 monitors, a wheel, and pedals, emulating the windshield, the directional and speed maneuvers, respectively.

Fig. 4 illustrates the proposed driving simulation setup for the verification. The driven vehicle (the "vehicle-of-interest" or "VoI" hereafter) is put into the following scenario where continued exchange of V2V BSM via NR-V2X can improve the safety. The VoI is put onto a 2-lane road: i.e., a single lane per direction. The driver cares to pass the large trailer truck in front of the VoI, which blocks the driver's sight of the other-direction lane. We design the simulation that because of the sight blockage, an attempt to pass the truck causes a *near crash* with another vehicle approaching from the other lane (the "vehicle-to-crash" or "VtC"). The assumption here (which is very realistic) is that if the VoI and VtC have successfully exchanged BSMs, the near crash can be avoided by the driver being able to refrain from the pass with the VtC approaching.

V. CONCLUSIONS

This paper proposed a framework for evaluating the performance of a NR-V2X system. The research was particularly motivated from the U.S. federal government's recent decision of leaving only 30 MHz of spectrum for V2X. As such, this research identified key V2X safety messages and the respective applications, and examined whether they can be still supported

with the reduced bandwidth. In an urban Mode 1 setting, most of the safety-critical applications appeared to satisfy their latency requirements. Our holistic simulation framework integrating the NR-V2X PHY/RRC, spatial environment, and driving simulators strengthened the validity of the results.

As future work, we plan on further improvement of this simulator suite such that it accommodates a wider variety of NR-V2X functionalities, road conditions, and traffic scenarios, e.g., Mode 2, suburban highway, etc.

ACKNOWLEDGEMENT

We acknowledge the Intelligent Transportation Society of America (ITSA) and the delegates from their member organizations including Qualcomm, Cisco, etc. for valuable feedback via continued discussions on the C-V2X message types and traffic families that were presented in Section III-A.

REFERENCES

- U.S. Department of Transportation, "Vehicle-to-vehicle communication technology," V2V Fact Sheet, Jul. 2017.
- [2] X. Wang, S. Mao, and M. X. Gong, "An overview of 3GPP cellular vehicle-to-everything standards," *GetMobile: Mobile Computing and Communications*, vol. 21, no. 3, pp. 19–25, 2017.
- [3] U.S. FCC, "In the matter of use of the 5.850-5.925 GHz band," Notice of Proposed Rulemaking, ET Docket No. 19-138, FCC 19-129, Dec. 2019
- [4] T. ElBatt, S. Goel, G. Holland, H. Krishnan, and J. Parikh, "Cooperative collision warning using dedicated short range wireless communications," in *Proc. ACM VANET 2006*.
- [5] S. Kim, "Impacts of mobility on performance of blockchain in VANET," IEEE Access, vol. 7, May 2019.
- [6] T. Dessalgn and S. Kim, "Danger aware vehicular networking," in *Proc. IEEE SoutheastCon 2019*.
- [7] S. Kim and B. J. Kim, "Crash risk-based prioritization of basic safety message in DSRC," *IEEE Access*, vol. 8, Nov. 2020.
- [8] S. Kim and C. Dietrich, "A novel method for evaluation of coexistence between DSRC and Wi-Fi at 5.9 GHz," in Proc. IEEE Globecom 2018.
- [9] M. Khan and S. Kim, "On the feasibility of 4.9 GHz public safety band as spectrum option for internet of vehicles," in *Proc. IEEE ICEIC* 2022.
- [10] M. Akdeniz, Y. Liu, M. Samimi, S. Sun, S. Rangan, T. Rappaport, and E. Erkip, "Millimeter wave channel modeling and cellular capacity evaluation," *IEEE J. Sel. Areas Commun.*, vol. 32, iss. 6, Jun. 14.
- [11] S. Kim and B. J. Kim, "Reinforcement learning for accident risk-adaptive V2X networking," in *Proc. IEEE VTC 2020 Fall*.
- [12] S. Kim, B. J. Kim, and B. Park, "Environment-adaptive multiple access for distributed V2X network: A reinforcement learning framework," in *Proc. IEEE VTC 2021 Spring*.
- [13] S. Kim and B. J. Kim, "On the Byzantine-fault-tolerant consensus in blockchain built on internet of vehicles," in *Proc. IEEE ICEIC 2022*.
 [14] I. Nasim, A. Ibrahim, and S. Kim, "Learning-based beamforming
- [14] I. Nasim, A. Ibrahim, and S. Kim, "Learning-based beamforming for multi-user vehicular communications: A combinatorial multi-armed bandit approach," *IEEE Access*, vol. 8, Dec. 2020.
- [15] C. Zoghlami, R. Kacimi, and R. Dhaou, "5G-enabled V2X communications for vulnerable road users safety applications: A review," Wireless Netw., vol. 23, Nov. 2022.
- [16] C. Zoghlami, R. Kacimi, and R. Dhaou, "Dynamics of cooperative and vulnerable awareness messages in V2X safety applications," in *IEEE IWCMC* 2022.
- [17] C. Zoghlami, R. Kacimi, and R. Dhaou, "A study on dynamic collection of cooperative awareness messages in v2x safety applications," in *IEEE* CONG 2022
- [18] S. Kim and T. Dessalgn, "Mitigation of civilian-to-military interference in DSRC for urban operations," in *Proc. IEEE MILCOM* 2019.
- [19] SAE, "Vehicle level validation test procedures for V2V safety communications," *J3161/1A*, Apr. 2022.
- [20] T. Karunathilake and A. Forster, "A survey on mobile road side units in VANETs," MDPI Veh., vol. 4, no. 2, May 2022.
- [21] 3GPP, "Universal Mobile Telecommunications System (UMTS); LTE; Proximity-based services (ProSe); Stage 2," ETSI TS 123303, V17.0.0, May 2022.

- [22] SAE, "V2X communications message set dictionary," SAE J2735, Jul. 2020
- [23] U.S. DOT, "CV273: Introduction to SPaT / MAP messages," *Module 62 CV273*. [Online]. Aavilable: https://www.pcb.its.dot.gov/standardstraining/mod62/ppt/m62ppt.htm
- [24] 3GPP, "5G; NR; Services provided by the physical layer," *ETSI TR* 138202, V17.3.0, Jan. 2023.
- [25] 3GPP, "5G; Study on channel model for frequencies from 0.5 to 100 GHz," ETSI TR 138901, V17.0.0, Apr. 2022.
- [26] 3GPP, "LTE; Evolved Universal Terrestrial Radio Access (E-UTRA); User equipment (UE) radio transmission and reception," ETSI TS 136101, V17.8.0, Jan. 2023.
- [27] 3GPP, "5G; NR; Physical layer; General description," ETSI TS 138201, V17.0.0, May 2022.
- [28] M. Garcia, A. Molina-Galan, M. Boban, J. Gozalvez, B. Coll-Perales, T. Sahin, and A. Kousaridas, "A tutorial on 5G NR V2X communications," IEEE Commun. Surveys Tutorials, vol. 23, no, 3, Feb. 2021.
- [29] 3GPP, "5G; Service requirements for enhanced V2X scenarios," ETSI TS 122186, V17.0.0, Apr. 2022.
- [30] U.S. NHTSA, "The 100-car naturalistic driving study: Phase II results of the 100-car field experiment," DOT HS 810 593, Apr. 2006.