

Two-qubit atomic gates: Spatio-temporal control of Rydberg interaction

Ignacio R. Sola*

Departamento de Química Física, Universidad Complutense, 28040 Madrid, Spain

Vladimir S. Malinovsky

DEVCOM Army Research Laboratory, 2800 Powder Mill Road, Adelphi, Maryland 20783, USA

Jaewook Ahn

Department of Physics, Korea Advanced Institute of Science and Technology (KAIST), Daejeon 34141, Republic of Korea

Seokmin Shin

School of Chemistry, Seoul National University, 08826 Seoul, Republic of Korea

Bo Y. Chang†

*School of Chemistry, Seoul National University, 08826 Seoul, Republic of Korea and
Research Institute of Basic Sciences, Seoul National University, 08826 Seoul, Republic of Korea*

By controlling the temporal and spatial features of light, we propose a novel protocol to prepare two-qubit entangling gates on atoms trapped at close distance, which could potentially speed up the operation of the gate from the sub-micro to the nanosecond scale. The protocol is robust to variations in the pulse areas and the position of the atoms, by virtue of the coherent properties of a dark state, which is used to drive the population through Rydberg states. From the time-domain perspective, the protocol generalizes the one proposed by Jaksch and coworkers [Jaksch *et al.*, *Phys. Rev. Lett.*, 2000, **85**, 2208], with three pulses that operate symmetrically in time, but with different pulse areas. From the spatial-domain perspective, it uses structured light. We analyze the map of the gate fidelity, which forms rotated and distorted lattices in the solution space. Finally, we study the effect of an additional qubit to the gate performance and propose generalizations that operate with multi-pulse sequences.

I. INTRODUCTION

Due to their excellent optical addressability, [1–5] rich many-body physics,[6–12] and long decoherence times,[13] neutral atoms excited in Rydberg states have been used as vectors for different quantum technologies, including entanglement preparation, [14–21] creation of photonic entanglement, [22] quantum simulators, [23–26] and quantum computation.[13, 19, 27–34]

A key step involves trapping the atoms at low temperature in magneto-optical traps (MOT). Homogeneous magnetic fields working on the MOT split the degeneracy of the hyperfine ground states of the atoms, allowing to encode and address separately the qubit states by optical fields through intermediate states or using microwave fields.[35–37] Currently, it is possible to create splittings Δ of the order of 10 GHz[14] that in principle, allow to drive the population from the $|0\rangle$ state independently of the $|1\rangle$ state in the nanosecond regime.

On the other hand, due to the strong dipole-dipole interaction of Rydberg states, [38, 39] the energy of a double excitation of Rydberg states $|rr\rangle$ is larger than twice the energy of each atom in a Rydberg state. For weak enough pulses (or close enough atoms) this extra

energy is also larger than the Rabi frequency driving the transition, and the $|rr\rangle$ state cannot be populated. This defines a maximum distance, called the Rydberg blockade radius, R_B , within which the well-known C-PHASE gate protocol was proposed by Jaksch *et al.* [27]. The three-pulse sequence protocol consists of a π -pulse acting on the first qubit, followed by a 2π -pulse acting on the second qubit, and a π -pulse again acting on the first qubit. The pulse frequencies are tuned to excite the chosen Rydberg state, $|r\rangle$ from the qubit state $|0\rangle$ (alternatively, from the $|1\rangle$ state) so the other qubit state is decoupled. Then if the system is initially in the $|00\rangle$ state, the first pulse moves the amplitude to $i|r0\rangle$, the second does nothing and the third moves the amplitude to $-|00\rangle$. If the system starts in $|01\rangle$, the first pulse acts as before, driving the amplitude to $i|r1\rangle$, the second does nothing and the third induces the transition to $-|01\rangle$. When the system is in $|10\rangle$ the first pulse does nothing, the second drives the amplitude to $-|10\rangle$ and the third does nothing. Finally, the lasers cannot induce any transition from the $|11\rangle$ state. In the following, we will refer to this set of operations as the Jaksch protocol (JP).

There have been several proposals to extend the JP mechanism using more robust adiabatic excitation schemes[40–42] adding alternative processes to the dipole blockade through dark states,[43] or addressing multi-qubit gate generalizations.[33, 34, 44, 45] Some of these ideas extend well known optical control adiabatic strategies [46–49] for dynamics with target states conditioned

* corresponding author: isolarei@ucm.es

† corresponding author: boyoung@snu.ac.kr

on the initial state. [50–53] One disadvantage of these schemes is the need to work with long pulses, in the microsecond regime. In the JP scheme, this is needed to operate with independent qubits, forcing interatomic distances of the order of $\sim 5\mu\text{m}$, with Rydberg-Rydberg interactions, $d_{\mathcal{B}}$, of a few MHz. The time-scale gap in Δ^{-1} and $d_{\mathcal{B}}^{-1}$ offers an opportunity to speed the gates typically by two orders of magnitude, by using denser arrays of atoms, therefore boosting the dipole blockade such that $d_{\mathcal{B}} \sim \Delta$. Although the physics of Rydberg states is rich and several unwanted physical processes may be involved in working in denser media, [17, 54–60] it is important to estimate if the JP can operate under these conditions or if one can design other robust protocols for the gates with non-independent qubits.

One way to extend the JP to more compact arrangements of atoms is to implement control not only in time (encoded in the pulse sequence), but also in space (encoded as geometrical parameters) taking into account the strength of the light-matter interaction at the exact qubit locations. In the simplest arrangements, the spatial control might just involve specific focusing of each laser light at different points of the lattice formed by the atoms, not just necessarily at the site that the atom occupies, using various TEM modes of light.[61]

Here we examine the potential advantages of using so-called structured light for the entangling gate implementation. Recent advances in the control of spatial properties of light have been used to create topological electromagnetic effects, as well as almost arbitrary complex geometrical patterns that can be complemented with pulse shaping techniques.[5, 62, 63] For instance, a superposition of TEM₀₀ and TEM₀₁ or TEM₁₀ can be used to create nodes and phase relations between the peak values of the fields at nearby locations. In addition to the space-dependent intensities, such *hybrid modes* (see the sketch in Fig.1) may have different phases at different positions of the atoms. The idea is to use a symmetrical protocol where the first pulse and its copy, focusing on the first qubit, are applied before and after a second pulse acts mostly on the second qubit. We prove that a particular relation in the spatial features of the pulses confers special robustness to the gate implementation, giving raise to the *Symmetric Orthogonal Protocol* or SOP that is proposed in this work. By incorporating the basic features of spatio-temporally controlled pulses as parameters in the Hamiltonian, we design simple models to estimate the fidelities for two- and three-qubit systems, implementing the C-PHASE type gate. The complexity of the system increases with the number of parameters, but what can be seen as a drawback, may be seen as an opportunity to find novel ways to control the system using optimization techniques.

Our study is a first demonstration of quantum control application[64–66] to design quantum gates addressing both the spatial and temporal features of the laser fields. Using simplified models at zero temperature and without noise, we show that the spatio-temporal control of

the fields acting locally on each qubit can be used to achieve robust and efficient implementations of fast entangling gates. In fact, this theoretical setup offers many more practical implementations to control gates and prepare entanglement, which will be addressed in the future. The speed of the designed gates justifies some of our assumptions, like neglecting decoherence, dephasing, and most mechanisms that might lead to fidelity losses. However, more detailed studies considering the effect of other states in the system, the presence of Stark shifts, noise in the pulses, and the motion of the atoms, are required to assess the practical implementation of the SOP.

II. GATE PERFORMANCE FOR NON-SEPARATED QUBITS: ANALYSIS

The computational basis of a two-qubit in our system is composed of $|00\rangle$, $|01\rangle$, $|10\rangle$ and $|11\rangle$ states. Together with the Rydberg ancillary states: $|r0\rangle$, $|0r\rangle$, $|r1\rangle$, $|1r\rangle$, form the basis where we will follow the evolution of the system, as we assume that the $|rr\rangle$ state cannot be accessed by strong Rydberg blockade. We assume that the distance between atoms is shorter than the waist of the laser beams. As a first approximation to model the local effect of the field on each of the qubits, we define *geometrical factors*, a_k and b_k , so the spatially and temporally dependent interaction of the laser k at qubit α ($\alpha = a, b$) is determined by the Rabi frequencies $\Omega_k(\vec{r}_\alpha, t) = \alpha_k \mu_{0r} E_k(t)/\hbar$. The geometrical factors can be partially incorporated in the Franck-Condon factor μ_{0r} so we can assume, without loss of generality, that a_k and b_k are normalized to unity ($\sqrt{a_k^2 + b_k^2} = 1$). Using hybrid modes of light (structured light) one can control a_k and b_k in a wide range of values, including negative factors.

Using a pulse sequence of non-overlapping pulses $\Omega_k(\vec{r}, t)$, in resonance between the $|0\rangle$ state of the qubit and the chosen Rydberg state $|r\rangle$, the Hamiltonian is block-diagonal, $\mathbf{H}_k^V \oplus \mathbf{H}_k^a \oplus \mathbf{H}_k^b \oplus \mathbf{H}^d$, where $\mathbf{H}_k^V = -\frac{1}{2}\Omega_k(t)(a|00\rangle\langle r0| + b|00\rangle\langle 0r| + \text{h.c.})$ is the Hamiltonian of a 3-level system in V configuration, acting in the subspace of $\{|00\rangle, |r0\rangle, |0r\rangle\}$ states, $\mathbf{H}_k^a = -\frac{a}{2}\Omega_k(t)(|01\rangle\langle r1| + \text{h.c.})$ and $\mathbf{H}_k^b = -\frac{b}{2}\Omega_k(t)(|10\rangle\langle 1r| + \text{h.c.})$ are two-level Hamiltonians acting in the subspace of $\{|01\rangle, |r1\rangle\}$ and $\{|10\rangle, |1r\rangle\}$ respectively. Finally, $\mathbf{H}^d = 0$ is a zero Hamiltonian acting on the state $|11\rangle$, decoupled from any field. The energy diagrams of the subsystems are shown in Fig1.

The time-evolution operator of any of these Hamiltonians can be solved analytically through their time-independent dressed states, that have zero non-adiabatic couplings.[67–69] For reference, we include here the analytical form of the time-evolution operators at the end of

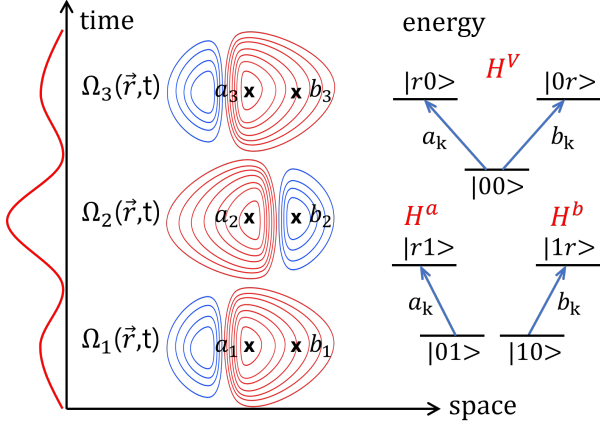


FIG. 1. Proposed implementation of the SOP for two-qubit gates. The qubits are located at the x positions. They are subject to the pulses, $\Omega_1(\vec{r}, t)$, $\Omega_2(\vec{r}, t)$, $\Omega_3(\vec{r}, t)$ whose spatial profile is shown in the horizontal “space” axis, with local amplitudes at the qubits designated by the geometrical factors a_k and b_k . Different colors represent a π phase change in the amplitude of the field (red - positive; blue - negative). The sequence of operations that governs the temporal evolution of the state vectors depends on the pulse sequence, shown in the vertical “time” axis. Conditional on the initial state of the qubit, $\{|00\rangle, |01\rangle, |10\rangle\}$, the energy diagram of the subsystem where the dynamics takes place is shown under “energy”. The $|11\rangle$, not shown, is completely decoupled.

the pulses. For H_k^V ,

$$U_k^V = \begin{pmatrix} \cos \theta_k & ia_k \sin \theta_k & ib_k \sin \theta_k \\ ia_k \sin \theta_k & a_k^2 \cos \theta_k + b_k^2 & a_k b_k [\cos \theta_k - 1] \\ ib_k \sin \theta_k & a_k b_k [\cos \theta_k - 1] & b_k^2 \cos \theta_k + a_k^2 \end{pmatrix} \quad (1)$$

where the mixing angle

$$\theta_k = \frac{1}{2} \int_{-\infty}^{\infty} \Omega_k(t) dt = \frac{1}{2} A_k$$

is half the pulse area. Interestingly, H_k^V supports a dark state, $|\Phi_k^0\rangle = -b_k|r0\rangle + a_k|0r\rangle$. This is a dressed state of zero energy, which is uncoupled to the ground state, $|00\rangle$, that is, $|\Phi_k^0\rangle$ cannot decay nor be excited by the field. On the other hand, the time-evolution operator that affects the initial states $|01\rangle$ and $|10\rangle$, is

$$U_k^\alpha = \begin{pmatrix} \cos \vartheta_k & i \sin \vartheta_k \\ i \sin \vartheta_k & \cos \vartheta_k \end{pmatrix} \quad (2)$$

where $\vartheta_k = \alpha_k \theta_k$ ($\alpha = a, b$).

Effect on $|00\rangle$

Let us predict the effect of the JP on the partially distinguishable qubits. Excitation from $|00\rangle$ with a π -pulse prepares the entangled state $|\Psi_1\rangle = ia_1|r0\rangle + ib_1|0r\rangle$. Because there is population in both qubits and $\Omega_2(\vec{r}, t)$ acts

on both, the second pulse can induce transitions from $|\Psi_1\rangle$, breaking the mechanism of the JP. If we want $|\Psi_1\rangle$ to remain undisturbed, we need $|\Psi_1\rangle$ to be the dark state of H_2^V , $|\Phi_2^0\rangle$, for which $a_1 = -b_2$ and $b_1 = a_2$. Then the third pulse can be another copy of the first pulse, transforming $|\Psi_1\rangle$ back into $-|00\rangle$.

To generalize the result we define *structural vectors*, which are normalized two-component vectors formed by the geometrical factors, $\vec{e}_k = (a_k, b_k)$ that characterize the spatial properties of the protocol. Success in the gate performance (starting in $|00\rangle$) implies that the first diagonal element of the full propagator, $U_{11}^V = (U_3^V U_2^V U_1^V)_{11} = -1$. Working out the matrix multiplication we obtain

$$U_{11}^V = c_3 c_2 c_1 - (\vec{e}_2 \vec{e}_1) c_3 s_2 s_1 - (\vec{e}_3 \vec{e}_2) s_3 s_2 c_1 - (\vec{e}_3 \vec{e}_2)(\vec{e}_2 \vec{e}_1) s_3 c_2 s_1 - [\vec{e}_3 \vec{e}_1 - (\vec{e}_3 \vec{e}_2)(\vec{e}_2 \vec{e}_1)] s_3 s_1 \quad (3)$$

where we have used the compact notation $c_k = \cos \theta_k$, $s_k = \sin \theta_k$. This formula is valid in general for a 3-pulse sequence on arrays of N qubits, where \vec{e}_k becomes a N -dimensional vector. The condition that $|\Psi_1\rangle = |\Phi_2^0\rangle$ (the dark state of H_2^V) is that \vec{e}_2 is orthogonal to both \vec{e}_1 and \vec{e}_3 . In symmetric protocols, with $\vec{e}_3 = \vec{e}_1$ and $\theta_1 = \theta_3$, one obtains the equation that defines the behavior under the SOP,

$$U_{11}^V = \cos^2 \theta_1 \cos \theta_2 - \sin^2 \theta_1. \quad (4)$$

For 2-qubit systems, the normalization and orthogonality of the structural vectors implies that there is only one free parameter, $b \equiv b_1 = -a_2$, that measures the overlap of the field on both qubits and as such, indirectly measures the proximity of the atoms in the trap.

If $\theta_1 = \pi/2$, as in the JP, $U_{11}^V = -1$ regardless of θ_2 and for any value of b . In addition, Eq.(4) guarantees a remarkable robustness to variations in the pulse areas. Making $\delta\theta_1' = \pi/2 + \delta_1 = \theta_3'$, and $\theta_2' = \pi + \delta_2$, one can easily obtain

$$U_{11}^V = \delta_1^2 \left(-1 + \frac{\delta_2}{2} \right) - \left(1 - \frac{\delta_1^2}{2} \right)^2 = -1 + (2\delta_2^2 - \delta_1^2) \frac{\delta_1^2}{4}. \quad (5)$$

Any error in the pulse areas will only add a quartic error in U_{11}^V ($\sim \delta^4$).

Effect on $|01\rangle$ and $|10\rangle$

To evaluate the gate performance when the two-qubit system is initiated in $|01\rangle$ or $|10\rangle$ we use Eq.(2). In a symmetrical sequence, the final state will be $(\alpha = a, b)$

$$U_{11}^\alpha = (U_3^\alpha U_2^\alpha U_1^\alpha)_{11} = \cos(2\alpha_1 \theta_1 + \alpha_2 \theta_2). \quad (6)$$

In Jaksch protocol, $(\theta_1 = \pi/2, \theta_2 = \pi)$, $U_{11}^\alpha = \cos([\alpha_1 + \alpha_2]\pi) = -1$ for independent qubits, as only one component, α_1 or α_2 , exist. But for orthogonal geometrical factors ($a_1 = b_2 \equiv a, b_1 = -a_2 \equiv b$),

$$U_{11}^a + U_{11}^b = 2 \cos(a\pi) \cos(b\pi) \approx -2 + b^2 \pi^2 \quad (7)$$

inducing quadratic deviations in b that lower the fidelity of the gate.

A compromise must be made in the choice of the pulse areas. Because U_{11}^V does not depend on the geometrical factors (nor on A_2), the pulse parameters should be adjusted mainly due to their effect on U_{11}^a and U_{11}^b , which require “rotating” the pulse areas. From Eq.(6), for any pulse area in the SOP, we obtain

$$U_{11}^a = \cos\left(aA_1 - \frac{1}{2}bA_2\right) = \cos\left(\frac{1}{2}[aA_{\text{odd}} - bA_{\text{even}}]\right) \quad (8)$$

$$U_{11}^b = \cos\left(bA_1 + \frac{1}{2}aA_2\right) = \cos\left(\frac{1}{2}[bA_{\text{odd}} + aA_{\text{even}}]\right) \quad (9)$$

where we use even and odd pulse areas. We can write Eqs.(8,9) in terms of new mixed pulse areas A'_{odd} , A'_{even} , where

$$\begin{pmatrix} A'_{\text{odd}} \\ A'_{\text{even}} \end{pmatrix} = \begin{pmatrix} a & -b \\ b & a \end{pmatrix} \begin{pmatrix} A_{\text{odd}} \\ A_{\text{even}} \end{pmatrix} \quad (10)$$

such that $A'_{\text{odd}} = 2\pi(1 + 2m)$, $A'_{\text{even}} = 2\pi(1 + 2n)$, as in the JP, but for the new mixed pulse areas. Although U_{11}^V will affect the overall fidelity, we observe that the effect of using orthogonal geometrical vectors is to rotate clockwise by an angle $\beta = \arctan(b/a)$, the pulse areas that will give maximal but not perfect fidelities.

III. GATE PERFORMANCE FOR NON-SEPARATED QUBITS: NUMERICS

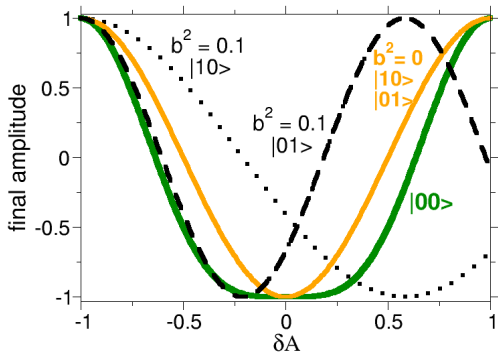


FIG. 2. Dependence of the final amplitude of the starting state ($|00\rangle$, $|01\rangle$ and $|10\rangle$) on deviations from π in the pulse areas of odd pulses ($\delta A_1 = \delta A_3 = \delta A$), and of 2π in the second pulse ($\delta A_2 = 2\delta A$), for different geometrical factors.

As discussed in the previous section, the orthogonality of the geometrical factors assures that population passage in the V subsystem comprising the $|00\rangle$, $|r0\rangle$ and $|0r\rangle$ states, goes through a dark state. It is so robust that errors in the pulse areas only imply quartic deviations in U_{11}^V regardless of the value of b , that is, of the proximity of the qubits. This is shown In Fig.2 (solid

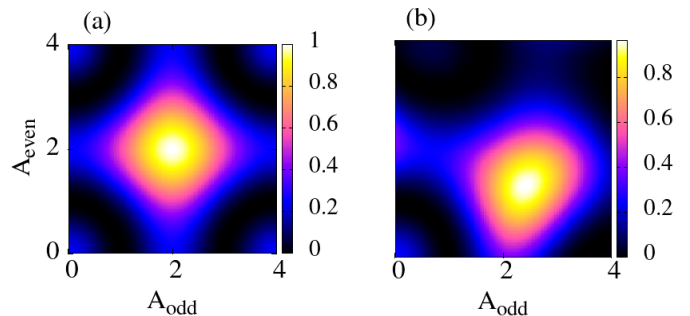


FIG. 3. Gate fidelity of the (a) JP and (b) SOP for $b^2 = 0.1$, as a function of the pulse areas (in units of π) for the solutions with minimal pulse area.

line), where U_{11} are computed for the different subsystems as a function of variations in pulses areas from the JP, assuming $\delta A = \delta A_1 = \delta A_2/2$. On the other hand, U_{11}^a increases quadratically around the minima (dashed black lines in Fig.2) and become disaligned for $|01\rangle$ and $|10\rangle$ as b increases. Thus, the desired value of $U_{11}^a = -1$ may fall outside of the flat band that characterizes the behavior of U_{11}^V around its minima, disrupting the gate’s efficiency.

To optimize the gate one needs to change the pulse areas in specific directions. The smallest optimal pulse areas that maximize the fidelity are shown in Fig.3, for $b^2 = 0.1$. To avoid a distortion in the map of solutions (henceforth *fidelity map*) we represent the map as a function on the area acting on each qubit, $A_{\text{odd}} = A_1 + A_3$ and $A_{\text{even}} = A_2$, rather than A_1 and A_2 . We obtain a maximum fidelity of 0.96 displaced to larger areas in A_{odd} and smaller areas in A_{even} . The overall pulse area, $A_T = |A_{\text{odd}}| + |A_{\text{even}}| = 3.7\pi$, is however smaller than in the JP (4π). On the other hand, the overall robustness of the gate, measured as the area occupied by the maximum in the space of solutions, is practically the same.

But this is only the minimal pulse area implementation. In the JP, other solutions are possible modulo area 2π in the areas of the first and third pulses, A_1 and A_3 , and modulo 4π in A_2 . Hence the family of protocols with symmetric pulses ($A_3 = A_1$) satisfying $A_{\text{odd}} = 2\pi(1 + 2m)$ and $A_{\text{even}} = 2\pi(1 + 2n)$, where m, n are integers, give perfect fidelity in the absence of noise or perturbations. While in the JP all the different protocols give the same fidelity, this is not the case for the SOP. Exploring solutions for larger pulse areas, better fidelities ($F \geq 0.98$) are found, as shown in Fig.4.

The fidelity map for the JP is a regular lattice with spacings $\Delta A_{\text{odd}} = \Delta A_{\text{even}} = 4\pi$. In the SOP, the lattice is rotated with respect to the JP, with a rotation angle of $\beta = \arctan(b/a)$, in agreement with Eq.(10). There are some distortions as b^2 increases, regaining a perfect, but different, symmetrical pattern as one reaches $b^2 = 0.5$ ($\beta = \pi/4$). All maps for different b have approximately the same number of maxima, separated a minimum distance of 4π , so the density of solutions is conserved. How-

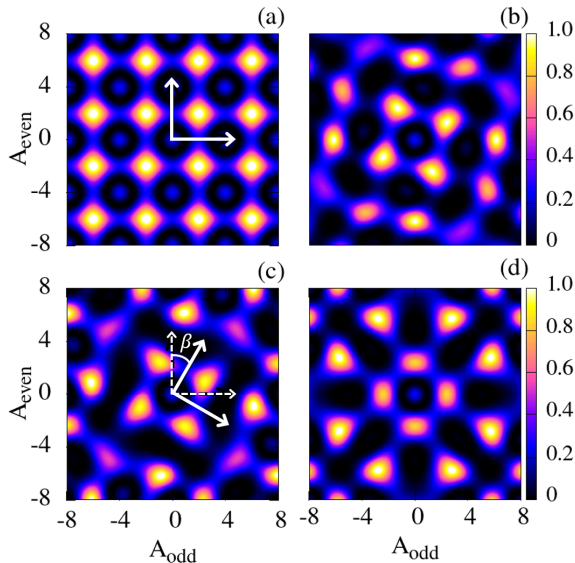


FIG. 4. Fidelity map as a function of the pulse areas (in units of π) for different geometrical factors: (a) $b^2 = 0$, (b) $b^2 = 0.1$, (c) $b^2 = 0.2$, (d) $b^2 = 0.5$.

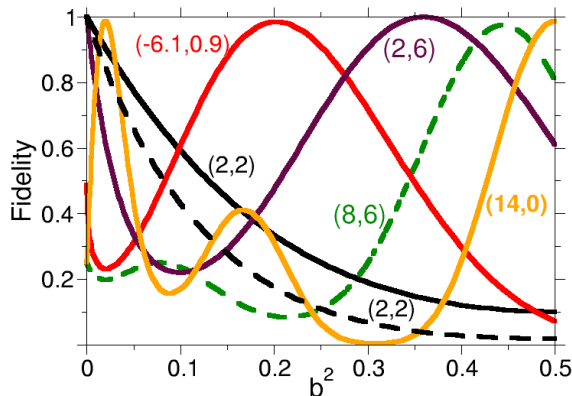


FIG. 5. Dependence of the fidelity of the gate on the geometrical factor b for different values of the pulse areas. Using the minimal pulse areas of the JP, we show how the fidelity decays more slowly along the SOP protocol conditions (black line) than when the atoms become closer without imposing the orthogonality (black dashed line).

ever, except for the $b = 0$ case, not all the fidelities at the maxima reach unity. Typically, larger areas are needed to find better solutions, *e.g.* $A_{\text{odd}} = -6.1\pi$, $A_{\text{even}} = 0.9\pi$ for a total area of $A_T = 7\pi$ and a peak fidelity of $F = 0.99$ for $b^2 = 0.2$. On the other hand, the minimal pulse area at which the first maxima appears decreases with b , and for $b^2 = 0.5$ one observes $F = 0.8$ using $\Omega_2(\vec{r}, t)$ only, or $\Omega_1(\vec{r}, t)$ and $\Omega_3(\vec{r}, t)$, for a total area of only 2.42π .

Instead of plotting how the fidelity map varies as a

function of the pulse areas for fixed geometrical factors, we can fix the areas and vary b . This is done in Fig.5. Only a few possible choices for the pulse areas are shown. The black line shows how the fidelity falls with the JP parameters, $A_1 = \pi$, $A_2 = 2\pi$, as b increases. In terms of A_{odd} and A_{even} we classify this protocol with a couple of numbers $(A_{\text{odd}}, A_{\text{even}}) = (2, 2)$ in units of π . Other implementations of the JP scheme without minimal pulse areas, as $(2, 6)$, decay faster than the $(2, 2)$ because of the larger accumulated pulse area, but surprisingly recover and work perfectly at different values of b . Protocols that do not belong to the JP, as $(8, 6)$, where A_{odd} is not of the form $A_{\text{odd}} = 2\pi(1 + 2m)$, fail at $b = 0$ but also provide high fidelities at certain values of b .

Although natural multiples of π for the pulse areas usually work relatively well, the ratios between the areas do not need to be natural numbers. The number of solutions is dense. For instance, taking into account the rotation of the optimal pulse areas depending on b , we show how the fidelity changes for the protocol $(-6.1, 0.9)$, which maximizes the fidelity at $b^2 = 0.2$ [see Fig.4(c)]. More surprisingly, one also finds solutions that do not require the three-pulse strategy, like $(14, 0)$ in which the second pulse does not participate, but nevertheless one achieves high fidelities at low and large b . These protocols are related to approximate solutions of Diophantine equations, where the gate mechanism does not rely on the dark state. They will be explored elsewhere.

The curves in Fig.5 show that the fidelities decay following a quadratic behavior when the geometrical factors depart from the optimal values, as expected. However, the decay is often slower at larger b . (And the effect is even more noticeable if F is plotted against b , instead of b^2 .) Interestingly, the SOP guarantees a slower decay in the presence of the other qubit. Compare the black line with the black dashed line. In the black dashed line we start in the JP conditions and show what happens when the atoms approach (the qubits are no longer independent) but we do not use structured light. Then $\vec{e}_2 = (b, a)$ instead of $(-b, a)$. In solid black line we use the SOP. As long as the displacement of the atoms preserves the orthogonality of the structural vectors, the decay in the fidelity of the SOP is clearly slower.

IV. THREE-QUBIT SYSTEMS

The protocol proposed in this work implies the use of denser arrays of trapped atoms. It is then important to analyze its robustness to the presence of other qubits not involved in the two-qubit gate. In this section, we check the efficiency of the SOP to prepare the gate \mathcal{P}_{ab}^- , which is the C-PHASE gate acting on qubits a and b in the presence of qubit c . This gate must operate exactly as with two qubits, regardless of the state of the third qubit, hence the diagonal of the \mathcal{P}_{ab}^- matrix has the signature $\text{diag}\{-1, -1, -1, -1, -1, -1, 1, 1\}$ when the basis is ordered as

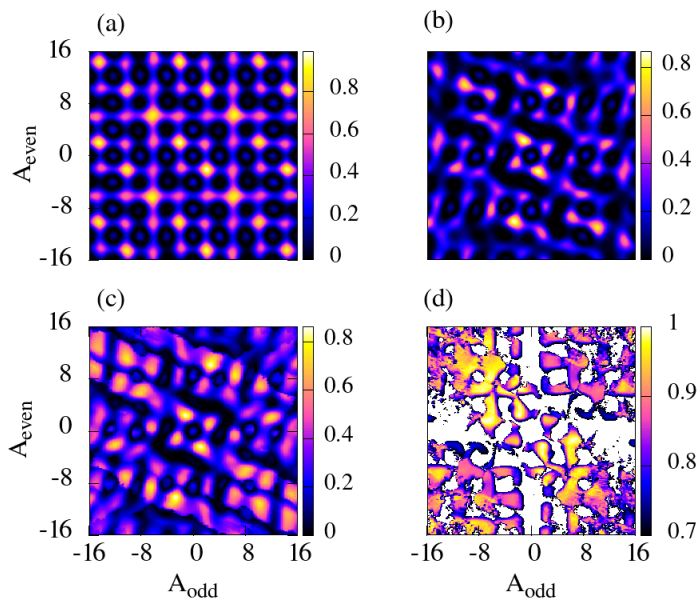


FIG. 6. Fidelity map of the \mathcal{P}_{ab}^- gate as a function of the pulse areas (in units of π) in a 3-qubit system. (a) JP scheme with $c_k^2 = 0.1$ for all pulses. (b) SOP with $b^2 = 0.1$ and $c_k^2 = 0.1$. (c) SOP with optimized c_k imposing symmetric and orthogonal conditions in qubits a and b . (d) Fidelity performing at optimized a_k and b_k for $c_k^2 = 0.1$, imposing symmetric conditions.

$\{|000\rangle, |010\rangle, |100\rangle, |001\rangle, |101\rangle, |011\rangle, |110\rangle, |111\rangle\}$.

The theoretical treatment follows closely the analysis in Section.2 and the main equations (4), (6) remain valid by adding a third component, c_k , which gives the geometrical factor on qubit c , to the structure vector \vec{e}_k .

For independent qubits, as in the JP, the result is the same as for two qubits, see Fig.4(a). However, if the third qubit is close to the other two ($c_k^2 = 0.1$ for all pulses), even if the second and first qubits are sufficiently apart ($b^2 = 0$), the fidelity already decreases as shown in Fig.6(a). The lattice of solutions looks like in the two-qubit system, but some local maxima can be rather smaller than one, although high fidelity solutions still exist.

On the other hand, if one starts with nearby qubits a and b and implements the SOP, is the presence of qubit c more disrupting? The answer is in Fig.6(b), where we assumed that $c_k^2 = 0.1$ for all pulses, and we applied the SOP to the remaining qubits forcing orthogonality and symmetric conditions.

As in the 2-qubit case, the fidelity map is rotated by approximately the same angle as before, with a slight shift due to c_k . But the highest fidelities are now clearly smaller than one ($F_{\max} \sim 0.85$), making the protocol less useful.

What if the c_k parameters are optimized? Can one control the position of qubit c (or the spatial profile of the laser located in this qubit) such that the fidelity

increases, for fixed values of the other geometrical parameters? Fig.6(c) shows that the third qubit cannot be used to improve the fidelity of the \mathcal{P}_{ab}^- gate. Here we project at every value of $(A_{\text{odd}}, A_{\text{even}})$ the best fidelity obtained by optimizing c_k , using symmetric pulses [$\Omega_3(t) = \Omega_1(t)$] and forcing orthogonal conditions over the subspace of the first two qubits, as in SOP. The parameters are found by using a simplex optimization with linear constraints.[70] The optimization does not change drastically the fidelity map, which shows the same angle of rotation, but the picture becomes blurry. By controlling c_k (with $c_k^2 \geq 0.1$) the protocols that appear as local maxima become more robust (the peaks are like plateaux) and the fidelities at low maxima increase, but the highest fidelities are still $F \sim 0.85$.

Perfect fidelities can be obtained for most pulse areas in the SOP if the geometrical factors of *all* qubits involved are controlled (forcing a minimal value of $\alpha_k^2 \geq 0.1$ and keeping $c_k = 0.1$ fixed). This is shown in Fig.6(d), where the minimum fidelity chosen is 0.7 in the map (close to the maximum fidelity in Fig.6(b)). The patterns of solutions display a regular, non-rotated lattice, similar to that in Fig.6(a), but with plateaux rather than maxima, that show high fidelities everywhere except for small pulse areas. Even at minimal pulse area of $A_T = 4\pi$ one can find protocols with $F \geq 0.99$. Clearly, there are many protocols that implement efficient and robust 2-qubit gates in systems of 3 not fully distinguishable qubits, but they require finer control. In particular, in optimizing all the geometric parameters we enforce the symmetry ($\vec{e}_3 = \vec{e}_1$) but not the orthogonalization, so the working protocols are not necessarily of the SOP type.

V. MULTIPULSE SEQUENCES

The SOP protocol follows a set of rules that can be easily extended to other multipulse sequences, with M number of pulses. We here propose the *Extended Symmetric Orthogonal Protocol* or ESOP, with the following features:

1. In the M -pulse sequence all odd pulses are equal to each other (copies of the same pulse) as well as all even pulses: $A_{k+2} = A_k$, $\vec{e}_{k+2} = \vec{e}_k$.
2. Odd and even pulses are orthogonal to each other: $\vec{e}_{k+1} \cdot \vec{e}_k = 0$.

Under these conditions it can be shown that the number of surviving terms in U_{11}^V [see Eq.(1)] is minimal. In particular, for 2-pulse sequences, there is only one term: $U_{11}^V = \cos\theta_2 \cos\theta_1$. For 3 and more pulses, there are always terms involving products of the sines of the areas

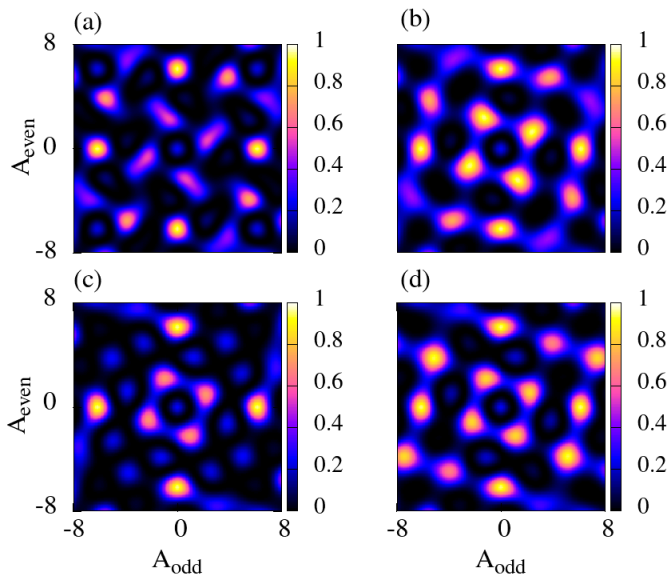


FIG. 7. Fidelity map for M -pulse sequence extensions of the SOP with (a) $M=2$, (b) $M=3$, (c) $M=4$, (d) $M=5$. We fixed $b^2 = 0.1$ in all cases.

of even or odd pulses:

$$\text{For } M=3: U_{11}^V = \cos^2 \theta_{\text{odd}} \cos \theta_{\text{even}} - \sin^2 \theta_{\text{odd}} \quad (11)$$

$$\text{For } M=4: U_{11}^V = \cos^2 \theta_{\text{odd}} \cos^2 \theta_{\text{even}} - \sin^2 \theta_{\text{odd}} - \sin^2 \theta_{\text{even}} \quad (12)$$

$$\text{For } M=5: U_{11}^V = \cos^3 \theta_{\text{odd}} \cos^2 \theta_{\text{even}} - 3 \sin^2 \theta_{\text{odd}} - \sin^2 \theta_{\text{even}} \quad (13)$$

where $\theta = A/2$. On the other hand, for the $|10\rangle$ and $|01\rangle$ states, the unitary evolution terms can always be written as

$$U_{11}^\alpha = \cos \left(\sum_k^M \alpha_k \theta_k \right) \quad (\alpha = a, b). \quad (14)$$

For $M=2$ there are no terms depending on $\sin \theta_{\text{odd}}$, constraining too much the possible solutions. In the JP and, to a lesser extent in the SOP with three pulses, this was the main term that forced the pulse areas of the *odd* pulses to be odd multiples of π , leading to optimal fidelities. The operating mechanism for the gate performance with two pulses is different. Still, it is possible to achieve high fidelities in a smaller set of protocols.

Fig.7(b) is the same result shown in Fig.4(b), repeated here to facilitate the comparison. Surprisingly, for $M=4$ the map is similar to that with $M=2$ in spite of U_{11}^V having more terms. The symmetry of the cosine and sine terms on θ_{odd} and θ_{even} effectively constraints the possible solutions so the fidelity map is similar to that with $M=2$. The same will happen in all sequences with even number of pulses. Solutions with odd number of pulses always provide richer fidelity maps, with higher fidelities available at more protocols. Although solutions can be

easily generalized to any number of pulses, the highly-constraining nature of the ESOP schemes makes these protocols probably unnecessary, as they do not improve the results of the SOP. This might not be the case, however, when the effects of noise are taken into account. Intensity fluctuations that are proportional to the peak intensity of the lasers will affect more strongly those protocols that use stronger fields, that is, with larger pulse areas. The effect will be dominated by the pulse with larger area in the sequence, rather than by the sum of all pulse areas. It is possible to find optimal protocols with 5-pulses that distribute the pulse area among all the fields, so that the peak intensities in each field are smaller than in the similar protocol with 3-pulses. Obviously, if the parameters are unconstrained and full optimization is performed to find the solutions, then having more pulses and more parameters will clearly provide more protocols, as will be shown in subsequent studies.

VI. SUMMARY AND DISCUSSION

We have studied the performance of a two-qubit gate in a denser array of trapped atoms under perfect conditions (zero temperature, no external noise) in the regime of strong Rydberg blockade. Extending the well-known Jaksch protocol (JP), we have proposed a novel implementation, called the Symmetric Orthogonal Protocol (SOP), by controlling both the pulse sequence and the spatial properties of the fields, using structured light. The Hamiltonian of the light-atomic system was modeled using geometrical factors, that measure the amplitudes of the fields at the location of the qubits, allowing to obtain analytical formulas for the propagators.

From the time-domain perspective, the scheme generalizes the JP with three pulses that operate symmetrically in time, but with different pulse areas. From the spatial-domain perspective, the scheme uses hybrid modes of light. The geometrical factors form orthogonal vectors in the SOP, which allow to decouple the effect of odd and even pulses in the sequence, by using a coherent dark state that drives the population through the Rydberg states. The SOP protocol is as robust as the JP to variations in the pulse areas and more robust to changes in the position of the atoms along certain directions. Implementations with maximal fidelity form a lattice of solutions in the space of the pulse areas, which is rotated with respect to the lattice of solutions in the JP.

We have analyzed the effect of adding a third atom in the proximity of the two-qubit system. The fidelity in the SOP decays more rapidly than in the JP. High-fidelity solutions could not be found by just controlling the position of the third atom, but rather the geometrical factors at the first two-qubits must be optimized for every choice of pulse areas. Finally, we have proposed natural generalizations of the SOP to multipulse sequences, showing that sequences with odd number of pulses form richer lat-

tices with a denser number of solutions than sequences with even number of pulses.

The SOP shows great promise for possible implementations of fast two-qubit gates. Working in the strong dipole blockade regime ($d_B > \Delta$) one can in principle accelerate the gate a factor of 200. However, high fidelities are achieved in the SOP using larger pulse areas than in the JP, typically by a factor of 2 to 10. Hence, gates with comparable or slightly worse fidelity and equal robustness could be in principle prepared at durations of the order of 20 to 100 times shorter, moving the scale from the microsecond to the nanosecond regime.

From the physical point of view, the SOP operates as the JP, so one can expect a similar sensitivity to decoherence and noise. However, because the atoms are much closer, the dipole blockade is much larger and the gate time is much shorter, the effect of the thermal motion of the atoms, Rydberg-Rydberg couplings or spontaneous emission, is almost negligible. Only fluctuations in the field intensities (hence pulse areas) as well as in the position of the atoms, leading to changes in the geometrical factors, have some impact on the fidelities. Preliminary estimates of these effects show about 1% reduction of the peak fidelities working at $\sim 25\mu\text{K}$ temperature. However, further comprehensive studies are needed to properly quantify the effect of noise. Equally important will

be to assess the current limitations (time durations, spatial resolution) in using structured light specific to the proposed design. Hybrid modes of light may find many applications in quantum technologies, beyond the present proposal. On the other hand, full optimization of both the pulse areas and the geometrical factors will probably allow refinements in the implementations, the surface of which has only been explored in the present contribution.

CONFLICTS OF INTEREST

There are no conflicts to declare.

ACKNOWLEDGEMENTS

This research was supported by the Quantum Computing Technology Development Program (NRF-2020M3E4A1079793) and the National Creative Research Initiative Grant (NRF-2014R1A3A2030423). IRS also thanks the BK21 program (Global Visiting Fellow) for the stay during which this project started and for support from MINECO CTQ2015-65033-P and MINECO PID2021-122796NB-I00. SS acknowledges support from the Center for Electron Transfer funded by the Korea government(MSIT)(NRF-2021R1A5A1030054).

-
- [1] Y. Mei, Y. Li, H. Nguyen, P. R. Berman and A. Kuzmich, *Phys. Rev. Lett.*, 2022, **128**, 123601.
- [2] Y. O. Dudin and A. Kuzmich, *Science*, 2012, **336**, 887–889.
- [3] C. S. Adams, J. D. Pritchard and J. P. Shaffer, *Journal of Physics B: Atomic, Molecular and Optical Physics*, 2019, **53**, 012002.
- [4] J. D. Pritchard, D. Maxwell, A. Gauguet, K. J. Weatherill, M. P. A. Jones and C. S. Adams, *Phys. Rev. Lett.*, 2010, **105**, 193603.
- [5] Y. Chew, T. Tomita, T. P. Mahesh, S. Sugawa, S. de Léséleuc and K. Ohmori, *Nature Photonics*, 2022, **16**, 724–729.
- [6] E. Brion, K. Mølmer and M. Saffman, *Phys. Rev. Lett.*, 2007, **99**, 260501.
- [7] T. Pohl, E. Demler and M. D. Lukin, *Phys. Rev. Lett.*, 2010, **104**, 043002.
- [8] M. D. Lukin, M. Fleischhauer, R. Cote, L. M. Duan, D. Jaksch, J. I. Cirac and P. Zoller, *Phys. Rev. Lett.*, 2001, **87**, 037901.
- [9] K. M. Maller, M. T. Lichtman, T. Xia, Y. Sun, M. J. Piotrowicz, A. W. Carr, L. Isenhower and M. Saffman, *Phys. Rev. A*, 2015, **92**, 022336.
- [10] Y. Zeng, P. Xu, X. He, Y. Liu, M. Liu, J. Wang, D. J. Papoular, G. V. Shlyapnikov and M. Zhan, *Phys. Rev. Lett.*, 2017, **119**, 160502.
- [11] H. Levine, A. Keesling, A. Omran, H. Bernien, S. Schwartz, A. S. Zibrov, M. Endres, M. Greiner, V. Vuletić and M. D. Lukin, *Phys. Rev. Lett.*, 2018, **121**, 123603.
- [12] E. Urban, T. A. Johnson, T. Henage, L. Isenhower, D. D. Yavuz, T. G. Walker and M. Saffman, *Nature Physics*, 2009, **5**, 110–114.
- [13] M. Saffman, T. G. Walker and K. Mølmer, *Rev. Mod. Phys.*, 2010, **82**, 2313–2363.
- [14] T. Wilk, A. Gaëtan, C. Evellin, J. Wolters, Y. Miroshnychenko, P. Grangier and A. Browaeys, *Phys. Rev. Lett.*, 2010, **104**, 010502.
- [15] X. L. Zhang, L. Isenhower, A. T. Gill, T. G. Walker and M. Saffman, *Phys. Rev. A*, 2010, **82**, 030306.
- [16] T. G. Walker and M. Saffman, *Advances in Atomic, Molecular, and Optical Physics*, Academic Press, 2012, vol. 61, pp. 81–115.
- [17] A. Gaëtan, Y. Miroshnychenko, T. Wilk, A. Chotia, M. Viteau, D. Comparat, P. Pillet, A. Browaeys and P. Grangier, *Nature Physics*, 2009, **5**, 115–118.
- [18] C. J. Picken, R. Legaie, K. McDonnell and J. D. Pritchard, *Quantum Science and Technology*, 2018, **4**, 015011.
- [19] T. M. Graham, Y. Song, J. Scott, C. Poole, L. Phuttitarn, K. Jooya, P. Eichler, X. Jiang, A. Marra, B. Grinkemeyer, M. Kwon, M. Ebert, J. Cherek, M. T. Lichtman, M. Gillette, J. Gilbert, D. Bowman, T. Ballance, C. Campbell, E. D. Dahl, O. Crawford, N. S. Blunt, B. Rogers, T. Noel and M. Saffman, *Nature*, 2022, **604**, 457–462.
- [20] S. A. Malinovskaya, *Opt. Lett.*, 2017, **42**, 314–317.
- [21] E. Pachniak and S. A. Malinovskaya, *Scientific Reports*, 2021, **11**, 12980.

- [22] P. Thomas, L. Ruscio, O. Morin and G. Rempe, *Nature*, 2022, **608**, 667–681.
- [23] H. Weimer, M. Müller, I. Lesanovsky, P. Zoller and H. P. Büchler, *Nature Physics*, 2010, **6**, 382–388.
- [24] H. Bernien, S. Schwartz, A. Keesling, H. Levine, A. Omran, H. Pichler, S. Choi, A. S. Zibrov, M. Endres, M. Greiner, V. Vuletić and M. D. Lukin, *Nature*, 2017, **551**, 579–584.
- [25] A. Keesling, A. Omran, H. Levine, H. Bernien, H. Pichler, S. Choi, R. Samajdar, S. Schwartz, P. Silvi, S. Sachdev, P. Zoller, M. Endres, M. Greiner, V. Vuletić and M. D. Lukin, *Nature*, 2019, **568**, 207–211.
- [26] H. Kim, Y. Park, K. Kim, H.-S. Sim and J. Ahn, *Phys. Rev. Lett.*, 2018, **120**, 180502.
- [27] D. Jaksch, J. I. Cirac, P. Zoller, S. L. Rolston, R. Côté and M. D. Lukin, *Phys. Rev. Lett.*, 2000, **85**, 2208–2211.
- [28] L. Isenhower, M. Saffman and K. Mølmer, *Quantum Information Processing*, 2011, **10**, 755.
- [29] V. Parigi, E. Bimbard, J. Stanojevic, A. J. Hilliard, F. Nogrette, R. Tualle-Brouiri, A. Ourjoumtsev and P. Grangier, *Phys. Rev. Lett.*, 2012, **109**, 233602.
- [30] K. Mølmer, L. Isenhower and M. Saffman, *Journal of Physics B: Atomic, Molecular and Optical Physics*, 2011, **44**, 184016.
- [31] M. Müller, I. Lesanovsky, H. Weimer, H. P. Büchler and P. Zoller, *Phys. Rev. Lett.*, 2009, **102**, 170502.
- [32] X.-F. Shi, *Phys. Rev. Applied*, 2018, **9**, 051001.
- [33] M. Khazali and K. Mølmer, *Phys. Rev. X*, 2020, **10**, 021054.
- [34] J.-L. Wu, Y. Wang, J.-X. Han, Y. Jiang, J. Song, Y. Xia, S.-L. Su and W. Li, *Phys. Rev. Appl.*, 2021, **16**, 064031.
- [35] S. Chu, L. Hollberg, J. E. Bjorkholm, A. Cable and A. Ashkin, *Phys. Rev. Lett.*, 1985, **55**, 48–51.
- [36] E. L. Raab, M. Prentiss, A. Cable, S. Chu and D. E. Pritchard, *Phys. Rev. Lett.*, 1987, **59**, 2631–2634.
- [37] K. E. Gibble, S. Kasapi and S. Chu, *Opt. Lett.*, 1992, **17**, 526–528.
- [38] N. Šibalić and C. S. Adams, *Rydberg Physics*, IOP Publishing, 2018.
- [39] T. F. Gallagher, *Rydberg Atoms*, Cambridge University Press, 1994.
- [40] M. H. Goerz, E. J. Halperin, J. M. Aytac, C. P. Koch and K. B. Whaley, *Phys. Rev. A*, 2014, **90**, 032329.
- [41] K. Bergmann, H. Theuer and B. W. Shore, *Rev. Mod. Phys.*, 1998, **70**, 1003–1025.
- [42] N. V. Vitanov, T. Halfmann, B. W. Shore and K. Bergmann, *Annual Review of Physical Chemistry*, 2001, **52**, 763–809.
- [43] D. Petrosyan, F. Motzoi, M. Saffman and K. Mølmer, *Phys. Rev. A*, 2017, **96**, 042306.
- [44] T. M. Graham, M. Kwon, B. Grinkemeyer, Z. Marra, X. Jiang, M. T. Lichtman, Y. Sun, M. Ebert and M. Saffman, *Phys. Rev. Lett.*, 2019, **123**, 230501.
- [45] H. Levine, A. Keesling, G. Semeghini, A. Omran, T. T. Wang, S. Ebadi, H. Bernien, M. Greiner, V. Vuletić, H. Pichler and M. D. Lukin, *Phys. Rev. Lett.*, 2019, **123**, 170503.
- [46] V. S. Malinovsky, I. R. Sola and J. Vala, *Phys. Rev. A*, 2014, **89**, 032301.
- [47] V. S. Malinovsky and I. R. Sola, *Phys. Rev. A*, 2004, **70**, 042304.
- [48] V. S. Malinovsky and I. R. Sola, *Phys. Rev. Lett.*, 2004, **93**, 190502.
- [49] V. S. Malinovsky and I. R. Sola, *Phys. Rev. Lett.*, 2006, **96**, 050502.
- [50] J. P. Palao and R. Kosloff, *Phys. Rev. A*, 2003, **68**, 062308.
- [51] M. H. Goerz, D. M. Reich and C. P. Koch, *New Journal of Physics*, 2014, **16**, 055012.
- [52] T. Caneva, T. Calarco and S. Montangero, *Phys. Rev. A*, 2011, **84**, 022326.
- [53] M. H. Goerz, T. Calarco and C. P. Koch, *Journal of Physics B: Atomic, Molecular and Optical Physics*, 2011, **44**, 154011.
- [54] L. S. Theis, F. Motzoi, F. K. Wilhelm and M. Saffman, *Phys. Rev. A*, 2016, **94**, 032306.
- [55] D. Comparat and P. Pillet, *J. Opt. Soc. Am. B*, 2010, **27**, A208–A232.
- [56] D. Tong, S. M. Farooqi, J. Stanojevic, S. Krishnan, Y. P. Zhang, R. Côté, E. E. Eyler and P. L. Gould, *Phys. Rev. Lett.*, 2004, **93**, 063001.
- [57] T. G. Walker and M. Saffman, *Phys. Rev. A*, 2008, **77**, 032723.
- [58] T. Pohl and P. R. Berman, *Phys. Rev. Lett.*, 2009, **102**, 013004.
- [59] S. T. Rittenhouse and H. R. Sadeghpour, *Phys. Rev. Lett.*, 2010, **104**, 243002.
- [60] J. P. Shaffer, S. T. Rittenhouse and H. R. Sadeghpour, *Nature Communications*, 2018, **9**, 1965.
- [61] M. V. R. K. Murty, *Appl. Opt.*, 1964, **3**, 1192–1194.
- [62] A. Forbes, M. de Oliveira and M. R. Dennis, *Nature Photonics*, 2021, **15**, 253–262.
- [63] H. Rubinsztein-Dunlop, A. Forbes, M. V. Berry, M. R. Dennis, D. L. Andrews, M. Mansuripur, C. Denz, C. Alpmann, P. Banzer, T. Bauer, E. Karimi, L. Marrucci, M. Padgett, M. Ritsch-Martens, N. M. Litchinitser, N. P. Bigelow, C. Rosales-Guzmán, A. Belmonte, J. P. Torres, T. W. Neely, M. Baker, R. Gordon, A. B. Stilgoe, J. Romero, A. G. White, R. Fickler, A. E. Willner, G. Xie, B. McMorran and A. M. Weiner, *Journal of Optics*, 2016, **19**, 013001.
- [64] S. Rice and M. Zhao, *Optical Control of Molecular Dynamics*, John Wiley & Sons, Ltd, 2000.
- [65] M. Shapiro and P. Brummer, *Quantum Control of Molecular Processes*, John Wiley & Sons, Ltd, 2011.
- [66] B. Y. Chang, I. R. Sola and S. Shin, *International Journal of Quantum Chemistry*, 2016, **116**, 608–621.
- [67] B. W. Shore, *Manipulating Quantum Structures Using Laser Pulses*, Cambridge University Press, 2011.
- [68] P. R. Berman and V. S. Malinovsky, *Principles of Laser Spectroscopy and Quantum Optics*, Princeton University Press, 2011.
- [69] I. R. Sola, B. Y. Chang, S. A. Malinovskaya and V. S. Malinovsky, *Advances In Atomic, Molecular, and Optical Physics*, Academic Press, 2018, vol. 67, pp. 151–256.
- [70] J. A. Nelder and R. Mead, *The Computer Journal*, 1965, **7**, 308–313.