Contents lists available at ScienceDirect

Ecological Engineering

journal homepage: www.elsevier.com/locate/ecoleng

Cost-benefit of green infrastructures for water management: A sustainability assessment of full-scale constructed wetlands in Northern and Southern Italy

Laura García-Herrero^{a,*}, Stevo Lavrnić^a, Valentina Guerrieri^a, Attilio Toscano^a, Mirco Milani^b, Giuseppe Luigi Cirelli^b, Matteo Vittuari^a

^a Department of Agricultural and Food Sciences, Alma Mater Studiorum-University of Bologna, Viale Giuseppe Fanin 50, 40127 Bologna, Italy ^b Department of Agriculture, Food and Environment (Di3A), University of Catania, Via Santa Sofia No. 98-100, 95123 Catania, Italy

ARTICLE INFO

Keywords: Cost-benefit analysis Constructed wetlands Nature-based solution

ABSTRACT

Sustainable water management has become an urgent challenge due to irregular water availability patterns and water quality issues. The effect of climate change exacerbates this phenomenon in water-scarce areas, such as the Mediterranean region, stimulating the implementation of solutions aiming to mitigate or improve environmental, social, and economic conditions. A novel solution inspired by nature, technology-oriented, explored in the past years, is constructed wetlands. Commonly applied for different types of wastewater due to its low cost and simple maintenance, they are considered a promising solution to remove pollutants while creating an improved ecosystem by increasing biodiversity around them. This research aims to assess the sustainability of two typologies of constructed wetlands in two Italian areas: Sicily, with a vertical subsurface flow constructed wetland, and Emilia Romagna, with a surface flow constructed wetland. The assessment is performed by applying a costbenefit analysis combining primary and secondary data sources. The analysis considered the market and nonmarket values in both proposed scenarios to establish the feasibility of the two options and identify the most convenient one. Results show that both constructed wetlands bring more benefits (benefits-cost ratio, BCR) than costs (BCR > 0). In the case of Sicily, the BCR is lower (1) in the constructed wetland scenario, while in its absence it is almost double. If other ecosystem services are included the constructed wetland scenario reach a BCR of 4 and a ROI of 5, showing a better performance from a costing perspective than the absence one. In Emilia Romagna, the constructed wetland scenario shows a high BCR (10) and ROI (9), while the scenario in absence has obtained a negative present value indicating that the cost do not cover the benefits expected. Further research should be focused on improving ecosystem services monetary quantification from different context (i.e. rural vs urban).

1. Introduction

Access to water and sanitation are primary in humans' lives, as the United Nations recognises under human rights (UN, 2020). At the same time, as a scarce and stressed resource, water is crucial in producing energy and food, industry, and environmental quality. It has an enormous impact on natural resource exploitation (Sgroi et al., 2018). Moreover, the Mediterranean region faces an unstable regime and limited availability, increasing threats by climate change and drought events (WWAP, 2017).


During the past decades, multiple policies were adopted at a

supranational, regional, and national scale to deal with the waterrelated issue. At the EU level, in 2000, the Water Framework Directive was implemented. This water policy aimed to protect water resources, ecosystems plan tailored policies to reach sustainable management of the water resources (European Commission, 2000). Other relevant policies linked to water management are the European Urban Wastewater Directive, which highlights the necessity of secondary and more severe treatment of urban wastewater in sensitive areas to protect the water resource and the environment (Djukic et al., 2016), and the EU Marine Strategy Framework Directive, adopted in 2008 and related to the improvement of marine water quality (Börger et al., 2016; EC, 1991).

https://doi.org/10.1016/j.ecoleng.2022.106797

Received 28 February 2022; Received in revised form 21 July 2022; Accepted 17 September 2022 Available online 26 September 2022 0925-8574/© 2022 Elsevier B.V. All rights reserved.





^{*} Corresponding author at: Joint Research Centre, Ispra, Italy. *E-mail address:* laura.garcia-herrero@ec.europa.eu (L. García-Herrero).

More recently, a new Regulation on minimum requirements for water reuse for agricultural irrigation has entered into force, with rules to be applied from June 2023 in the Circular economy action plan context, intending to stimulate and facilitate water reuse in the EU (EU, 2020).

As part of a global strategy, the European Union (EU) approved the 17 sustainable development goals, part of the 2030 Agenda for Sustainable Development. Goal number 6, "Ensure availability and sustainable management of water and sanitation for all," is related to the provision to developing countries of bilateral assistance programs and regional initiatives and in general support to the water sector, which is critical in the commitment towards to more sustainable management of water resources (United Nations, 2015).

Therefore, the role of water in the EU's policy agenda emphasizes the need to address water scarcity identifying innovative solutions to respond to raising problems.

In this framework, a promising technology for wastewater treatment that allows freshwater utilisation for alternative purposes is constructed wetland (CW). This green infrastructure mainly comprises vegetation, soil and substrates, and water, creating different mechanisms to remove contaminants or improve water quality, as natural wetlands would do (Gorgoglione and Torretta, 2018; Resende et al., 2019). Unlike grey infrastructures, CW is an easily manageable and low-cost technology that requires a minimal level of maintenance. It can be applied in different socio-economic and geographical contexts and has the flexibility to be adopted and tailored to different territorial conditions (Gkika et al., 2014; Lavrnić et al., 2018). CWs' performance is influenced by factors such as size, operating conditions and local climate, wastewaters properties, and pollution content, among others.

Due to the properties already listed and with the aim of improving the quality of water, some CW are designed to treat domestic wastewater while combining more intensive technologies to increase removal performance (Nan et al., 2020). In agriculture, for example, the inclusion this type of CW could ensure different positive effects because of its ability to block non-point sources of pollution, such as nitrogen and phosphorus, hence preventing the eutrophication phenomenon that can harm surface water bodies (Yang et al., 2020). Thus, acting as a multifunctional system that can provide several ecosystem services, such as support to the biodiversity and habitat of an environment, recreational and socio-economic services as the biomass produced could be utilised in energy production, could help in flood prevention, and control, retention of water and prevention of erosion (Lavrnić et al., 2018; Milani et al., 2019; Wang and Banzhaf, 2018).

To reveal CW's positive and negative effects in the draft and implementation of efficient policies and strategies related to water resources administration, the Water Framework Directive underlined the importance of applying appropriate economic analysis tools, such as Cost-Benefit Analysis (CBA) or Cost-Effectiveness. CBA is a wide-recognised tool to assess selected sustainability features in projects and services. It combines price flow analysis, environmental consequences by including externalities, and the social perspective of different projects or policies. Furthermore, CBA mainly adopts money or welfare as a unit of reference (Hoogmartens et al., 2014), allowing comparing the different alternative measures and scenarios - such as CW- enabling users to assess economic and financial profitability respectively a societal and a stakeholders' points of view. As recognised by Aparicio et al. (2019), the application of CBA for the evaluation of the economic feasibility of projects related to water use and reuse increased over the past few years.

This research aims to assess the sustainability of a vertical subsurface flow constructed wetland in the South of Italy (Sicily) and a surface flow constructed wetland in the North of Italy (Emilia Romagna) by applying Cost-Benefit Analysis.

2. Material and methods

This section presents a brief description of each case study (Table 1) and the application of the methodology, considering both market and

Table 1

Main characteristics of the Catania and	Bologna	case studies.
---	---------	---------------

	Sicily	Emilia Romagna
Location	Metropolitan city of Catania	Metropolitan city of
		Bologna
Context	Urban	Rural
Type of green	Retention pond + Vertical	Surface flow CW
infrastructure	subsurface flow CW (VFCW)	(SFCW)
Influent	Surface run-off	Agricultural drainage
		water
Flow rate	\approx 40 m ³ d ⁻¹ (maximum 300 m ³	Varying (0–600 m ³
	d ⁻¹)	d^{-1})
Size/Area	1500 m ²	5557 m ²
Scale	Full-scale	Full-scale
Waterproof	Yes	No

non-market values. Further details are provided in the Supplementary Data.

Each case study is organized around two scenarios. First, a baseline scenario without a vertical subsurface flow CW structure is coupled to an alternative scenario with a vertical subsurface flow CW structure for Sicily. Second, for Emilia Romagna, a baseline scenario without a surface flow CW intervention is coupled with an alternative scenario with a surface flow CW intervention.

2.1. Sicily case study

The Sicily case study is located in the Metropolitan city of Catania, within an Ikea® land property. At the end of 2016, this area was installed a pilot-scale CW plant to treat a portion (about $2 \text{ m}^3 \text{ d}^{-1}$) of the surface run-off collected from the retail store's parking area (Ventura et al., 2021). The University of Catania built the experimental plant within the international research joint project (Ventura et al., 2019). For the case study, the scale-up was assumed from pilot plant to full-scale CW plant in a field categorised for agricultural purposes currently used by shepherds for pasture (Fig. 1). Due to its marginalised location, a land-use change for constructive purposes is not likely.

The surface will be extended to 1500 m^2 , composed of a retention pond occupying an area of 500 m^2 . A vertical subsurface flow CW extended on 500 m^2 and an area of the relevance of about 500 m^2 . The CW will manage the first 5 mm of rain of the parking lot of Ikea® in Catania, about $60,000 \text{ m}^2$, and will not manage unexpected events (second rainwater). It will be designed to treat a maximum flow rate of about 300 m^3 /day ($15,000 \text{ m}^3$ /year). Concerning the labour force, it is not projected to have a regular staff but only periodical maintenance after its construction. However, in the case of extreme droughts, it might need specific care. The water treated will be utilised for green areas irrigation and WC flushes at the store.

Following the CBA steps, the baseline scenario in this case study is defined as the current land use without introducing the VFCW. In contrast, the alternative scenario implies applying the designed VFCW.

2.2. Emilia Romagna case study

This surface flow CW is located in the experimental farm of the Land Reclamation Consortium Emiliano Romagnolo Canal in Budrio (CER, according to its acronym in Italian), in Emilia Romagna. The SFCW was completed in 2000, and since 2003 has been the target of different experimental studies (Lavrnić et al., 2020b). Currently, it treats the drainage water from the experimental surroundings, a farm of 12.4 ha with different cultivation systems (mainly with trees, vegetables, and cereals). The CW has a total area of 5557 m², with a 470 m long channel and 8–10 m wide, divided into four meanders and a total capacity of 1500 m³ (Lavrnić et al., 2020a). It does not have a constant inflow of water since agricultural drainage water volume mainly depends on precipitation. The main plant species are *Phragmites Australis, Typha Latifolia*, and *Carex* spp., Fig. 2 shows an aerial image of the case study

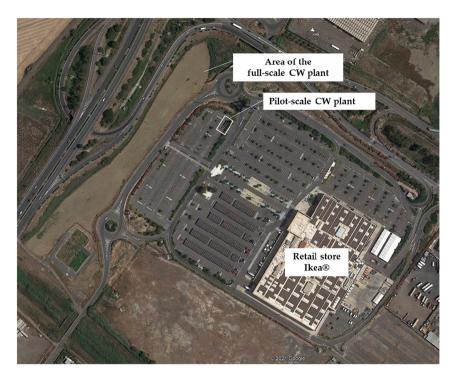


Fig. 1. Location of the pilot-scale CW plant and the area of the full-scale CW plant in Sicily (from Google Maps).



Fig. 2. The SFCW in Emilia Romagna and the surrounding farm area.

location.

The main ditch collects the agricultural drainage water from the fields. It flows by gravity towards the farm's end, where the SFCW is located. Two electric pumps bring the water into the wetland, as there are few meters from the main ditch to the wetland. The water flows through the different meanders, thanks to gravity and pressure from incoming water. If the water level above 0.4 m – water discharge occurs, a pump brings the water out of the SFCW to the main ditch. During the wetland construction, the labour force was concentrated on maintenance as mowing performed once a year. After almost two decades of operation, the system can still effectively treat agricultural drainage water and presents a buffer for different contaminants (Lavrnić et al., 2020b; Lavrnić et al., 2018).

The alternative scenario considered the surface currently covered with the wetland as an agricultural area with potatoes, soybeans, corn, and wheat. Therefore, these crops are selected as they are present on the remaining surface of the experimental farm.

2.3. Cost-benefit analysis

Cost-Benefit analysis is a widely recognised economic tool that explores the costs and the benefits of the selected project. The CBA starts from the premise that investment should only be commissioned if the benefits exceed the aggregate costs (Molinos-Senante et al., 2010), considering that the compared benefits and costs must belong to the same situation (Young and Loomis, 2014). However, as the principal limit of this methodology is identified, the fact that not all impacts can be quantified and monetised, which restricts the provided results (Huysegoms et al., 2018); while provides several advantages such as the identification of positive and negative societal cost, the inclusion of discount rate or the evidence of a general overview of impacts from different nature as evaluation (Huysegoms et al., 2018). Fig. 3 shows the steps followed to perform the CBA of the case studies based on different CBA guidelines.

Primary data collection to perform this CBA was prioritised. As both cases are under the supervision of researchers from the University of Catania, University of Bologna, and CER, each case study's responsibility was addressed in person and by phone to provide most of the information. When researchers did not have the requested information, the contact of suppliers and operational workers was facilitated. Secondary data was collected in the absence of primary data, including an extensive literature review of scientific and grey literature.

The authors' highlight as a limit of this research the utilisation of secondary data when the primary was not available and the estimations considered in some monetised items in the Emilia Romagna case since they could be outdated as the construction took place at the beginning of 2000.

Some key performance indicators (KPI) associated with CBA (step 6 in 3) were utilised to compare different dimensions in the baseline and alternative scenarios. The first step to obtain the KPIs was to set the present value or value 2019 in this research results.

 $PV \cos t = \cos t * (1 + r)^{-t};$

PV benefit = benefit * $(1 + r)^{-t}$

Equation 1. Present value.

The present value (PV), in Eq. 1, considered the discount rate (r) for future values under a specific time (t). In this research, a 5% discount rate has been applied, as widely utilised in green infrastructure assessments and recommended by the European Commission (Bixler et al., 2019; Djukic et al., 2016; European Commission, 2014; Resende et al., 2019).

1	2	3	4
Identification of the baseline scenario, which is the current situation without performing any intervention.	Characterization of the sphere of analysis. This sphere corresponds to all stakeholders (including the environment) involved/ impacted by the project. It's a combination of geographic and institutional characteristics, since all project funders are part of the sphere of analysis. This phase enables to determine if the analysis shall be conducted from a private or from a social point of view.	Description of the alternative scenario. The situation considering the project execution, which could be the CW implementation in the Sicilian case, or the absence of CW in the Emilia Romagna case.	Setting the time horizon. The time horizon is the period over which realized is the CBA: from 20 to 50 years according to the level of capitalistic/ private nature of the project or the level of social / collective/ public character of it. The choice of the time horizon will necessarily have consequences on how to consider renewals of infrastructures and their residual value.
5 Identification and	6 Aggregation of costs and	7 Sensitivity analysis of the	
evaluation of the costs and	benefits and evaluation of	f NPV to the main	
benefits of the baseline and alternative scenario. Cost or		parameters. Since many of	
benefit that are identic	the sphere of analysis	in the parameters are stochastic or inaccurate, a	
between the scenarios are	(community point of view)		
not considered. Some	and for each of them.	needed. The outcomes of th	
monetization techniques for	r Identification of key	CBA will be examined to	
1			
the environmental and social services evaluation	performance indicators (KPIs) to compare the	prove data robustness and flexibility regarding key	

Fig. 3. Steps followed in the CBA for the two case studies.

The net present value (NPV) was essential to understand if the scenario analysed is positive or negative in terms of economic cost. At the same time, the benefit-cost ratio (BCR) offered the relationship between the relative costs and benefits of the case studies. Finally, the return on investment (ROI) is a well-known monetary indicator that measures the investment's efficiency. Eq. 2 discloses how these KPIs were obtained.

 $NPV = \sum PV$ benefits - $\sum PV$ costs

Benefit Cost Ratio (BCR) = \sum PV benefits / \sum PV costs

Return On Investment (ROI) = $(\sum PV \text{ benefits} - PV \text{ cost of investment}) / PV \text{ cost of investment}$

Equation 2. NPV, BCR, and ROI formulas.

Other KPIs considered were the $cost/m^2$ and NPV/m^2 to test the cost referring to the size occupied by the wetland or in its absence.

3. Results and discussion

This section provides the results and discussion of both case studies. In addition, at the end of each case study, the results of the key performance indicators and the sensitivity analysis are provided.

3.1. CBA in Sicily

3.1.1. Baseline scenario

Table 2 shows the results of the baseline scenario. The column "value" represents the total investment, while "value 2019" (present value) represents the current value where a discount rate of 5% (when it applied) and present in Table 3. This discount rate has been selected as is the one recommended by the European Commission for the cost-benefit analysis and widely applied in other studies analysing wetlands

Table 2

Cost from the baseline scenario in Sicily without VFCW.

Costs	Value	Unit	Source
CAPEX (capital costs)			
Purchasing land cost – 1500m ²	5000	€ in Year 0	Interview
OPEX (operational and maintenance)			
Financial			
Land insurance	Not	€/year	Interview
	expected		
Plant insurance	Not	€/year	Interview
	expected		
Maintenance			
Land maintenance (weeds removal	Not	€/year	Interview
labour)	expected		
External costs			
Environmental costs (flood risk)	2369	€/year	(i)
Alternative water treatment methods or w	vater sources cos	ts	
Outsourcing costs for water treatment	Not	€/year	Interview
	expected		
Grey infrastructure plant cost	Not	€/year	Interview
	expected		
Energy costs for grey infrastructure	Not	€/year	Interview
	expected		
Disposal cost of greywater	Not	€/year	Interview
	expected		
Taxes			
Sewer tax for greywater	Not	€/year	Interview
	expected		

i. USD\$0.18/m³ in 2018 (Nordman et al., 2018). It was updated with inflation and \$/ ℓ to reflect the value in 2019. It considers the maximum flow rate that the GI can treat (15,000 m³).

Table 3

Benefits from the baseline scenario in Sicily without VFCW.

Benefits	Unit	Value	Value 2019	Source
Alternative use of the land	/			Interview
No material and equipment cost for GI	£	90,500	3016.67	Green Infrastructure
No labour cost for green infrastructure	e	12,500	417.67	Green Infrastructure
No maintenance cost for green infrastructure	€/year	5000	5000	Green Infrastructure
No electrical energy for green infrastructure	€/year	940.8	940.80	Green Infrastructure
No mowing and disposal of vegetable biomass cost	€/year	1000	952.38	Alternative scenario
Non-maintenance benefit because of pasture use of the land (Estimated 3 interventions/year 2 h/ intervention)	€/year	540	540	(i)

(i) 90€/h for 1500 m2 (UNCAI, 2019).

(Molinos-Senante et al., 2010; Hernández-Sancho and Sala-Garrido, 2009; European Commission, 2014). The lifespan of the green structure is 30 years, which is the estimated lifetime of the constructed wetland (Alves et al., 2019).

In the first instance, the baseline condition has only one initial investment: the land purchase cost. The operational costs are represented by the maintenance, which is zero, given that the land is freely granted for pasture. The environmental costs are composed only by the flood risk, considering the absence of action. No other water treatment cost was identified in this section, as no taxes are paid to manage sewer greywater.

The largest burden is allocated to external cost due to environmental flood management, representing the total cost of the baseline scenario.

Table 3 shows the different expected benefits of the baseline scenario. Those sources under the Green Infrastructure label are disclosed in the alternative scenario of the VFCW.

According to the calculated benefits figures, about 10,900 \notin /year are expected to be obtained when no action is taken. The largest contributor is those benefit items under the green infrastructure construction (initial cost and maintenance).

3.1.2. Alternative scenario: Constructed wetland

Table 4 shows the cost calculated to implement the VFCW from its initial investment to its maintenance.

Under the alternative scenario, a larger initial investment cost is evident compared to the baseline, as the land must be prepared to allocate a VFCW. The primary cost item refers to the core works of the VFCW. The total cost per year is approximately 10,500 ϵ /year. About 34% is associated with the initial investment cost, and about 66% is related to operational costs. The CW in Catania does not have a financial cost associated with land-use typology. Its utilisation does not require any type of insurance. There are no-cost outcomes obtained from nutrient and water distribution. On the one hand, there is a modest amount of nutrients present. On the other hand, currently, the water treated cannot be capitalised profitably.

When focusing on the environmental cost, the construction stage represents almost 100% of the overall environmental impacts due to excavations. This value is larger than the 80% specified in other studies (Resende et al., 2019). This cost has been calculated by establishing a carbon price that is highly volatile under current environmental policies and the carbon market. The large environmental burden happens once during the VFCW construction stage. Therefore, it could be neglected as these structures' lifespan is extended. In Table 5, the expected benefits of the alternative scenario are disclosed.

A large benefit has been associated with the water output, expecting to be included in the water system and profit from it. Considering the Ecological Engineering 185 (2022) 106797

Table 4

Cost expected from the alternative scenario in Sicily, with VFCW.

Expected costs	Unit	Value	Value 2019	Source
Initial Investment				
Purchasing land cost – 1500m ²	e	5000	166.67	Interview
Materials and Equipment				
Plant cost	€	5700	190	Interview
Excavation cost	€	9649	321.67	Interview
Ponds waterproofing	€	34,000	1133.33	Interview
Electrical system	e	9000	300	Interview
Hydraulic system	e	9000	300	Interview
Completion work of ponds (non-				
woven fabric, bio jute net,	€	21,250	708.33	Interview
filling ground, inert material)	_			
Lifting pumps	€	1900	63.33	Interview
Labour	0	0750	105	• . •
Completion work of ponds labour	e	3750	125	Interview
Ponds waterproofing labour Electrical system labour	€ €	6000 1000	200 33.33	Interview
	e	1000	33.33	Interview Interview
Hydraulic system labour Planting labour	e	300	33.33 10	Interview
Lifting pumps labour	€	100	3.33	Interview
Excavation labour	e	350	11.67	Interview
Operational Costs	e	000	11.07	interview
Fixed				
Electrical energy 400 kwh/month	€/year	940.80	940.80	(i)
Fixed plant staff cost	€/month	It is not 1	needed	Interview
Plant monitoring cost	€/month	It is not 1	nonitored	Interview
Variable				
		No sludg	e - modest	
Reagent substances (sludge)	€/year	concentra	ations (<1	Interview
		mg/l)		
Mowing and disposal of vegetable	€/year	1000	952.38	(ii)
biomass cost	c, y cui	1000	502100	(11)
Ordinary maintenance of the	€/year	5000	5000	Interview
plant	•			
Irrigations (when necessary)	€/year	It is not 1	needed	Interview
Financial costs		Those is		
Land insurance	€/year	There is a insurance		Interview
		There is a		
Plant insurance	€/year	insurance	-	Interview
Taxes		insurance	5	
		There is	not plant	
Plant taxes	€/year	taxes	F	Interview
		There is	not water	
Water distribution (if sold)	€/year	sold		Interview
Nutrients distribution (if and d)	6 /	There are	e not	T
Nutrients distribution (if sold)	€/year	nutrients	sold	Interview
External costs				
Social costs	€/year		nonitored. It	
		-	nal for the co	ompany.
Exceptional irrigations	€/year	This cost	1s not	
	and	expected	1.45	(!!!)
Environmental costs	ϵ/m^3	43.42	1.45	(iii)

i. 0.196 €/kw provided by Ikea®.

ii. Interview, vegetable biomass mowing, and disposal is a cost to sustain after one year. Therefore, it was discounted at the 5% rate. This cost includes the maintenance of the use of the land.

iii. Environmental costs are represented only by the CO_2 of excavations, which were valued using the kg of CO_2 equivalent/m³ of the excavation($\simeq 0.48$) (Wernet et al., 2016), the m³ of the land (1500 m³) and the cost of CO_2 (60 ϵ /ton) (Eff. Carbon Rates 2021, 2021).

location of the wetland, in an island suffering from high temperatures and irregular raining patterns, the cost of the water reused has been established in $0.9\epsilon/m3$, while this cost in Italy could rank from 0.25 to $1.5\epsilon/m3$ (Pistocchi et al., 2018). Improve air quality is referred to as reduced air pollution, thanks to the CO₂ uptake by these natural ecosystems. This figure might be more prominent if other externalities such as human health improvement due to pollution-related diseases are considered. Several studies highlight the role of ecosystem services and their monetary value, a relevant study from Costanza et al. (2014) quantified that the land use changes at global level between 1997 and

Table 5

Benefits expected from the alternative scenario in Sicily, with VFCW.

Expected benefits	Unit	Value	Value 2019	Source
Output water 12,000 m ³ /year Improve air quality and CO ₂ storage Reduce the risk of flood	€/m2 €/year €/year	10,800 15,884.1 2369	10,285.71 2	(i) (ii) (iii)

i. 0.9€/m3 water reuse cost in Italy (Pistocchi et al., 2018).

ii. 1.48USD $\$/m^3$ in 2018 (Nordman et al., 2018). It has been updated with inflation adapted to the European currency in 2019. Air pollution reduction + CO_2 storage.

iii. 0.18 USD\$/m³ in 2018 (Nordman et al., 2018). It has been updated with inflation adapted to the European currency in 2019.

2011 ensued in a loss of ecosystem services of between \$4.3 and \$20.2 trillion/yr. It is also highlighted the difficulty for general public to understand the value of the services this ecosystem could bring, such as reduction of loss of resources, protection of human health, nutrients recycling and restoration and reuse of water resources, if the land is expected to be used for further proposes (Masi et al., 2018; Resende et al., 2019). Aesthetical benefits, such as improve aesthetic value, scenic beauty, temperature refreshment, have not been considered as the area is not easily accessible. Still, it should be considered in the future together as depending on the context it could offer positive welfare effects (benefits) (Darnthamrongkul and Mozingo, 2021; Jensen et al., 2019; Ureta et al., 2021). Moreover, the value of wetlands per biome in monetary units among different ecosystem evaluated has been revelled the highest – mainly under mangroves (de Groot et al., 2012).

3.1.3. Performance and sensitivity analysis

Key Performance Indicators (KPI) considered to evaluate both scenarios are disclosed in Table 6.

Results evidence that the NPV is higher in the baseline scenario due to the present net value obtained, while at long term the alternative scenario could become more profitable. Following the CBA premise that benefits should extend the costs, constructed wetlands could be suitable for this case study, but the ROI and BCR is low. If considering an increase in the cost of the reuse water (from $0.9 \notin /m3$ to $1 \notin /m3$), and aesthetical value which is feasible due to its socio-economic and geographical context (>50 km from urban areas and the number of visitors to this parking lot, the BRC could reach almost 5 (adjusted with inflation 2.98 %/m3 from Nordman et al., 2018), and the ROI almost 3, being superior than in the baseline scenario. Therefore, further research should be made to better capture the costing service of this ecosystem.

For both cases, a sensitivity analysis was carried out to test how robust the results are by modifying selected inputs. In this case, the selected variables to test due to their influence on the results are:

• The discount rate. The reference value was modified by 2.5 and 7.5%, as the discount rate is often tested in similar studies (Alves et al., 2019; Molinos-Senante et al., 2010).

Table 6

KPI comparing the alternative and baseline scenario in the case study in Sicily.

KPI	VALUE
Alternative scenario: Green Infrastructure	
Net Present Value (NPV)	2.46
Benefit-Cost Ratio (BCR)	1.00
Return On Investment (ROI)	0
Total Costs/m ² (1500m ²)	7.00
NPV/m^2 (1500 m ²)	0
Baseline scenario	
Net Present Value (NPV)	5838.59
Benefit-Cost Ratio (BCR)	2.16

- The ordinary maintenance of the plant, which represents a high yearly cost, can vary based on the necessity, modifying the reference value by 3000 and 7000.
- The output water in m3/year varies on precipitation base, modifying the reference value by 6000 and 15,000 m3/year (as the structure has been projected to deal with a maximum flow rate of 15,000 m3/ year).
- The sensitivity analysis results can be observed by changing the discount rate values, ordinary maintenance of the plant, and the output water in m3/year; there is only a minimum variation in the totals and the KPIs.
- The NPV is forecasted over 30 years (from 2019 to 2049) with an interval confidence bound of 95% based on the minimum and maximum possible variation of output water. The NPV is forecasted to be negative only in case output water values are near the minimum flow rate.

3.2. CBA in Emilia Romagna

3.2.1. Baseline scenario

In this case study, the baseline scenario is the SFCW. In contrast, the alternative scenario was defined as a theoretical cultivation rotation of potatoes, soybeans, corn, and wheat. Table 7 shows the cost from the baseline scenario, considering that the area has 0.55 ha and can treat up to about 20,000 m3 of water/year depending on the rate of annual precipitations In this study, an overall inflow and outflow of 16,186 m³/ year and 7119 m³/year were considered as a mean value of volume of treated wastewater in the years 2018 and 2019 (Lavrnić et al., 2018).

Table 7 shows that land purchase has not been included in the cost as the CER owns this land for >20 years. Therefore, it was deemed appropriate to calculate the opportunity cost deriving from the income related to the following crops-, potato, soybeans, corn, wheat, which are usually grown in a rotation system. The excavation costs were calculated for a depth of 0.40 m from the field level and 0.90 m including embankments and the inclusion of labour costs for the equivalent of 2 working days; the cost of the electrical system includes the costs of bringing electricity from the rural buildings present at the entrance to the farm, up to the Phyto-depuration area. Since the area is subject to scientific research activities, the macrophytes planted were taken from natural environments and introduced into the area by carrying out several tests to test their engraftment. To calculate their cost, reference is made to the total sale price of the seedlings in multipots of 60 units, planted with a crop density equal to 1 unit $/ m^2$; no base or cover fertilisations were performed, as the plant essences were selected for their high rustic characteristics; the hydraulic system costs have been calculated based on the prices provided by the interview performed to Impianti Bragaglia at the end of 2019. The total value of the investment costs expressed reach about per year in 30 years of life.

The operational costs are mainly fixed—the first item related to maintenance, which is $1720 \in$ and takes place once every five years. The ordinary maintenance is expected to happen 5 times a year, each time with a duration of 2 working days. The energy costs are related to the electric pump functioning to transfer the water from the main channel to the constructed wetland, while no pumping is needed to transfer clean water from the constructed wetland to the main channel once the water has been phyto-depurated as it works thanks to gravity. There is a cost item related to labour – 2 working days per year - when mowing and harvesting the constructed wetland biomass. The IMU cost, an Italian Municipal Property Tax related to property land, was estimated as 3.5% on the total taxable amount, corresponding to the surface of the phytodepuration area on the farm's total area. The environmental cost was always related to excavation costs. Overall costs reach 2121.28 ϵ /year.

This cost could be reduced if better performance excavators were utilised for the wetland construction consuming fewer fossil fuels. Table 8 indicates the benefits of the current scenario.

Expected benefits have been calculated by applying estimations

Table 7

Cost from the baseline scenario in Emilia Romagna, with SFCW.

Costs	Unit	Value	Value 2019	Source
Initial investment				
Opportunity cost land	€∕ha per year		25.20	Alternative Scenario
Design cost	£	2000	66.67	Interview
Cost of excavation and embankment (including labour)	£	3500	116.67	Interview
Electrical system cost	€	500	16.67	Interview
Cost of basic fertilization	€/kg	0	0	Interview
Cost of seedlings (in 60 holes multipot pot)	€	2800	93.33	Interview
Irrigation cost	€	3708	123.60	(i)
Other costs (concrete structures)	€	5000	233.33	Interview
Labour cost (assembly)	€	560	18.67	Interview
Cost of submersible electric pumps (2) AP.50.11.3 1KW, 380 V, 3A	£	2000	66.67	Interview
Cost of pipes 5€ / m ²	€	500	16.67	Interview
Cost of electric box	€	300	10	Interview
Volumetric impulse meter (2)	€	660	22	Interview
Level sensor (2)	€	1700	56.67	Interview
Operational cost Fixed				
Maintenance costs (extraordinary)	€/year	344	344	Interview
Ordinary plant maintenance (green management)	€/hour	18	1080	Interview
Energy costs 138 kW/month (ordinary operation) Variable	€/year	46.32	46,32	Interview (ii)
Labour for mowing and dry biomass harvesting	€/hour	18.00	288	Interview
Irrigation				
Planting of new vegetation/ plants				
Financial cost and taxes				
Plant insurance	Not applie	1		
IMU (tax)	€/ha	200	70	Interview (v)
External cost				
Social cost				
Environmental cost	€	44.80	1.49	(vi)

i. $1.20 \mbox{\'/m}^2$ for 3090 \mbox{m}^3 Gruppo Hera, 2019 (non-domestic use, agricultural purposes).

ii. Retrived from CER electrical bill (0.0125 $\varepsilon/kW+$ fixed costs = 0.20 $\varepsilon/kW).$ Supplied by Nova AEG.

iii. 3.5% of the total taxable amount corresponds to the surface of the phytodepuration area on the farm's total area.

iv. It refers to the CO₂ emissions produced by excavation (\simeq 0.48tCO₂eq.) multiplied by the market price of CO₂eq./ton emissions (60 € / ton) (Eff. Carbon Rates 2021, 2021)

already established in different studies located outside Italy as other studies have not been found. This research gap suggests, as in the case of Sicily, the need to better explore the role of this ecosystem service in this case, in a rural area.

3.2.2. Alternative scenario: Without wetland

There is no opportunity cost in the alternative scenario as the crop field is used for cropping purposes. The following rotation crops have been considering: potato, wheat, maize and soybeans. Operating costs are related to standard agronomic cultivation practices' average costs and are shown in Annex 1. The value of the IMU remains unchanged concerning the condition in which the CW is present. The alternative scenario costs amount to 2266ε without including external cost, while when it is included, it reaches 2296ε . Table 9 discloses the expected cost from the alternative scenario.

Yearly benefits of the alternative scenario reach over as is evidenced in Table 10 due to the economic benefit of selling the crops and Table 8

Benefits from the baseline scenario in Emilia Romagna with SFCW.

Benefits	Unit	Value	Value 2019	Source
Lower P pollution in water	€/year	10.14	10.14	(i)
Lower N pollution in water	€/year	123.54	123.54	(ii)
TSS reduction	€/year	298.90	298.90	(iii)
Ecosystem benefits	€/year	17,599.07	17,599.10	(iv)
Flood reduction	€/year	30.10	30.10	(v)
Agricultural benefits	€/year	2554.01	2432.39	(vi)
Scenic amenity value	€/year	654.93	654.93	(vii)

i. 109 kg/year removal from Lavrnić et al., 2018 considering 29250AUS\$/t in 2012 (Daniels et al., 2012). The figure has been updated with inflation adapted to the European currency in 2019.

ii. 0.36 kg/year removal from Lavrnić et al., 2018 considering 861 AUS\$/t in 2012 (Daniels et al., 2012). The figure has been updated with inflation adapted to the European currency in 2019 (Daniels et al., 2012).

iii. 1.36 USD $/m^3$ (Nordman et al., 2018). It has been updated with inflation adapted to the European currency in 2019

iv. 24,056 AUS\$/ha considering the minimum value (Daniels et al., 2012). The figure has been updated with inflation adapted to the European currency in 2019.

v. 0.18USD (Nordman et al., 2018). It has been updated with inflation adapted to the European currency in 2019.

vi. Agricultural benefits from the potential reuse of wastewater considering an 'extra' income for avoided losses on production due to drought events equal to 20% of Gross Saleable Production (4036.05 \pounds) of a field of \simeq 3,00 ha (Verlicchi et al., 2012).

vii. $2.98USD\$/m^3$ (Nordman et al., 2018). It has been updated with inflation adapted to European currency in 2019.

Table 9

Cost expected from the alternative scenario in Emilia Romagna, without SFCW.

Expected costs	Unit	Value	Value 2019	Source
Initial Investment				
Opportunity cost land	€/year	It is no ex	pected	Interview
Operational cost				
Potato/wheat/corn/soybean cultivation	€/year	2196.12	2196.12	(i)
Financial cost and taxes				
IMU (tax)	€/ha	200	70	Interview (ii)
External cost				
Risk of flood	e	30.10	30.10	(iii)

i. Centro Ricerche Produzioni Vegetali (CRPV) and inflated to 2019 (World Bank).

ii. 3.5% on the total taxable amount, corresponding to the surface of the Phytodepuration area (in this scenario, crop) on the farm's total area.

iii. 0.18USD $/m^3$ (Nordman et al., 2018). It has been updated with inflation adapted to European currency in 2019.

Table 10

Benefit expected from the alternative scenario in Emilia Romagna, without SFCW.

Expected benefits	Unit	Value	Value 2019	Source
Gross saleable production	€		2219.83	(i)
No CO ₂ emission due to excavation	€	44.80	1.49	(ii)

i. Retrieved from ISTAT (yield q/ha) and ISMEA (price $\varepsilon/t)$ and inflated to 2019 (World Bank).

ii. It refers to the CO₂ emissions produced by excavation (\simeq 0.48tCO₂eq.) multiplied by the market price of CO₂eq./ton emissions (60€/ton), (*Eff. Carbon Rates 2021*, 2021).

environmental benefit (externality) since no excavation like the one in the baseline scenario would be required. Some authors (Baldocchi, 2003; Bondeau et al., 2007) associate carbon storage – sequestration - to specific crop production due to carbon intake naturally occurring in certain agro-systems. This item has not been included in this research, as it is not uniformly recognised in the scientific community. It could imply a zero balance once the crop is harvested.

3.2.3. Performance and sensitivity analysis

The analysis of KPIs in both scenarios in Budrio, Emilia Romagna is disclosed in Table 11.

Results show that the NPV is higher in the baseline scenario than the SFCW due to the high benefit-cost ratio obtained. Following the CBA premise, that benefit should extend the costs, therefore constructed wetlands could be a suitable structure to consider in this case study. The ROI value is also encouraging in the SFCW scenario and shows a fast repayment of the costs.

The BCR shows that the baseline scenario's benefits are about higher than the costs, as the value is >0. In comparison, the alternative scenario brings more than benefits higher than the costs, around 9 times.

In this case study, also a sensitivity analysis was carried out on the system by varying the discount rate as it was done in the case of Sicily.

The sensitivity analysis results can also be observed in a way that changed the discount rate values, the output water m^3 /year drastically, and the value of the biomass produced. There is only a minimum variation in the totals and the KPIs.

The NPV is forecasted over 30 years (from 2019 to 2049) with an interval confidence bound of 95% based on the minimum and maximum possible variation of output water. The NPV is forecasted to remain positive when the output water values are near the minimum flow rate.

3.3. Case studies comparison

In both case studies, the presence of wetlands has more benefits than cost. In the case of Sicily, the scenario without the wetland brings more benefits due to the cost involved in the construction of the wetland. Instead, if additional benefits such as aesthetical values are included in the scenario with the wetland, it could become a promising scenario reaching a very high ROI and BCR (higher than the scenario without VFCW). In the case of Emilia Romagna, the wetland scenario shows a better costing performance than the alternative scenario. The benefits from selling the crop if the surface currently occupied by the wetland are not worthy when comparing all benefits can be obtained from the wetland scenario. In fact, the NPV in the alternative scenario is negative, and the BCR is <1, therefore it is not recommended to perform that scenario. A key aspect should be further explored in further research is the need to differentiate benefits humans can attribute to this system from rural and urban areas, while also other benefits associated to the biodiversity improvement (or loss avoidance) could be also explored. When reviewing the methodology applied, a lack of CBA is conducted on this typology nature-based solutions, which is difficult to compare with other studies. Therefore, as recommended by the European Commission (European Commission, 2014), this methodology should be widely utilised to support decision making to move towards the decarbonisation plan expected in The Green Deal (European Commission, 2019) while being aligned with different SDGs, beyond the SDG 6. Table 12. Total cost, benefits and NPV in selected cases studies. Shows the total cost, benefits and NPV from each case study.

4. Conclusions

The current study presents a CBA of two types of constructed wetland in two Italian locations: a vertical subsurface flow constructed wetland in the south of Italy, in Sicily, and a surface flow constructed wetland in the north of Italy in Emilia Romagna. The CBA methodology allowed to compare a constructed wetland scenario with a scenario without this intervention, offering numerical cost and benefits of each option. The outcomes of this research evidence that both types of constructed wetlands represent promising results in terms of their cost. In Sicily, the BRC is positive but low (ratio equal to 1), showing that it brings more benefits

Table 11

KPI comparing the alternative and baseline scenario in the case study in Emilia Romagna.

KPI	VALUE
Baseline scenario: Green infrastructure	
Net Present Value (NPV)	19,027.79
Benefit-Cost Ratio (BCR)	9.97
Return On Investment (ROI)	8.97
Total Costs/m ²	0.38
NPV/m ²	3.424
Alternative scenario	
Net Present Value (NPV)	-74.9
Benefit-Cost Ratio (BCR)	0.97

Table 12

Total cost, benefits and NPV in selected cases studies.

	Sicily		Emilia Romagna	
	Without CW	With CW	With CW	Without CW
Total Costs Total Benefits NPV	5027.89 110,479.80 5838.59	10,494.59 11,011.34 2.46	19,290.80 21,270.69 19,027.79	2426.22 2264.63 74.90

than costs. While comparing with the absence of CW scenario still this last one has more benefits due to the lack of investments (NPV around 6000€/yr and a BCR around 2). If further ecosystem services (mainly aesthetical are included), the wetland scenario could reach a BRC of 5 with a ROI of 4 (considering secondary data from studies outside Italy), with further incomes entering for example with a ticket to visit the structure or to enjoy the area. In that case, the wetland scenario should be prioritised from a costing perspective because 1) the investment will be repaid very fast as the very high ROI (8.96) indicates, 2) the NPV is higher (around 19,000€/year) compared with the negative value in the alternative scenario (-75€/year), where the negative value indicates that there are more cost than profits, therefore it is not recommended to change the current status.

Further research could be driven to explore other social (human preferences) and environmental benefits (such as biodiversity) of these structures. Additionally, other sustainability assessment techniques, such as those under the life cycle thinking method, could be applied to bring a systemic approach. Constructed wetland could bring new business model development under a favourable policy framework linked with current trends about the circular economy. Thus, an exploratory analysis of business model design, including this infrastructure, could be relevant for moving towards sustainability.

Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgements

This research has been performed under GREEN4WATER, a national research project coordinated by the University of Bologna and funded by the Ministry of Education, University and Research within the PRIN 2015 call (grant number: PRIN2015AKR4HX) available at https://site.unibo.it/green4water.

This work was also supported by the WATERAGRI Project (water retention and nutrient recycling in soils and streams for improved agricultural production), which received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No 858375. Special thanks to Giusi Crisafulli and Ionut Alexandru Vartolomei, who supported data collection; as well as Mr. Stefano Anconelli and the Canale Emilia Romagnolo team for their precious time facilitating data and solving doubts.

Appendix A. Supplementary data

Supplementary data to this article can be found online at https://doi.org/10.1016/j.ecoleng.2022.106797.

References

- Alves, A., Gersonius, B., Kapelan, Z., Vojinovic, Z., Sanchez, A., 2019. Assessing the Co-Benefits of green-blue-grey infrastructure for sustainable urban flood risk management. J. Environ. Manag. 239, 244–254. https://doi.org/10.1016/j. jenvman.2019.03.036.
- Aparicio, J., Tenza-Abril, A.J., Borg, M., Galea, J., Candela, L., 2019. Agricultural irrigation of vine crops from desalinated and brackish groundwater under an economic perspective. A case study in Siggiewi. Malta Sci Total Environ 650, 734–740. https://doi.org/10.1016/j.scitotenv.2018.09.059.
- Baldocchi, D.D., 2003. Assessing the eddy covariance technique for evaluating carbon dioxide exchange rates of ecosystems: past, present and future. Glob. Chang. Biol. 9, 479–492. https://doi.org/10.1046/j.1365-2486.2003.00629.x.
- Bixler, T.S., Houle, J., Ballestero, T., Mo, W., 2019. A dynamic life cycle assessment of green infrastructures. Sci. Total Environ. 692, 1146–1154. https://doi.org/10.1016/ j.scitotenv.2019.07.345.
- Bondeau, A., Smith, P.C., Zaehle, S., Schaphoff, S., Lucht, W., Cramer, W., Gerten, D., Lotze-campen, H., Müller, C., Reichstein, M., Smith, B., 2007. Modelling the role of agriculture for the 20th century global terrestrial carbon balance. Glob. Chang. Biol. 13, 679–706. https://doi.org/10.1111/j.1365-2486.2006.01305.x.
- Börger, T., Broszeit, S., Ahtiainen, H., Atkins, J.P., Burdon, D., Luisetti, T., Murillas, A., Oinonen, S., Paltriguera, L., Roberts, L., Uyarra, M.C., Austen, M.C., 2016. Assessing costs and benefits of measures to achieve good environmental status in european regional seas: challenges, opportunities, and lessons learnt. Front. Mar. Sci. 3 https://doi.org/10.3389/fmars.2016.00192.
- Costanza, R., de Groot, R., Sutton, P., van der Ploeg, S., Anderson, S.J., Kubiszewski, I., Farber, S., Turner, R.K., 2014. Changes in the global value of ecosystem services. Glob. Environ. Chang. 26, 152–158. https://doi.org/10.1016/j. gloenvcha.2014.04.002.
- Daniels, P., Porter, M., Bodsworth, P., 2012. Externalities in Sustainable Regional Water Strategies: Application of a Simple Methodology Urban Water Security Research Alliance Technical Report No. 81.
- Darnthamrongkul, W., Mozingo, L.A., 2021. Toward sustainable stormwater management: Understanding public appreciation and recognition of urban Low Impact Development (LID) in the San Francisco Bay Area. J. Environ. Manag. 300 https://doi.org/10.1016/j.jenvman.2021.113716.
- de Groot, R., Brander, L., van der Ploeg, S., Costanza, R., Bernard, F., Braat, L., Christie, M., Crossman, N., Ghermandi, A., Hein, L., Hussain, S., Kumar, P., McVittie, A., Portela, R., Rodriguez, L.C., ten Brink, P., van Beukering, P., 2012. Global estimates of the value of ecosystems and their services in monetary units. Ecosyst Serv 1, 50–61. https://doi.org/10.1016/j.ecoser.2012.07.005.
- Djukic, M., Jovanoski, I., Ivanovic, O.M., Lazic, M., Bodroza, D., 2016. Cost-benefit analysis of an infrastructure project and a cost-reflective tariff: a case study for investment in wastewater treatment plant in Serbia. Renew. Sust. Energ. Rev. 59, 1419–1425. https://doi.org/10.1016/j.rser.2016.01.050.
- EC, 1991. The Urban Waste Water Treatment Directive (91/271/EEC). Institution of Water Officers Journal.
- Effective Carbon Rates, 2021. Effective Carbon Rates 2021. OECD. https://doi.org/ 10.1787/0e8e24f5-en.
- EU, 2020. Regulation (EU) 2020/741 of the European Parliament and of the Council on Minimum Requirements for Water Reuse.
- European Commission, 2000. Water Framework Directive [WWW Document].
- European Commission, 2014. Guide to Cost-benefit Analysis of Investment Projects: Economic appraisal tool for Cohesion Policy 2014-2020. Publications Office of the European Union. https://doi.org/10.2776/97516.
- European Commission, 2019. The European Green Deal Eur Comm, 53, p. 24. https:// doi.org/10.1017/CBO9781107415324.004.
- Gkika, D., Gikas, G.D., Tsihrintzis, V.A., 2014. Construction and operation costs of constructed wetlands treating wastewater. Water Sci. Technol. 70, 803–810. https:// doi.org/10.2166/wst.2014.294.
- Gorgoglione, A., Torretta, V., 2018. Sustainable management and successful application of constructed wetlands: a critical review. Sustain. 10, 1–19. https://doi.org/ 10.3390/su10113910.
- Hera, Gruppo, 2019. Gruppo Hera Water fee Bologna [WWW Document]. URL https:// www.gruppohera.it/clienti/casa/casa_acqua/casa_acqua_tariffe/329.html (accessed 11.1.19).

- Hernández-Sancho, F., Sala-Garrido, R., 2009. Technical efficiency and cost analysis in wastewater treatment processes: A DEA approach. Desalination 249, 230–234. https://doi.org/10.1016/j.desal.2009.01.029.
- Hoogmartens, R., Van Passel, S., Van Acker, K., Dubois, M., 2014. Bridging the gap between LCA, LCC and CBA as sustainability assessment tools. Environ. Impact Assess. Rev. 48, 27–33. https://doi.org/10.1016/j.eiar.2014.05.001.
- Huysegoms, L., Rousseau, S., Cappuyns, V., 2018. Friends or foes? Monetized life cycle assessment and cost-benefit analysis of the site remediation of a former gas plant. Sci. Total Environ. 619–620, 258–271. https://doi.org/10.1016/j. scitotenv.2017.10.330.
- Jensen, A.K., Uggeldahl, K.C., Jacobsen, B.H., Jensen, J.D., Hasler, B., 2019. Including aesthetic and recreational values in cost-effectiveness analyses of land use change based nitrogen abatement measures in Denmark. J. Environ. Manag. 240 https://doi. org/10.1016/j.jenvman.2019.03.076.
- Lavrnić, S., Braschi, I., Anconelli, S., Blasioli, S., Solimando, D., Mannini, P., Toscano, A., 2018. Long-term monitoring of a surface flow constructed wetland treating agricultural drainagewater in Northern Italy. Water (Switzerland) 10. https://doi. org/10.3390/w10050644.
- Lavrnić, S., Alagna, V., Iovino, M., Anconelli, S., Solimando, D., Toscano, A., 2020a. Hydrological and hydraulic behaviour of a surface flow constructed wetland treating agricultural drainage water in northern Italy. Sci. Total Environ. 702 https://doi. org/10.1016/j.scitotenv.2019.134795.
- Lavrnić, S., Nan, X., Blasioli, S., Braschi, I., Anconelli, S., Toscano, A., 2020b. Performance of a full scale constructed wetland as ecological practice for agricultural drainage water treatment in Northern Italy. Ecol. Eng. 154, 105927 https://doi.org/ 10.1016/j.ecoleng.2020.105927.
- Masi, F., Rizzo, A., Regelsberger, M., 2018. The role of constructed wetlands in a new circular economy, resource oriented, and ecosystem services paradigm. J. Environ. Manag. 216, 275–284. https://doi.org/10.1016/j.jenvman.2017.11.086.
- Milani, M., Marzo, A., Toscano, A., Consoli, S., Cirelli, G.L., Ventura, D., Barbagallo, S., 2019. Evapotranspiration from horizontal subsurface flow constructedwetlands planted with different perennial plant species. Water (Switzerland) 11. https://doi. org/10.3390/w11102159.
- Molinos-Senante, M., Hernández-Sancho, F., Sala-Garrido, R., 2010. Economic feasibility study for wastewater treatment: a cost-benefit analysis. Sci. Total Environ. 408, 4396–4402. https://doi.org/10.1016/j.scitotenv.2010.07.014.
- Nan, X., Lavrnić, S., Toscano, A., 2020. Potential of constructed wetland treatment systems for agricultural wastewater reuse under the EU framework. J. Environ. Manag. 275 https://doi.org/10.1016/j.jenvman.2020.111219.
- Nordman, E.E., Isely, E., Isely, P., Denning, R., 2018. Benefit-cost analysis of stormwater green infrastructure practices for Grand Rapids, Michigan. USA J Clean Prod 200, 501–510. https://doi.org/10.1016/j.jclepro.2018.07.152.
- Pistocchi, A., Aloe, A., Dorati, C., Alcalde Sanz, L., Bouraoui, F., Gawlik, B., Grizzetti, B., Pastori, M., Vigiak, O., 2018. The Potential of Water Reuse for Agricultural Irrigation in the EU a Hydro-Economic Analysis. https://doi.org/10.2760/263713.
- Resende, J.D., Nolasco, M.A., Pacca, S.A., 2010. Life cycle assessment and costing of wastewater treatment systems coupled to constructed wetlands. Resour. Conserv. Recycl. 148, 170–177. https://doi.org/10.1016/j.resconrec.2019.04.034.
- Sgroi, M., Vagliasindi, F.G.A., Roccaro, P., 2018. Feasibility, sustainability and circular economy concepts in water reuse. Curr Opin Environ Sci Heal 2, 20–25. https://doi. org/10.1016/j.coesh.2018.01.004.

UN, 2020. Human Rights to Water and Sanitation [WWW Document]. URL. https://www.unwater.org/water-facts/human-rights/ (accessed 3.4.20).

- https://www.unwater.org/water-facts/human-rights/ (accessed 3.4.20). United Nations, 2015. The Sustainable Development Goals [WWW Document].
- Ureta, J., Motallebi, M., Scaroni, A.E., Lovelace, S., Ureta, J.C., 2021. Understanding the public's behavior in adopting green stormwater infrastructure. Sustain. Cities Soc. 69 https://doi.org/10.1016/j.scs.2021.102815.
- Ventura, D., Barbagallo, S., Consoli, S., Ferrante, M., Milani, M., Licciardello, F., Cirelli, G.L., 2019. On the performance of a pilot hybrid constructed wetland for stormwater recovery in Mediterranean climate. Water Sci. Technol. 79, 1051–1059. https://doi.org/10.2166/wst.2019.103.
- Ventura, D., Ferrante, M., Copat, C., Grasso, A., Milani, M., Sacco, A., Licciardello, F., Cirelli, G.L., 2021. Metal removal processes in a pilot hybrid constructed wetland for the treatment of semi-synthetic stormwater. Sci. Total Environ. 754, 142221 https:// doi.org/10.1016/j.scitotenv.2020.142221.
- Wang, J., Banzhaf, E., 2018. Towards a better understanding of Green Infrastructure: a critical review. Ecol. Indic. 85, 758–772. https://doi.org/10.1016/j. ecolind.2017.09.018.
- Wernet, G., Bauer, C., Steubing, B., Reinhard, J., Moreno-Ruiz, E., Weidema, B., 2016. The ecoinvent database version 3 (part I): overview and methodology. Int. J. Life Cycle Assess. 21, 1218–1230.
- WWAP, 2017. The United Nations World Water Development Report 2017. Wastewater: The Untapped Resource. UNESCO, Paris. https://doi.org/10.1017/ CBO9781107415324.004.
- Yang, C., Nan, J., Yu, H., Li, J., 2020. Embedded reservoir and constructed wetland for drinking water source protection: Effects on nutrient removal and phytoplankton succession. J. Environ. Sci. 87, 260–271. https://doi.org/10.1016/j.jes.2019.07.005.
- Young, R.A., Loomis, J.B., 2014. Determining the Economic Value of Water: Concepts and Methods. New York.