

# MARTA REACH

## Piloting an On-Demand Multimodal Transit System in Atlanta

Pascal Van Hentenryck\*, Connor Riley, Anthony Trasatti, Hongzhao Guan,  
Tejas Santanam, Jorge A. Huertas, Kevin Dalmeijer, Kari Watkins,  
Juwon Drake, and Samson Baskin

Georgia Institute of Technology, Atlanta, GA

September 26, 2023

### Abstract

This paper reports on the results of the six-month pilot MARTA REACH, which aimed to demonstrate the potential value of On-Demand Multimodal Transit Systems (ODMTS) in the city of Atlanta, Georgia. ODMTS take a transit-centric view by integrating on-demand services and traditional fixed routes in order to address the first/last mile problem. ODMTS combine fixed routes and on-demand shuttle services *by design* (not as an after-thought) into a transit system that offers a door-to-door multimodal service with fully integrated operations and fare structure. The paper fills a knowledge gap, i.e., the understanding of the impact, benefits, and challenges of deploying ODMTS in a city as complex as Atlanta, Georgia.

The pilot was deployed in four different zones with limited transit options, and used on-demand shuttles integrated with the overall transit system to address the first/last mile problem. The paper describes the design and operations of the pilot, and presents the results in terms of ridership, quality of service, trip purposes, alternative modes of transportation, multimodal nature of trips, challenges encountered, and cost estimates. The main findings of the pilot are that REACH offered a highly valued service that performed a large number of trips that would have otherwise been served by ride-hailing companies, taxis, or personal cars. Moreover, the wide majority of REACH trips were multimodal, with connections to rail being most prominent.

## 1 Introduction

The first/last mile problem is often identified as a key obstacle for transit systems in the United States. It captures the difficulty of attracting riders to transit systems organized solely around fixed routes in low population density environments, while balancing frequent service with cost. As a result, in many transit systems, services are infrequent and riders have to walk long distances to reach their stops. Buses often run mostly empty, yet these areas have a strong need for better access to jobs, health services, groceries, and education.

Mobility as a Service (MaaS; [Shaheen and Chan \(2016\)](#)), enabled by modern IT technology, is often seen as a way to overcome some of these difficulties. In particular, MaaS includes the concept of connecting riders to transit using other shared modes to address the first/last mile problem. One means of this connection is via micro-transit, on-demand transit services. However, such micro-transit services typically have limited integration with the fixed-route transit system.

In contrast, the concept of On-Demand Multimodal Transit Systems (ODMTS) takes a *transit-centric* approach to integrate on-demand services and address the first/last mile problem. ODMTS combine fixed routes and on-demand shuttle services *by design* into a transit system that offers a door-to-door multimodal service with *fully integrated operations and fare structure*. The on-demand shuttles in ODMTS act as feeders

---

\*Email: pvh@gatech.edu

to and from the fixed rail/bus routes. In turn, the fixed routes enable economies of scale and minimize congestion on the high-density corridors. The design and operations of ODMTS have been studied in numerous papers (e.g., [Mahéo et al. \(2019\)](#); [Auad et al. \(2021\)](#); [Basciftci and Van Hentenryck \(2020\)](#)). Their benefits in cost, convenience, and accessibility have also been studied in detail (e.g., [Van Hentenryck \(2019\)](#); [Agatz et al. \(2021\)](#); [Li et al. \(2022\)](#)). Simulation studies of ODMTS have been performed on numerous cities, including the city of Canberra, Australia ([Mahéo et al., 2019](#)), the broad Ann-Arbor and Ypsilanti region, Michigan ([Basciftci and Van Hentenryck, 2020, 2023](#); [Auad and Van Hentenryck, 2022](#)), the city of Atlanta, Georgia ([Dalmeijer and Van Hentenryck, 2020](#); [Auad et al., 2021](#); [Lu et al., 2023b](#)), and Austin, Texas ([Lu et al., 2023a](#)). In 2018, ODMTS were piloted on the campus of the University of Michigan in parallel with the existing transit system ([Van Hentenryck, 2019](#)). This pilot offered service with an average wait time of about three minutes, supported mode changes between buses and on-demand shuttles, and demonstrated a path to economic sustainability.

The research described in this paper originated from a fundamental knowledge gap: *to understand what would be the impact, benefits, and challenges of deploying ODMTS in a city as complex as Atlanta, Georgia*. MARTA REACH (REACH for short) was designed to start to fill this gap: it was a six-month pilot to understand the potential value of ODMTS in Atlanta, and to complement, validate, and expand the simulation results presented by [Auad et al. \(2021\)](#).<sup>1</sup> The pilot was a collaboration between the Socially-Aware Mobility (SAM) Lab at Georgia Tech, the Metropolitan Atlanta Regional Transit Authority (MARTA), and Propel Atlanta, a transportation advocacy group, and was supported by an NSF Civic grant, which covered the development of the technology and the actual operations. The pilot focused on four different zones where the first/last mile problem was considered a potential barrier to transit adoption. SAM developed the software technology enabling the pilot, including the mobility and supervision applications and the back-end computing server. MARTA operated the pilot, and provided, through contractors, the shuttle fleet, the drivers, and the supervisors. The fare for riders was set equal to the \$2.50 fare for the existing system, whether the rider used on-demand shuttles, buses, rail, or a combination of all three. The pilot was deployed in a number of zones with distinct characteristics, e.g., low-income residential areas and job centers, to understand the potential benefits of ODTMS from a broad perspective.

This paper reports the results of the pilot, answering questions about ridership, quality of service, the realities of the first/last mile problem, mode switches, accessibility, operational challenges, and the general case for ODMTS. The results were obtained from two main data sources: (1) the operational data coming from the mobile applications that monitored the system, and (2) electronic surveys that took place during and after the pilot.

Some of the key findings of the pilot can be summarized as follows:

- REACH offered a service that was highly valued by riders and addressed a fundamental need.
- REACH contributed to a significant number of mode switches, performing a large number of trips that would have otherwise been served by ride-hailing companies, taxis, or personal cars.
- The vast majority of REACH trips during the peak hours were multimodal, with connections to rail being most prominent.
- REACH demonstrated, through continuously increasing ridership, that ODMTS have a path to becoming an economically sustainable component of the public transportation system.

The pilot also revealed a number of operational challenges for ODTMS in the field, particularly driver and fleet management issues. Some of these challenges were tackled through technology enhancements and the paper also reports the benefits of these new features.

Altogether, these results give a unique perspective on the potential of ODMTS as a future for transit systems. The quality of service, the convenience, the switch from ride-hailing/taxi services and personal cars, and the fundamentally multimodal nature of the trips provide evidence that the transit-centric perspective of ODMTS may fill an important gap in mobility and deserves to be investigated further. In fact, the team is now pursuing a project to deploy ODMTS for the entire city of Savannah, Georgia using fully electric vehicles ([Chatham Area Transit, 2023](#)).

---

<sup>1</sup>A companion paper describes a number of scenario-based studies through simulations.

The remainder of this paper is structured as follows. Section 2 provides the background on on-demand mobility and ODMTS. The design of MARTA REACH is described in Section 3. Section 4 reports the pilot results. Section 5 concludes this paper with final remarks and perspectives on MARTA REACH and ODMTS. Appendix A provides more detail about the technologies that supported Reach.

## 2 Related Work and ODMTS Background

Recent research has shown that the first/last mile experiences can have a significant impact on transit riders' satisfaction and their loyalty to public transit (Venter, 2020; Park et al., 2021). Beside walking the first/last mile, using technology-based ride-sharing services to connect to transit stops has become a common means of connection. There is a substantial body of research on connecting public transit and on-demand services, which is part of the broad area of Mobility as a Service (MaaS) (Shaheen and Chan, 2016; Feigon and Murphy, 2016). As pointed out by Wang and Shen (2023), transit agencies in the United States have expressed significant interest in the potential integration of on-demand shared mobility modes into their existing fixed-route transit services. A previous study showcases that the integration of ride-sharing services with public transit systems has the potential to significantly increase transit ridership (Yan et al., 2019). Two studies conducted by Yan et al. (2021) and Wang et al. (2022) in low-income communities has indicated that riders in these areas prefer the integrated services over traditional fixed-route transit systems. Computational studies based on simulation and optimization were also carried out to assess the feasibility and potential impact of integrating shared mobility services to enhance conventional public transit systems (Shen et al., 2018; Stiglic et al., 2018; Mahéo et al., 2019; Gurumurthy et al., 2020; Imhof et al., 2020). These studies typically discover that the integration of shared mobility can yield several advantages, including reduced operating costs, enhanced convenience, and solutions to the first/last mile challenges.

Different to the aforementioned computational studies, actual on-demand services have also been implemented to bring riders to transit services. However, these projects are often operated as independent services. Some pilot operators include RIDECo, a technology company that launched a one-year pilot in March 2015 with the transit agency in Milton, Toronto, Canada (RideCo, 2018). In 2017, MaaS company Via started to initiate partnerships with cities in Europe and in the United States (Via Transportation, 2023). In September 2018, the City of Belleville in Canada ran an on-demand transit pilot for six months, which substituted a late-night fixed-route with the on-demand service (Sanaullah et al., 2021). However, the on-demand service was only operated between existing fixed-route stops; hence, this pilot did not aim to provide connections to fixed-routes. Other mobility on-demand pilots have been carried out in different locations in the world such as Dhaka, Bangladesh (Kamau et al., 2016), Munich, Germany (MVG, 2018), and Milpitas, California, United States (Milpitas, 2022).

Several recent pilots in the United States were supported by the Mobility on Demand (MOD) Sandbox Program to address the first/last mile problem. The MOD Sandbox Program is an initiative with the goal of promoting and advancing innovative transportation solutions within the United States (Patel et al., 2022; Federal Transit Administration, 2023). Led by the U.S. Department of Transportation (DOT), the program aims to facilitate collaborations between the public and private sectors to tackle mobility challenges and enhance transportation options for communities (Federal Transit Administration, 2023). In Pierce County, Washington, a pilot was conducted in collaboration with the ride-hailing company Lyft and transit agencies. The pilot targeted individuals who required transportation beyond half a mile from the nearest transit access point, or who needed service after regular transit hours. Its objectives were to improve access to transit bus routes, increase transit ridership, and reduce congestion (Cordahi et al., 2018b; Brown et al., 2022). In Los Angeles County, California, and King County, Washington, two pilots were implemented in collaboration with multiple transit agencies and Via. These programs aimed to provide equitable first/last mile transit access to fixed-routes, allowing riders to request Via rides to/from transit stations within specified zones (Cordahi et al., 2018c; Martin et al., 2022). Moreover, a pilot in Dallas, Texas, explored a soft integration of smart app platforms for Transportation Network Companies (TNCs) and other MOD providers like Spare. This pilot aimed not only at providing first/last mile solutions to DART (Dallas Area Rapid Transit) riders but also at assessing the potential of replacing ineffective fixed-route services in low-density areas with on-demand mobility services (Cordahi et al., 2018a; Martin et al., 2021).

The pilots and studies just mentioned established collaborations between transit agencies and TNCs, or were solely led by the TNCs themselves. *This research and the MARTA Reach pilot are fundamentally*

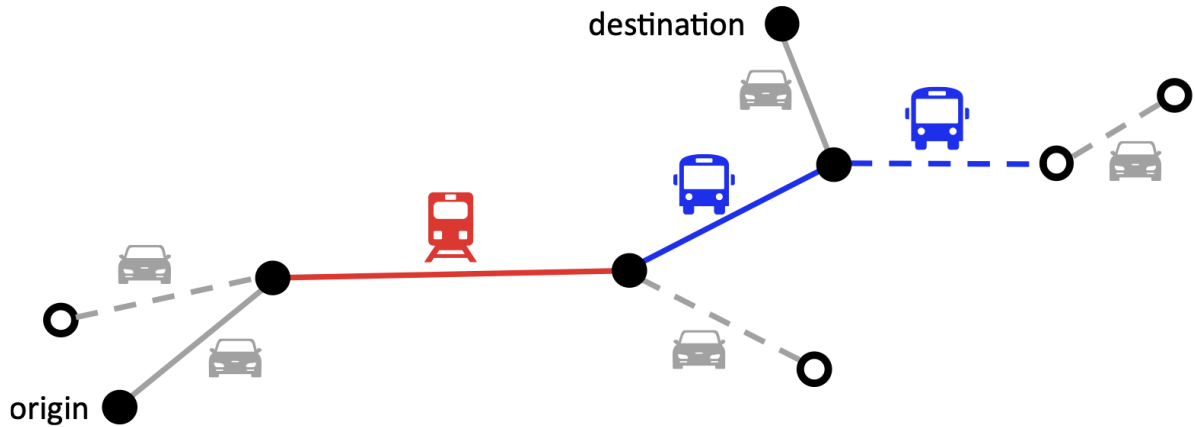


Figure 1: Example ODMTS with Passenger Path (solid lines)

*different: they envision the future of transit systems to be completely integrated and run entirely by transit agencies.* This integration allows for the holistic design and operations of on-demand door-to-door transit systems, a simple fare structure, and economies of scale; it also avoids the inherent conflict of interest between transit systems and profit-maximizing TNCs.

MARTA REACH is an actual implementation of the On-Demand Multimodal Transit Systems (ODMTS), which have been investigated for over a decade. At a high level, ODMTS holistically combine, in a single public transit systems, high-frequency fixed routes (rail or buses) with on-demand, dynamic shuttles to connect riders to/from the fixed network (Van Hentenryck, 2019). They provide “door-to-door” services, addressing the first/last mile problem that plagues many public transit systems across the country. Through the use of high-capacity vehicles on high-density corridors, ODMTS minimize congestion and achieve economies of scale, providing a sustainable cost model for public transit systems. ODMTS also provide a unique opportunity to reduce greenhouse gas emissions by electrifying the entire fleet of vehicles. The design of ODMTS leverages research on hub and spoke network models, and originated from the work of Mahéo et al. (2019) and elaborated in (Dalmeijer and Van Hentenryck, 2020; Basciftci and Van Hentenryck, 2020, 2023; Guan et al., 2022, 2023). Their operations were studied in (Riley et al., 2019, 2020; Auad et al., 2021; Riley, 2022). The cost models and sustainability of ODMTS were studied in (Van Hentenryck, 2019; Agatz et al., 2021; Li et al., 2022). Figure 1 illustrates the service of ODMTS for a single rider. In ODMTS, riders provide their origin and destination through a mobile application or phone call and are offered a route to serve them. In the figure, a passenger is picked up by an on-demand shuttle at, or close to, their origin and brought to the train station. The rider is then instructed to take a train and a bus, which both run on a fixed schedule. When the rider arrives at the bus station closest to their destination, another on-demand shuttle is ready to pick them up and serve the last mile. The benefits of ODMTS have been demonstrated in multiple simulation studies and an actual ODMTS pilot in Michigan, as summarized in Section 1.

### 3 Pilot Design

The REACH pilot was conceived to evaluate the ODMTS concept in a complex city. Atlanta showcases many characteristics that impose challenges when deploying an on-demand pilot. The riders, the transit system, and the realities in the field interact to raise these challenges. In particular, the population and the neighborhoods are diverse, with different socio-economic backgrounds, accessibility needs, mobility options, and perceptions of the transit system. Some neighborhoods are residential, some are job centers, and some are a combination of both. MARTA, the transit system of the Atlanta area, offers multiple modes of transportation including rail, bus, and paratransit services; some of these are directly operated by MARTA while some others contracted, bringing other financial and integration challenges. Furthermore, interacting with operators and all the challenges that a real-world implementation in a large city implies will push the limits of small pilots and simulations (Berrebi et al., 2018). It is precisely those challenges that the REACH pilot tried to capture and

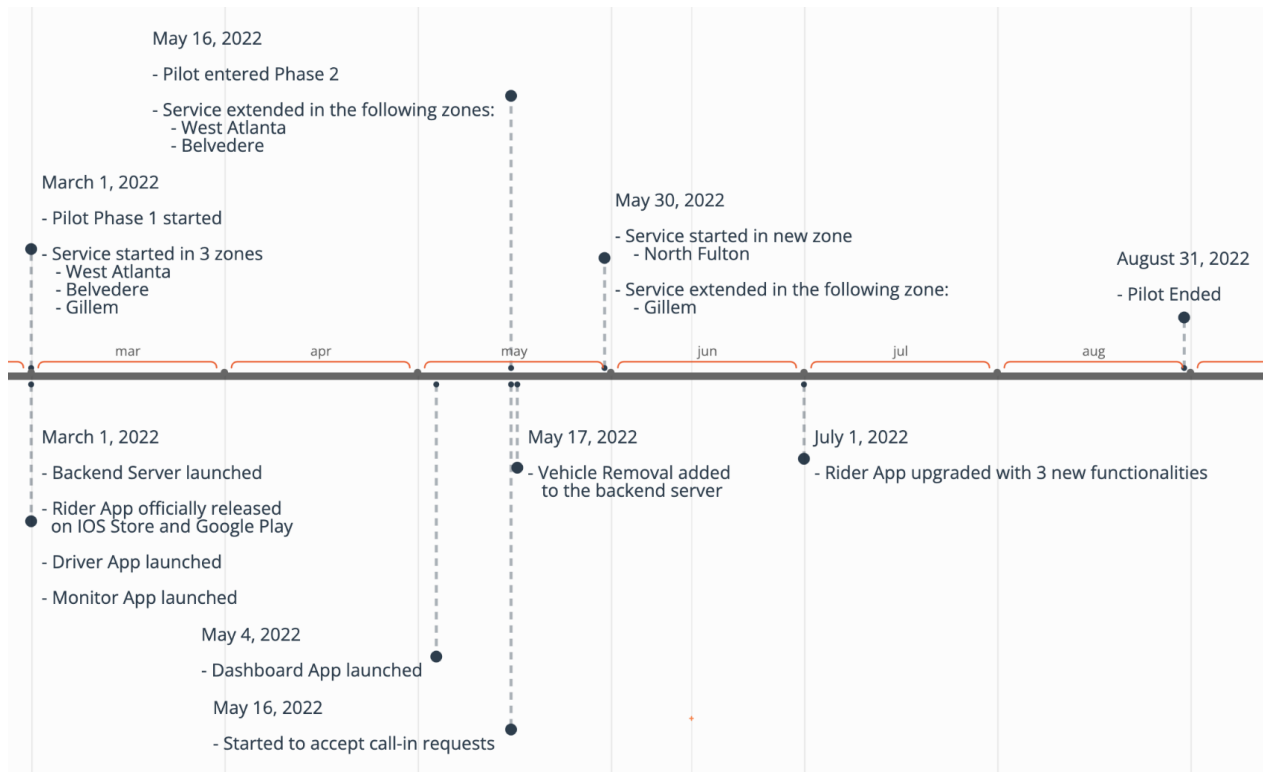


Figure 2: Timeline for MARTA REACH Pilot.

address.

This section presents a comprehensive overview of the MARTA REACH pilot: it presents the timeline and the neighborhoods selected for REACH, highlights the concepts behind its operations, and discusses the strategies employed to overcome the challenges encountered during the pilot. REACH was funded by a grant of the National Science Foundation for a duration of six months. More precisely, REACH operated, from March 1, 2022 to August 31, 2022 from 6:00 a.m. to 7:00 p.m. on weekdays, including federal holidays, for a total duration of 132 service days. Section 3.1 presents the timeline of the pilot, Section 3.2 describes on the pilot zones and their mobility needs, and Section 3.3 discusses the key concepts behind the pilot operations and explains the rationale behind the introduction of new functionalities.

### 3.1 Timeline

Figure 2 summarizes the pilot timeline, with a particular focus on the critical events for operations and technology developments that occurred during the implementation. *The pilot was a fertile ground for rapid deployment and experimentation:* the REACH team worked at a fast pace to address challenges occurring in the field and new functionalities to improve the rider experience.

For the purpose of this paper, the operations can mostly be divided into two phases. In Phase 1, from the pilot launch on March 1, 2022 to May 15, 2022, the pilot served three zones: West Atlanta, Belvedere, and the Gillem Logistics Center. During this phase, the pilot was operated using a rider mobile application, a driver mobile application, and a monitor web application. A dashboard web application was introduced near the end of Phase 1. The three pilot zones were expanded in Phase 2, starting on May 16, 2022 until the pilot completion in August 31, 2022. The North Fulton zone was added in Phase 2 on May 30, 2022. Phase 2 also expanded the technology infrastructure in significant ways. The technology is described in Appendix A.

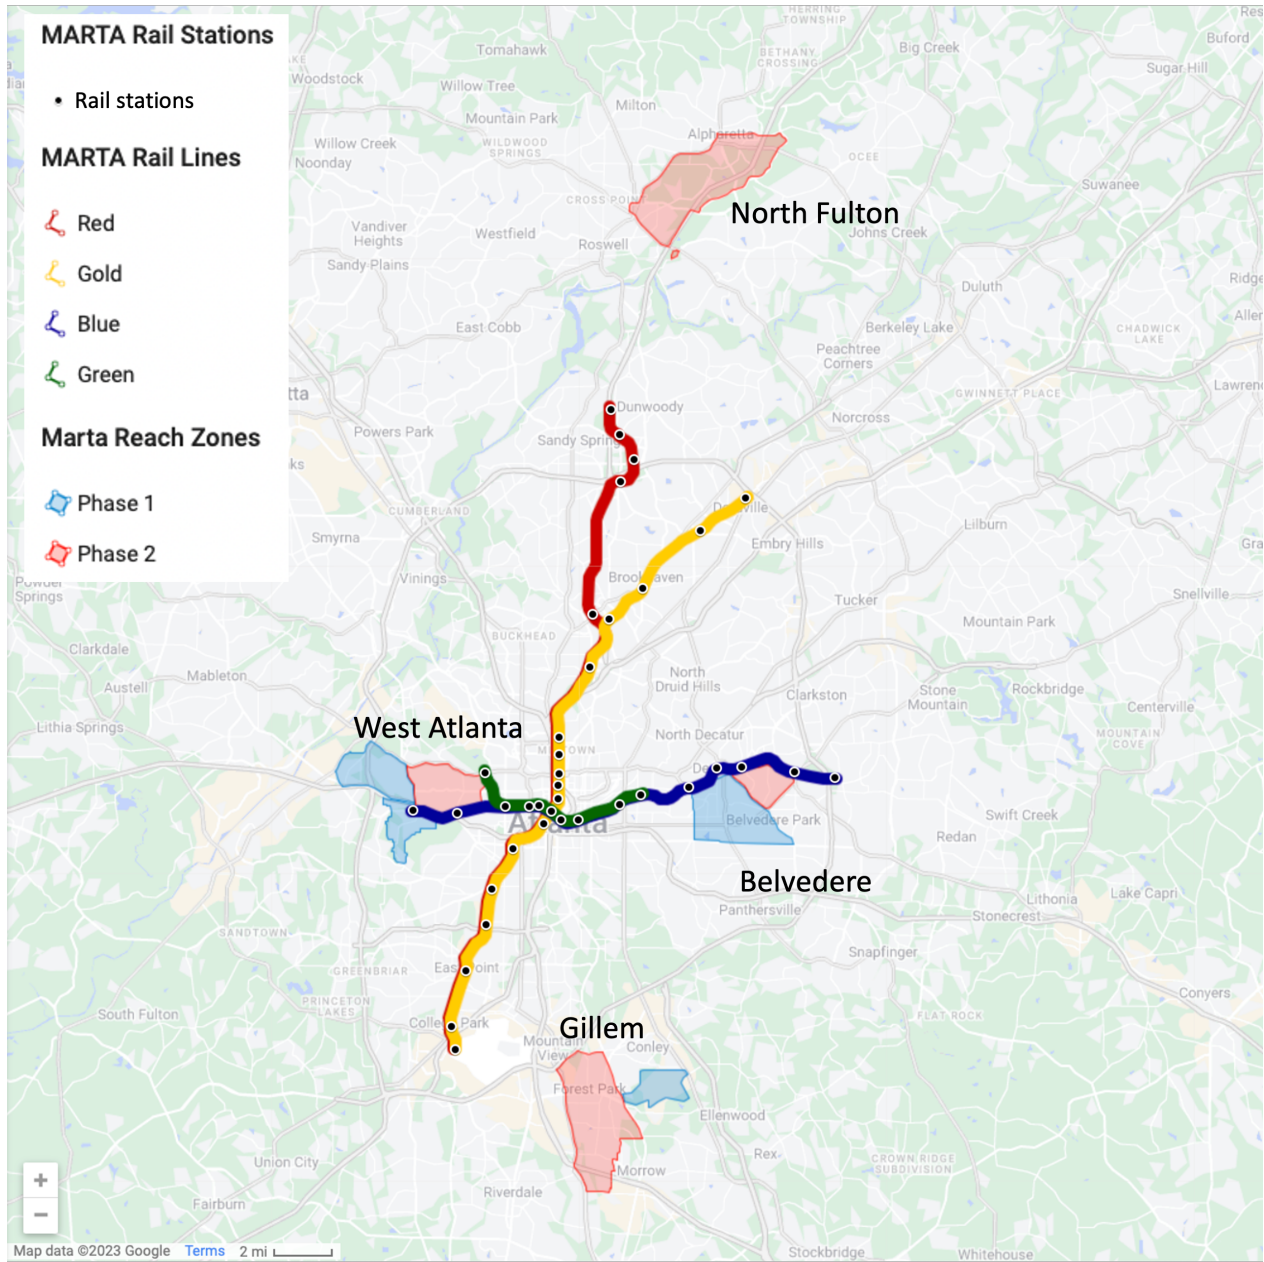


Figure 3: The MARTA REACH Pilot Zones.

### 3.2 The Pilot Zones

The operations took place in the four zones presented in Figure 3: the figure presents how the initial blue-shaded area of each zone in Phase 1 was expanded in Phase 2 to include the red-shaded area. It also presents how the four zones interact with the existing MARTA rail lines.

The three initial zones were selected to assess where to deploy ODMTS with the overall MARTA system: each of these zones had a potential connection to the transit system, but also a significant first/last mile problem. They also represented different types of neighborhood. The West-Atlanta zone is a low-income residential area, Belvedere is a mixed-use zone with diverse population segments, and Fort Gillem is a job center with weak connection to transit.<sup>2</sup> Tables 1 and 2 present the areas, population, and demographics by

<sup>2</sup>An interactive map with the MARTA REACH zones is available on [this web site](#).

Table 1: Area and Demographics of each Zone during Phase 1 of the Pilot.

Zone	Area (mi <sup>2</sup> )	Population	Race (%)				Ethnicity (%)		Average per capita income (\$)	Number of shuttles
			White	Black or African American	Asian	Other	Hispanic or Latino			
West Atlanta	4.99	11,712	3.20	93.25	0.48	3.07	3.96	26,784.13	10	
Belvedere	4.99	18,971	58.21	34.15	5.21	2.43	5.19	50,453.83	3	
Gillem	1.87	2,093	10.05	63.68	2.84	23.44	23.88	22,636.28	3	


Table 2: Area and Demographics of each Zone during Phase 2 of the Pilot.

Zone	Area (mi <sup>2</sup> )	Population	Race (%)				Ethnicity (%)		Average per capita income (\$)	Number of shuttles
			White	Black or African American	Asian	Other	Hispanic or Latino			
West Atlanta	8.42	21,031	4.39	92.64	0.49	2.48	3.47	22,303.73	6	
Belvedere	6.79	24,816	59.56	33.01	4.99	2.44	5.06	51,208.51	4	
Gillem	9.39	20,264	13.00	46.83	8.93	31.24	31.85	19,435.61	2	
North Fulton	8.52	23,012	39.41	18.76	11.7	30.13	30.83	40,071.29	4	

race and ethnicity for each zone in both phases, according to the 2020 Decennial U.S. Census (U.S. Census Bureau, 2020); as well as the average per capita income computed from the 2021 American Community Survey (U.S. Census Bureau, 2022). Note that, although the zones could not be qualified as transit deserts, transit options were quite limited as will be clear from some of the rider comments.


**West Atlanta** Figure 4a presents the West Atlanta zone, which is a low-income (compared to the general Atlanta Metro average per capita income of \$39,904 (U.S. Census Bureau, 2022)) residential area with limited transit options. The key mobility assets in this zone are the H.E. Holmes, Westlake, and Bankhead rail stations which connect the West-Atlanta neighborhoods to the blue and green lines of the MARTA rail system. The zone, however, is large and has limited bus coverage to reach the train stations. Tables 1 and 2 show that its population is predominantly Black or African American. In Phase 1, ten MARTA REACH shuttles operated in the blue area to serve the residents of this zone, who are distributed along five main middle and lower-income neighborhoods: Fairburn Heights, Westhaven, Collier Heights, Peyton Forest, and Florida Hill (Statistical Atlas, 2023). The expansion in Phase 2 added five more neighborhoods: Center Hill, Dixie Hill, Penelope Neighbors, West Lake, the southern half of Grove Park, and the southern third of Carey Park. Although the expansion increased the area and population served, only six shuttles operated in this zone during Phase 2. The other four shuttles were relocated to the added zone in North Fulton.

**Belvedere** Figure 4b presents the Belvedere zone, located at the east of Atlanta around the Belvedere Park. This zone is a mixed-use neighborhood with residential and commercial activities. There are some significant differences in income levels between various parts of the zone. More precisely, residents are distributed along five main high and middle-income neighborhoods: East Lake, Oakhurst, College Heights, Midway Woods, and White Oak Hills (Statistical Atlas, 2023). The commercial area includes the Walmart Supercenter in the southern section of the red area in Figure 4b: this is both a job and a shopping center. The Belvedere zone is connected to the existing MARTA rail blue line through the the East Lake, Decatur, and Avondale stations in the northern part of the zone. There are also buses running through the south part of the zone. Tables 1 and 2 show that its population is predominantly White with a strong share of Black or African American residents, and some Asian population. In Phase 1, three MARTA REACH shuttles operated in the blue area to serve the residents of this zone. The expansion in Phase 2 added two more neighborhoods: Avondale Estates and the East of Belvedere Park. Because of this, a total of four shuttles operated in Belvedere after the expansion.

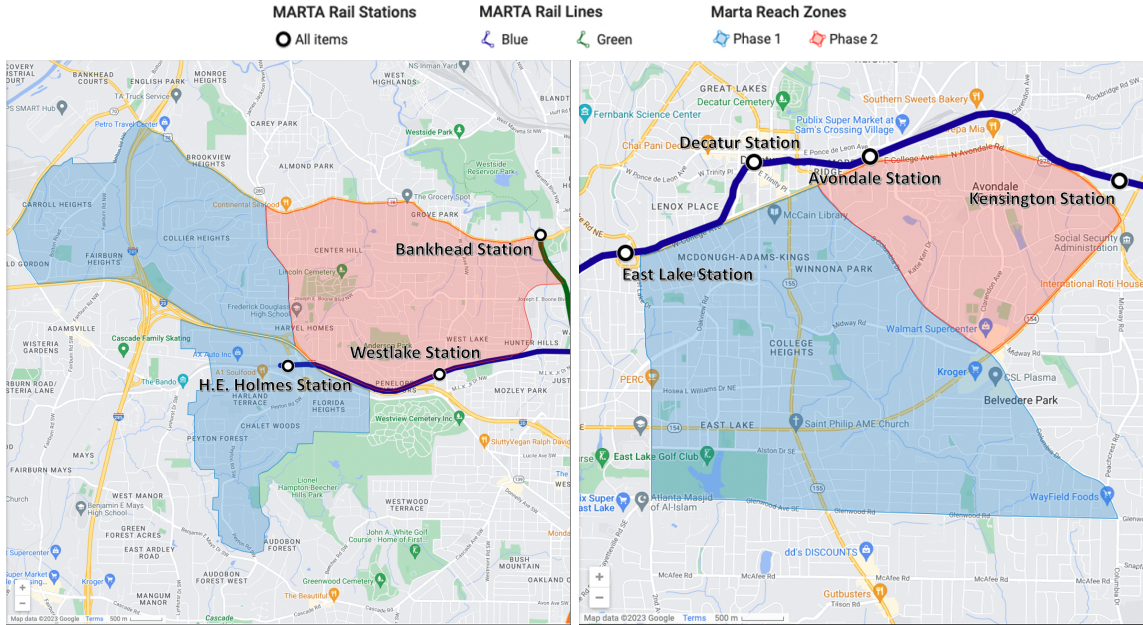

(a) West Atlanta

(b) Belvedere

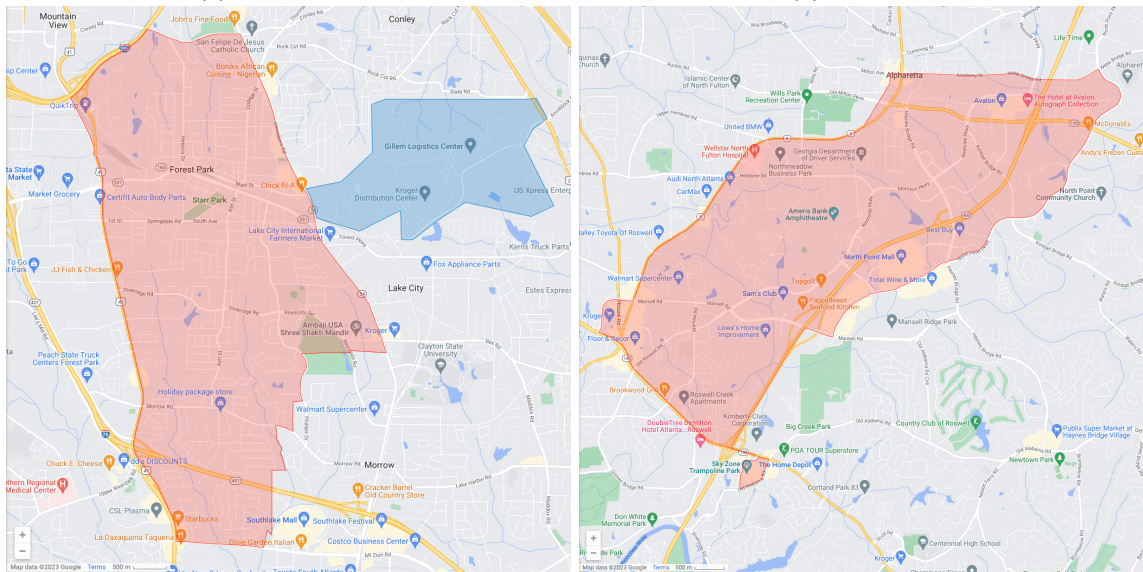

(c) Gillem

(d) North Fulton

Figure 4: The Individual MARTA REACH Zones.

**Gillem** Figure 4c presents the Gillem zone, located south of Atlanta near the Hartsfield-Jackson International Airport. This zone was chosen mainly because it is an industrial zone that has no direct connectivity to the existing MARTA rail system. In Phase 1, three shuttles operated in the blue area of this zone, focusing primarily on serving the Gillem Logistics Center with facilities such as the Kroger Fulfillment and Distribution Centers. In Phase 2, the Forest Park neighborhood was included, which made this zone very diverse with the majority of the population being Black or African American complemented by a strong Hispanic or Latino representation. Although the expansion increased the area and population served, only two shuttles operated in this zone during Phase 2. The third shuttle that was originally operating in this zone in Phase 1 was moved to serve the Belvedere zone during Phase 2.





Figure 5: A MARTA REACH Shuttle.

**North Fulton** Figure 4d presents the North Fulton zone, located north of Atlanta near City of Alpharetta. This zone was included because it is very diverse in race, ethnicity, and income; it is a mixed-use region that joins residential and commercial areas; and it has no direct access to the existing MARTA rail lines. Four vehicles were relocated from West Atlanta to operate in this zone.

### 3.3 The Pilot Operations

MARTA REACH relied on branded shuttles, virtual stops, specific idling locations, mobile applications to operate the pilots, and fleet management procedures. It is important to review these as they provide the context to understand some of the pilot findings.

**Shuttles** Tables 1 and 2 present the number of REACH shuttles which operated in each zone. The REACH shuttles have a capacity of eight people and are wheelchair accessible. They were operated by drivers from two contracting agencies (First Transit and Transdev) following two shifts: 6:00 a.m. to 1:00 p.m. and 1:00 p.m. to 7:00 p.m. There were a total of 18 branded REACH vehicles, allowing for two vehicles in reserve. Figure 5 shows one of the shuttles: they were easily recognizable by riders due to their branding and identifying numbers. In fact, the branding was a critical aspect to make communities aware of the pilot.

**Virtual Stops** The MARTA REACH pilot used the concept of *virtual stops*, i.e., locations where shuttles pick up or drop off passengers. They are called *virtual* because there is no need for a visual signal to mark their locations, making it easy to add or remove them. As a result, many virtual stops were located within each zone: this ensures that riders inside each zone always had a virtual stop within a short walking distance from their origins and destinations. The flexibility afforded by virtual stops made it possible to evaluate their location on a weekly basis, leading to key decisions on where to place new virtual stops to serve a specific population, or which virtual stops to remove when they were not as effective as initially thought. Table 3 presents the information about the virtual stops at the end of the pilot and Figure 6 displays the virtual stops in Belvedere. The blue dots represent the virtual stops placed at the same locations as existing MARTA bus stops or rail stations. These stops allow for multi-modal trips because the shuttles can pick up or drop off passengers from these existing bus stops or rail stations. The orange dots show the additional virtual stops included in the MARTA REACH pilot to be as close as possible to a “door-to-door” service.

**Idle Locations** Not all of the virtual stops are locations where shuttles could safely remain idle, waiting for trip assignments. The MARTA safety team reviewed all virtual stops and determined the locations where

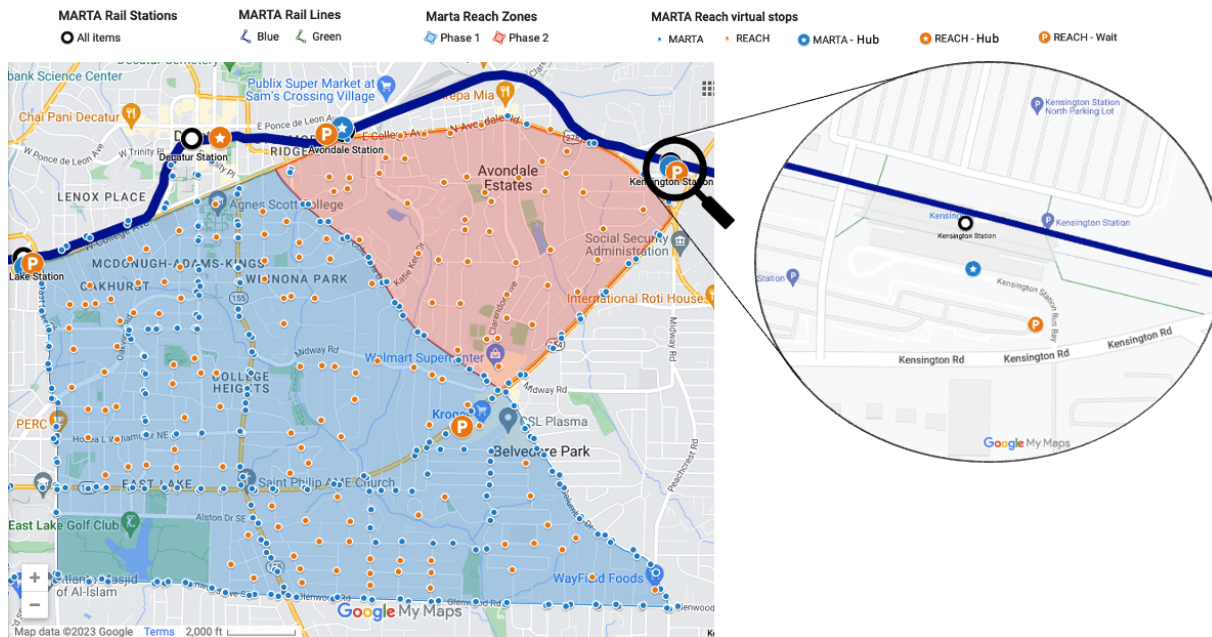


Figure 6: The MARTA REACH Virtual Stops in Belvedere

Table 3: The Virtual Stops per Zone.

Zone	Total	Existing MARTA stops/stations	New MARTA Reach stops	Idle stops
West Atlanta	485	374	111	3
Belvedere	465	308	157	4
Gillem	246	120	126	4
North Fulton	240	149	91	4
<b>Totals</b>	<b>1,436</b>	<b>951</b>	<b>485</b>	

shuttles were allowed to wait. The safety team was highly conservative, mostly using locations that were rail stations or authorized parking lots. As a result, after completing a trip and when there were no outstanding passengers or requests, the driver mobile application would route the shuttle to the nearest idle location, where they would wait for the next trip assignment. Figure 6 presents the Kensington Station in Belvedere, which has a parking lot that was used as an idle location.

**Fleet Management** In adherence to the pilot operational protocol, drivers were expected to log-in to the system, receive requests, and follow instructions via the driver mobile application in their vehicles. Drivers only interacted with the application when the vehicle was at a completed stop. To ensure that the fleets operated properly, real-time monitoring of the MARTA REACH vehicles was conducted using the monitor web application.

*During the pilot, probably the most significant operational challenge was the delayed responses to trip requests by drivers.* Such delays led to long waiting times for riders and trip cancellations. In Phase 1, dispatchers were authorized to manually sign-off such drivers using the monitor web application. Such actions were labelled as “*removed by admin*” in MARTA REACH. In Phase 2, the REACH software was upgraded to enable automatic sign-off of unresponsive vehicles by the server: if a driver with an empty vehicle received an

instruction but did not respond within a designated time window, they were signed off the application and were no longer considered for future requests until they signed on again. This functionality is referred to as “*removed by server*” or “*automatic vehicle removal*” in the REACH system. When automatic vehicle removal was released on May 17, 2022, the time threshold was set to 5 minutes, and it was reduced to 4 minutes on June 4, 2022. It is important to note that this functionality does not apply to the last vehicle available in the zone to prevent the zone from having no active vehicles.

**Fare Program** REACH riders were charged the traditional MARTA flat fare of \$2.50, including transfers to fixed-route service. Payment could be made using cash or MARTA Breeze cards. For this flat fare, riders could complete an entire multimodal trip, like the one depicted by the solid line in Figure 1. It is important to note that riders are responsible for planning their REACH trips when using fixed-route connections. However, the future ODMTS project in Savannah, Georgia, aims to address this issue by developing an automatic multimodal trip planning system for riders.

**Request and Cancellation** Riders have the option to make/cancel trip requests either through the REACH mobile application or via a phone call. It should be emphasized that the trip origin and destination must be situated within the same pilot zone. Riders can submit a request for a group of up to four people.

In Phase 2, the rider application was upgraded with three new features to provide a more user-friendly experience: it allowed riders to request frequent trips with one click, gave riders shortcuts to frequent origins and destinations, and enabled users to find virtual stops using street addresses. The first feature eliminated the need to manually enter the same information repeatedly. The second feature enables riders to easily select frequent stops associated with their account. The third feature introduced an address search bar to help riders locate virtual stops near their origin/destination address. This feature made it easier for riders to identify the best stop to use, particularly when they were unfamiliar with the area. The call-in request functionality introduced in Phase 2 ensured that individuals who may not have access to a smartphone or prefer not to use technology could still utilize the MARTA REACH service. In the event that riders failed to appear at the pick-up location, the trip was recorded as a *no-show* and considered a cancellation.


## 4 The Pilot Evaluation

This section presents the evaluation of the MARTA REACH pilot from multiple perspectives. The findings presented demonstrate that REACH effectively addressed the first/last mile problem, providing high-quality services at an attractive cost. The results also highlight some of the challenges faced during the pilot, how they were remedied, and how future technologies would also alleviate them. In particular, Section 4.1 presents an analysis of the ridership of REACH. Section 4.2 makes the case for ODMTS, and *highlights the multimodal nature of the large majority of trips*. Section 4.3 discusses quality of service. Some of the operational challenges are discussed in Section 4.4, while Section 4.5 presents a cost analysis.

The results presented in this section are based on two data sources: (1) real-time operational data obtained through the mobile applications and (2) user surveys. A long-term evaluation survey was distributed to REACH users via email on August 8, 2022, and the response collection ended on September 23, 2022, resulting in 232 total responses (before data cleaning). A trip-specific survey was available to riders throughout the entire pilot period, collecting 262 total responses (before data cleaning). The surveys were created using the online survey platform Qualtrics (Qualtrics, 2023). The survey results presented in this section provide a concise overview, and the reader is referred to Drake and Watkins (2023) for a comprehensive analysis of Marta Reach riders’ travel behaviors.

### 4.1 Ridership

*The MARTA Reach ridership continuously increased during the pilot, the highest ridership happening on the last day. Moreover, the ridership increased by 61.33% during the last month of the pilot, showing the high potential of REACH services and the lag between the introduction of a new transit service and customer response. Approximately 35% of riders were served in the last month of the pilot, and it is hard to predict how much more ridership REACH would have served if the pilot had continued beyond the six-month period,*

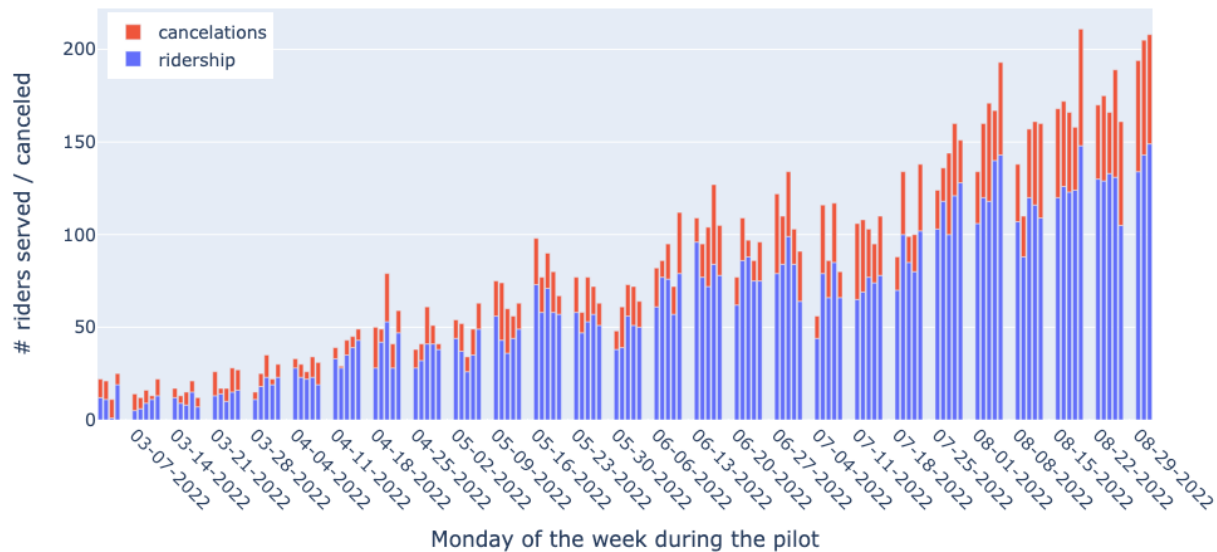

(a) Daily



(b) Monthly

Figure 7: MARTA REACH’s Daily and Monthly Ridership and Cancellations During the Pilot Period.

but the potential of REACH is clear. This will be discussed again later in the paper. Figures 7a and 7b report REACH’s daily and monthly ridership and cancellations. Throughout the pilot period, REACH served 7,596 requests, serving a total of 8,332 riders. Ridership is relatively lower on federal holidays i.e., Memorial Day (May 30, 2022), Juneteenth (observed June 20, 2022), and Independence Day (July 4, 2022). Table 4 reports the distribution of riders served by MARTA REACH across the four pilot zones. It is important to

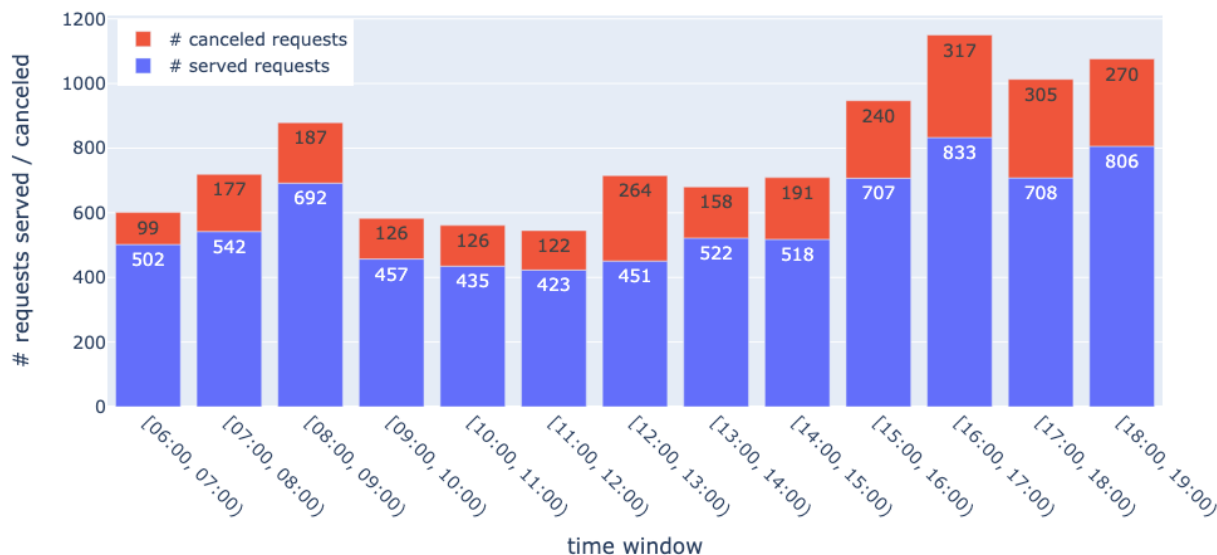


Figure 8: The Distribution of Completed and Canceled Requests over the Service Hours.

Table 4: The Number of Served Requests and Riders in each Pilot Zone.

	West Atlanta	Belvedere	Gillem	North Fulton	Total
# Served Requests	4,440 (58.45%)	2,644 (34.81%)	316 (4.16%)	196 (2.58%)	7,596 (100%)
# Served Riders	4,859 (58.32%)	2,914 (34.97%)	325 (3.90%)	234 (2.80%)	8,332 (100%)

recall that a single request can encompass multiple riders. West Atlanta and Belvedere accounted for the majority of the rides, with 58.32% and 34.97%, respectively; Gillem and North Fulton serve only 3.90% and 2.80% of the rides. The key reason for these discrepancies, as discussed subsequently, is the significant impact of rail connections on REACH ridership. Figure 8 reports the distribution of trip requests over service hours: demand is generally higher during peak hours, particularly between 8:00 to 9:00 a.m. and after 3:00 p.m. The majority of requests (92.33%) were submitted by individual riders. A small portion of requests were submitted for groups of two, three, and four riders (470, 70, and 42 requests, respectively). Backend optimization occasionally dispatched shuttles to fulfill multiple requests, particularly when demand was high. Ride sharing amounted to 9.66% of mileage serving passengers. REACH thus has ample room to serve more passengers with the same fleet through additional ride sharing.

**Overall Satisfaction** Figure 9 (left) presents the results of the satisfaction survey that shows that 94% of riders are either *satisfied* or *very satisfied* with the service. Figure 9 (right) presents the same results for MARTA services overall (right). For these riders, MARTA REACH provided a significantly better experience: REACH has 71% of *very satisfied* riders, in contrast to the 35% riders who are *very satisfied* with MARTA traditional services.

**Mode Switching to Public Transit** The survey question “*What alternate modes of transportation would you have used, had REACH not been available*” provides some truly interesting results depicted in Table 5. Note that survey takers could have chosen multiple answers to this question to reflect the use of multiple modes chained together. The approach to interpreting the responses to this survey question is through a hierarchical method. In particular, each of the mode options provided in response to this survey question is initially assigned to one of the five hierarchical categories (see Table 5). If a respondent’s choices fall within the transit category, which is the highest ranked category, then the response is classified as such.

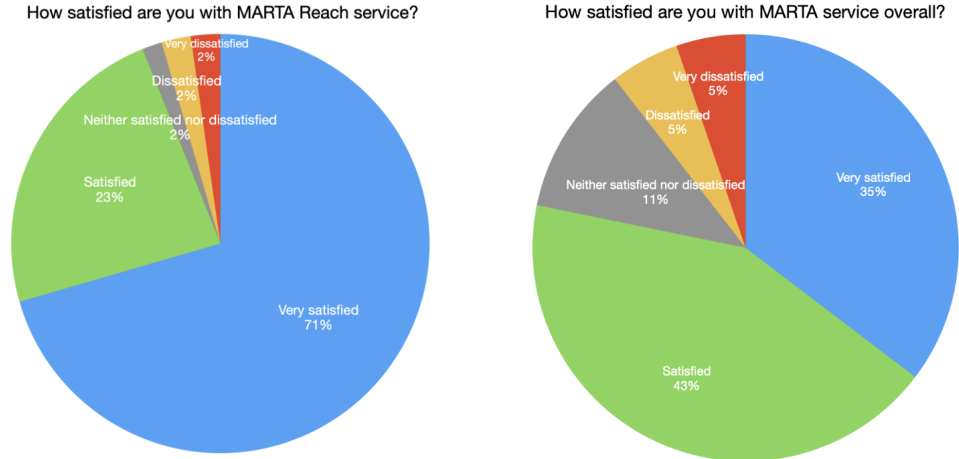


Figure 9: Satisfaction with MARTA REACH Compared to Traditional MARTA services (Survey Results).

Otherwise, it is assessed to determine if it belongs the next ranked category. This process continues until the lowest-ranked category is reached. Table 5 reports the number of valid responses that are classified to each category. 35.51% of trips moved into REACH from a non-transit mode of transportation, i.e., 35.51% is the percentage of survey respondents who did not include a form of public transit in their alternate options. *This indicates the high potential of ODMTS to attract new riders to public transit systems.* Without REACH, many riders would either drive, ride-hail or ride-share.

Table 5: The Classification of Alternative Travel Modes using a Hierarchical Approach (Survey Result).

Rank	Category	Travel Modes in the Category	# Responses (%)
1	Transit	MARTA Bus, Rail, and Mobility	158 (64.49%)
2	Auto	Drive myself, Ride with someone, Taxi / Uber / Lyft	30 (12.24%)
3	Active	Walk, E-Scooter, Bike	39 (15.92%)
4	Other	Others	2 (0.82%)
5	Would not make the trip	N/A	16 (6.53%)

**Trip Purpose** Figure 10 reports results on trip purpose obtained from survey results. Commuting represents the largest category of trips, making up nearly half of all trips. Social activities and shopping are common choices for REACH riders, while accessing medical care and taking multimodal trips to the airport are also popular.

**Frequent Riders** REACH *gained a loyal customer base by providing stable services that could be relied upon on a daily basis.* During the pilot period, over 550 individuals were served by REACH. 14 riders took more than 100 REACH trips and 41 riders used REACH more than 50 times. These top 14 riders accounted for 2,143 trips (28.21% overall), while the top 41 riders contributed more than half of the total served requests (3,924, 51.66%). One of the riders made 26 requests by calling the dispatch center, demonstrating that REACH provided reliable services to people with no access to mobile devices. There were 136 *frequent trips*, i.e., O-D pairs requested more than 10 times by a patron. Of course, these numbers likely would have increased significantly if the pilot continued, since the last month saw a 60% increase in ridership.

It is useful to highlight a rider who resides in one of the pilot zones and regularly commuted with MARTA REACH to their job. Starting from their first MARTA REACH ride on March 17, 2022, this rider completed, or partially completed, this commute tour on 74 out of 119 service days (62.2%). They completed only home-to-work trips, only work-to-home trips, and full commuting tours on 15, 3, and 56 service days, respectively. These commuting trips with identical O-D pairs contribute to 130 out of 146 requests made by this rider

## Trip Purpose


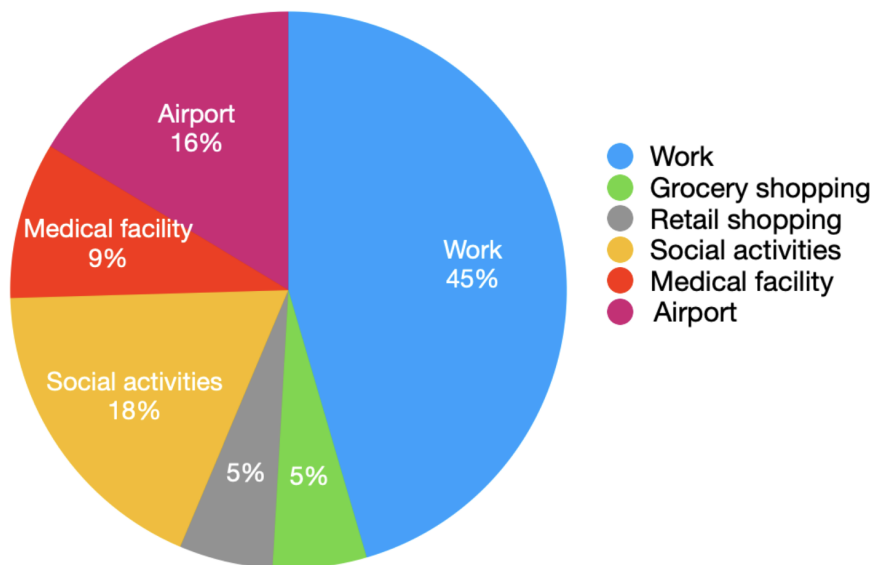


Figure 10: Breakdown of Popular Trip Purposes (Survey Results).

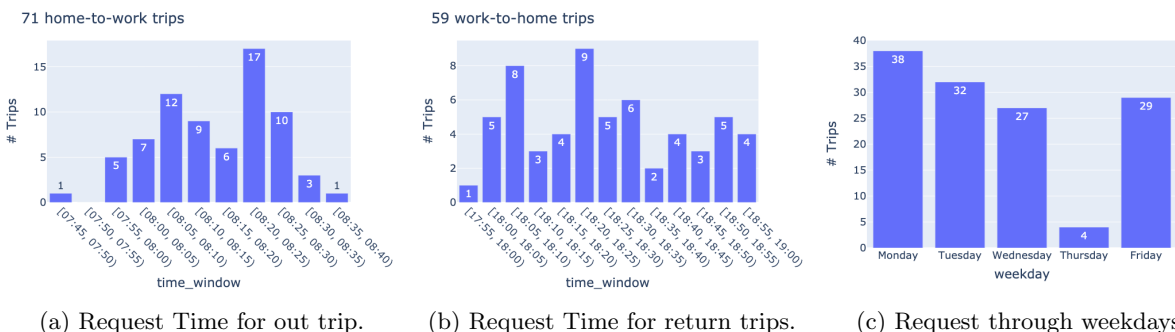

(a) Request Time for out trip. (b) Request Time for return trips. (c) Request through weekdays.

Figure 11: Example: Trip Patterns for a Rider who Regularly Commuted with REACH.


(89.04%). The distributions of trip request times are shown in Figures 11a and 11b for home-to-work and work-to-home trips, respectively. These charts show that the departure times were typically within an one-hour long time window. Figure 11c presents the distribution of trips over weekdays, revealing that this rider seldom commuted on Thursdays. Furthermore, the average travel time for this rider’s home-to-work trips is 20.86 minutes (including an average of 9.83 minutes spent waiting), while the travel time with fixed-routes around 8:00 a.m. on a weekday is approximately 30 minutes, including walking. Similarly, the work-to-home trips have an average time of 20.81 minutes (including 7.60 minutes of waiting time), while the fixed-routes take about 25 minutes around 6:00 p.m. For this particular rider, REACH offers a better travel time than fixed-routes with the same ticket fare and eliminates the need to walk the first and last leg of the trips. The ridership data include multiple individuals demonstrating similar travel behaviors, and these examples serve as strong evidence that Reach provides economical and reliable services for local communities.

## 4.2 The Case for Multimodal Transit Systems

ODMTS aim at solving the infamous “first/last mile” problem. There have been questions in the community whether the first/last mile problem is really a significant issue for riders in practice. Figures 12a and 12b address this question by studying the prominence of multimodal trips among REACH riders. The figures



(a) Breakdown statistics on trip origins.

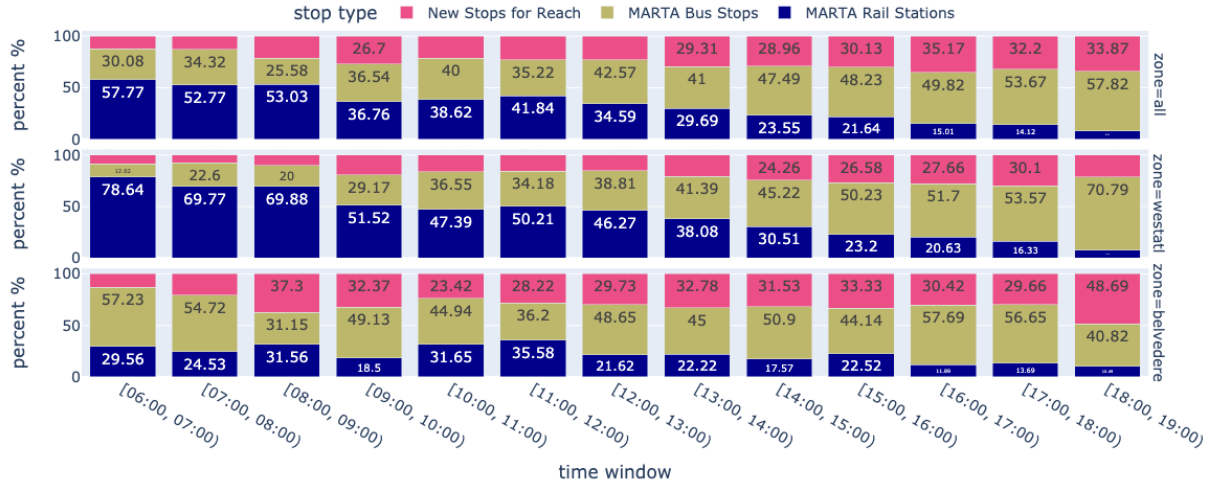

(b) Breakdown statistics on trip destinations.

Figure 12: Stop types proportions of MARTA REACH requests by zones. When zone is set to ‘all’, the chart presents the statistics over all four zones.

Table 6: Statistics on Direct Driving Distance for REACH trips.

Zone	Average (km)	SD (km)	Mode (km)
West Atlanta	3.1	1.8	1.0
Belvedere	3.5	1.6	3.2
Gillem	4.5	3.2	2.6
North Fulton	5.3	2.9	1.2

categorize trips based on their origins and destinations, pilot zones, stops types, and request times, which help reveal the amount of multimodal trips. *What stands out in these results is the percentage of connections to rail. For instance, during the morning peak in West Atlanta, over 70% of the riders request REACH trips that end at rail stations. In the evening peak, about 60% request REACH trips that start from rail stations.* The pilot results indicate that the “first/last mile” problem is indeed a reality and that ODMTS are a practical



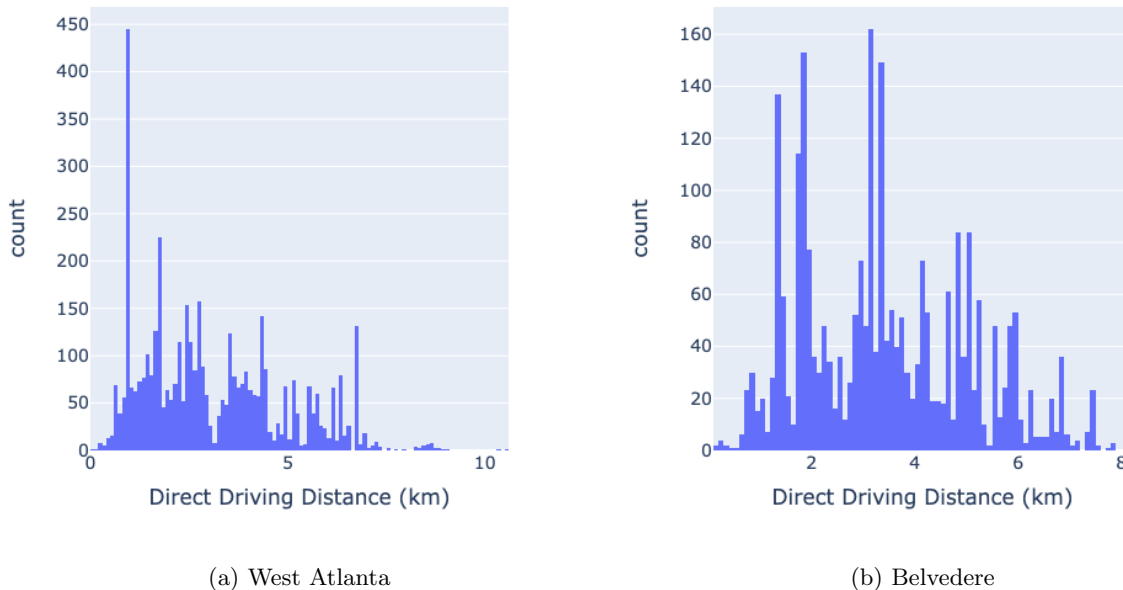


Figure 13: The direct driving distance distribution for REACH trips is visualized using a histogram, with each bin representing a distance interval of 0.1 km.

*solution to address it.* The shuttles make the rail stations and bus stops more accessible to riders residing in underserved areas.

Table 6 presents statistical data on driving distances within each zone. Figures 13a and 13b display histograms depicting the distribution of driving distances in the West Atlanta and Belvedere zones, respectively. These distances are computed based on the direct driving route between the origin and destination of the trip using GraphHopper (Karich, 2014)—a trip distance estimator based on OpenStreetMap (OpenStreetMap, 2023). *The key take-away is that MARTA Reach trips have relatively short distances but these distances are generally too long to walk and may not always be safe for pedestrians.*

### 4.3 Quality of Service

This section reports on a number of metrics for evaluating the quality of MARTA REACH services. Figure 14 reports the average waiting time, riding time, and total travel time of REACH during different service hours. The average waiting time for MARTA REACH is approximately 8 minutes throughout the day, while the average riding time is less than 10 minutes. Interestingly, the travel time of MARTA REACH remains consistent irrespective of peak hours, despite slightly longer trips observed between 8:00 to 9:00 a.m. and between 4:00 to 5:00 p.m. This is because REACH primarily serves the first and last mile within local regions, which are less affected by traffic congestion during peak hours.

**Comparison with Fixed Routes** Figure 15 illustrates a comparison of the averaged travel time with REACH and fixed-route buses in all four pilot zones. The *Travel Time* for REACH is computed as the duration between request time at trip origin and alight time at trip destination. The travel time for fixed-routes is estimated for the same origin-destination pair, assuming that the rider will walk for their first and last legs. The departure times are set to match the request times of the corresponding REACH trips. For each trip, two types of estimations are conducted and referred to as *Adjusted Departure Time* and *Same Departure Time* in Figure 15. The first option provides an optimal travel plan for fixed routes by adjusting the rider departure times to synchronize with the bus schedules. The second option assumes that the riders depart at the exact query time and wait longer at bus stops.

The results in Figure 15 clearly demonstrate that REACH outperforms the existing transit system in all

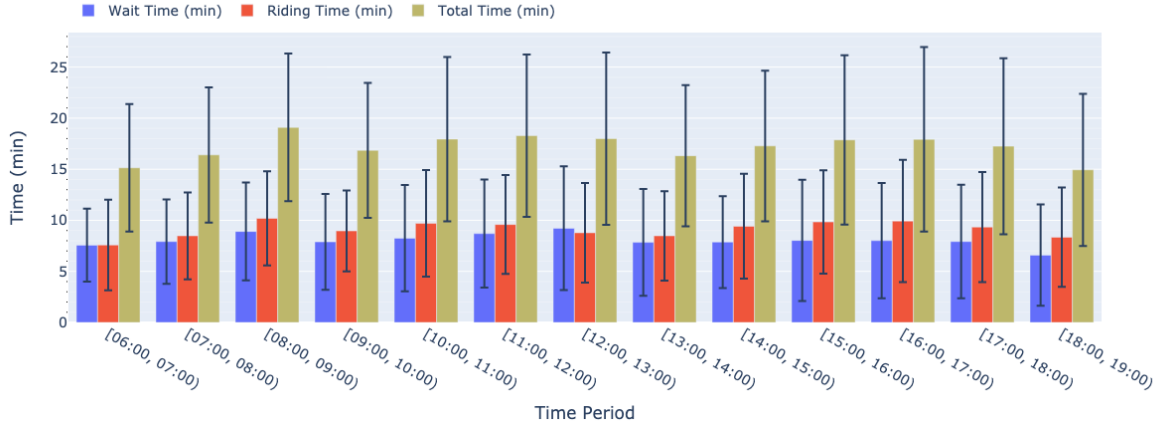


Figure 14: Travel Time with Reach During the Service Hours. The mean and standard deviation values are presented.

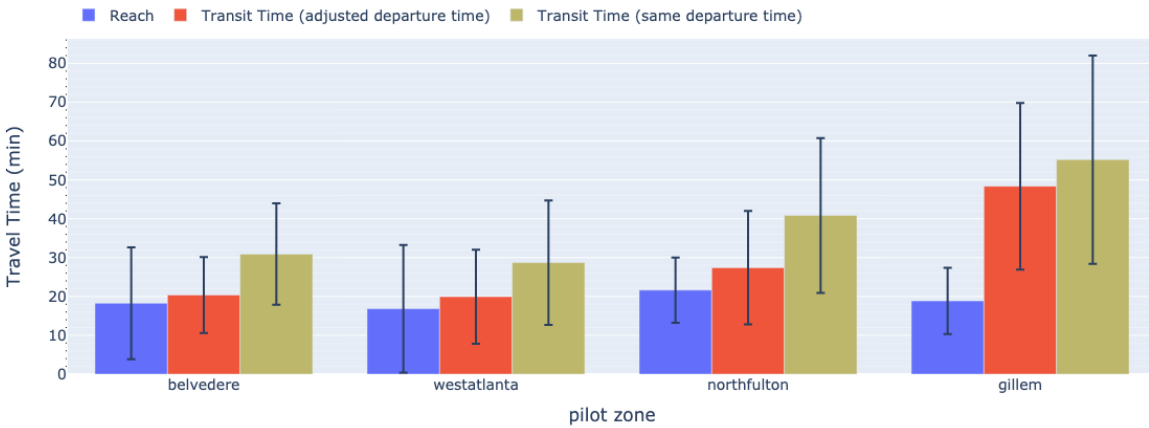


Figure 15: REACH Travel Time vs. Estimated Transit Travel Time. The mean and standard deviation values are presented.

four pilot zones in terms of average travel time. Even compared to the setting in which riders adjust their departure time to the fixed transit system, REACH delivers a better travel time for 60%-64% of the trips over the different zones. This number increases to 84%-85% compared to the fixed-route system with the same departure time. Also note that the reported times for REACH are actual, not estimations. The benefits of REACH are particularly pronounced in the Gillem pilot zone, because the existing fixed routes are nearly inaccessible for most of the industrial facilities. Note also that the differences between *Adjusted Departure Time* and *Same Departure Time* are significant: *travelling with fixed routes requires careful synchronization, while REACH provides a more flexible and stable service to the riders.*

**Cancellations** Table 7 reports on cancellations for different time thresholds  $\theta$ . Cancellations are grouped into four categories:

1. *Exact Return*: the rider makes another request with the same O-D pair within  $\theta$  minutes from the cancellation time and the request is served;

Table 7: Classification of Canceled Requests.

$\theta$ (min)	Exact Return	Other Return	Repeated Cancellations	No Return	Total
15	461 (17.93%)	254 (9.87%)	200 (7.78%)	1657 (64.42%)	2,572 (100%)
30	481 (18.70%)	280 (10.89%)	249 (9.68%)	1562 (60.73%)	
60	488 (18.97%)	306 (11.90%)	275 (10.69%)	1503 (58.44%)	

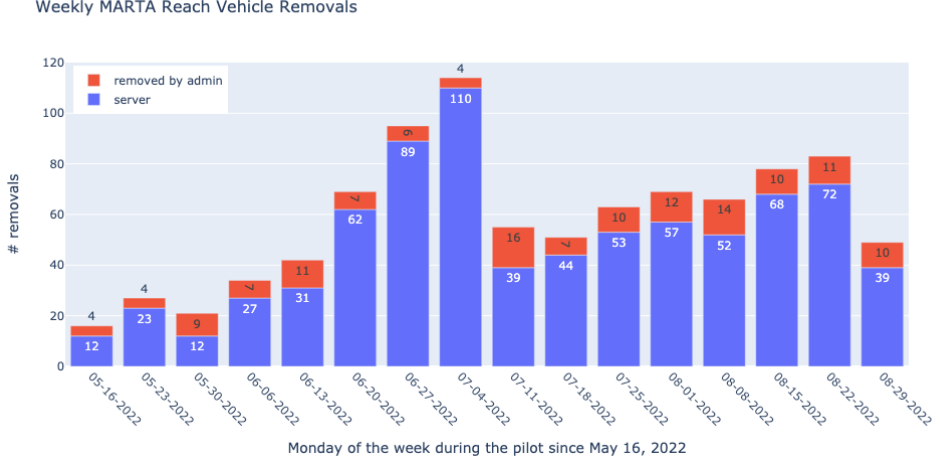


Figure 16: The weekly number of vehicle removals during the MARTA REACH pilot. “Removed by Admin” and “Server” indicate that the vehicles were removed manually by dispatchers and automatically by the server, respectively. Note that these metrics were not tracked until the week of May 16, 2022, when the “automatic vehicle removal” functionality was introduced to the server.

2. *Other Return*: the rider makes another request with a different O-D pair within  $\theta$  minutes from the cancellation time and the request is served;
3. *Repeated Cancellations*: After canceling the first request and before getting a ride within  $\theta$  minutes, the rider keeps submitting requests and canceling them.
4. *No Return*: The rider cancels the request and does not take a ride within  $\theta$  minutes.

Approximately 30% of cancellations are followed by an actual ride. This suggests that riders using REACH tend to have some flexibility in their travel schedules, and may view REACH as a preferred mode of transportation. Secondly, riders may slightly change their origins and destinations to match a vehicle. This is highlighted by the number of cancellations classified as *other return*. These behaviors are likely due to the high density of REACH stops, riders not minding additional short walking legs. Furthermore, some riders tend to repeat canceling in order to minimize wait time, a behavior that should be discouraged in future generations of ODMTS services. Lastly, the *no return* cancellations may be due to the following reasons: (i) riders returned after  $\theta$  minutes, (ii) the waiting times (although typically short as discussed later) are not acceptable to riders, (iii) riders did not arrive at the pick-up location in time and drivers reported no-show on the driver app, and (iv) app users were simply testing the app and were not interested in a ride with REACH at that time.

#### 4.4 Driver Behavior and Fleet Management

Two key challenges faced during the pilot were driver behavior and fleet management. This section reviews them and describes (partial) solutions adopted in the pilot.

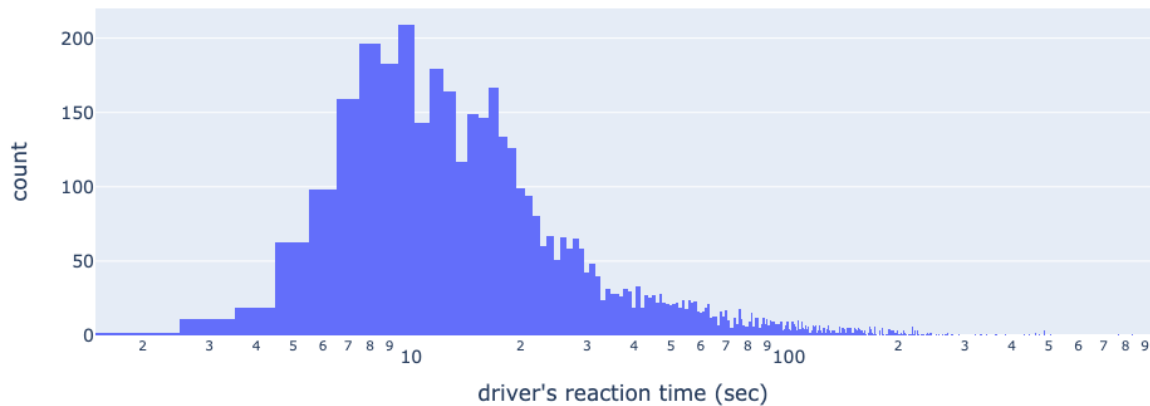


Figure 17: The Distribution of Reaction Times for REACH Drivers (in Log-Scale Horizontally).

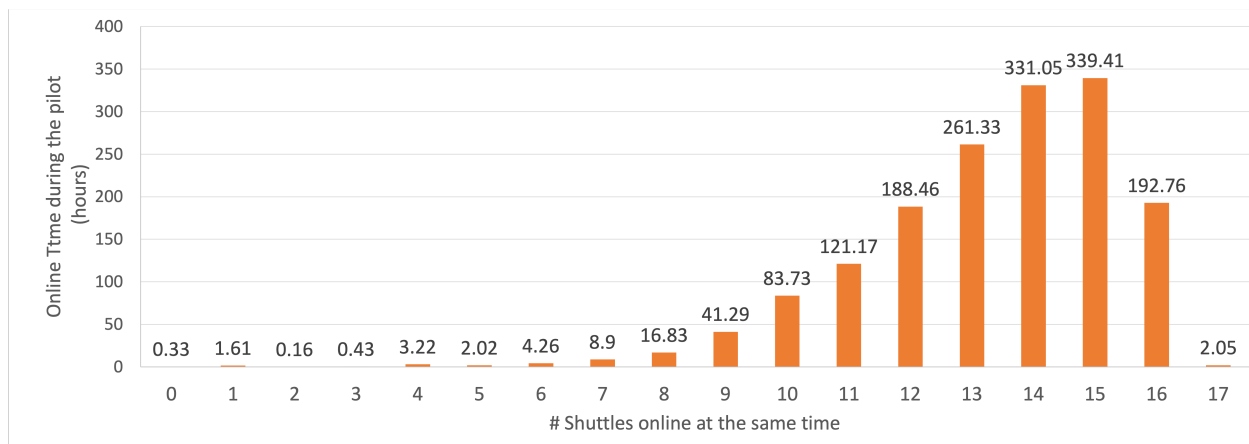


Figure 18: Fleet online hours during the pilot for different fleet-size

**Driver Response Time** Recall that the REACH platform has the ability to remove drivers from the REACH system, either manually through the monitor app or automatically through the backend server. The frequency of vehicle removals is reported in Figure 16 on a weekly basis: they range from 16 to 114 per week, indicating that REACH drivers were frequently unresponsive. Figure 17 presents a histogram representing the distribution of response times over the course of the pilot. For simplicity, the histogram focuses on a particular scenario where a vehicle was idle at a stop and needed to serve a single request without any intermediate stops. This scenario occurred 4,678 times during the pilot, and the mean and median response times were 45 and 19 seconds, respectively. There were 396 and 65 instances where the driver reacted after more than two and five minutes respectively.

The introduction of the Automatic Vehicle Removal function had significant effects in preventing long response times. Prior to its implementation, the mean and median response times were 69 and 24 seconds respectively, with the longest response time reaching 1015 seconds (approximately 17 minutes). After the implementation of Automatic Vehicle Removal, the mean and median response times were reduced to 38 and 18 seconds respectively, with the longest waiting time at 661 seconds. Note that the Automatic Vehicle Removal function did not apply to the last remaining vehicle in a zone, which explains this outlier.

**Shuttle Online Times** The MARTA REACH pilot had a fleet of 16 shuttles at its disposal. The pilot spanned over 132 service days with a daily working schedule of 13 hours from 6:00 a.m. to 7:00 p.m. Excluding

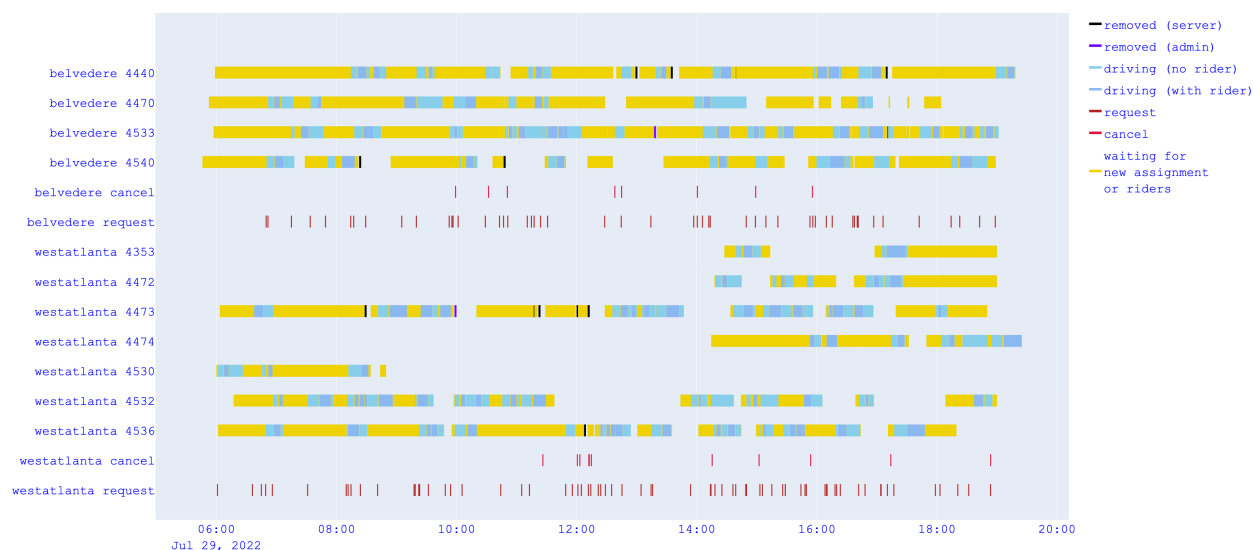


Figure 19: A Gantt chart that present vehicle activities in the West Atlanta and Belvedere pilot zones on July 29, 2022. Vehicles are identified by unique four-digit numbers.

travel time from and to the shuttle depot before and after working hours, the entire fleet should have provided 27,456 (calculated as  $132 \times 16 \times 13$ ) working hours. The server experienced minor technical issues for 9 service dates from March 18, 2022 to March 30, 2022 which resulted in a few hours total of degraded service during that period. Removing these days from the analysis, the drivers should have been signed in for 27,456 hours (123 fully recorded service days, 16 shuttles, and 13 hours). However, in reality, the drivers were online for a total of 21,294 hours, i.e., 83.23% of the planned vehicle online time. This discrepancy can be attributed to many reasons, including absences, driver shifts, breaks, and driver shortages. Figure 18 provides statistics on the number of working hours with different fleet sizes during the pilot. Under ideal conditions, the should yield 1,599 service hours with the full fleet (calculated as  $123 \times 13$ ). However, during the pilot, the REACH fleet was fully present for only 194.81 hours (summing up 192.76 and 2.05), contributing to only 12.82% of the expected service hours with a full fleet size. Summing up the service time from one shuttle to 12 shuttles reveals that 472.08 service hours (29.52%) were served with no more than 75% of the full fleet-size. These observations indicate that fleet management issues were pervasive and need to be addressed when deploying ODMTS.

Figure 19 provides a Gantt chart that illustrates the activities performed by REACH vehicles in Belvedere and West Atlanta on July 29, 2022. The chart highlights major events, such as requests, cancellations, and vehicle removals, and illustrates some of the driver and fleet management issues faced during the pilot. Specifically, the Belvedere fleet usually had three out of four vehicles online throughout the day. Around 2pm, all four vehicles are serving passengers. Vehicles 4540 and 4470 were particularly problematic that day with instances of removals followed by long periods of inactivity (4540) and a long period of inactivity at the end of the day (4470). The West Atlanta fleet started service with four vehicles, which was then increased to six vehicles after 2pm to address the higher travel demand. During most of the day, the West Atlanta fleet was significantly short of the designated fleet-size (full fleet-size was six, see Table 2). At noon, the fleet had only one or two active vehicles to serve a considerable amount of requests. The rest of the vehicles were signed-out due to various reasons, indicating poor coordination between drivers and dispatchers at shift times. Figure 20 further presents the waiting time of each request in West Atlanta on July 29, 2022. Due to the absence of shuttles, waiting times tend to be longer in the morning and around noon, despite the lower volume of requests during that period. Addressing these fleet management issues will further improve response times, trip durations, and overall customer satisfaction. Shift management was particularly lacking in the pilot, and is an important consideration for future deployments.

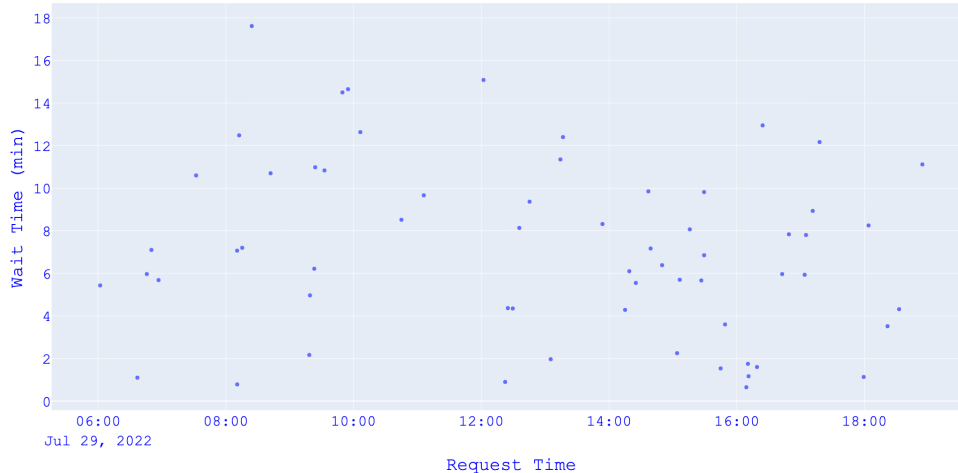


Figure 20: The waiting time of each request in the West Atlanta pilot zone on July 29, 2022.

## 4.5 Operating Costs

It is also interesting to quantify the cost of the REACH service to inform transit agencies about the tradeoffs between quality of service and costs. These tradeoffs were computed using the simulator from [Auad et al. \(2021\)](#): the simulator was run for a full day of trips, computing costs and waiting times. The cost per vehicle hour was multiplied by the number of hours of service and the number of vehicles, before being divided by the number of riders served to derive the cost per rider per hour for the MARTA REACH service. Table 8 presents the sensitivity analysis for different costs per vehicle hour and for different fleet sizes and ridership levels for the West Atlanta zone. Recall that ridership increased by over 60% in the last month of the pilot, which explains why the analysis includes two potential growth scenarios. The pilot used a fleet size of 6, but results are also presented for 5 and 7 shuttles. The waiting times are presented at the top of the table for each fleet size and demand scenario. For the demand scenarios, the simulator uses requests from August 31, 2022, the pilot day with highest ridership, and from recent days preceding August 31, 2022, until a desired ridership level is reached in the case of growth scenarios. Trips that involve a rider from August 31, 2022 on a previous day are only sampled for increased ridership if the time window of the trip on the earlier day does not overlap with the time window of that rider’s trip on August 31, 2022.

For the shuttles used in the MARTA REACH pilot, the cost per vehicle hour is expected to be between \$50 to \$70 an hour. The average cost per vehicle hour for a ride-hailing service such as Uber that uses smaller cars like sedans is approximated at \$28.21 when you combine average labor (\$19.36) and vehicle operating cost (\$8.85) ([Helling, 2023, 2020](#)). The results are quite illuminating. At twice the pilot ridership, which is a realistic assumption, REACH would operate at a cost between \$17.86 (5 vehicles at \$50/hour) and \$35.00 (7 vehicles at \$70/hour) per rider. At three times the pilot ridership, the cost decreases to be between \$12.04 and \$23.59 dollars per rider. If REACH were operated with smaller vehicles (like ride-hailing services, between \$25 and \$30 per vehicle/hour), the cost would be in the ranges \$18.26–\$30.67, \$8.93–\$15.00, and \$6.02–\$10.11 for the pilot ridership, twice the ridership, and three times the ridership respectively.

## 5 Conclusion and Perspectives

This paper presented the results of the MARTA REACH pilot project, a six-month pilot for evaluating the potential of ODMTS. ODMTS take a *transit-centric* approach to integrating on-demand services and fixed routes, and addressing the first/last mile problem. ODMTS combine fixed routes and on-demand shuttle services *by design* into a transit system that offers a door-to-door multimodal service with *fully integrated operations and fare structure*.

Table 8: Cost (\$) per rider in West Atlanta Across Ridership Levels and Fleet Sizes

Cost per Vehicle/hour (\$/hr)	Cost per Rider (\$)								
	Base Ridership			2x Ridership			3x Ridership		
	Fleet Size (Wait Time)			Fleet Size (Wait Time)			Fleet Size (Wait Time)		
	5 (7.75 min)	6 (7.26 min)	7 (7.36 min)	5 (9.81 min)	6 (8.50 min)	7 (7.80 min)	5 (17.35 min)	6 (10.85 min)	7 (9.04 min)
20	14.61	17.53	20.45	7.14	8.57	10.00	4.81	5.78	6.74
25	18.26	21.91	25.56	8.93	10.71	12.50	6.02	7.22	8.43
30	21.91	26.29	30.67	10.71	12.86	15.00	7.22	8.67	10.11
35	25.56	30.67	35.79	12.50	15.00	17.50	8.43	10.11	11.80
40	29.21	35.06	40.90	14.29	17.14	20.00	9.63	11.56	13.48
45	32.87	39.44	46.01	16.07	19.29	22.50	10.83	13.00	15.17
50	36.52	43.82	51.12	17.86	21.43	25.00	12.04	14.44	16.85
55	40.17	48.20	56.24	19.64	23.57	27.50	13.24	15.89	18.54
60	43.82	52.58	61.35	21.43	25.71	30.00	14.44	17.33	20.22
65	47.47	56.97	66.46	23.21	27.86	32.50	15.65	18.78	21.91
70	51.12	61.35	71.57	25.00	30.00	35.00	16.85	20.22	23.59
75	54.78	65.73	76.69	26.79	32.14	37.50	18.06	21.67	25.28
80	58.43	70.11	81.80	28.57	34.29	40.00	19.26	23.11	26.96
85	62.08	74.49	86.91	30.36	36.43	42.50	20.46	24.56	28.65
90	65.73	78.88	92.02	32.14	38.57	45.00	21.67	26.00	30.33
95	69.38	83.26	97.13	33.93	40.71	47.50	22.87	27.44	32.02
100	73.03	87.64	102.25	35.71	42.86	50.00	24.07	28.89	33.70

**Summary** The research underlying the paper originated from a fundamental knowledge gap: *to understand what would be the impact, benefits, and challenges of deploying ODMTS in a city as complex as Atlanta, Georgia.* MARTA REACH was designed as attempt to start to fill this gap and complement and expand the simulation results presented by [Auad et al. \(2021\)](#). Some of the key findings of the pilot can be summarized as follows:

- REACH offered a service that was highly valued by riders with 71% of the riders being very satisfied and 23% being satisfied.
- REACH contributed to a significant number of mode switches, performing a large number of trips that would have otherwise been served by ride-hailing companies, taxis, or personal cars.
- The vast majority of REACH trips were multimodal, with connections to rail being most prominent. For instance, during the morning peak in the West Atlanta zone, over 70% of the riders connect to rail stations.
- REACH demonstrated, through continuously increasing ridership, that ODMTS have a path to becoming a economically sustainable component of the public transportation system.

**Perspectives** The pilot was much more successful in West Atlanta and Belvedere than in Fort Gillem. One reason is that these two zones have strong connections to rail, which makes the overall multimodal trip attractive when commuting to downtown and midtown. Gillem does not have this type of high-frequency connections to the city and/or residential neighborhoods. The service in Gillem connected passengers to a few bus lines. However, these bus lines had low frequency, making them less attractive to passengers. *This is one more argument to support the transit-centric view of ODMTS and the need to integrate on-demand and fixed routes by design and not as an after-thought.*

MARTA REACH also highlighted the importance of community engagement. There was a significant delay between the start of the service and the significant ridership growth experienced later in the pilot. MARTA advertised the service at their rail stations. But, as the results show, many of the rides came from commuters who were not using transit: they were using personal vehicles and TNCs. It is only through word of mouth, the sighting of the branded vehicles, and social media (NextDoor) that many riders became aware of MARTA REACH.

**Conclusion** Altogether, these results give unique perspectives on a possible future for transit systems. The quality of service, the convenience, the switch from ride-hailing/taxi services and personal cars, and the fundamentally multimodal nature of the trips provide evidence that the transit-centric perspective of ODMTS may fill an important gap in mobility and deserve to be investigated further. In fact, the team is now pursuing a project to deploy an ODMTS for the entire city of Savannah, Georgia, using electric vehicles.

## Acknowledgments

This research was partly supported by NSF Civic grant NSF-2230410 (deployment) and NSF Leap-HI (supporting infrastructure). The authors would like to thank MARTA for a successful collaboration, in particular Robert Goodwin for the initial concept and Anthony Thomas, Jonathan Weaver, Erick Knowles, Chris Wyczalkowski, David Emory, and the rest of the MARTA Reach team at MARTA, for the daily operations and planning activities. The authors would also like to thank Debra Lam and her team at PIN for facilitating these research and partnership opportunities.

## References

- Agatz, N., Hewitt, M., Thomas, B.W., 2021. “Make no little plans”: Impactful research to solve the next generation of transportation problems. *Networks* 77, 269–286. [10.1002/net.22002](https://doi.org/10.1002/net.22002).
- Auad, R., Dalmeijer, K., Riley, C., Santanam, T., Trasatti, A., Van Hentenryck, P., Zhang, H., 2021. Resiliency of On-Demand Multimodal Transit Systems During a Pandemic. *Transportation Research Part C: Emerging Technologies* 133, 103418. [10.1016/j.trc.2021.103418](https://doi.org/10.1016/j.trc.2021.103418).
- Auad, R., Van Hentenryck, P., 2022. Ridesharing and Fleet Sizing For On-Demand Multimodal Transit Systems. *Transportation Research Part C: Emerging Technologies* 138, 103594. [10.1016/j.trc.2022.103594](https://doi.org/10.1016/j.trc.2022.103594).
- Basciftci, B., Van Hentenryck, P., 2020. Bilevel Optimization for On-Demand Multimodal Transit Systems, in: Hebrard, E., Musliu, N. (Eds.), *Integration of Constraint Programming, Artificial Intelligence, and Operations Research*. Springer, 52–68. [10.1007/978-3-030-58942-4\\_4](https://doi.org/10.1007/978-3-030-58942-4_4).
- Basciftci, B., Van Hentenryck, P., 2023. Capturing Travel Mode Adoption in Designing On-demand Multimodal Transit Systems. *Transportation Science* 57, 351–375. [10.1287/trsc.2022.1184](https://doi.org/10.1287/trsc.2022.1184).
- Berrebi, S.J., Óg Crudden, S., Watkins, K.E., 2018. Translating research to practice: Implementing real-time control on high-frequency transit routes. *Transportation Research Part A: Policy and Practice* 111, 213–226. [10.1016/j.tra.2018.03.008](https://doi.org/10.1016/j.tra.2018.03.008).
- Brown, L., Martin, E., Cohen, A., Gangarde, S., Davis, G., Shaheen, S., 2022. Mobility on Demand (MOD) Sandbox Demonstration: Pierce Transit Limited Access Connections, Evaluation Report. FTA Report No. 0237. Federal Transit Administration. [10.21949/1527650](https://doi.org/10.21949/1527650).
- Chatham Area Transit, 2023. CAT Smart Grant 2023. <https://www.catchacat.org/smart/>.
- Cordahi, G., Shaheen, S., Martin, E., 2018a. MOD Sandbox Demonstrations Independent Evaluation (IE) Dallas Area Rapid Transit (DART) – First and Last Mile Solution Evaluation Plan. Technical report FHWA-JPO-18-677. Federal Transit Administration.
- Cordahi, G., Shaheen, S., Martin, E., 2018b. MOD Sandbox Demonstrations Independent Evaluation (IE) Pierce Transit Limited Access Connections Evaluation Plan. Technical report FHWA-JPO-18-678. Federal Transit Administration.
- Cordahi, G., Shaheen, S., Martin, E., Hoffman-Stapleton, M., Hamilton, B.A., 2018c. Mobility on Demand (MOD) Sandbox Demonstrations Independent Evaluation (IE) - Los Angeles County and Puget Sound MOD First and Last Mile Partnership with Via Evaluation Plan. Technical report FHWA-JPO-18-682. Federal Transit Administration.
- Dalmeijer, K., Van Hentenryck, P., 2020. Transfer-Expanded Graphs for On-Demand Multimodal Transit Systems, in: Hebrard, E., Musliu, N. (Eds.), *Integration of Constraint Programming, Artificial Intelligence, and Operations Research*. Springer, 167–175. [10.1007/978-3-030-58942-4\\_11](https://doi.org/10.1007/978-3-030-58942-4_11).
- Drake, J., Watkins, K.E., 2023. An evaluation of on-demand transit user and interested-non-user characteristics and the factors that attract the transit-curious to using on-demand transit. Under Peer Review.



- Federal Transit Administration, 2023. Mobility on Demand Sandbox Program. <https://www.transit.dot.gov/research-innovation/mobility-demand-mod-sandbox-program/>.
- Feigon, S., Murphy, C., 2016. Shared Mobility and the Transformation of Public Transit. TCRP Research Report 188.
- Guan, H., Basciftci, B., Van Hentenryck, P., 2022. Heuristic Algorithms for Integrating Latent Demand into the Design of Large-Scale On-Demand Multimodal Transit Systems. arXiv:2212.03460.
- Guan, H., Basciftci, B., Van Hentenryck, P., 2023. Path-Based Formulations for the Design of On-Demand Multimodal Transit Systems with Adoption Awareness. arXiv:2301.07292.
- Gurumurthy, K.M., Kockelman, K.M., Zuniga-Garcia, N., 2020. First-mile-last-mile collector-distributor system using shared autonomous mobility. Transportation Research Record 2674, 638–647.
- Helling, B., 2020. Ridester’s 2020 Independent Driver Earnings Survey – Driver Income Revealed. <https://www.ridester.com/2020-survey/>.
- Helling, B., 2023. How Much Does it Really Cost to Drive Your Car for Uber and Lyft? <https://www.ridester.com/uber-lyft-driver-costs-and-expenses/>.
- Imhof, S., Frölicher, J., von Arx, W., 2020. Shared autonomous vehicles in rural public transportation systems. Research in transportation economics 83, 100925.
- Kamau, J., Ahmed, A., Rebeiro-h, A., Kitaoka, H., Okajima, H., Ripon, Z.H., 2016. Demand Responsive Mobility as a Service, in: IEEE International Conference on Systems, Man, and Cybernetics, 001741–001746. [10.1109/smc.2016.7844489](https://doi.org/10.1109/smc.2016.7844489).
- Karich, P., 2014. GraphHopper. <https://www.graphhopper.com>.
- Li, A., Liu, M., Racas, A., Santanam, T., Syed, J., Zientala, P., 2022. Ease and Equity of Point of Interest Accessibility via Public Transit in the U.S. arXiv:2212.06954.
- Lu, J., Riley, C., Gurumurthy, K.M., Van Hentenryck, P., 2023a. Revitalizing Public Transit in Low Ridership Areas: An Exploration of On-Demand Multimodal Transit Systems. arXiv:2308.01298.
- Lu, J., Trasatti, A., Guan, H., Dalmeijer, K., Van Hentenryck, P., 2023b. The Impact of Dedicated Lanes on On-Demand Multimodal Transit Systems. arXiv:2302.03165.
- Mahéo, A., Kilby, P., Van Hentenryck, P., 2019. Benders Decomposition for the Design of a Hub and Shuttle Public Transit System. Transportation Science 53, 77–88. [10.1287/trsc.2017.0756](https://doi.org/10.1287/trsc.2017.0756).
- Martin, E., Stocker, A., Cohen, A., Shaheen, S., Brown, L., 2021. Mobility on Demand (MOD) Sandbox Demonstration: Dallas Area Rapid Transit (DART) First and Last Mile Solution Evaluation Report. FTA Report No. 0195. Federal Transit Administration. [10.21949/1520681](https://doi.org/10.21949/1520681).
- Martin, E., Wong, S., Cohen, A., Soysal, S., Shaheen, S., Brown, L., 2022. Mobility on Demand (MOD) Sandbox Demonstration: Los Angeles County and Puget Sound First and Last Mile Partnership with Via Evaluation Report. FTA Report No. 0239. Federal Transit Administration. [10.21949/1527652](https://doi.org/10.21949/1527652).
- Milpitas, 2022. Simple Mobile Access to Reliable Transit (SMART). <https://www.milpitas.gov/492/Simple-Mobile-Access-to-Reliable-Transit>.
- MVG, 2018. Service on Demand. <https://www.mvg.de/ueber/mvg-projekte/mvg-sod.html>.
- OpenStreetMap, 2023. Planet dump retrieved from <https://planet.osm.org>. <https://www.openstreetmap.org>.
- Park, K., Farb, A., Chen, S., 2021. First-/last-mile experience matters: The influence of the built environment on satisfaction and loyalty among public transit riders. Transport policy 112, 32–42.

- Patel, R.K., Etmnani-Ghasrodashti, R., Kermanshachi, S., Rosenberger, J.M., Foss, A., 2022. Mobility-on-demand (MOD) Projects: A study of the best practices adopted in United States. *Transportation Research Interdisciplinary Perspectives* 14, 100601. [10.1016/j.trip.2022.100601](https://doi.org/10.1016/j.trip.2022.100601).
- Qualtrics, 2023. <https://www.qualtrics.com/>.
- RideCo, 2018. Solving the First Mile-Last Mile On Demand – How RideCo planned, launched and operated a successful dynamic route on-demand van service for Metrolinx. [https://rideco-home.squarespace.com/s/RideCo\\_CS\\_Metrolinx\\_Mar2018\\_FA2\\_hr.pdf](https://rideco-home.squarespace.com/s/RideCo_CS_Metrolinx_Mar2018_FA2_hr.pdf).
- Riley, C., 2022. Operating On-Demand Ride-Sharing Services. Ph.D. thesis. Georgia Institute of Technology.
- Riley, C., Legrain, A., Van Hentenryck, P., 2019. Column Generation for Real-Time Ride-Sharing Operations, in: Rousseau, L.M., Stergiou, K. (Eds.), *Integration of Constraint Programming, Artificial Intelligence, and Operations Research*. Springer, 472–487. [10.1007/978-3-030-19212-9\\_31](https://doi.org/10.1007/978-3-030-19212-9_31).
- Riley, C., Van Hentenryck, P., Yuan, E., 2020. Real-Time Dispatching of Large-Scale Ride-Sharing Systems: Integrating Optimization, Machine Learning, and Model Predictive Control, in: *International Joint Conference on Artificial Intelligence*, 4417–4423. [10.24963/ijcai.2020/609](https://doi.org/10.24963/ijcai.2020/609).
- Sanaullah, I., Alsaleh, N., Djavadian, S., Farooq, B., 2021. Spatio-temporal analysis of on-demand transit: A case study of Belleville, Canada. *Transportation Research Part A: Policy and Practice* 145, 284–301. [10.1016/j.tra.2021.01.020](https://doi.org/10.1016/j.tra.2021.01.020).
- Shaheen, S., Chan, N., 2016. Mobility and the Sharing Economy: Potential to Facilitate the First- and Last-Mile Public Transit Connections. *Built Environment* 42, 573–588. [10.2148/benv.42.4.573](https://doi.org/10.2148/benv.42.4.573).
- Shen, Y., Zhang, H., Zhao, J., 2018. Integrating shared autonomous vehicle in public transportation system: A supply-side simulation of the first-mile service in singapore. *Transportation Research Part A: Policy and Practice* 113, 125–136.
- Statistical Atlas, 2023. Household Income in Atlanta, Georgia. <https://statisticalatlas.com/place/Georgia/Atlanta/Household-Income>.
- Stiglic, M., Agatz, N., Savelsbergh, M., Gradisar, M., 2018. Enhancing urban mobility: Integrating ride-sharing and public transit. *Computers & Operations Research* 90, 12–21.
- U.S. Census Bureau, 2020. 2020 Census Results. <https://www.census.gov/programs-surveys/decennial-census/decade/2020/2020-census-results.html>.
- U.S. Census Bureau, 2022. Mean income in the past 12 months (in 2021 inflation-adjusted dollars). 2021 American Community Survey 1-Year Estimates.
- Van Hentenryck, P., 2019. On-demand mobility systems can ease commuters’ burdens – Socially aware transit solutions focus on solving ‘first/last mile’ challenge. *ISE Magazine* 51, 28–33.
- Venter, C.J., 2020. Measuring the quality of the first/last mile connection to public transport. *Research in Transportation Economics* 83, 100949.
- Via Transportation, 2023. Public Mobility Solutions. <https://ridewithvia.com/>.
- Wang, X., Yan, X., Zhao, X., Cao, Z., 2022. Identifying latent shared mobility preference segments in low-income communities: Ride-hailing, fixed-route bus, and mobility-on-demand transit. *Travel Behaviour and Society* 26, 134–142.
- Wang, Y., Shen, Q., 2023. An economic analysis of incorporating new shared mobility into public transportation provision. *Transport Policy* 141, 263–273.
- Yan, X., Levine, J., Zhao, X., 2019. Integrating ridesourcing services with public transit: An evaluation of traveler responses combining revealed and stated preference data. *Transportation Research Part C: Emerging Technologies* 105, 683–696.

Yan, X., Zhao, X., Han, Y., Van Hentenryck, P., Dillahunt, T., 2021. Mobility-on-demand versus fixed-route transit systems: An evaluation of traveler preferences in low-income communities. *Transportation Research Part A: Policy and Practice* 148, 481–495.

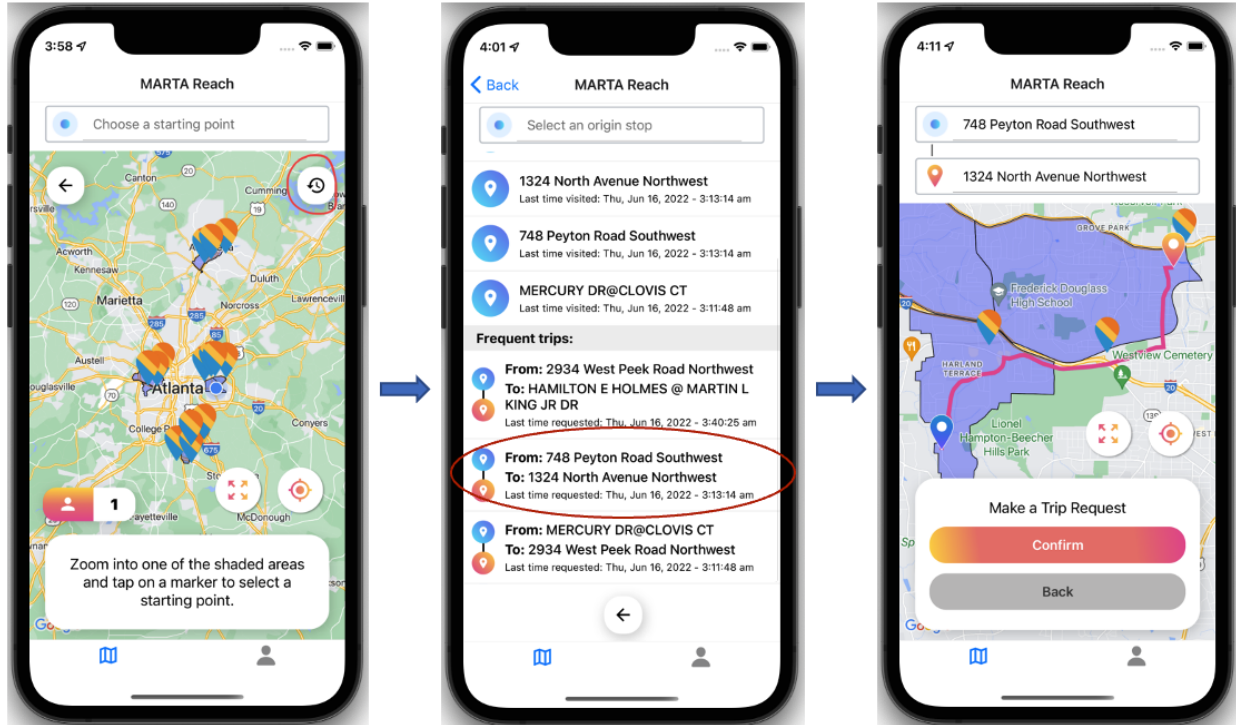


Figure 21: The Rider Application and the Selection of Frequent Trips.

## A REACH Technology

This section presents the four mobile/web applications used during REACH: the rider mobile application, the driver mobile application, the monitor application, and the dashboard. All of these apps are developed with React and React Native, popular tools for building user interfaces (UI). React is a JavaScript library based on UI components and React Native is a UI software framework. The section also presents the backend which dispatches vehicles and supports the above mentioned applications. After conducting initial testing in February 2022, all applications (except the dashboard) were officially launched on the first day of the pilot (March 1, 2022). The dashboard was released on May 4, 2022 before the pilot entered Phase 2. During the pilot, in order to proactively address feedback from both riders and dispatchers and to overcome challenges that arose, multiple extensions were introduced to the applications. In addition to the key additions shown in Figure 2, other significant extensions and their respective release dates are highlighted in this section.

### A.1 The Rider Application

As illustrated in Figure 21, the rider app is a user-friendly mobile app that enables riders to quickly and easily hail a ride from their current location to their desired destination within one of the designated pilot zones. The application highlights key transfer points where riders could connect to MARTA rail and bus lines. It allows users to create an account, log in, and select their virtual pickup location by either searching for it on the map or using the search bar. Similarly, riders can enter their destination in the same way. To address feedback from riders, more detailed instructions and three new functionalities (see Section 3.3) were added in June 2022. These additions make it even more convenient for frequent users to book a ride, track their driver arrival, and enjoy a seamless journey to their destination. After beta testing these new functionalities for a few weeks, the rider application was officially upgraded on July 1, 2022.

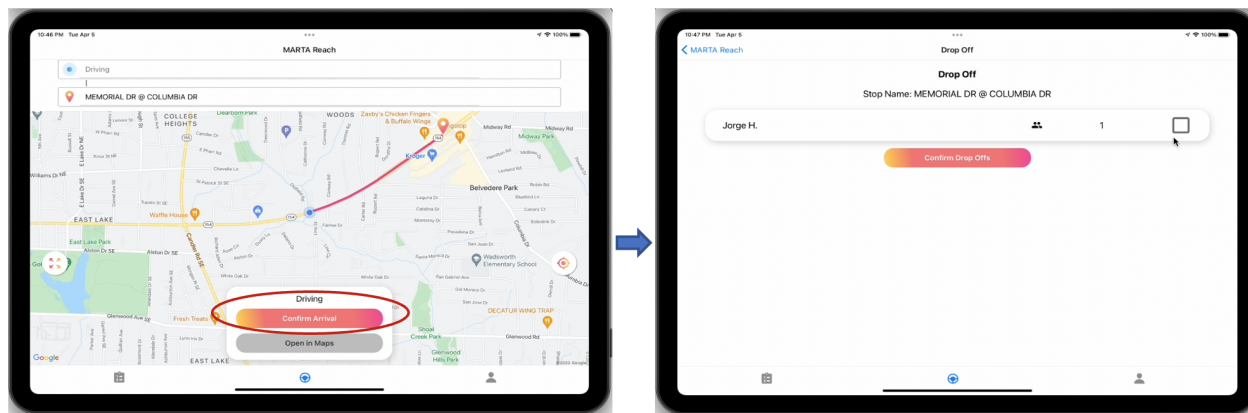


Figure 22: Driver App and Arrival Confirmation to Drop Off Riders.


## A.2 The Driver Application

The driver application manages the routes, pickups, drop-offs, and relocations. Once they log in, drivers wait for ride requests. From that moment on, they will receive and serve pickup and drop-off assignments until they request a break, their shift ends, or there are no more requests. Drivers only see one leg at a time, i.e., the next stop where riders will be picked up or dropped off. The application also never communicates with them during driving, except for the map directions. Drivers confirm pickups and drop-offs, and report no-show passengers directly within the application. Once a driver has completed all of their assignments, they are directed back to an idle location to wait for another assignment. Figure 22 presents an example of how drivers confirm arrival at their next stops and confirm drop-offs. The driver application is also used to track the location of the vehicle and provide real-time information to riders. This helps to ensure that passengers can track their driver arrival and estimated time of arrival (ETA) to the pickup location.


## A.3 Monitor

The REACH monitor is a web-based application that enables dispatchers to track the shuttle fleet, view real-time key events, and interact with the system. Figures 23a and 23b show the fleet being monitored with real-time GPS coordinates. The vehicles have three statuses, represented by black, blue, and red icons, which indicate *regular*, *with riders*, and *wrong location*, respectively. In particular, the *regular* status can be further divided into four subcategories—*idling*, *waiting for departure*, *waiting for passengers*, and *driving without passengers*. The *waiting for departure* status indicates a driver receives a request or a rebalancing command but has not responded yet. The *wrong location* status was added to the monitor on March 29, 2022, to further assist the dispatchers. A vehicle is categorized as *wrong location* if a driver reported being at a stop that is farther than 400 meters from its GPS location. In such situations, the dispatcher would contact the driver to make adjustments. Moreover, the dispatcher can manually sign off a vehicle using the monitor.

Riders and their assigned vehicles are displayed on the monitor once they submit requests. Riders have two statuses in general—*waiting* and *riding*, the status switches from *waiting* to *riding* once the driver confirms the pickup through the driver app. Clicking on rider icon or vehicle icon on the monitor displays a polyline indicating the trip path. The monitor app also presents zones and stops in the background, with zone areas and idle stops displayed by default, and other stops being shown by toggling check-boxes. In addition to real-time visualization, since May 16, 2022, the monitor app includes a table that allows dispatchers to book requests for riders who prefer phone calls to mobile apps. The last extension on the monitor app was released on July 8, 2022, and is an address search window that assists newly-employed dispatchers who recently relocated to Atlanta.

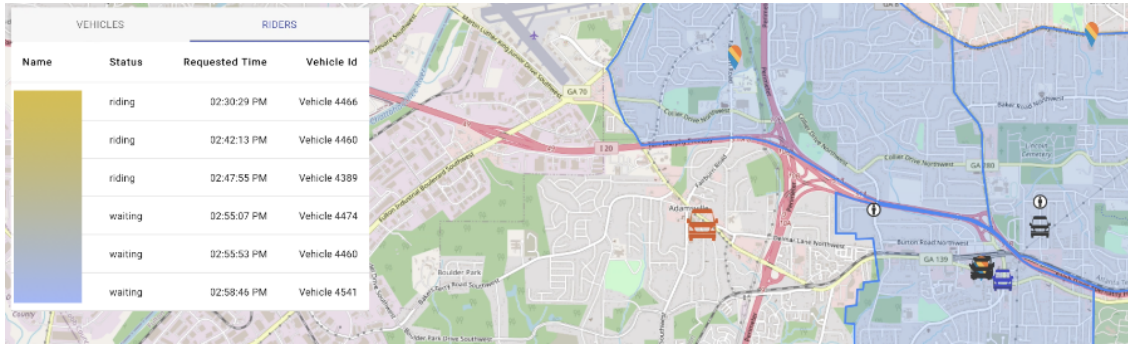

(a) Monitor only shows idle stops.

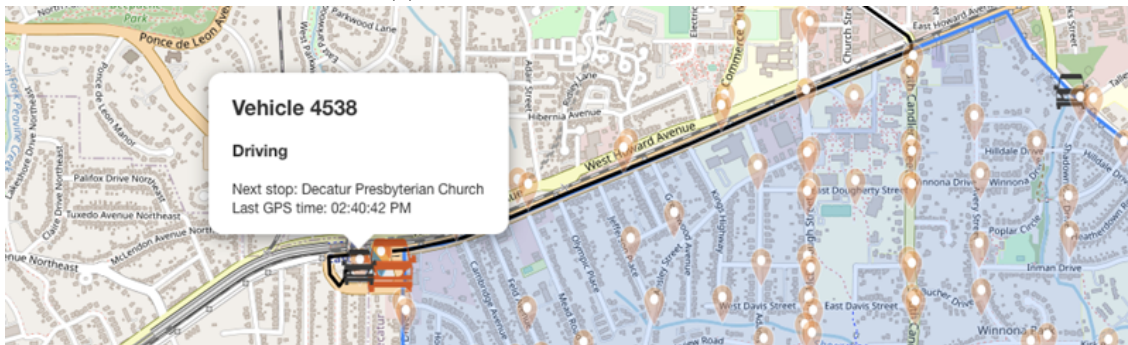

(b) Monitor shows all stops and a polyline.

Figure 23: Two Screenshots from the Monitor App, Private Information is Hidden.

## A.4 The Dashboard

In addition to the live visualization provided by the monitor app, a dashboard app was created to keep track of system performance over the course of a day. The header of the dashboard is shown in Figure 24. The dashboard app displays trackers for total requested trips, completed trips, and cancellations, both in aggregate, and broken down by hour in bar graphs. Tables with the details of each trip, including the rider names, request times, board times, dropoff times, vehicles taken, and zones of origin are displayed such that one can identify riders who had issues, riders who made the same trips each day, or riders who took multiple trips in a day. Riders who canceled trips also have their cancellation time shown. All of these features were introduced by May 4, 2022. The dashboard also contains a section tracking call-in requests for trips that were not made through the app. Additionally, a small table tracked vehicles that were removed from service due to driver inactivity. The last table is a live updating section that provided the active status of each online vehicle, whether it was idling, picking up a rider, or serving a trip. Beyond these metrics, a few map visualizations were also included at the bottom of the dashboard. The first map visualization shows the origins and destinations of all trips over the day within the shaded boundaries of the operating zones. The second map visualization displays the polylines of completed trips. The thickness of the polyline showing how frequently each road segment is used. A node.JS preservation script was also developed that would run every day after service was over. The preservation script would save the day dashboard as a PDF and automatically upload that file to a Dropbox which facilitated comparison of service quality over the course of the pilot. The preservation script began service on May 25, 2022.

## A.5 Backend Servers and Infrastructure

The backend architecture consists of node.JS and Python servers, a Redis cluster for pub/sub, the noSQL version of cosmosDB, and a rabbitmq cluster. A diagram of the backend is shown in Figure 25. There are two node.JS servers: one for the riders, and another for the drivers which manage authentication, user sessions, and communication between the backend and the mobile apps. Messages are passed to/from the backend

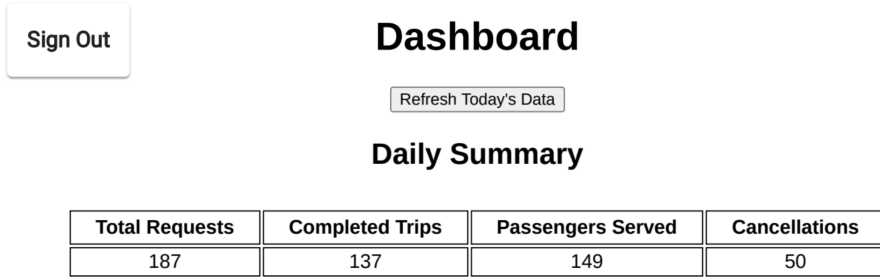


Figure 24: The Header of the Dashboard Web App.

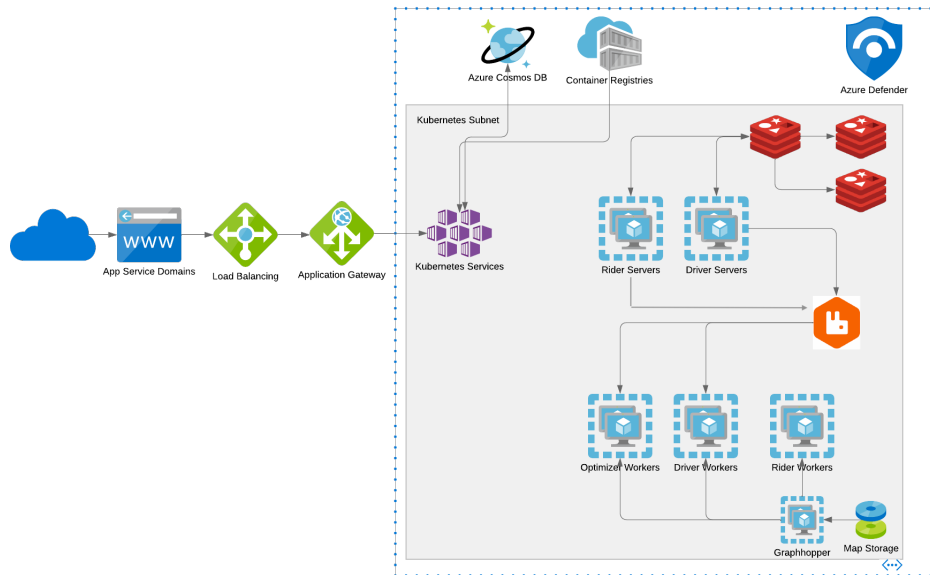


Figure 25: A Diagram of the Backend Infrastructure.

from/to the mobile apps through socket.io connections, which are subscribed to relevant Redis queues. For example, when a rider is assigned to a vehicle, the rider app is subscribed to that vehicle’s GPS-queue in Redis. Thereafter, whenever the driver app pushes a GPS coordinate to that queue, the rider app will receive the new GPS position of the vehicle. The Python servers handle all the business logic, communicating with the cosmosDB to make changes to the state of the system. The Python servers were split out by function, one handling rider functions, another driver functions, and one per zone for functions that had to be done sequentially per zone. Each Python server is managed by Celery, a distributed task queue framework, which uses rabbitmq as a message broker. Each microservice was containerized and orchestrated using Azure Kubernetes Service, which ensured multiple replications of each server were running to provide maximal uptime. Initially, the backend control was limited to a state-of-the-art dispatching algorithm, which was used to assign vehicles to passengers as ride requests were made (Riley, 2022). On May 17, 2022 the *automatic vehicle removal* function to remove inattentive drivers was added. On May 22, 2022, a rebalancing algorithm was added to relocate vehicles towards areas of predicted future demand (Riley, 2022).