

EFFICIENT NEURAL NETWORK APPROACHES FOR CONDITIONAL OPTIMAL TRANSPORT WITH APPLICATIONS IN BAYESIAN INFERENCE*

ZHEYU OLIVER WANG[†], RICARDO BAPTISTA[‡], YOUSSEF MARZOUK[†], LARS RUTHOTTO[§], AND DEEPANSHU VERMA[§]

Abstract. We present two neural network approaches that approximate the solutions of static and dynamic *conditional optimal transport* (COT) problems. Both approaches enable conditional sampling and conditional density estimation, which are core tasks in Bayesian inference—particularly in the simulation-based (“likelihood-free”) setting. Our methods represent the target conditional distributions as transformations of a tractable reference distribution and, therefore, fall into the framework of measure transport. Although many measure transport approaches model the transformation as COT maps, obtaining the map is computationally challenging, even in moderate dimensions. To improve scalability, our numerical algorithms use neural networks to parameterize COT maps and further exploit the structure of the COT problem. Our static approach approximates the map as the gradient of a partially input-convex neural network. It uses a novel numerical implementation to increase computational efficiency compared to state-of-the-art alternatives. Our dynamic approach approximates the conditional optimal transport via the flow map of a regularized neural ODE; compared to the static approach, it is slower to train but offers more modeling choices and can lead to faster sampling. We demonstrate both algorithms numerically, comparing them with competing state-of-the-art approaches, using benchmark datasets and simulation-based Bayesian inverse problems.

Key words. measure transport, generative modeling, optimal transport, Bayesian inference, inverse problems, uncertainty quantification

MSC codes. 62F15, 62M45

1. Introduction. Conditional sampling is a core computational challenge in many mathematical and statistical problems. A widespread motivation is Bayesian inference: given a statistical model $\pi(\mathbf{y}|\mathbf{x})$ for some observations \mathbf{y} , parameterized by \mathbf{x} , one endows the parameters \mathbf{x} with a prior distribution $\pi(\mathbf{x})$ and therefore specifies the joint distribution $\pi(\mathbf{x}, \mathbf{y}) = \pi(\mathbf{y}|\mathbf{x})\pi(\mathbf{x})$. The computational goal of Bayesian inference is then to characterize the posterior distribution $\pi(\mathbf{x}|\mathbf{y})$ for some realization of \mathbf{y} . While in some simple (conjugate) models, the posterior may lie in a tractable family of distributions, in more general settings one seeks to draw samples from the posterior, such that the expectation of any test function (yielding, for example, posterior moments or predictions) can be estimated via Monte Carlo.

Most methods for sampling the posterior, such as Markov chain Monte Carlo (MCMC) [7], or for otherwise approximating it in some variational family [13], require evaluations of the unnormalized

*Submitted to the editors July 22, 2024.

Funding: LR’s and DV’s work was supported in part by NSF awards DMS 1751636, DMS 2038118, AFOSR grant FA9550-20-1-0372, and US DOE Office of Advanced Scientific Computing Research Field Work Proposal 20-023231. RB and YM acknowledge support from the US Department of Energy, Office of Advanced Scientific Computing Research, M2dt MMICC center, award number DE-SC0023187. ZW and YM were supported by the Office of Naval Research, SIMDA (Sea Ice Modeling and Data Assimilation) MURI, award number N00014-20-1-2595 (Dr. Reza Malek-Madani and Dr. Scott Harper). RB gratefully acknowledges support from the Air Force Office of Scientific Research, Machine Learning and Physics-Based Modeling and Simulation MURI, award number FA9550-20-1-0358, and a Department of Defense Vannevar Bush Faculty Fellowship, award N00014-22-1-2790.

[†]Department of Aeronautics and Astronautics, Massachusetts Institute of Technology, Cambridge, MA (olivrw@mit.edu, ymarz@mit.edu).

[‡]Computing + Mathematical Sciences, California Institute of Technology, Pasadena, CA (rsb@caltech.edu).

[§]Department of Mathematics, Emory University, Atlanta, GA (deepanshu.verma@emory.edu, lruthotto@emory.edu).

posterior density. This requirement limits such methods to the “conventional” setting of a tractable likelihood function and prior density—i.e., a likelihood and prior that can be evaluated pointwise. This setting includes likelihoods common in inverse problems, given by a forward operator that maps \mathbf{x} to a prediction of the observations, which is then perturbed by noise. Even in this setting, producing thousands of approximately i.i.d. samples from the posterior distribution may require millions of unnormalized posterior density evaluations. This can be especially expensive for science and engineering applications where the forward operator entering the likelihood involves the solution of differential equations.

Conditional sampling is even more challenging when the likelihood model—and hence the unnormalized posterior density—is intractable to compute. One common reason is that the forward model is intrinsically stochastic, or (equivalently) that it contains perhaps a high-dimensional set of random latent parameters \mathbf{c} that are not the target of inference; in this setting, computing the likelihood $\mathbf{x} \mapsto \pi(\mathbf{y}|\mathbf{x})$ requires an expensive step of marginalization. In other applications, often the case in data assimilation [53] or inverse problems with data-driven priors [23], the prior distribution may be known only through samples with no closed-form density. In both of these cases, one can *simulate* sample pairs $(\mathbf{x}_i, \mathbf{y}_i) \sim \pi(\mathbf{x}, \mathbf{y})$ but not evaluate their joint density.

As a possible remedy, *likelihood-free* (also called *simulation-based*) inference methods [12] have gained significant recent interest. Instead of relying on evaluations of the unnormalized posterior density, most of these methods employ some form of sample-driven *measure transport*, either as a way of estimating conditional densities [43] or directly sampling from the posterior [18]. The latter can be understood as using transport for conditional generative modeling: we seek transport maps, amortized over multiple realizations of the data \mathbf{y} , that push forward a given reference distribution to the target posterior distribution $\pi(\mathbf{x}|\mathbf{y})$. Once such a map is obtained, one can readily generate i.i.d. samples from the target by evaluating the map on samples drawn from the reference given any realization of data \mathbf{y} . This distinguishes transport maps from methods such as MCMC, which are intrinsically serial (thus challenging to parallelize) and typically requiring re-initialization for any new value of \mathbf{y} .

Under mild assumptions on the reference and posterior, there exist infinitely many transport maps that couple the two distributions. Accordingly, many parameterizations and construction methods for such transport maps have been pursued in recent literature. In particular, neural networks are widely used to represent transport maps, due to their expressiveness and scalability to high dimensions [2, 20, 14, 40, 24]. Yet in many settings, the target map, e.g., the map obtained in the limit of increasing expressiveness of the network, is not clearly or uniquely specified. The lack of a specific target transport leaves open a wide variety of ad hoc design choices, where these choices implicitly determine the class of transport maps being considered. Moreover, it is then challenging to understand the approximation properties of resulting transports and their implications for computational cost. A more systematic way of using neural networks to represent conditional transports with a well-specified target map is desirable. To this end, we will seek neural network approximations of conditional *optimal* transport (COT) maps, in particular, maps that are optimal under the L^2 transport cost. These maps are unique, under mild assumptions on the reference and the target conditionals, and are also known as conditional Brenier maps [9].

This paper contributes two neural network approaches for learning the static and dynamic COT maps, respectively, through maximum likelihood training. We select conditional Brenier maps as our target transport class and enforce their gradient-of-convex-potential structure to regularize the transport map learning problem, eliminating exploration of the unnecessary off-target choices. This leads directly to our first approach, the *partially convex potential map* (PCP-Map), where

we parameterize the map as the (partial) gradient of a partially input convex neural network (PICNN) [1]. PCP-Maps, by construction, approximate static conditional Brenier maps in the limit of network expressiveness. For our second approach, called *conditional optimal transport flow* (COT-Flow), we extend our prior approach, OT-Flow [40], to include amortization over multiple realizations of the data. Like OT-Flow, our method considers dynamic measure transport, which has recently gained much popularity. The dynamic approach realizes transport by integrating a velocity field for a finite time. COT-Flow seeks a conditional optimal transport defined by the flow map of an ODE with constant-velocity (in a Lagrangian sense) trajectories. Rather than *strongly* enforcing the structure of optimal transport on this velocity field, we encourage optimality of the conditional transport via appropriate penalties on the velocity. In particular, we represent the velocity as the gradient of a scalar potential parameterized by a neural network (hence obtaining a neural ODE) and penalize the squared magnitude of the velocity and violations of a Hamilton–Jacobi–Bellman PDE.

We compare the performance of our approaches with each other and against other state-of-the-art neural and non-neural approaches for conditional sampling and density estimation in terms of the computational cost of training and sampling, the quality of the resulting samples, and the complexity of hyperparameter tuning. We conduct numerical experiments using six UCI tabular datasets [32], inverse problems involving the stochastic Lotka–Volterra model [44], and the one-dimensional shallow water equations [48]. Across all experiments, we observe that both PCP-Map and COT-Flow achieve competitive accuracy as measured by negative log-likelihoods, sample visualizations, and posterior calibration analyses, compared to consistent approximate Bayesian computation methods [57] and other transport or deep learning approaches [3, 48]. While PCP-Map and COT-Flow enjoy comparable accuracy, the strongly-constrained PCP-Map can be trained more quickly than COT-Flow in our experiments. Also, PCP-Map relies on fewer and less influential hyperparameters than the weakly-constrained COT-Flow and thus requires less parameter tuning. COT-Flow, however, offers faster sampling after training due to its nearly straight-line velocity field. We also conduct a comparative study of PCP-Map and a conditional version of the optimal transport approach proposed in [24] and observe that our numerical implementation improves the numerical accuracy and efficiency.

The remainder of the paper is organized as follows. Section 2 formulates the conditional sampling problem and reviews related learning approaches. Section 3 presents our partially convex potential map (PCP-Map). Section 4 presents our conditional optimal transport flow (COT-Flow). Section 5 describes our effort to achieve reproducible results and systematic procedures for identifying effective hyperparameters for neural network training. Section 6 contains a detailed numerical evaluation of both approaches using six open-source data sets and experiments motivated by Bayesian inference for the stochastic Lotka–Volterra equation and the shallow water equations. Section 7 features a detailed discussion of our results and highlights the advantages and limitations of the presented approaches.

2. Background and related work. Given i.i.d. sample pairs $\{(\mathbf{x}_i, \mathbf{y}_i)\}_{i=1}^N$ drawn from the joint distribution $\pi(\mathbf{x}, \mathbf{y})$, with $\mathbf{x}_i \in \mathbb{R}^n$ and $\mathbf{y}_i \in \mathbb{R}^m$, our goal is to sample from $\pi(\mathbf{x}|\mathbf{y})$ for any value of the conditioning variable \mathbf{y} . In the context of Bayesian inference, $\pi(\mathbf{x}|\mathbf{y})$ is the posterior distribution. Even when the likelihood is not available, the joint sample pairs can be obtained by first drawing \mathbf{x}_i from the prior distribution $\pi(\mathbf{x})$ and then drawing \mathbf{y}_i from $\pi(\mathbf{y}|\mathbf{x}_i)$.

Under the transport-based framework, solving this conditional sampling problem amounts to

learning a block-triangular map, as described in [2],

$$(2.1) \quad T : \mathbb{R}^{n+m} \rightarrow \mathbb{R}^{n+m}, \quad T(\mathbf{z}_x, \mathbf{z}_y) = \begin{bmatrix} \mathbf{h}(\mathbf{z}_y) \\ \mathbf{g}(\mathbf{z}_x, \mathbf{h}(\mathbf{z}_y)) \end{bmatrix}$$

that pushes forward a tensor-product reference distribution $\rho_{\mathbf{z}}(\mathbf{z}) := \rho_{\mathbf{z}_x}(\mathbf{z}_x) \otimes \rho_{\mathbf{z}_y}(\mathbf{z}_y)$ to the target joint distribution $\pi(\mathbf{x}, \mathbf{y}) = \pi(\mathbf{y})\pi(\mathbf{x}|\mathbf{y})$ where $\rho_{\mathbf{z}_x}(\mathbf{z}_x)$ and $\rho_{\mathbf{z}_y}(\mathbf{z}_y)$ are defined on \mathbb{R}^n and \mathbb{R}^m , respectively. More specifically, to evaluate $T(\mathbf{z}_x, \mathbf{z}_y)$, we first evaluate the mapping \mathbf{h} on \mathbf{z}_y and then substitute $\mathbf{h}(\mathbf{z}_y)$ into \mathbf{g} to evaluate $\mathbf{g}(\mathbf{z}_x, \mathbf{h}(\mathbf{z}_y))$. Notice that $\mathbf{h} : \mathbb{R}^m \rightarrow \mathbb{R}^m$ and $\mathbf{g} : \mathbb{R}^n \times \mathbb{R}^m \rightarrow \mathbb{R}^n$. If $\mathbf{z}_y \sim \rho_{\mathbf{z}_y}(\mathbf{z}_y)$ and $\mathbf{z}_x \sim \rho_{\mathbf{z}_x}(\mathbf{z}_x)$, Theorem 2.4 in [2] shows that we will have $\mathbf{g}(\mathbf{z}_x, \mathbf{h}(\mathbf{z}_y)) \sim \pi(\mathbf{x}|\mathbf{y})$.

We can simplify this construction by choosing \mathbf{h} to be the identity function and setting the reference distribution to be $\pi(\mathbf{y}) \otimes \rho_{\mathbf{z}_x}(\mathbf{z}_x)$. The reference marginal $\rho_{\mathbf{z}_x}(\mathbf{z}_x)$ can be chosen as any tractable distribution, e.g., a standard Gaussian. We can use the conditioning variable \mathbf{y} as the second argument of \mathbf{g} . The block triangular map becomes

$$(2.2) \quad T(\mathbf{z}_x, \mathbf{y}) = \begin{bmatrix} \mathbf{y} \\ \mathbf{g}(\mathbf{z}_x, \mathbf{y}) \end{bmatrix}.$$

With this construction, we can sample from the conditional distribution $\pi(\mathbf{x}|\mathbf{y})$ simply by evaluating the mapping $g : \mathbf{z}_x \mapsto \mathbf{g}(\mathbf{z}_x, \mathbf{y})$ for $\mathbf{z}_x \sim \rho_{\mathbf{z}_x}(\mathbf{z}_x)$. We will focus on such a g in this paper, and call it the *conditional generator* (interchangeably with ‘conditional transport map’). We view g as a mapping from $\mathbb{R}^n \rightarrow \mathbb{R}^n$, parameterized by \mathbf{y} , and will write $g(\mathbf{z}_x; \mathbf{y})$, for $\mathbf{z}_x \in \mathbb{R}^n$, to make this interpretation clear. We will also use $g^{-1}(\cdot; \mathbf{y})$ to denote the inverse of this mapping (when it exists) for any given value of \mathbf{y} . In other words, $g(g^{-1}(\mathbf{x}; \mathbf{y}); \mathbf{y}) = \mathbf{x}$.

There are numerous ways of parameterizing, constraining, and learning the conditional generator. For example, [3, 26] use transformations of polynomials to approximate g . While linear spaces (such as polynomial spaces) are amenable to analysis and have well-understood approximation properties, they typically suffer from the computational difficulties of basis selection and the curse of dimensionality. In the deep generative modeling community [49], neural networks are instead used to parameterize g . This paper will focus on deep generative modeling approaches that learn invertible and differentiable generators; as we will explain shortly, these properties enable exact density evaluations and, hence, maximum likelihood training. This choice thus excludes other conditional generative models popular in machine learning, such as conditional VAEs [51] and conditional GANs [38, 34], as they do not employ invertible maps or allow density evaluations. In such methods, when the latent code \mathbf{z} has a dimension less than n , the pushforward distribution, in fact, does not have a density with respect to the Lebesgue measure on \mathbb{R}^n . Therefore, these methods must be trained by methods other than maximum likelihood.

Given a conditional generator $g(\cdot; \mathbf{y})$ that is a diffeomorphism for any value of \mathbf{y} , we can write the pushforward of the reference density $\rho_{\mathbf{z}_x}$ by $g(\cdot; \mathbf{y})$ via the change-of-variables formula:

$$(2.3) \quad g(\cdot; \mathbf{y})_{\#} \rho_{\mathbf{z}_x}(\mathbf{x}) := \rho_{\mathbf{z}_x}(g^{-1}(\mathbf{x}; \mathbf{y})) |\det \nabla_{\mathbf{x}} g^{-1}(\mathbf{x}; \mathbf{y})|.$$

Then we can use $g(\cdot; \mathbf{y})_{\#} \rho_{\mathbf{z}_x}(\mathbf{x})$ to approximate the conditional density $\pi(\mathbf{x}|\mathbf{y})$, i.e., to seek

$$(2.4) \quad g(\cdot; \mathbf{y})_{\#} \rho_{\mathbf{z}_x}(\mathbf{x}) \approx \pi(\mathbf{x}|\mathbf{y}).$$

The explicit density in (2.3) is quite useful in this regard; for instance, it allows us to identify a good g within a given class of diffeomorphisms via maximum likelihood estimation.

In general, there are infinitely many diffeomorphisms that can achieve equality in (2.4). One class of diffeomorphisms for smooth densities is given by monotone triangular maps [36, 58], which include the canonical Knothe–Rosenblatt rearrangement; the latter achieves equality in (2.4) for any absolutely continuous target. Triangular maps allow easy inversion and Jacobian determinant evaluations, though they are sensitive to variable ordering. A different class of candidate diffeomorphisms is given by conditional normalizing flows [35, 46]; these are specific neural network representations of diffeomorphisms on \mathbb{R}^n , parameterized by \mathbf{y} , that also allow easy inversion and evaluations of the Jacobian determinant. A vast array of architectures for such flows, in the conditional and unconditional cases, have been proposed in the literature [45], and there even exist universal approximation results for certain common architectures [56].

Early normalizing flows [14, 30, 46] directly modeled the displacement of points from the reference to the target distribution. They can be thus viewed as a “static” approach to measure transport. Most of these flows do not aim to approximate any particular canonical transport, although many (e.g., autoregressive flows) use restricted classes of triangular maps as a building block. Continuous normalizing flows, as proposed in [11, 22], on the other hand, represent the diffeomorphism of interest by the finite-time flow map of an ODE [37] whose velocity field is parameterized by a deep neural network. These flows thus can be viewed as a “dynamic” form of measure transport. Generic continuous normalizing flows also lack a specific approximation target; they can, in principle, represent infinitely many transport maps that are consistent with (2.4), with no direct control over what map is realized. To resolve this ill-posedness [62], recent works have sought to tailor continuous NFs towards specific target transports. In particular, there has been considerable interest in targeting *optimal transport* with quadratic cost (i.e., the Brenier map) to take advantage of its properties. Several dynamic measure transport approaches drive their flows towards optimal transport by adding regularization penalties to the training objective [40, 20, 63, 61]. Static density estimation and generative modeling approaches that seek to approximate the Brenier map include [24, 8, 2]; we will discuss [24] and [8] further below. Figure 1 provides a schematic overview of various (conditional and unconditional) measure transport approaches, arranged by the approximation target (if any) and whether they are static or dynamic.

As discussed in Section 1, this paper focuses on neural network approaches to learning COT maps. A close relative to our PCP-Map construction is the CP-Flow approach of [24]. CP-Flow is primarily designed to approximate solutions of the joint (rather than conditional) optimal transport problem. A variant of CP-Flow defines a variational autoencoder (VAE) suitable for variational Bayesian inference. But extensions of CP-Flow to COT are also natural; though not described in the paper, a script in the GitHub repository associated with [24] enables CP-Flow to approximate the COT problem for a simple Gaussian mixture target distribution in a similar fashion to PCP-Map. We, therefore, compare PCP-Map to conditional CP-Flow numerically; see Subsection 6.4. In these experiments, we find that CP-Flow either fails to provide a solution or is considerably slower than PCP-Map. We discuss possible reasons in Subsection 6.4, but note here some distinctions between (conditional) CP-Flow and PCP-Map: the latter uses a simplified transport map architecture, new automatic differentiation tools that avoid the need for stochastic log-determinant estimators, and a projected gradient method to enforce non-negativity constraints on parts of the weights.

Another close relative of PCP-Map is the CondOT approach in [8]. The main distinction between CondOT and PCP-Map is in the definition of the learning problem. The former solves the W_2 COT problem in an adversarial manner, which leads to a challenging stochastic saddle point problem. Our approach instead uses a maximum likelihood estimation, which yields a simpler, direct minimization problem.

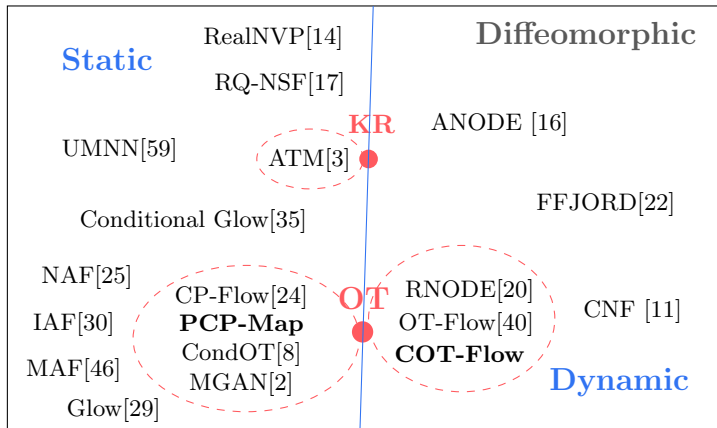


FIG. 1. Schematic overview of related measure transport approaches, all of which produce diffeomorphic transport maps. Approaches are first separated into static versus dynamic, then grouped by their approximation target assumptions. The red dots represent specific, canonical transport maps: (L^2) optimal transport (OT) and the Knothe–Rosenblatt (KR) transport. The surrounding ellipses capture methods that seek to approximate these canonical maps.

The COT-Flow developed in this paper approach extends the dynamic OT formulation in [40] to enable conditional sampling and density estimation. The resulting approach is similar to the recent work [42], which uses an RKHS approach to approximate the velocity and bases the training objective function on maximum mean discrepancy (MMD) instead of maximum likelihood.

3. Partially convex potential maps (PCP-Map). Our first approach, PCP-Map, approximates the static COT problem by solving a maximum likelihood estimation problem over a class of neural network-based conditional transport maps whose structure is enforced to match the structure of conditional Brenier maps—which are *partial* gradients of *partially* convex potentials. By the neural network architectural design, this partial convexity is guaranteed for any choice of the network weights.

Training problem. Given samples from the joint distribution, our algorithm seeks a conditional generator g by solving the maximum likelihood problem

$$(3.1) \quad \min_{g^{-1} \in \mathcal{G}} J_{\text{NLL}}[g],$$

where the objective J_{NLL} is the expected negative log-likelihood functional

$$(3.2) \quad J_{\text{NLL}}[g] = \mathbb{E}_{\pi(\mathbf{x}, \mathbf{y})} \left[\frac{1}{2} \|g^{-1}(\mathbf{x}; \mathbf{y})\|^2 - \log \det \nabla_{\mathbf{x}} g^{-1}(\mathbf{x}; \mathbf{y}) \right].$$

This objective arises from choosing $\rho_{\mathbf{z}_x}$ to be a standard Gaussian and it maximizes the likelihood that g^{-1} samples are standard Gaussian. Since the learning problem in (3.2) only involves the *inverse conditional generator* g^{-1} , in (3.1) we follow [2] and directly seek conditional generators whose inverses take the structural form of conditional Brenier maps, i.e.,

$$(3.3) \quad \mathcal{G} = \{(\mathbf{x}; \mathbf{y}) \mapsto \nabla_{\mathbf{x}} G(\mathbf{x}; \mathbf{y}) \text{ s.t. } G : \mathbb{R}^n \times \mathbb{R}^m \rightarrow \mathbb{R} \text{ is convex in its first argument}\}.$$

These parameterizations are equivalent: if, for any fixed \mathbf{y} , $g(\cdot; \mathbf{y})$ is the gradient of a convex potential, then $g(\cdot; \mathbf{y})^{-1}$ is also the gradient of a (different) convex potential by Brenier’s theorem. While this choice avoids inverting the generator during training, sampling requires inverting the learned map. Note that the inverse conditional generator pushes forward the conditional distribution $\pi(\mathbf{x}|\mathbf{y})$ to the reference distribution. We note that the negative log-likelihood J_{NLL} also agrees (up to an additive constant) with the Kullback–Leibler (KL) divergence from the pushforward $g(\cdot; \mathbf{y})_{\#}\rho_{\mathbf{z}_x}$ to the conditional distribution $\pi(\mathbf{x}|\mathbf{y})$, in expectation over the conditioning variable $\mathbf{y} \sim \pi(\mathbf{y})$.

Theoretically speaking, Brenier’s theorem ensures the existence of a unique monotone transport map among all maps written as the gradient of a convex potential; see [6] for the original result and [9] for conditional transport maps. Theorem 2.3 in [9] also shows that g^{-1} is *optimal* in the sense that among all maps that match the distributions, it minimizes the integrated L_2 transport costs

$$(3.4) \quad P_{\text{OT}}[g] = \mathbb{E}_{\pi(\mathbf{x}, \mathbf{y})} [\|\mathbf{x} - g^{-1}(\mathbf{x}; \mathbf{y})\|^2].$$

Neural Network Representation. In this work, we directly enforce the structural form of conditional Brenier maps on the inverse conditional generator using scalar-valued partially input convex neural networks (PICNNs) [1]. In particular, we parameterize g_{θ}^{-1} as the gradient of a PICNN based potential $\tilde{G}_{\theta} : \mathbb{R}^n \times \mathbb{R}^m \rightarrow \mathbb{R}$ that depends on weights θ . A PICNN is a feed-forward neural network that is specifically designed to ensure convexity in some of its inputs; see the original work that introduced this neural network architecture in [1] and its use for generative modeling in [24]. To the best of our knowledge, investigating if PICNNs are universal approximators of partially input convex functions is still an open issue, also see [28, Section IV], that is beyond the scope of our paper; a perhaps related result for fully input convex neural networks is given in [24, Appendix C].

To ensure the monotonicity of g_{θ}^{-1} , we construct \tilde{G}_{θ} to be strictly convex as a linear combination of a scalar-valued PICNN and a positive definite quadratic term. That is,

$$(3.5) \quad \tilde{G}_{\theta}(\mathbf{x}, \mathbf{y}) = \sigma_{\text{softplus}}(\gamma_1) \cdot w_K + (\sigma_{\text{ReLU}}(\gamma_2) + \sigma_{\text{softplus}}(\gamma_3)) \cdot \frac{1}{2} \|\mathbf{x}\|^2,$$

where γ_1, γ_2 , and γ_3 are scalar parameters that are re-parameterized via the soft-plus function $\sigma_{\text{softplus}}(x) = \log(1 + \exp(x))$ and the ReLU function $\sigma_{\text{ReLU}}(x) = \max\{0, x\}$ to ensure strict convexity of \tilde{G}_{θ} . Here, w_K is the output of a K -layer scalar-valued PICNN and is computed through forward propagation through the layers $k = 0, \dots, K - 1$ starting with the inputs $\mathbf{v}_0 = \mathbf{y}$ and $\mathbf{w}_0 = \mathbf{x}$

$$(3.6) \quad \begin{aligned} \mathbf{v}_{k+1} &= \sigma^{(v)} \left(\mathbf{L}_k^{(v)} \mathbf{v}_k + \mathbf{b}_k^{(v)} \right), \\ \mathbf{w}_{k+1} &= \sigma^{(w)} \left(\sigma_{\text{ReLU}} \left(\mathbf{L}_k^{(w)} \right) \left(\mathbf{w}_k \odot \sigma_{\text{ReLU}} \left(\mathbf{L}_k^{(wv)} \mathbf{v}_k + \mathbf{b}_k^{(wv)} \right) \right) + \right. \\ &\quad \left. \mathbf{L}_k^{(x)} \left(\mathbf{x} \odot \left(\mathbf{L}_k^{(xv)} \mathbf{v}_k + \mathbf{b}_k^{(xv)} \right) \right) + \mathbf{L}_k^{(vw)} \mathbf{v}_k + \mathbf{b}_k^{(w)} \right). \end{aligned}$$

Here, \mathbf{v}_k , termed contexts, are layer activations of input \mathbf{y} , and \odot denotes the element-wise Hadamard product. We implement the non-negativity constraints on $\mathbf{L}_k^{(w)}$ and $\mathbf{L}_k^{(wv)} \mathbf{v}_k + \mathbf{b}_k^{(wv)}$ via the ReLU activation and set $\sigma^{(w)}$ and $\sigma^{(v)}$ to the softplus and ELU functions, respectively, where

$$\sigma_{\text{ELU}}(x) = \begin{cases} x & \text{if } x > 0 \\ e^x - 1 & \text{if } x \leq 0 \end{cases}.$$

TABLE 1

Parameter dimensions of a K -layer PICNN architecture from (3.6). Since the dimensions of the inputs, $\mathbf{x} \in \mathbb{R}^n$ and $\mathbf{y} \in \mathbb{R}^m$, are given, and the network outputs a scalar, we vary only the depth, K , feature width, w , and context width, u , in our experiments.

k , layer	$\text{size}(\mathbf{L}_k^{(v)})$	$\text{size}(\mathbf{L}_k^{(vw)})$	$\text{size}(\mathbf{L}_k^{(w)})$	$\text{size}(\mathbf{L}_k^{(wv)})$	$\text{size}(\mathbf{L}_k^{(xv)})$	$\text{size}(\mathbf{L}_k^{(x)})$
0	(u, m)	(w, m)	(w, n)	(n, m)	0	0
1	(u, u)	(w, u)	(w, w)	(w, u)	(n, u)	(w, n)
\vdots	\vdots	\vdots	\vdots	\vdots	\vdots	\vdots
$K-2$	(u, u)	(w, u)	(w, w)	(w, u)	(n, u)	(w, n)
$K-1$	0	$(1, u)$	$(1, w)$	(w, u)	(n, u)	(w, n)

We list the dimensions of the weight matrices in Table 1. The sizes of the bias terms equal the number of rows of their corresponding weight matrices. The trainable parameters are

$$(3.7) \quad \theta = (\gamma_{1:3}, \mathbf{L}_{0:K-2}^{(v)}, \mathbf{b}_{0:K-2}^{(v)}, \mathbf{L}_{0:K-1}^{(vw)}, \mathbf{L}_{0:K-1}^{(w)}, \mathbf{b}_{0:K-1}^{(w)}, \mathbf{L}_{0:K-1}^{(wv)}, \mathbf{b}_{0:K-1}^{(wv)}, \mathbf{L}_{1:K-1}^{(xv)}, \mathbf{b}_{1:K-1}^{(xv)}, \mathbf{L}_{1:K-1}^{(x)}).$$

Using properties for the composition of convex functions [21], it can be verified that the forward propagation in (3.6) defines a function that is convex in \mathbf{x} , but not necessarily in \mathbf{y} (which is not needed), as long as $\sigma^{(w)}$ is convex and non-decreasing.

To compute the log determinant of g_θ^{-1} , we use vectorized automatic differentiation to obtain the Hessian of \tilde{G}_θ with respect to its first input and then compute its eigenvalues. This is feasible when the Hessian is moderate; e.g., in our experiments, it is less than one hundred. We use efficient implementations of these methods that parallelize the computations over all the samples in a batch.

Our algorithm enforces the non-negativity constraint by projecting the parameters into the non-negative orthant after each optimization step using ReLU. Thereby, we alleviate the need for re-parameterization, for example, using the softplus function in [1]. Another novelty introduced in PICNN is that we utilize trainable affine layer parameters $\mathbf{L}_k^{(v)}$ and a context width u as a hyperparameter to increase the expressiveness over the conditioning variables, which are pivotal to characterizing conditional distributions; existing works such as [24] set $\mathbf{L}_{1:K-2}^{(v)} = \mathbf{I}$.

Sample generation. Due to our neural network parameterization, there is generally no closed-form relation between g_θ and g_θ^{-1} . As in [24], we approximate the inverse of g_θ^{-1} during sampling as the Legendre-Fenchel dual. That is, given a reference sample $\mathbf{z}_x \sim \rho_{\mathbf{z}_x}(\mathbf{z}_x)$ and a conditioning variable $\mathbf{y} \sim \pi(\mathbf{y})$, we solve the convex optimization problem

$$(3.8) \quad \mathbf{v}^* = \arg \min_{\mathbf{v}} \tilde{G}_\theta(\mathbf{v}; \mathbf{y}) - \mathbf{z}_x^\top \mathbf{v}.$$

Due to the strict convexity of \tilde{G}_θ in its first argument, the first-order optimality conditions gives

$$\mathbf{v}^* \approx \nabla_{\mathbf{z}_x} \tilde{G}_\theta^{-1}(\mathbf{z}_x; \mathbf{y}) = g_\theta(\mathbf{z}_x; \mathbf{y}) \sim \pi(\mathbf{x}|\mathbf{y}).$$

Hyperparameters. In our numerical experiments, we vary only three hyperparameters to adjust the complexity of the architecture. As described in section 5 we randomly sample the depth, K , the feature width, w , and the context width, u , from the values in Table 2.

4. Conditional OT-Flow (COT-Flow). In this section, we extend the OT-regularized continuous normalizing flows in [40] to the conditional generative modeling problem introduced in section 2.

Training Problem. Following the general approach of continuous normalizing flows [10, 22], we express the transport map that pushes forward the reference distribution $\rho_{\mathbf{z}_x}(\mathbf{z}_x)$ to the target $\pi(\mathbf{x}|\mathbf{y})$ via the flow map of an ODE. That is, we define $g(\mathbf{z}_x; \mathbf{y}) = \mathbf{u}(1)$ as the terminal state of the ODE

$$(4.1) \quad \frac{d}{dt} \mathbf{u}(t) = v(t, \mathbf{u}(t); \mathbf{y}), \quad t \in (0, 1], \quad \mathbf{u}(0) = \mathbf{z}_x,$$

where the evolution of $\mathbf{u}: [0, 1] \rightarrow \mathbb{R}^n$ depends on the velocity field $v: [0, 1] \times \mathbb{R}^n \times \mathbb{R}^m \rightarrow \mathbb{R}^n$ and will be parameterized with a neural network below. When the velocity is trained to minimize the negative log-likelihood loss in (3.2), the resulting mapping is called a continuous normalizing flow [22]. We add \mathbf{y} as an additional input to the velocity field to enable conditional sampling. Consequently, the resulting flow map and generator g depend on \mathbf{y} .

One advantage of defining the generator through an ODE is that the loss function can be evaluated efficiently for a wide range of velocity functions. Recall that the loss function requires the inverse of the generator and the log-determinant of its Jacobian. For sufficiently regular velocity fields, the inverse of the generator can be obtained by integrating backward in time. To be precise, we define $g^{-1}(\mathbf{x}; \mathbf{y}) = \mathbf{p}(0)$ where $\mathbf{p}: [0, 1] \rightarrow \mathbb{R}^n$ satisfies (4.1) with the terminal condition $\mathbf{p}(1) = \mathbf{x}$. As derived in [63, 22, 61], constructing the generator through an ODE also simplifies computing the log-determinant of the Jacobian, i.e.,

$$(4.2) \quad \log \det \nabla_{\mathbf{x}} g^{-1}(\mathbf{x}; \mathbf{y}) = \int_0^1 \text{trace}(\nabla_{\mathbf{p}} v(t, \mathbf{p}(t); \mathbf{y})) dt.$$

Penalizing transport costs during training leads to theoretical and numerical advantages; see, for example, [63, 61, 40, 20]. Hence, we consider the OT-regularized training problem

$$(4.3) \quad \min_v J_{\text{NLL}}[g] + \alpha_1 P_{\text{DOT}}[v]$$

where $\alpha_1 > 0$ is a regularization parameter that trades off matching the distributions (for $\alpha_1 \ll 1$) and minimizing the transport costs (for $\alpha_1 \gg 0$) given by the dynamic transport cost penalty

$$(4.4) \quad P_{\text{DOT}}[v] = \mathbb{E}_{\pi(\mathbf{x}, \mathbf{y})} \left[\int_0^1 \frac{1}{2} \|v(t, \mathbf{p}(t); \mathbf{y})\|^2 dt \right].$$

This penalty is stronger than the static counterpart in (3.4), in other words

$$(4.5) \quad P_{\text{OT}}[g] \leq P_{\text{DOT}}[g] \quad \forall g: \mathbb{R}^n \rightarrow \mathbb{R}^n.$$

However, the values of both penalties agree when the velocity field in (4.1) is constant along the trajectories, which is the case for the optimal transport map. Hence, we expect the solution of the dynamic problem to be close to that of the static formulation when α_1 is chosen well.

To provide additional theoretical insight and motivate our numerical method, we note that (4.3) is related to the potential mean field game (MFG)

$$(4.6) \quad \begin{aligned} & \min_{\varrho, v} \int_{\mathbb{R}^m} \int_{\mathbb{R}^n} \left(-\log \varrho(1, \mathbf{x}; \mathbf{y}) \pi(\mathbf{x}, \mathbf{y}) + \alpha_1 \int_0^1 \frac{1}{2} \|v(t, \mathbf{x}; \mathbf{y})\|^2 \varrho(t, \mathbf{x}; \mathbf{y}) dt \right) dx dy \\ & \text{subject to } \partial_t \varrho(t, \mathbf{x}; \mathbf{y}) + \nabla_{\mathbf{x}} \cdot (\varrho(t, \mathbf{x}; \mathbf{y}) v(t, \mathbf{x}; \mathbf{y})) = 0, \quad t \in (0, 1] \\ & \quad \varrho(0, \mathbf{x}; \mathbf{y}) = \rho_{\mathbf{z}_x}(\mathbf{x}). \end{aligned}$$

Here, the terminal and running costs in the objective functional are the L_2 anti-derivatives of J_{NLL} and P_{DOT} , respectively, and the continuity equation is used to represent the density evolution under the velocity v . To be precise, (4.3) can be seen as a discretization of (4.6) in the Lagrangian coordinates defined by the reversed ODE (4.14). Note that both formulations differ in the way the transport costs are measured: (4.4) computes the cost of pushing the conditional distribution to the Gaussian, while (4.6) penalizes the costs of pushing the Gaussian to the conditional. While these two terms do not generally agree, they coincide for the L_2 optimal transport map; see [19, Corollary 2.5.13] for a proof for unconditional optimal transport. For more insights into MFGs and their relation to optimal transport and generative modeling, we refer to our prior work [50] and the more recent work [62, Sec 3.4]. The fact that the solutions of the microscopic version in (4.3) and the macroscopic version in (4.6) agree is remarkable and was first shown in the seminal work [31].

By Pontryagin’s maximum principle, the solution of (4.3) satisfies the feedback form

$$(4.7) \quad v(t, \mathbf{p}(t); \mathbf{y}) = -\frac{1}{\alpha_1} \nabla_{\mathbf{p}} \Phi(t, \mathbf{p}(t); \mathbf{y})$$

where $\Phi : [0, 1] \times \mathbb{R}^n \times \mathbb{R}^m \rightarrow \mathbb{R}$ and $\Phi(\cdot, \cdot; \mathbf{y})$ can be seen as the value function of the MFG and, alternatively, as the Lagrange multiplier in (4.6) for a fixed \mathbf{y} . Therefore, we model the velocity as a conservative vector field as also proposed in [40, 50]. This also simplifies the computation of the log-determinant since the Jacobian of v is symmetric, and we note that

$$(4.8) \quad \text{trace} \nabla_{\mathbf{p}} (\nabla_{\mathbf{p}} \Phi(t, \mathbf{p}(t); \mathbf{y})) = \Delta_{\mathbf{p}} \Phi(t, \mathbf{p}(t); \mathbf{y}).$$

Another consequence of optimal control theory is that the value function satisfies the Hamilton Jacobi Bellman (HJB) equations

$$(4.9) \quad \partial_t \Phi(t, \mathbf{x}; \mathbf{y}) - \frac{1}{2\alpha_1} \|\nabla_{\mathbf{x}} \Phi(t, \mathbf{x}; \mathbf{y})\|^2 = 0, \quad t \in [0, 1]$$

with the terminal condition

$$(4.10) \quad \Phi(1, \mathbf{x}; \mathbf{y}) = -\frac{\pi(\mathbf{x}, \mathbf{y})}{\varrho(1, \mathbf{x}; \mathbf{y})},$$

which is only tractable if the joint density $\pi(\mathbf{x}, \mathbf{y})$ is available. These n -dimensional PDEs are parameterized by $\mathbf{y} \in \mathbb{R}^m$.

Neural network approach. We parameterize the value function, Φ , with a scalar-valued neural network. In contrast to the static approach in the previous section, the choice of function approximator is more flexible in the dynamic approach. The approach can be effective as long as Φ is parameterized with any function approximation tool that is effective in high dimensions, allows efficient evaluation of its gradient and Laplacian, and the training problem can be solved sufficiently well. For our numerical experiments, we use the architecture considered in [40] and model Φ as the sum of a simple feed-forward neural network and a quadratic term. That is,

$$(4.11) \quad \Phi_{\theta}(\mathbf{q}) = \text{NN}_{\theta_{\text{NN}}}(\mathbf{q}) + Q_{\theta_{\text{Q}}}(\mathbf{q}), \quad \text{with} \quad \mathbf{q} = (t, \mathbf{x}; \mathbf{y}), \quad \theta = (\theta_{\text{NN}}, \theta_{\text{Q}}).$$

As in [40], we model the neural network as a two-layer residual network of width w that reads

$$(4.12) \quad \begin{aligned} \mathbf{h}_0 &= \sigma(\mathbf{A}_0 \mathbf{q} + \mathbf{b}_0) \\ \mathbf{h}_1 &= \mathbf{h}_0 + \sigma(\mathbf{A}_1 \mathbf{h}_0 + \mathbf{b}_1) \\ \text{NN}_{\theta_{\text{NN}}}(\mathbf{q}) &= \mathbf{a}^{\top} \mathbf{h}_1 \end{aligned}$$

with trainable weights $\theta_{\text{NN}} = (\mathbf{a}, \mathbf{A}_0, \mathbf{b}_0, \mathbf{A}_1, \mathbf{b}_1)$ where $\mathbf{a} \in \mathbb{R}^w$, $\mathbf{A}_0 \in \mathbb{R}^{(w \times (m+n+1))}$, $\mathbf{b}_0 \in \mathbb{R}^w$, $\mathbf{A}_1 \in \mathbb{R}^{w \times w}$, and $\mathbf{b}_1 \in \mathbb{R}^w$. The quadratic term depends on the weights $\theta_{\text{Q}} = (\mathbf{A}, \mathbf{b}, c)$ where $\mathbf{A} \in \mathbb{R}^{(n+m+1) \times r}$, $\mathbf{b} \in \mathbb{R}^{m+n+1}$, $c \in \mathbb{R}$ and is defined as

$$(4.13) \quad Q_{\theta_{\text{Q}}}(\mathbf{q}) = \frac{1}{2} \mathbf{q}^\top (\mathbf{A} \mathbf{A}^\top) \mathbf{q} + \mathbf{b}^\top \mathbf{q} + c.$$

Adding the quadratic term provides a simple and efficient way to model affine shifts between the distributions. In our experiments r is chosen to be $\min(10, n + m + 1)$.

Training problem. In summary, we obtain the training problem

$$(4.14) \quad \begin{aligned} \min_{\theta} \quad & J_{\text{NLL}}[g_{\theta}] + \alpha_1 P_{\text{DOT}}[\nabla_{\mathbf{p}} \Phi_{\theta}] + \alpha_2 P_{\text{HJB}}[\Phi_{\theta}] \\ \text{where} \quad & g_{\theta}^{-1}(\mathbf{x}; \mathbf{y}) = \mathbf{p}(0) \text{ and } \frac{d}{dt} \mathbf{p}(t) = -\frac{1}{\alpha_1} \nabla_{\mathbf{p}} \Phi_{\theta}(t, \mathbf{p}(t); \mathbf{y}), \quad t \in (0, 1], \quad \mathbf{p}(1) = \mathbf{x}. \end{aligned}$$

Here, $\alpha_2 \geq 0$ controls the influence of the HJB penalty term from [40], which reads

$$(4.15) \quad P_{\text{HJB}}[\Phi] = \mathbb{E}_{\pi(\mathbf{x}, \mathbf{y})} \left[\int_0^1 \left| \partial_t \Phi(t, \mathbf{p}(t); \mathbf{y}) - \frac{1}{2\alpha_1} \|\nabla_{\mathbf{p}} \Phi(t, \mathbf{p}(t); \mathbf{y})\|^2 \right| dt \right].$$

When α_1 is chosen so that the minimizer of the above problem matches the densities exactly, the solution is the optimal transport map. In this situation, the relationship between the value function, Φ_{θ} , and the optimal potential, \tilde{G}_{θ} , is given by

$$(4.16) \quad \tilde{G}_{\theta}(\mathbf{x}, \mathbf{y}) + C = \frac{1}{2} \mathbf{x}^\top \mathbf{x} + \frac{1}{\alpha_1} \Phi_{\theta}(1, \mathbf{x}; \mathbf{y}).$$

for some constant $C \in \mathbb{R}$. To train the COT-Flow, we use a discretize-then-optimize paradigm. In our experiments, we use n_t equidistant steps of the Runge-Kutta-4 scheme to discretize the ODE constraint in (4.14) and apply the Adam optimizer to the resulting unconstrained optimization problem. Note that following the implementation by [40], we enforce a box constraint of $[-1.5, 1.5]$ to the network parameters θ_{NN} . Since the velocities defining the optimal transport map will be constant along the trajectories, we expect the accuracy of the discretization to improve as we get closer to the solution.

Sample generation. After training, we draw i.i.d. samples from the approximated conditional distribution for a given \mathbf{y} by sampling $\mathbf{z}_x \sim \rho_{\mathbf{z}_x}(\mathbf{z}_x)$ and solving the ODE (4.1). Since we train the inverse generator using a fixed number of integration steps, n_t , it is interesting to investigate how close our solution is to the continuous problem. One indicator is to compare the samples obtained with different number of integration steps during sampling. Another indicator is to compute the variance of $\nabla \Phi$ along the trajectories.

Hyperparameters. As described in section 5, we randomly sample the width, w , of the neural network, the number of time integration steps during training, the penalty parameters α_1, α_2 , and the hyperparameters of the Adam optimizer (batch size and initial learning rate) from the values listed in Table 2.

5. Implementation and Experimental Setup. This section describes our implementations, experimental setups and provides guidance for applying our techniques to new problems.

TABLE 2

Hyperparameter search space for PCP-Map and COT-Flow. Here m denotes the size of the context feature or observation \mathbf{y}

Hyperparameters	PCP-Map	COT-Flow
Batch size	$\{2^5, 2^6, 2^7, 2^8\}$	$\{2^5, 2^6, \dots, 2^{10}\}$
Learning rate	$\{0.05, 0.01, 10^{-3}, 10^{-4}\}$	$\{0.05, 0.01, 10^{-3}, 10^{-4}\}$
Feature Layer width, w	$\{2^5, 2^6, \dots, 2^9\}$	$\{2^5, 2^6, \dots, 2^{10}\}$
Context Layer width, u	$\{\frac{w}{2^i} \frac{w}{2^i} > m, i=0,1,\dots\} \cup \{m\}$	
Embedding feature width, w_y		$\{2^5, 2^6, 2^7\}$
Embedding output width, w_{yout}		$\{2^5, 2^6, 2^7\}$
Number of layers, K	$\{2, 3, 4, 5, 6\}$	$\{2\}$
Number of time steps, n_t		$\{8, 16\}$
$[\log(\alpha_1), \log(\alpha_2)]$		$[\mathcal{U}(-1, 3), \mathcal{U}(-1, 3)]$ or $[\mathcal{U}(10^2, 10^5), \mathcal{U}(10^2, 10^5)]$

Implementation. The scripts for implementing our neural network approaches and running our numerical experiments are written in Python using PyTorch. For datasets that are not publicly available, we provide the binary files we use in our experiments and the Python scripts for generating the data. We have published the code and data along with detailed instructions on how to reproduce the results in our main repository <https://github.com/EmoryMLIP/PCP-Map.git>. Since the COT-Flow approach is a generalization of a previous approach, we have created a fork for this paper <https://github.com/EmoryMLIP/COT-Flow.git>.

Hyperparameter selection. Finding hyperparameters, such as network architectures and optimization parameters, is crucial in neural network approaches. In our experience, the choice of hyperparameters is often approach and problem-dependent. Establishing rigorous mathematical principles for choosing the parameters in these models (as is now well known for regularizing convex optimization problems based on results from high-dimensional statistics [39]) is an important area of future work and is beyond the scope of this paper. Nevertheless, we present an objective and robust way, relying only on random grid search over a pre-determined search space Table 2, of identifying an effective combination of hyperparameters for our approaches. To be more specific, we first perform a *pilot run* for each experiment using randomly selected hyperparameters combinations from a subset of Table 2. The number of hyperparameters considered in the pilot run for each experiment will be presented in the next section. Then, after identifying the best combination in terms of validation loss, we perform full training with that combination.

6. Numerical Experiments. We test the accuracy, robustness, efficiency, and scalability of our approaches from sections 3 and 4 using three problem settings that lead to different challenges and benchmark methods for comparison. All numerical experiments are conducted on one Quadro RTX 8000 GPU with 48 GB of RAM. In subsection 6.1, we compare our proposed approaches to the Adaptive Transport Maps (ATM) approach developed in [3] on estimating the joint and conditional distributions of six UCI tabular datasets [32]. In subsection 6.2, we compare our approaches to a provably convergent approximate Bayesian computation (ABC) approach on accuracy and computational cost using the stochastic Lotka–Volterra model, which yields an intractable likelihood. Using this dataset, we also compare PCP-Map’s and COT-Flow’s sampling efficiency for different settings. In subsection 6.3, we demonstrate the scalability of our approaches to higher-dimensional problems by comparing them to the flow-based neural posterior estimation (NPE) approach on an inference problem involving the 1D shallow water equations. To demonstrate the improvements of

PCP-Map over the amortized CP-Flow approach in the repository associated with [24], we compare computational cost in subsection 6.4.

6.1. UCI Tabular Datasets. We follow the experimental setup in [3] by first removing the discrete-valued features and one variable of every pair with a Pearson correlation coefficient greater than 0.98. We then partition the datasets into training, validation, and testing sets using an 8:1:1 split, followed by normalization. For the joint and conditional tasks, we set \mathbf{x} to be the second half of the features and the last feature, respectively. The conditioning variable \mathbf{y} is set to be the remaining features for both tasks.

To perform joint density estimation and sampling, we use the inverse of the block-triangular generator in (2.1)

$$(6.1) \quad T^{-1}(\mathbf{x}, \mathbf{y}) = \begin{bmatrix} \mathbf{h}^{-1}(\mathbf{y}) \\ g^{-1}(\mathbf{x}; \mathbf{y}) \end{bmatrix} \quad \text{and} \quad \nabla T^{-1}(\mathbf{x}, \mathbf{y}) = \begin{bmatrix} \nabla_{\mathbf{y}} \mathbf{h}^{-1}(\mathbf{y}) & 0 \\ \nabla_{\mathbf{y}} g^{-1}(\mathbf{x}; \mathbf{y}) & \nabla_{\mathbf{x}} g^{-1}(\mathbf{x}; \mathbf{y}) \end{bmatrix}.$$

We learn the map T by minimizing the expected negative log-likelihood functional

$$(6.2) \quad J_{\text{NLL}}[T] = \mathbb{E}_{\pi(\mathbf{x}, \mathbf{y})} \left[\frac{1}{2} \|T^{-1}(\mathbf{x}, \mathbf{y})\|^2 - \log \det \nabla T^{-1}(\mathbf{x}, \mathbf{y}) \right].$$

Since the reference distribution, $\rho_{\mathbf{z}} = \mathcal{N}(0, I_{n+m})$, is of product type, we can decouple the objective functional into the following two terms

$$J_{\text{NLL}}[T] = J_{\text{NLL}, \mathbf{x}}[g] + J_{\text{NLL}, \mathbf{y}}[\mathbf{h}]$$

with $J_{\text{NLL}, \mathbf{x}}$ defined in (3.2) and

$$(6.3) \quad J_{\text{NLL}, \mathbf{y}}[\mathbf{h}] = \mathbb{E}_{\mathbf{y} \sim \pi(\mathbf{y})} \left[\|\mathbf{h}^{-1}(\mathbf{y})\|^2 - \log \det \nabla_{\mathbf{y}} \mathbf{h}^{-1}(\mathbf{y}) \right].$$

For PCP-Map, as proposed in [1], we employ the gradient of a fully input convex neural network (FICNN) $\tilde{F}_{\theta_F} : \mathbb{R}^n \rightarrow \mathbb{R}$, parameterized by weights θ_F , to represent the inverse generator \mathbf{h}^{-1} . A general K -layer FICNN can be expressed as the following sequence starting with $\mathbf{s}_0 = \mathbf{y}$:

$$(6.4) \quad \mathbf{s}_{k+1} = \sigma^{(s)} \left(\mathbf{L}_k^{(w)} \mathbf{s}_k + \mathbf{L}_k^{(y)} \mathbf{y} + \mathbf{b}_k \right)$$

for $k = 0, \dots, K-1$. Here $\sigma^{(s)}$ is the softplus activation function. Since the FICNN map is not part of our contribution, we use the input-augmented ICNN implementation used in [24]. For the second map component g^{-1} , we use the gradient of a PICNN as described in section 3. For COT-Flow, we construct two distinct neural network parameterized potentials Φ_x and Φ_y . Here, Φ_y only takes the conditioning variable \mathbf{y} as inputs and can be constructed exactly like in [40]. Φ_x acts on all features and is the same potential described in section 4. We learn the inverse conditional generator g_{θ}^{-1} to perform conditional density estimation. This is equivalent to solely learning the weights θ of the PICNN \tilde{G}_{θ} for PCP-Map. For COT-Flow, we only construct and learn the potential Φ_x .

The hyperparameter sample space we use for this experiment is presented in Table 3. We select smaller batch sizes and large learning rates as this leads to fast convergence on these relatively simple problems. For each dataset, we select the ten best hyperparameter combinations based on a pilot run for full training. For PCP-Map’s pilot run, we performed 15 epochs for all three conditional datasets, three epochs for the Parkinson’s and the White Wine datasets, and four epochs for Red

TABLE 3
Hyperparameter sample space for the UCI tabular datasets experiment.

Hyperparameters	PCP-Map	COT-Flow
Batch size	{32, 64}	{32, 64}
Learning rate	{0.01, 0.005, 0.001}	{0.01, 0.005, 0.001}
Feature Layer width, w	{32, 64, 128, 256, 512}	{32, 64, 128, 256, 512}
Context Layer width, u	$\{\frac{w}{2^i} \frac{w}{2^i} > m, i = 0, 1, \dots\} \cup \{m\}$	
Number of layers, K	{2, 3, 4, 5, 6}	{2}
Number of time steps, n_t		{8, 16}
$[\log(\alpha_1), \log(\alpha_2)]$		$[\mathcal{U}(-1, 3), \mathcal{U}(-1, 3)]$

TABLE 4
Mean negative log-likelihood comparisons between ATM, PCP-Map, and COT-Flow on test data. For our approaches, we report the best, median, and worst results over different hyperparameter combinations and five training runs. Lower is better, and we highlight the best results in bold.

dataset name	joint			conditional		
	Parkinson's $d = 15$ $N = 5875$	white wine $d = 11$ $N = 4898$	red wine $d = 11$ $N = 1599$	concrete $d = 9$ $N = 1030$	energy $d = 10$ $N = 768$	yacht $d = 7$ $N = 308$
ATM [3]	2.8 ± 0.4	11.0 ± 0.2	9.8 ± 0.4	3.1 ± 0.1	1.5 ± 0.1	0.5 ± 0.2
PCP-Map (best)	1.59±0.08	10.81±0.15	8.80±0.11	0.19±0.14	-1.15±0.08	-2.76±0.18
PCP-Map (median)	1.96±0.08	10.99±0.24	9.90±0.53	0.28±0.07	-1.02±0.16	-2.42±0.25
PCP-Map (worst)	2.34±0.09	12.53±2.68	11.08±0.72	1.18±0.54	0.30±0.63	-0.27±1.28
COT-Flow (best)	1.58±0.09	10.45±0.08	8.54±0.13	0.15±0.05	-1.19±0.09	-3.14±0.14
COT-Flow (median)	2.72±0.34	10.73±0.05	8.71±0.12	0.21±0.04	-0.83±0.05	-2.77±0.12
COT-Flow (worst)	3.27±0.15	11.04±0.28	9.00±0.05	0.35±0.04	-0.56±0.04	-2.38±0.11

Wine using 100 randomly sampled combinations. For COT-Flow, we limit the pilot runs to only 50 sampled combinations due to a narrower sample space on model architecture. To assess the robustness of our approaches, we performed five full training runs with random initializations of network weights for each of the ten hyperparameter combinations for each dataset.

In Table 4, we report the best, median, and worst mean negative log-likelihood on the test data across the six datasets for the two proposed approaches and the best results for ATM. The table demonstrates that the best models outperform ATM for all datasets and that the median performance is typically superior. Overall, COT-Flow slightly outperforms PCP-Map in terms of loss values for the best models. The improvements are more pronounced for the conditional sampling tasks, where even the worst hyperparameters from PCP-Map and COT-Flow improve over ATM with a substantial margin.

6.2. Stochastic Lotka-Volterra. We compare our approaches to an ABC approach based on Sequential Monte Carlo (SMC) for likelihood-free Bayesian inference using the stochastic Lotka-Volterra (LV) model [60]. The LV model is a stochastic process whose dynamics describe the evolution of the populations $S(t) = (S_1(t), S_2(t))$ of two interacting species, e.g., predators and prey. These populations start from a fixed initial condition $S(0) = (50, 100)$. The parameter $\mathbf{x} \in \mathbb{R}^4$ determines the rate of change of the populations over time, and the observation $\mathbf{y} \in \mathbb{R}^9$ contains summary statistics of the time series generated by the model. This results in an observation vector with nine entries: the mean, the log-variance, the auto-correlation with lags one and two, and the cross-correlation coefficient. The procedure for sampling a trajectory of the species populations is

known as Gillespie’s algorithm.

Given a prior distribution for the parameter \mathbf{x} , we aim to sample from the posterior distribution corresponding to an observation \mathbf{y}^* . As in [44], we consider a log-uniform prior distribution for the parameters whose density (of each component) is given by $\pi(\log x_i) = \mathcal{U}(-5, 2)$. As a result of the stochasticity that enters non-linearly in the dynamics, the likelihood function is not available in closed form. Hence, this model is a popular benchmark for likelihood-free inference algorithms as they avoid evaluating $\pi(\mathbf{y}|\mathbf{x})$ [44].

We generate two training sets consisting of 50k and 500k samples from the joint distribution $\pi(\mathbf{x}, \mathbf{y})$ obtained using Gillespie’s algorithm. To account for the strict positivity of the parameter, which follows a log-uniform prior distribution, we perform a log transformation of the \mathbf{x} samples. This ensures that the conditional distribution of interest has full support, which is needed to find a diffeomorphic map to a Gaussian. We split the log-transformed data into ten folds and use nine folds of the samples as training data and one fold as validation data. We normalize the training and validation sets using the training set’s empirical mean and standard deviation.

For the pilot run, we use the same sample space in Table 3 except expanding the batch size space to $\{64, 128, 256\}$ for PCP-Map and $\{32, 64, 128, 256\}$ for COT-Flow to account for the increase in sample size. We also fixed, for PCP-Map, $w = u$. During PCP-Map’s pilot run, we perform two training epochs with 100 hyperparameter combination samples using the 50k dataset. For COT-Flow, we only perform one epoch of pilot training as it is empirically observed to be sufficient. We then use the best hyperparameter combinations to train our models on the 50k and 500k datasets to learn the posterior for the normalized parameter in the log-domain. After learning the maps, we used their inverses, the training data mean and standard deviation, and the log transformations to yield parameter samples in the original domain.

The SMC-ABC algorithm finds parameters that match the observations with respect to a selected distance function by gradually reducing a tolerance $\epsilon > 0$, which leads to samples from the true posterior exactly as $\epsilon \rightarrow 0$. For our experiment, we consider inference problems arising from observations associated with two true parameters. We allow ϵ to converge to 0.1 for the first true parameter and 0.15 for the second.

We evaluate our approaches for maximum-a-posteriori (MAP) estimation and posterior sampling. We consider a true parameter $\mathbf{x}^* = (0.01, 0.5, 1, 0.01)^\top$, which was chosen to give rise to oscillatory behavior in the population time series. Given one observation $\mathbf{y}^* \sim \pi(\mathbf{y}|\mathbf{x}^*)$, we first identify the MAP point by maximizing the estimated log-likelihoods provided by our approaches. Then, we generate 2000 samples from the approximate posterior $\pi(\mathbf{x}|\mathbf{y}^*)$ using our approaches. Figure 2 presents one and two-dimensional marginal histograms and scatter plots of the MAP point and samples, compared against 2000 samples generated by the SMC-ABC algorithm from [5]. Our approaches yield samples tightly concentrated around the MAP points that are close to the true parameter \mathbf{x}^* .

To provide more evidence that our learning approaches indeed solve the amortized problem, Figure 3 shows the MAP points and approximate posterior samples generated from a new random observation \mathbf{y}^* corresponding to the true parameter $\mathbf{x}^* = (0.02, 0.02, 0.02, 0.02)^\top$. We observe similar concentrations of the MAP point and posterior samples around the true parameter and similar correlations learned by the generative model and ABC, for example, between the third and other parameters.

Efficiency-wise, PCP-Map and COT-Flow yield similar approximations to ABC at a fraction of the computational cost of ABC. The latter requires approximately 5 or 18 million model simulations for each conditioning observation, while the learned approaches use the same 50 thousand

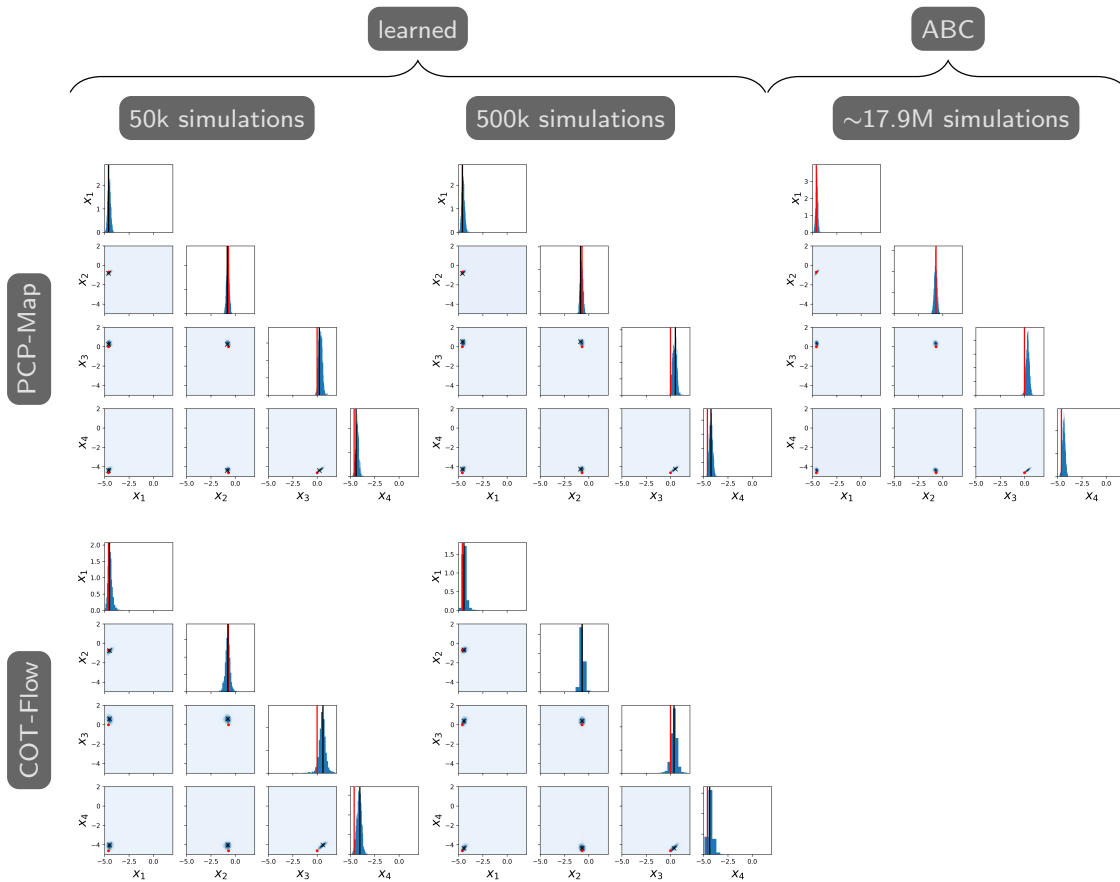


FIG. 2. Posterior samples in log scale and MAP point quality comparisons between proposed approaches and ABC with $\mathbf{x}^* = (0.01, 0.5, 1, 0.01)^\top$. **Left:** posterior samples generated by proposed approaches trained on 50k samples. **Middle:** posterior samples generated by proposed approaches trained on 500k samples. The red dots and bars correspond to \mathbf{x}^* , and the black crosses and bars correspond to the MAP point. **Right:** posterior samples from ABC.

simulations to amortize over the observation. These savings generally offset the hyperparameter search and training time for the proposed approaches, which is typically less than half an hour per full training run on a GPU. For some comparison, SMC-ABC took 15 days to reach $\epsilon = 0.1$ for $\mathbf{x}^* = (0.01, 0.5, 1, 0.01)^\top$.

To further validate that we approximate the posterior distribution as well, Figure 4 compares the population time series generated from approximate posterior samples given by our approaches and SMC-ABC. This corresponds to comparing the posterior predictive distributions for the states $S(t)$ given different posterior approximations for the parameters. While the simulations have inherent stochasticity, we observe that the generated posterior parameter samples from all approaches recover the expected oscillatory time series simulated from the true parameter \mathbf{x}^* , especially at earlier times.

In the experiments above, we employed $n_t = 32$ to generate posterior samples during testing for

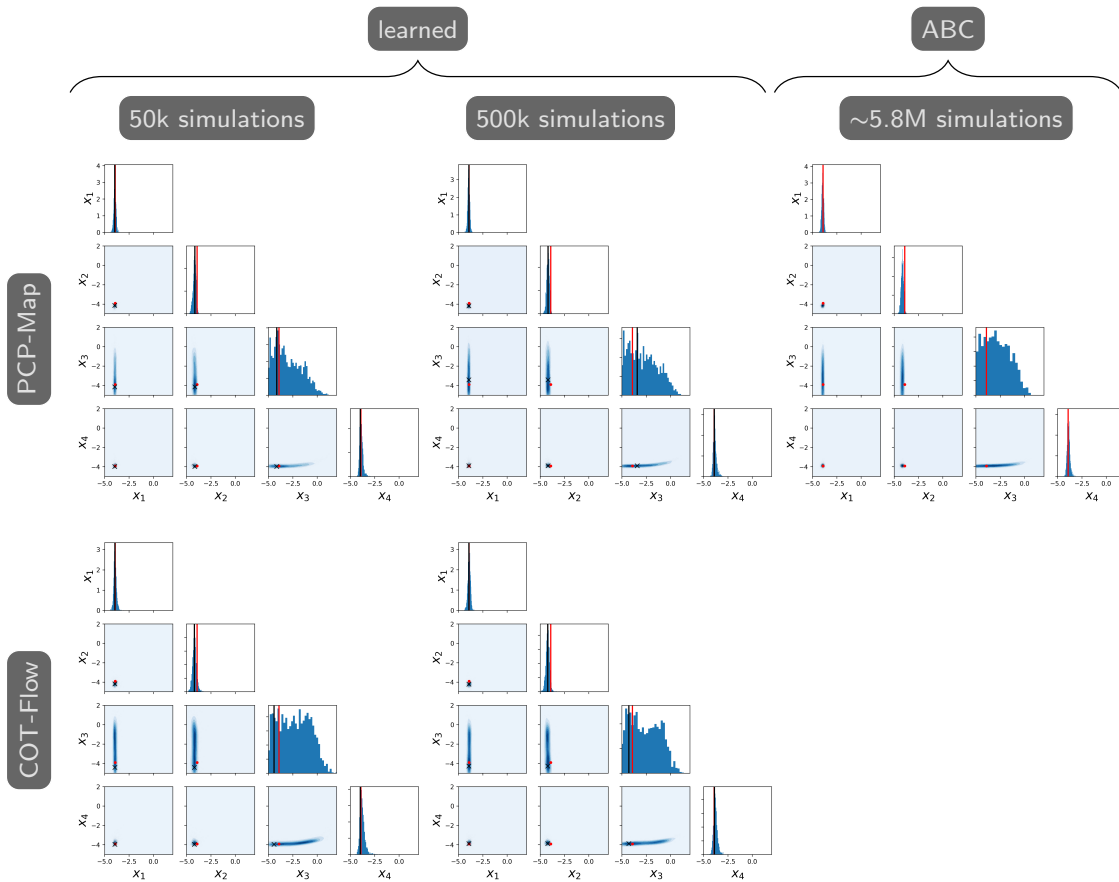


FIG. 3. Posterior samples log scale and MAP point quality comparisons between proposed approaches and ABC with $\mathbf{x}^* = (0.02, 0.02, 0.02, 0.02)^\top$. **Left:** posterior samples generated by proposed approaches trained on 50k samples. **Middle:** posterior samples generated by proposed approaches trained on 500k samples. The red dots and bars correspond to \mathbf{x}^* , and the black crosses and bars correspond to the MAP point. **Right:** posterior samples from ABC.

the COT-Flow. However, one can also decrease n_t after training to generate samples faster without sacrificing much accuracy, as shown in Figure 5. Thereby, one can achieve faster sampling speed using COT-Flow than using PCP-Map as demonstrated in Table 5. To establish such a comparison, we increase the l -BFGS tolerance when sampling using PCP-Map, which produces a similar effect on sampling accuracy than decreasing the number of time steps for COT-Flow.

6.3. 1D Shallow Water Equations. The shallow water equations model wave propagation through shallow basins described by the depth profiles parameter, $\mathbf{x} \in \mathbb{R}^{100}$, which is discretized at 100 equidistant points in space. After solving the equations over a time grid with 100 cells, the resulting wave amplitudes form the 10k-dimensional raw observations. As in [48], we perform a 2D Fourier transform on the raw observations and concatenate the real and imaginary parts since the

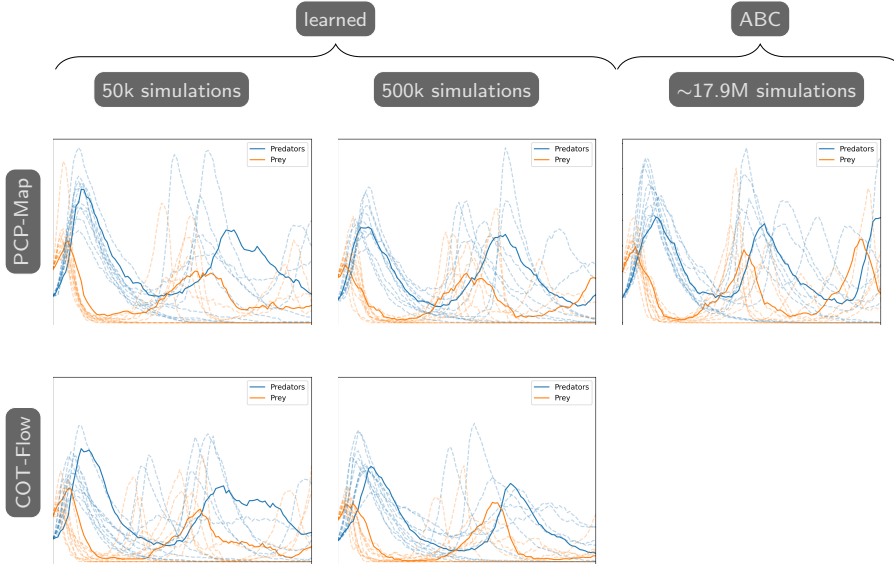


FIG. 4. *Posterior predictives quality comparisons between proposed approaches and ABC with $\mathbf{x}^* = (0.01, 0.5, 1, 0.01)^\top$. The solid lines in each plot represent a simulated time series using \mathbf{x}^* . Dotted lines represent time series simulated using ten randomly selected posterior samples from the 2000. **Left:** posterior predictives from proposed approaches trained on 50k samples. **Middle:** posterior predictives from proposed approaches trained on 500k samples. **Right:** posterior predictives from ABC.*

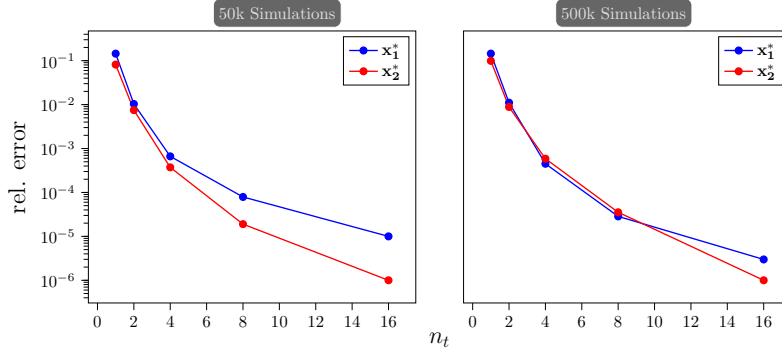


FIG. 5. *Relative normed errors between COT-Flow posterior samples generated with smaller n_t values and samples generated with $n_t = 32$. Here $\mathbf{x}_1^* = (0.01, 0.5, 1, 0.01)^\top$ and $\mathbf{x}_2^* = (0.02, 0.02, 0.02, 0.02)^\top$.*

waves are periodic. We define this simulation-then-Fourier-transform process as our forward model and denote it as $\Psi(\mathbf{x})$. Additive Gaussian noise is then introduced to the outputs of Ψ , which gives us the observations $\mathbf{y} = \Psi(\mathbf{x}) + 0.25\epsilon$, where $\mathbf{y}, \epsilon \in \mathbb{R}^{200 \times 100}$ and $\epsilon_{i,j} \sim \mathcal{N}(0, 1)$. We aim to use the proposed approaches to learn the posterior $\pi(\mathbf{x}|\mathbf{y})$.

We follow instructions from [48] to set up the experiment and obtain 100k samples from the joint distribution $\pi(\mathbf{x}, \mathbf{y})$ as the training dataset using the provided scripts. We use the prior

TABLE 5

Sampling efficiency comparisons between PCP-Map and COT-Flow in terms of GPU time in seconds (s). We report the mean and standard deviation over five runs, respectively.

COT-Flow Sampling (s)		PCP-Map Sampling (s)	
$n_t=32$	0.538 ± 0.003	tol=1e-6	0.069 ± 0.004
$n_t=16$	0.187 ± 0.004	tol=1e-5	0.066 ± 0.004
$n_t=8$	0.044 ± 0.000	tol=1e-4	0.066 ± 0.004
$n_t=4$	0.025 ± 0.001	tol=1e-3	0.066 ± 0.004
$n_t=2$	0.012 ± 0.000	tol=1e-2	0.059 ± 0.001
$n_t=1$	0.006 ± 0.000	tol=1e-1	0.049 ± 0.004

distribution defined as

$$\pi(\mathbf{x}) = \mathcal{N}(10 \cdot \mu \mathbf{1}_{100}, \Sigma) \text{ with } \Sigma_{ij} = \sigma \exp\left(\frac{-(i-j)^2}{2\tau}\right), \sigma = 15, \tau = 100.$$

Using a principal component analysis (PCA), we analyze the intrinsic dimensions of \mathbf{x} and \mathbf{y} . To ensure that the large additive noise 0.25ϵ does not affect our analysis, we first study the noise-free prior predictive by collecting a set of 100k forward model evaluations and forming the estimated covariance $\text{Cov}(\Psi(\mathbf{X})) \approx \frac{1}{N-1} \Psi(\mathbf{X})^\top \Psi(\mathbf{X})$. Here, $\Psi(\mathbf{X}) \in \mathbb{R}^{100000 \times 20000}$ stores the forward model outputs row-wise in a matrix. The top 3500 modes explain around 96.5% of the variance. A similar analysis on the noise-present training dataset shows that the top 3500 modes, in this case, only explain around 75.6% of the variance due to the added noise. To address the rank deficiency, we construct a projection matrix \mathbf{V}_{proj} using the top 3500 eigenvectors of $\text{Cov}(\Psi(\mathbf{X}))$ and obtain the projected observations $\mathbf{y}_{\text{proj}} = \mathbf{V}_{\text{proj}}^\top \mathbf{y}$ from the training datasets. We then perform a similar analysis for \mathbf{x} and discovered that the top 14 modes explained around 99.9% of the variance. Hence, we obtain $\mathbf{x}_{\text{proj}} \in \mathbb{R}^{14}$ as the projected parameters.

We then trained our approaches to learn the reduced posterior, $\pi_{\text{proj}}(\mathbf{x}_{\text{proj}}|\mathbf{y}_{\text{proj}})$. For comparisons, we trained the flow-based NPE approach to learn the same posterior by following [48]. For COT-Flow, we add a 3-layer fully connected neural network with tanh activation to embed \mathbf{y}_{proj} . To pre-process the training dataset, we randomly select 5% of the dataset as the validation set and use the rest as the training set. We project both \mathbf{x} and \mathbf{y} and then normalize them by subtracting the empirical mean and dividing by the empirical standard deviations of the training data.

We employ the sample space presented in Table 6 for the pilot runs. For COT-Flow, we select a w sample space with larger values for maximum expressiveness and allow multiple optimization steps over one batch, randomly selected from $\{8, 16\}$. We then use the best hyperparameter combination based on the validation loss for the full training. For NPE, we used the `sbi` package [55] and the scripts provided by [48].

We first compare the accuracy of the MAP points, posterior samples, and posterior predictives across the three approaches. The MAP points are obtained using the same method as in subsection 6.2. For posterior sampling, we first sample a ‘‘ground truth’’ $\mathbf{x}^* \sim \pi(\mathbf{x})$ and obtain the associated ground truth reduced observation $\mathbf{y}_{\text{proj}}^* = \mathbf{V}_{\text{proj}}^\top (\Psi(\mathbf{x}^*) + 0.25\epsilon)$. Then, we use the three approaches to sample from the posterior $\pi_{\text{proj}}(\mathbf{x}_{\text{proj}}|\mathbf{y}_{\text{proj}}^*)$. This allows us to obtain approximate samples $\mathbf{x} \sim \pi(\mathbf{x}|\mathbf{y}^*)$. The posterior predictives are obtained by solving the forward model for the generated parameters. Through Figure 6, we observe that the MAP points, posterior samples, and predictives produced by PCP-Map and COT-Flow are more concentrated around the ground truth

TABLE 6
Hyperparameter sample space for the 1D shallow water equations experiment.

Hyperparameters	PCP-Map	COT-Flow
Batch size	{64, 128, 256}	$\{2^7, 2^8, 2^9, 2^{10}\}$
Learning rate	$\{10^{-2}, 10^{-3}, 10^{-4}\}$	$\{10^{-2}, 10^{-3}, 10^{-4}\}$
Feature layer width, w	{32, 64, 128, 256, 512}	{512, 1024}
Context layer width, u	$\{u = w\}$	
Embedding feature width, w_y		$\{2^5, 2^6, 2^7\}$
Embedding output width, w_{yout}		$\{2^5, 2^6, 2^7\}$
Number of layers, K	{2, 3, 4, 5, 6}	{2}
Number of time steps, n_t		{8, 16}
$[\log(\alpha_1), \log(\alpha_2)]$		$[\mathcal{U}(10^2, 10^5), \mathcal{U}(10^2, 10^5)]$

than those produced by NPE.

We perform the simulation-based calibration (SBC) analysis described in [48, App. D.2] to further assess the three approaches’ accuracy; see Figure 7. We can see that, while they are all well calibrated, the cumulative density functions of the rank statistics produced by PCP-Map align almost perfectly with the CDF of a uniform distribution besides a few outliers.

Finally, we analyze the three approaches’ efficiency in terms of the number of forward model evaluations. We train the models using the best hyperparameter combinations from the pilot run on two extra datasets with 50k and 20k samples. We compare the posterior samples’ mean and standard deviation against \mathbf{x}^* across three approaches trained on the 100k, 50k, and 20k sized datasets as presented in Figure 8. We see that PCP-Map and COT-Flow can generate posterior samples centered more closely around the ground truth than NPE using only 50k training samples, which translates to higher computational efficiency since fewer forward model evaluations are required.

6.4. Comparing PCP-Map to amortized CP Flow. We conduct this comparative experiment using the shallow water equations problem for its high dimensionality. We include the more challenging task of learning $\pi(\mathbf{x}|\mathbf{y}_{proj})$, obtained without projecting the parameter, to test the two approaches most effectively. We followed [24] and its associated GitHub repository as closely as possible to implement the amortized CP-Flow. To ensure as fair of a comparison as possible, we used the hyperparameter combination from the amortized CP-Flow pilot run for learning $\pi(\mathbf{x}|\mathbf{y}_{proj})$ and the combination from the PCP-Map pilot run for learning $\pi_{proj}(\mathbf{x}_{proj}|\mathbf{y}_{proj})$. Note that for learning $\pi(\mathbf{x}|\mathbf{y}_{proj})$, we limited the learning rate to 0.0001 for which we observed reasonable convergence.

In the experiment, we observed that amortized CP-Flow’s Hessian vector product function gave NaNs consistently when computing the stochastic log-determinant estimation. Thus, we resorted to exact computation for the pilot and training runs. PCP-Map circumvents this as it uses exact log-determinant computations. Each model was trained five times to capture possible variance.

For comparison, we use the exact mean negative log-likelihood as the metric for accuracy and GPU time as the metric for computational cost. We only record the time for loss function evaluations and optimizer steps for both approaches. The comparative results are presented in Table 7. We see that PCP-Map and amortized CP-Flow reach similar training and validation accuracy measured by NLL. However, PCP-Map on average takes roughly 7 and 3 times less GPU time, respectively, to achieve that accuracy than amortized CP-Flow. Possible reasons for the increased efficiency of PCP-Map’s are its use of ReLU non-negative projection, exact and vectorized Hessian computation, removal of activation normalization, and gradient clipping.

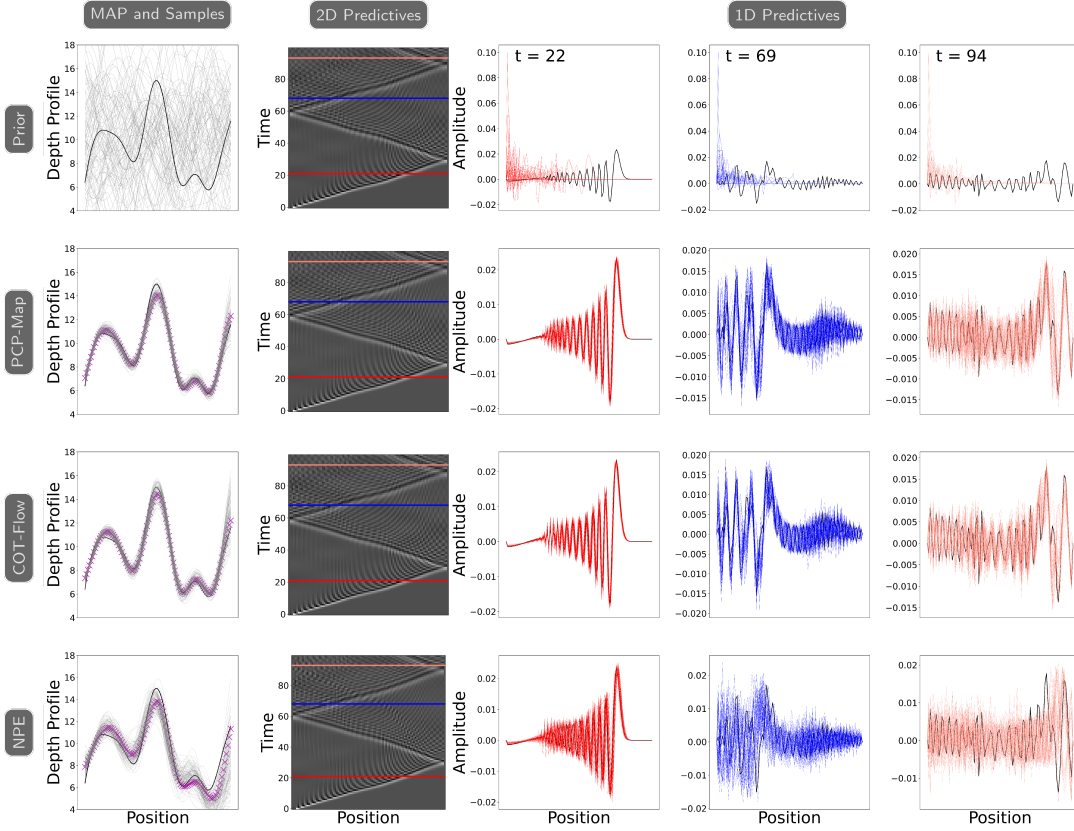


FIG. 6. Prior, MAP point, posterior samples, and predictives quality comparisons between PCP-Map, COT-Flow, and NPE. **Each Row:** left: prior (first row) or posterior samples in gray and \mathbf{x}^* in black. **middle:** 2D image of the wave amplitudes simulated using \mathbf{x}^* (first row) or posterior samples for 100 time grids. **right:** wave amplitudes simulated using 50 prior (first row) or posterior samples at $t = 22, 69, 94$. Here \mathbf{y}^* is plotted in black.

7. Discussion. In our numerical experiments, the comparison to the SMC-ABC approach for the stochastic Lotka-Volterra problem illustrates common trade-offs when selecting conditional sampling approaches. Advantages of the ABC approach include its strong theoretical guarantees and well-known guidelines for choosing the involved hyper-parameters (annealing, burn-in, number of samples to skip to reduce correlation, etc.). The disadvantages are that ABC typically requires a large number of likelihood evaluations to produce (approximately) i.i.d. samples and low-variance estimators in high-dimensional parameter spaces; the computation is difficult to parallelize in the sequential Monte Carlo setting, and the sampling process is not amortized over the conditioning variable \mathbf{y}^* , i.e., it needs to be recomputed whenever \mathbf{y}^* changes.

Comparisons to the flow-based NPE method [48] for the high-dimensional 1D shallow water equations problem subsection 6.3 illustrate the superior accuracy achieved by our approaches. The results indicate that both methods can learn high-dimensional COT maps. Here, the number of effective parameters in the dataset was $n = 14$, and the number of effective measurements was $m = 3500$. Particularly worth noting is that PCP-Map, on average, converges in around 715 seconds

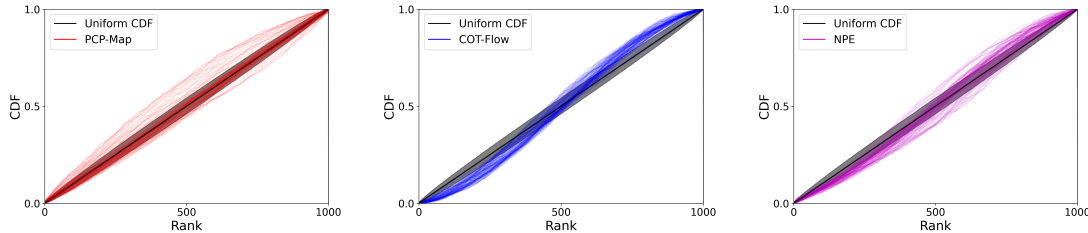


FIG. 7. SBC Analysis for PCP-Map, COT-Flow and NPE. Each colored line represents the empirical cumulative density function (CDF) of the SBC rank associated with one posterior sample dimension.

TABLE 7

Computational cost comparisons between amortized CP-Flow and PCP-Map in terms of GPU time in seconds (s). We report the mean and standard deviation of the training and validation mean NLL, the mean and standard deviation of the GPU times over five training runs, and the number of parameters in million(M), respectively.

Approach	$\pi(\mathbf{x} \mathbf{y}_{\text{proj}})$		$\pi_{\text{proj}}(\mathbf{x}_{\text{proj}} \mathbf{y}_{\text{proj}})$	
	PCP-Map	CP-Flow	PCP-Map	CP-Flow
Number of Parameters	$\sim 8.9\text{M}$	$\sim 5.7\text{M}$	$\sim 2.5\text{M}$	$\sim 1.4\text{M}$
Training Mean NLL	-540.3 ± 4.5	-534.2 ± 9.1	-5.8 ± 0.6	-6.6 ± 0.3
Validation Mean NLL	-519.0 ± 4.1	-506.4 ± 5.1	8.5 ± 0.1	6.1 ± 0.2
Training(s)	6652.2 ± 1030.3	47207.4 ± 7221.0	706.9 ± 61.0	1989.4 ± 10.5
Validation(s)	108.5 ± 17.1	232.1 ± 35.5	6.6 ± 0.6	10.3 ± 0.1
Total(s)	6760.7 ± 1047.4	47439.5 ± 7256.4	713.5 ± 61.5	1999.7 ± 10.5

on one GPU on this challenging high-dimensional problem. Moreover, when compared to the amortized CP-Flow approach, PCP-Map achieves significantly faster convergence while providing a working computational scheme to the static COT problem.

Learning posterior distributions using our techniques or similar measure transport approaches is attractive for real-world applications where samples from the joint distributions are available (or can be generated efficiently), but evaluating the prior density or the likelihood model is intractable. Common examples where a non-intrusive approach for conditional sampling can be fruitful include inverse problems where the predictive model involves stochastic differential equations (as in subsection 6.2) or legacy code and imaging problems where only prior samples are available. Our conditional OT approaches can also be integrated into LFI frameworks such as BayesFlow [47, 55] to perform the density estimation. Another interesting avenue of future work is using our conditional generators in hybrid inference approaches such as [41], which demonstrates that physics-based modeling combined with conditional normalizing flows can improve the scalability and sampling efficiency of LFI for large scale problems

One key advantage of our approaches compared to other transport-based methods that lack approximation targets is they allow for the development of theoretical guarantees. Although this paper focuses on computational algorithms and their empirical validation, we see potential in providing statistical complexity analysis and approximation theoretic analysis for approximating COT maps using our approaches in a conditional sampling context. Encouraging recent progress can already be seen in the theoretical analysis of unconditional OT maps [58, 15].

Given the empirical nature of our study, we paid particular attention to the setup and repro-

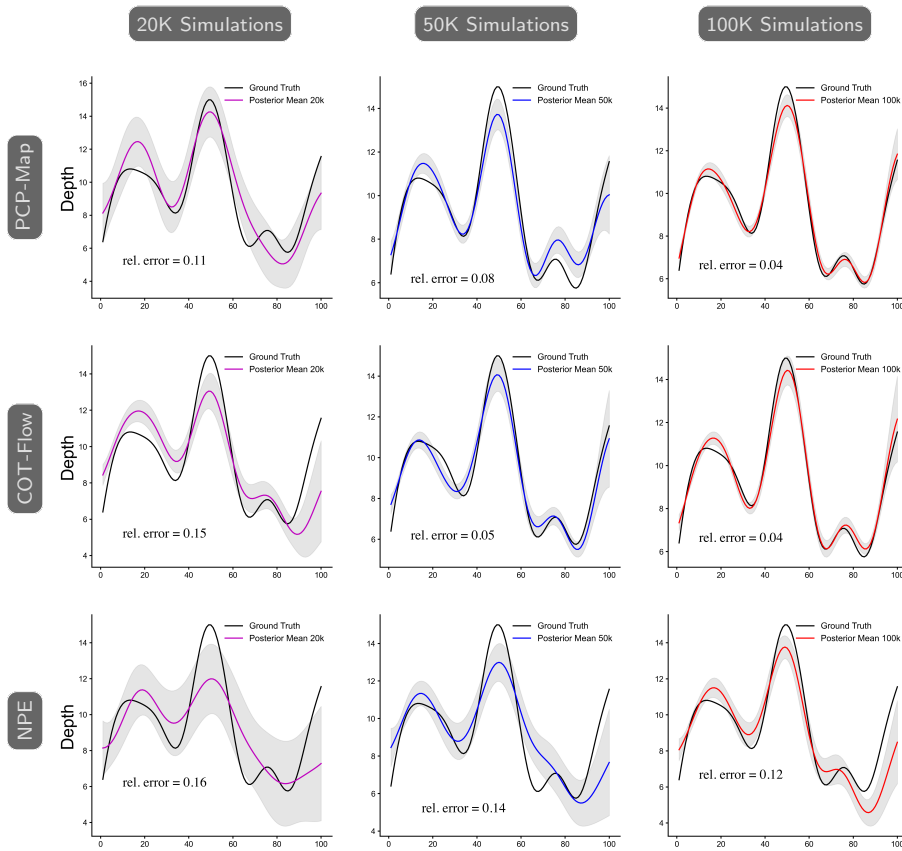


FIG. 8. Posterior sample quality comparisons between PCP-Map, COT-Flow, and NPE trained using 20k, 50k, and 100k samples. We report the relative normed error between the posterior sample mean (over 100 samples) and the ground truth parameter. The gray bands represent regions within one standard deviation of the means.

ducibility of our numerical experiments. To show the robustness of our approaches to hyperparameters and to provide guidelines for hyperparameter selection in future experiments, we report the results of a simple two-step heuristic that randomly samples hyperparameters and identifies the most promising configurations after a small number of training steps. We stress that the same search space of hyperparameters is used across all numerical experiments.

Since both approaches perform similarly in our numerical experiments, we want to comment on some distinguishing factors. One advantage of the PCP-Map approach is its model simplicity, depending only on three hyperparameters (feature width, context width, and network depth), enabled by identifying clearly the conditional Brenier maps as the target. We observed consistent performance for most choices of hyperparameter combination. This feature is particularly attractive when experimenting with new problems. The limitation is that constraints must be imposed to guarantee partial convexity of the potential. On the other hand, the value function (i.e., the velocity field) in COT-Flow can be designed almost arbitrarily. Thus, the latter approach may be beneficial when new data types and their invariances need to be modeled, e.g., permutation

invariances or symmetries, that might conflict with the network architecture required by the direct transport map. Both approaches also differ in terms of their numerical implementation. Training the PCP-Map via backpropagation is relatively straightforward, but sampling requires solving a convex program, which can be more expensive than integrating the ODE defined by the COT-Flow approach, especially when that model is trained well, and the velocity is constant along trajectories. Training the COT-Flow model, however, is more involved due to the ODE constraints and influential hyperparameters for the transport cost and HJB penalties.

Beyond the approaches surveyed and discussed, diffusion models [52] gained much success recently across many applications. In particular, following the procedure in [52, Appendix I.4], the resulting unconditional generator can be used to obtain various conditional distributions as long as there is a tractable and differentiable log-likelihood function; see, e.g., applications to image generation and time series imputation in [4, 54]. We omit discussions on diffusion models since the notion of measure transport is not immediately obvious in this setting as the reference samples are evolved stochastically. Besides diffusion models, flow matching has been recently proposed as an alternative training scheme for continuous normalizing flows [33] with connections to OT. Since flow matching alleviates the need for time integration, investigating extensions to COT merits further investigation [27].

REFERENCES

- [1] B. AMOS, L. XU, AND J. Z. KOLTER, *Input convex neural networks*, in International Conference on Machine Learning, 2017, pp. 146–155.
- [2] R. BAPTISTA, B. HOSSEINI, N. B. KOVACHKI, AND Y. MARZOUK, *Conditional sampling with monotone GANs: from generative models to likelihood-free inference*, SIAM Journal of Uncertainty Quantification, (2024, To Appear).
- [3] R. BAPTISTA, Y. MARZOUK, AND O. ZAHM, *On the representation and learning of monotone triangular transport maps*, Foundations of Computational Mathematics, (2023), pp. 1–46.
- [4] G. BATZOLIS, J. STANCZUK, C.-B. SCHÖNLIEB, AND C. ETMANN, *Conditional image generation with score-based diffusion models*, arXiv preprint arXiv:2111.13606, (2021).
- [5] F. V. BONASSI AND M. WEST, *Sequential Monte Carlo with adaptive weights for approximate Bayesian computation*, Bayesian Analysis, 10 (2015), pp. 171–187.
- [6] Y. BRENIER, *Polar factorization and monotone rearrangement of vector-valued functions*, Communications on pure and applied mathematics, 44 (1991), pp. 375–417.
- [7] S. BROOKS, A. GELMAN, G. JONES, AND X.-L. MENG, *Handbook of Markov Chain Monte Carlo*, CRC press, 2011.
- [8] C. BUNNE, A. KRAUSE, AND M. CUTURI, *Supervised training of conditional Monge maps*, in Advances in Neural Information Processing Systems, S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh, eds., vol. 35, Curran Associates, Inc., 2022, pp. 6859–6872.
- [9] G. CARLIER, V. CHERNOZHUKOV, AND A. GALICHON, *Vector quantile regression: An optimal transport approach*, Annals of Statistics, 44 (2014), pp. 1165–1192.
- [10] R. T. Q. CHEN, J. BEHRMANN, D. K. DUVENAUD, AND J.-H. JACOBSEN, *Residual flows for invertible generative modeling*, in Advances in Neural Information Processing Systems, vol. 32, Curran Associates, Inc., 2019.
- [11] R. T. Q. CHEN, Y. RUBANOVA, J. BETTENCOURT, AND D. DUVENAUD, *Neural ordinary differential equations*, in Proceedings of the 32nd International Conference on Neural Information Processing Systems, NIPS’18, Red Hook, NY, USA, 2018, Curran Associates Inc., p. 6572–6583.
- [12] K. CRANMER, J. BREHMER, AND G. LOUPPE, *The frontier of simulation-based inference*, Proceedings of the National Academy of Sciences, 117 (2020), pp. 30055–30062.
- [13] A. K. DAVID M. BLEI AND J. D. McAULIFFE, *Variational inference: A review for statisticians*, Journal of the American Statistical Association, 112 (2017), pp. 859–877.
- [14] L. DINH, J. SOHL-DICKSTEIN, AND S. BENGIO, *Density estimation using real NVP*, in International Conference on Learning Representations, 2017.
- [15] V. DIVOL, J. NILES-WEED, AND A.-A. POOLADIAN, *Optimal transport map estimation in general function spaces*, 2024, <https://arxiv.org/abs/2212.03722>, <https://arxiv.org/abs/2212.03722>.

- [16] E. DUPONT, A. DOUCET, AND Y. W. TEH, *Augmented neural ODEs*, in Advances in Neural Information Processing Systems, vol. 32, Curran Associates, Inc., 2019.
- [17] C. DURKAN, A. BEKASOV, I. MURRAY, AND G. PAPAMAKARIOS, *Neural spline flows*, in Advances in Neural Information Processing Systems, vol. 32, Curran Associates, Inc., 2019.
- [18] C. DURKAN, G. PAPAMAKARIOS, AND I. MURRAY, *Sequential neural methods for likelihood-free inference*, in Bayesian Deep Learning Workshop at Neural Information Processing Systems, 2018.
- [19] A. FIGALLI AND F. GLAUDO, *An Invitation to Optimal Transport, Wasserstein Distances, and Gradient Flows*, EMS Press, 2021.
- [20] C. FINLAY, J.-H. JACOBSEN, L. NURBEKYAN, AND A. OBERMAN, *How to train your neural ODE: the world of Jacobian and kinetic regularization*, in Proceedings of the 37th International Conference on Machine Learning, PMLR, Nov. 2020, p. 3154–3164.
- [21] M. GRANT, S. BOYD, AND Y. YE, *Disciplined Convex Programming*, Springer US, Boston, MA, 01 2006, pp. 155–210.
- [22] W. GRATHWOHL, R. T. CHEN, J. BETTERNCOURT, I. SUTSKEVER, AND D. DUVENAUD, *FFJORD: Free-form continuous dynamics for scalable reversible generative models*, in International Conference on Learning Representations (ICLR), 2019.
- [23] M. HOLDEN, M. PEREYRA, AND K. C. ZYGALAKIS, *Bayesian imaging with data-driven priors encoded by neural networks*, SIAM Journal on Imaging Sciences, 15 (2022), pp. 892–924.
- [24] C.-W. HUANG, R. T. Q. CHEN, C. TSIRIGOTIS, AND A. COURVILLE, *Convex potential flows: Universal probability distributions with optimal transport and convex optimization*, in International Conference on Learning Representations, 2021.
- [25] C.-W. HUANG, D. KRUEGER, A. LACOSTE, AND A. COURVILLE, *Neural autoregressive flows*, in Proceedings of the 35th International Conference on Machine Learning, vol. 80 of Proceedings of Machine Learning Research, PMLR, 10–15 Jul 2018, pp. 2078–2087.
- [26] P. JAINI, K. A. SELBY, AND Y. YU, *Sum-of-squares polynomial flow*, in Proceedings of the 36th International Conference on Machine Learning, K. Chaudhuri and R. Salakhutdinov, eds., vol. 97 of Proceedings of Machine Learning Research, PMLR, 09–15 Jun 2019, pp. 3009–3018.
- [27] G. KERRIGAN, G. MIGLIORINI, AND P. SMYTH, *Dynamic conditional optimal transport through simulation-free flows*, 2024, <https://arxiv.org/abs/2404.04240>.
- [28] J. KIM AND Y. KIM, *Parameterized convex universal approximators for decision-making problems*, IEEE Transactions on Neural Networks and Learning Systems, (2022), pp. 1–12.
- [29] D. P. KINGMA AND P. DHARIWAL, *Glow: Generative flow with invertible 1x1 convolutions*, in Advances in Neural Information Processing Systems, vol. 31, 2018.
- [30] D. P. KINGMA, T. SALIMANS, R. JOZEFOWICZ, X. CHEN, I. SUTSKEVER, AND M. WELLING, *Improved variational inference with inverse autoregressive flow*, in Advances in Neural Information Processing Systems, vol. 29, 2016, pp. 4743–4751.
- [31] J.-M. LASRY AND P.-L. LIONS, *Mean field games*, Japanese Journal of Mathematics, 2 (2007), pp. 229–260.
- [32] M. LICHMAN ET AL., *UCI machine learning repository*, 2013.
- [33] Y. LIPMAN, R. T. Q. CHEN, H. BEN-HAMU, M. NICKEL, AND M. LE, *Flow matching for generative modeling*, in The Eleventh International Conference on Learning Representations, 2023.
- [34] S. LIU, X. ZHOU, Y. JIAO, AND J. HUANG, *Wasserstein generative learning of conditional distribution*, ArXiv, [abs/2112.10039](https://arxiv.org/abs/2112.10039) (2021).
- [35] Y. LU AND B. HUANG, *Structured output learning with conditional generative flows*, Proceedings of the AAAI Conference on Artificial Intelligence, 34 (2020), pp. 5005–5012.
- [36] Y. MARZOUK, T. MOSELHY, M. PARNO, AND A. SPANTINI, *Sampling via measure transport: An introduction*, Handbook of uncertainty quantification, 1 (2016), p. 2.
- [37] Y. MARZOUK, Z. REN, S. WANG, AND J. ZECH, *Distribution learning via neural differential equations: a nonparametric statistical perspective*, 2023, <https://arxiv.org/abs/2309.01043>.
- [38] M. MIRZA AND S. OSINDERO, *Conditional generative adversarial nets*, in Deep Learning and Representation Learning Workshop at Neural Information Processing Systems, 2014.
- [39] S. N. NEGAHBAN, P. RAVIKUMAR, M. J. WAINWRIGHT, AND B. YU, *A Unified Framework for High-Dimensional Analysis of M-Estimators with Decomposable Regularizers*, Statistical Science, 27 (2012), pp. 538 – 557.
- [40] D. ONKEN, S. WU FUNG, X. LI, AND L. RUTHOTTO, *OT-Flow: Fast and accurate continuous normalizing flows via optimal transport*, in Proceedings of the AAAI Conference on Artificial Intelligence, vol. 35, 2021.
- [41] R. OROZCO, M. LOUBOUTIN, A. SIAHKOOHI, G. RIZZUTI, T. VAN LEEUWEN, AND F. HERRMANN, *Amortized normalizing flows for transcranial ultrasound with uncertainty quantification*, 2023, <https://arxiv.org/abs/2303.03478>.
- [42] B. PANDEY, B. HOSSEINI, P. BATLLE, AND H. OWHADI, *Diffeomorphic Measure Matching with Kernels for*

- Generative Modeling*, arXiv, (2024), <https://arxiv.org/abs/2402.08077>.
- [43] G. PAPAMAKARIOS, *Neural density estimation and likelihood-free inference*, 2019, <https://arxiv.org/abs/1910.13233>.
 - [44] G. PAPAMAKARIOS AND I. MURRAY, *Fast ϵ -free inference of simulation models with Bayesian conditional density estimation*, in *Advances in Neural Information Processing Systems*, vol. 29, Curran Associates, Inc., 2016.
 - [45] G. PAPAMAKARIOS, E. NALISNICK, D. J. REZENDE, S. MOHAMED, AND B. LAKSHMINARAYANAN, *Normalizing flows for probabilistic modeling and inference*, *The Journal of Machine Learning Research*, 22 (2021), pp. 2617–2680.
 - [46] G. PAPAMAKARIOS, T. PAVLAKOU, AND I. MURRAY, *Masked autoregressive flow for density estimation*, in *Advances in Neural Information Processing Systems*, vol. 30, Curran Associates, Inc., 2017.
 - [47] S. T. RADEV, M. SCHMITT, L. SCHUMACHER, L. ELSEMÜLLER, V. PRATZ, Y. SCHÄLTE, U. KÖTHE, AND P.-C. BÜRKNER, *Bayesflow: Amortized bayesian workflows with neural networks*, 2023, <https://arxiv.org/abs/2306.16015>.
 - [48] P. RAMESH, J.-M. LUECKMANN, J. BOELTS, Á. TEJERO-CANTERO, D. S. GREENBERG, P. J. GONÇALVES, AND J. H. MACKE, *GATSBI: Generative Adversarial Training for Simulation-Based Inference*, in *Proceedings of the 10th International Conference on Learning Representations (ICLR 2022)*, Online, 2022.
 - [49] L. RUTHOTTO AND E. HABER, *An Introduction to Deep Generative Modeling*, *GAMM Mitteilungen*, cs.LG (2021).
 - [50] L. RUTHOTTO, S. J. OSHER, W. LI, L. NURBEKYAN, AND S. W. FUNG, *A machine learning framework for solving high-dimensional mean field game and mean field control problems*, *Proceedings of the National Academy of Sciences*, 117 (2020), pp. 9183 – 9193.
 - [51] K. SOHN, H. LEE, AND X. YAN, *Learning structured output representation using deep conditional generative models*, in *Advances in Neural Information Processing Systems*, vol. 28, Curran Associates, Inc., 2015.
 - [52] Y. SONG, J. SOHL-DICKSTEIN, D. P. KINGMA, A. KUMAR, S. ERMON, AND B. POOLE, *Score-based generative modeling through stochastic differential equations*, in *International Conference on Learning Representations*, 2021.
 - [53] A. SPANTINI, R. BAPTISTA, AND Y. MARZOUK, *Coupling techniques for nonlinear ensemble filtering*, *SIAM Review*, 64 (2022), pp. 921–953.
 - [54] Y. TASHIRO, J. SONG, Y. SONG, AND S. ERMON, *CSDI: Conditional score-based diffusion models for probabilistic time series imputation*, in *Neural Information Processing Systems*, 2021.
 - [55] A. TEJERO-CANTERO, J. BOELTS, M. DEISTLER, J.-M. LUECKMANN, C. DURKAN, P. J. GONÇALVES, D. S. GREENBERG, AND J. H. MACKE, *sbi: A toolkit for simulation-based inference*, *Journal of Open Source Software*, 5 (2020), p. 2505.
 - [56] T. TESHIMA, I. ISHIKAWA, K. TOJO, K. OONO, M. IKEDA, AND M. SUGIYAMA, *Coupling-based invertible neural networks are universal diffeomorphism approximators*, in *Advances in Neural Information Processing Systems*, vol. 33, Curran Associates, Inc., 2020, p. 3362–3373.
 - [57] T. TONI, D. WELCH, N. STRELKOWA, A. IPSEN, AND M. P. STUMPF, *Approximate Bayesian computation scheme for parameter inference and model selection in dynamical systems*, *Journal of The Royal Society Interface*, 6 (2009), pp. 187–202.
 - [58] S. WANG AND Y. MARZOUK, *On minimax density estimation via measure transport*, 2022, <https://arxiv.org/abs/2207.10231>.
 - [59] A. WEHENKEL AND G. LOUPPE, *Unconstrained monotonic neural networks*, in *Advances in Neural Information Processing Systems*, vol. 32, 2019.
 - [60] D. J. WILKINSON, *Stochastic modelling for systems biology*, CRC press, 2018.
 - [61] L. YANG AND G. E. KARNIADAKIS, *Potential flow generator with L_2 optimal transport regularity for generative models*, *IEEE Transactions on Neural Networks and Learning Systems*, 33 (2022), pp. 528–538.
 - [62] B. J. ZHANG AND M. A. KATSOUKAKIS, *A mean-field games laboratory for generative modeling*, 2023, <https://arxiv.org/abs/2304.13534>.
 - [63] L. ZHANG, W. E, AND L. WANG, *Monge-Ampère flow for generative modeling*, 2018, <https://arxiv.org/abs/1809.10188>.