



by Clover and Wolf[3]). The sample cell was located at the center of a quasi-Helmholtz radiofrequency coil L that was thermally anchored to an independent thermal board whose temperature could be carefully regulated by a local heater. The sample S was contained in a small Kel-F container and thermally bonded to the thermal board with N-grease.[12] The inductance L was resonated with a silver-dipped mica capacitor C located on the TD block and, depending on choice of the coil L could be operated between 2 and 120 MHz. The sample cell block was shielded by a copper cylinder that minimizes external noise and provides additional thermal isolation for the sample.

The fixed temperature tunnel diode block is separated from the sample cell block by a 10 cm length of semi-rigid cryogenic coaxial cable with stainless-steel outer conductor and silver plated beryllium-copper inner conductor[13] that provides adequate thermal isolation to maintain the sample board at a temperature between 1.7 K and 100 K (with a precision of better than 1 %) by using a regulated feedback circuit, while the tunnel diode block is held at liquid helium temperatures. The sample cell and tunnel diode block temperatures were measured using calibrated Cernox thermometers.[14] A small amount of  $^4\text{He}$  exchange gas was added to the sample space to provide additional cooling.

As shown in figure 2, the open Helmholtz coil design allowed one to introduce small electrodes to place a static electric field (up to  $100 \text{ kV.m}^{-1}$ ) across the sample to detect magnetoelectric effects. In addition to a static field a small AC field can be applied and used in conjunction with FM detection for high resolution, ( $\sim$  hundreds of ppb), detection of magnetoelectric effects.




FIG. 2. Picture of Kel-F sample cell showing the Helmholtz coil pair (5 mm diameter) and the electrodes for generating an electric field across the sample (typically 1 mm in lateral dimension). The sample is thermalized by applying Apiezon N-grease which makes contact with the thermal board.

### III. PERFORMANCE

In order to test the sensitivity we used a commercial sample of  $\text{MgB}_2$  [15] that had a known magnetic susceptibility change at the superconducting transition temperature of  $40.05 \pm 0.10 \text{ K}$  (in good agreement with the values for the crit-

ical temperature reported in the literature.[16] The fractional change in oscillator frequency

$$\frac{\Delta f}{f} = -\frac{1}{2}\eta\chi' + O(Q^{-2}\chi'') \quad (1)$$

where  $\eta$  is the sample filling factor and  $\chi'$  and  $\chi''$  are the real and imaginary components of the sample susceptibility, respectively. is in good agreement with the estimated value of  $\eta \sim 4\%$ . The noise level in the low resolution channel was 12ppm and in the high resolution AC channel was of the order of 0.01 ppm, comparable to the best performance reported by Degriff[17] for a low current diode BD6 at a fixed temperature. Similar sensitivity was reported by Van Riet and Van Gerver who used a low temperature tunnel diode circuit to observe NMR in a micromolar sample at 4K.[18]

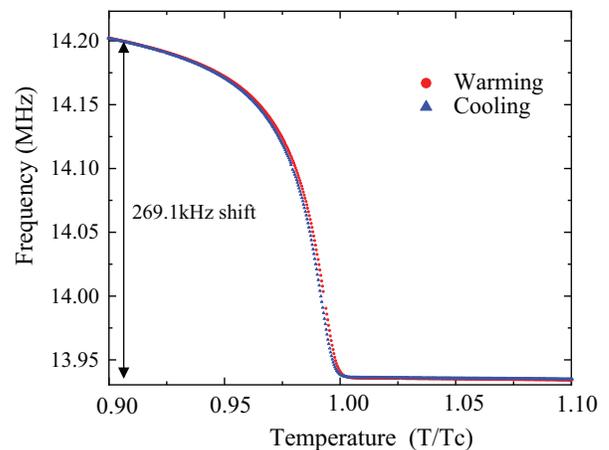


FIG. 3. Frequency response measured for the magnetic susceptibility of high-temperature superconductor  $\text{MgB}_2$ . The fractional change in frequency corresponds to a filling factor of 3.8%.

### IV. CONCLUSION

We have demonstrated the use of a novel cryogenic design for a tunnel diode oscillator for measuring the magnetic susceptibility of small samples over a wide temperature range (1.7-100 K). High sensitivity and high stability were achieved by thermally separating the sample cell from the tunnel diode with the latter held at fixed helium temperatures. The compact geometry allows on to insert the complete system in a simple liquid helium dewar keeping the boil off to less than 0.2 liquid liters per hour at the highest sample temperatures.

### ACKNOWLEDGMENTS

We would like to thank the University of Florida Cryogenics Facility and the Machine and Electronic shops of the

Physics Department for their assistance with this project. This work was supported as part of the Center for Molecular Mag-

netic Quantum Materials, an Energy Frontier Research Center funded by the U.S. Department of Energy, Office of Science, Basic Energy Sciences under Award # DE-SC0019330.

- 
- [1] C. T. Van Degrift and D. P. Love, *Review of Scientific Instruments* **52**, 712 (1981), <https://doi.org/10.1063/1.1136656>.
- [2] L. Drigo, F. Durantel, A. Audouard, and G. Ballon, *Eur. Phys. J. Appl. Phys.* **52**, 10401 (2010).
- [3] R. B. Clover and W. P. Wolf, *Rev. Sci. Instr.* **41**, 617 (1970).
- [4] H. Srikanth, J. Wiggins, and H. Rees, *Rev. Sci. Instr.* **70**, 3097 (1999).
- [5] T. Coffey, Z. Bayindir, J. F. DeCarolis, M. Bennett, G. Esper, and C. C. Agosta, *Rev. Sci. Instr.* **71**, 4600 (2000).
- [6] M. M. Altarawneh, C. H. Mielke, and J. S. Brooks, *Rev. Sci. Instr.* **80**, 066104 (2009).
- [7] E. Komatsu, E. Ohmichi, and T. Osada, *Physica B: Condensed Matter* **346-347**, 534 (2004), Proceedings of the 7th International Symposium on Research in High Magnetic Fields.
- [8] J. S. Xia, L. Yin, N. S. Sullivan, V. S. Zapf, and A. Paduan-Filho, *J. Low Temp. Phys.* **187**, 627 (2017).
- [9] G. K. White and P. J. Meeson, *Experimental Techniques in Low Temperature Physics* (Clarendon Press, Oxford University, UK, 2002).
- [10] L. E. DeLong, O. G. Symko, and J. C. Wheatley, *Rev. Sci. Instr.* **42**, 147 (1971).
- [11] H. R. Lowry, J. Giorgis, E. Gotlieb, and R. C. Weischedel, Type 4jf2a-4, Tunnel Diode Manual (General Electric) (1961).
- [12] Apiezon type N-grease, M& I Materials Ltd, Manchester, UK.
- [13] Coaxitube Type JN50141, precision Tube Co.
- [14] Cernox type 1030, lakeshore Cryotronics.
- [15] Product 553913, Sigma Aldrich.
- [16] C. Buzea and T. Yamashita, *Supercon. Sci. and Tech.* **14**, R115 (2001).
- [17] C. T. Van Degrift, *Rev. Sci. Instr.* **46**, 599 (1975).
- [18] B. V. Riet and L. V. Gerven, *Journal of Physics E: Scientific Instruments* **15**, 558 (1982).