

# Evaluating potential landing sites for the Artemis III mission using a multi-criteria decision making approach

Eloy Peña-Asensio<sup>a</sup>, Álvaro-Steve Neira-Acosta<sup>b</sup>, Juan Miguel Sánchez-Lozano<sup>c,\*</sup>

<sup>a</sup>*Politecnico di Milano (PoliMi), Italy*

<sup>b</sup>*Valencian International University (VIU), Spain*

<sup>c</sup>*Centro Universitario de la Defensa (CUD), Universidad Politécnica de Cartagena (UPCT), Spain*

---

## Abstract

The selection of a landing site within the Artemis Exploration Zone (AEZ) involves multiple factors and presents a complex problem. This study evaluates potential landing sites for the Artemis III mission using a combination of Geographic Information Systems (GIS) and Multi-Criteria Decision Making (MCDM) methodologies, specifically the TOPSIS algorithm. By integrating topographic, illumination, and mineralogy data of the Moon, we assess 1247 locations that meet the Human Landing System (HLS) requirements within 13 candidate regions and Site 004 near the lunar south pole. Criteria considered include surface visibility, HLS-astronaut line of sight, Permanently Shadowed Regions (PSRs), sunlight exposure, direct communication with Earth, geological units, and mafic mineral abundance. Site DM2 (Nobile Rim 2), particularly the point at latitude  $84^{\circ}12'5.61''$  S and longitude  $60^{\circ}41'59.61''$  E, is the optimal location for landing. Sensitivity analysis confirms the robustness of our approach, validating the suitability of the best location despite the MCDM method employed and variations in criteria weightings to prioritize illumination and PSRs. This research demonstrates the applicability of GIS-MCDM techniques for lunar exploration and the potential benefits they can bring to the Artemis program.

*Keywords:* Lunar Exploration, Landing Site, Artemis III, Multi-Criteria

---

\*Corresponding author

*Email address:* [juanmi.sanchez@tud.upct.es](mailto:juanmi.sanchez@tud.upct.es) (Juan Miguel Sánchez-Lozano)

## 1. Introduction

More than 55 years have passed since Neil Armstrong set foot on the Moon in July 1969 during the Apollo 11 mission [1]. Recently, our natural satellite has experienced a resurgence of interest in its exploration, with NASA’s Artemis program as the most clear example of it. Unlike previous missions, which focused on maximizing communication with Earth by landing in the equatorial zone [2–6], Artemis III aims to explore the lunar south pole region.

The lunar south pole presents a unique opportunity to investigate Permanently Shadowed Regions (PSRs), which may contain reservoirs of water ice. These ice reservoirs are essential for supporting long-term missions on the lunar surface, generating propellants for future missions, and studying trapped volatiles [7]. However, the Artemis Exploration Zone (AEZ), located at 6° latitude from the south pole, features an abrupt and complex topography which may affect astronaut’s Extra-Vehicular Activities (EVA) [8]. Therefore, it is important to identify an area that complies with certain criteria, such as a safe and flat topography to minimize the risk during landing and subsequent operations, direct communication with Earth for efficient data transmission and mission control, as well as adequate exposure to sunlight for solar energy generation and maintaining operational temperatures of equipment, while maximizing the scientific return [9].

Thirteen candidate regions of interest that meet the aforementioned criteria have been officially pre-selected<sup>1</sup>, see Figure 1. Several studies have been published focusing on the geology and potential astronaut exploration within these sites [10–19]. However, NASA has not yet selected a landing site for the Artemis III mission [20]. This presents the challenge of selecting the optimal location

---

<sup>1</sup><https://www.nasa.gov/news-release/nasa-identifies-candidate-protect-penalty-z@-regions-for-landing-next-americans-on-moon/>

among several alternatives, where multiple factors or criteria converge. Decision theory provides algorithms and techniques to address such problems, commonly encountered in engineering projects. These are known as Multi-Criteria Decision Making (MCDM) methodologies [21], which we apply in this work to rank the potential landing sites among these regions.

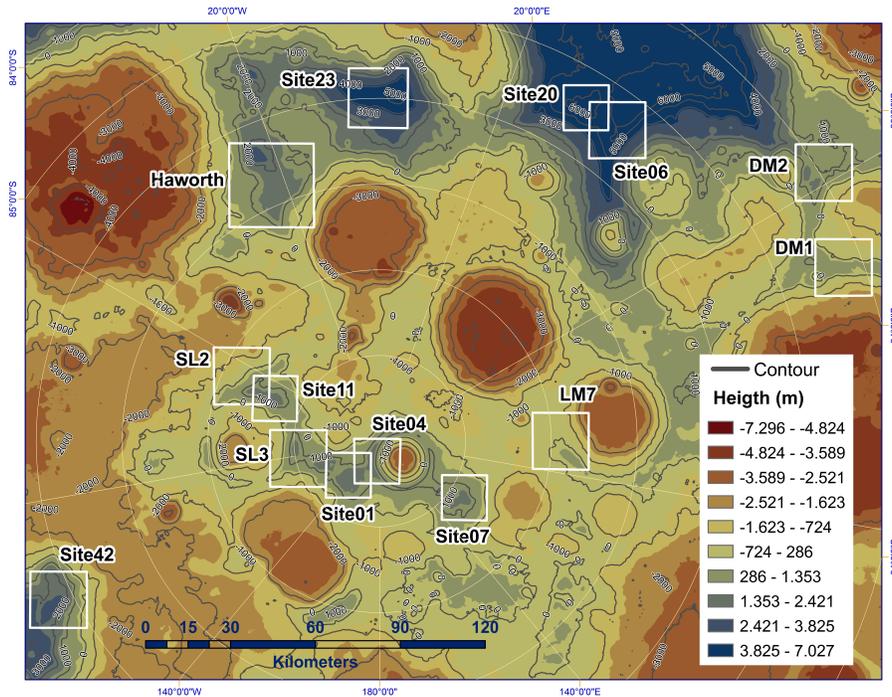


Figure 1: Map of 13 candidate landing regions for Artemis III, in addition to Site 004. Each region measures approximately  $\sim 15 \times 15$  km. Concentric rings at steps of  $1^\circ$  in latitude.

Since the advent of MCDM approaches in the second half of the 20th century, numerous algorithms and techniques have been developed. Notable among these are the Analytic Hierarchy Process (AHP) [22], Technique for Order of Preference by Similarity to Ideal Solution (TOPSIS) [23], ViseKriterijumska Optimizacija I Kompromisno Resenje (VIKOR) [? ], Elimination and Choice Translating Reality (ELECTRE) [24], Preference Ranking Organization Method for Enrichment Evaluation (PROMETHEE) [25], and DEcision-MAking Trial and

Evaluation Laboratory (DEMATEL) [26]. More recent methodologies include Multi-Attributive Border Approximation area Comparison (MABAC) [27], Combined Compromise Solution (CoCoSo) [28], and Additive Ratio Assessment (ARAS) [29]. All these methodologies utilize a decision matrix of alternatives and criteria, akin to the one required for selecting the landing site for the Artemis III mission.

The current availability of high-resolution topographic models of the Moon [30] facilitates the generation of databases of alternatives and criteria for landing site selection. These can be effectively managed using computer-based spatial visualization tools such as Geographic Information Systems (GIS). GIS software is an ideal complement to MCDM methodologies as it allows an easy generation of the decision matrix, which is the starting point of any multi-criteria analysis [31]. In fact, the GIS-MCDM combination has been widely applied to solve various location problems on Earth [32–45].

The TOPSIS approach, one of the most applied MCDM methodologies, is frequently combined with GIS software for several compelling reasons. Its main advantages include computational simplicity, clear logic, and mathematical robustness [46]. Moreover, it can handle a large number of alternatives based on criteria of diverse nature and different units of measurement. These characteristics make the TOPSIS method particularly attractive when various data layers from GIS software intersect at each pixel identifying the alternatives to be prioritized. The scientific literature demonstrates that the GIS-MCDM combination, previously unused outside the terrestrial environment, is well-suited for solving optimal location problems such as the one posed in this study. Therefore, we employ the GIS-TOPSIS combination to identify the best landing location for the Artemis III mission.

The structure of this study is as follows: Section 2 describes the databases used and the methodology applied, Section 3.1 describes the generation of the potential landing locations, Section 3.2 details the definition of the criteria employed for the evaluation, Section 3.3 shows the results, Section 3.4 examines the robustness of the methodology through a sensitivity analysis, and finally

Section 4 summarizes the conclusions drawn and potential future work.

## 2. Methods and datasets

Our goal is to identify the optimal landing sites within specific regions of the AEZ using the TOPSIS method. This approach allows us to evaluate various point locations based on the following multiple criteria: visibility, PSRs, solar illumination, direct communication with Earth, geological units, and the abundance of mafic materials. The visibility maps are generated specifically for this study. The other maps utilized are based on previously produced and openly available products, as detailed later on.

The TOPSIS method, developed by [23], is a widely used MCDM methodology in engineering projects [47]. It is based on calculating the relative closeness of each alternative to two fictitious ideal solutions using Euclidean distance: the positive ideal solution and the negative ideal solution. The method asserts that the best alternative is the one closest to the positive ideal solution and farthest from the negative ideal solution. This relative closeness generates a ranking or prioritization of the alternatives. The fundamentals of this MCDM technique are well detailed in the scientific literature [21]. In this work, we apply the TOPSIS method to prioritize the best landing site for the Artemis III mission.

The TOPSIS method involves the following steps:

- Step 1. Establish a performance decision matrix: This matrix is composed of rows representing the alternatives  $A_i$  ( $i = 1, 2, \dots, m$ ) to be evaluated and columns representing the criteria  $C_j$  ( $j = 1, 2, \dots, n$ ) that influence the assessment process.
- Step 2. Normalize the decision matrix: The decision matrix is normalized using the following expression:

$$n_{ij} = \frac{x_{ij}}{\sqrt{\sum_{i=1}^m x_{ij}^2}}, \quad (1)$$

where  $n_{ij}$  is an element of the normalized decision matrix  $N$ .

- Step 3. Calculate the weighted normalized decision matrix: The normalized decision matrix is multiplied by the global weight vector of the criteria:

$$v_{ij} = w_j \otimes n_{ij}, \quad j = 1, \dots, n, \quad i = 1, \dots, m, \quad (2)$$

where  $w_j$  values satisfy  $\sum_{j=1}^n w_j = 1$ .

- Step 4. Determine the positive ideal  $A^+$  and negative ideal  $A^-$  solutions: These solutions are determined by the characteristics of the criteria. For a benefit criterion, the  $A^+$  solution is the maximum valuation, and for a cost criterion, it is the minimum valuation. The inverse applies for  $A^-$ :

$$A^+ = \{v_1^+, \dots, v_n^+\} = \begin{cases} \max_i \{v_{ij}, j \in J\}, & i = 1, 2, \dots, m \\ \min_i \{v_{ij}, j \in J'\}, & i = 1, 2, \dots, m \end{cases} \quad (3)$$

$$A^- = \{v_1^-, \dots, v_n^-\} = \begin{cases} \min_i \{v_{ij}, j \in J\}, & i = 1, 2, \dots, m \\ \max_i \{v_{ij}, j \in J'\}, & i = 1, 2, \dots, m \end{cases} \quad (4)$$

where  $J$  corresponds to benefit criteria and  $J'$  to cost criteria.

- Step 5. Calculate the separation measures of each alternative: The separation distances from  $A^+$  ( $d_i^+$ ) and  $A^-$  ( $d_i^-$ ) are calculated using the  $n$ -dimensional Euclidean distance method:

$$d_i^+ = \sqrt{\sum_{j=1}^n (v_{ij} - v_j^+)^2}, \quad (5)$$

$$d_i^- = \sqrt{\sum_{j=1}^n (v_{ij} - v_j^-)^2}. \quad (6)$$

- Step 6. Calculate the relative closeness to the ideal solution: The closeness coefficient for each alternative is calculated as:

$$R_i = \frac{d_i^-}{d_i^+ + d_i^-}. \quad (7)$$

- Step 7. Rank the preference order: Alternatives are ranked in descending order based on  $R_i$  values. An alternative  $A_i$  closer to  $A^+$  and farther from  $A^-$  has a higher ranking as  $R_i$  approaches 1.

Regarding the data, we employ 14 Digital Elevation Models (DEMs) of the south pole with a resolution of 5 m/pixel, derived from the Lunar Reconnaissance Orbiter’s (LRO) Lunar Orbiter Laser Altimeter (LOLA) [48]. These account for the 13 candidate regions in addition to Site 004, which we include because of its scientific interest [49]. Solar illumination, PSR, and Earth sunlight reflection maps of 240 m/pixel are also used [50]. We consider as well a 1  $\mu\text{m}$  absorption depth band map of 1.4 km/pixel from M<sup>3</sup> data [51] and a 1:5,000,000 scale geologic map derived from SELENE Kaguya terrain camera stereo (60 m/pix) and LOLA altimetry (100 m/pix) [52]. To handle these maps, we utilize two GIS tools: *ArcGIS* [53] and *Global Mapper* [54]. We utilize Bresenham’s line algorithm to generate visibility maps considering the lunar curvature, which include one map representing the total area visible from the HLS windows and another for the line of sight of astronaut-HLS within the 2 km radius limited by the mission requirements [55].

The starting point involves analyzing LOLA topography images [48] of the 14 regions, where potential lunar landing locations will be evaluated and prioritized. This analysis begins by defining the parameters established for the Artemis III HLS [56], which include a landing precision of 100 m from any target landing site and slope requirements with vertical orientations ranging between 0 and 5°. We generate a buffer zone around all pixels with a slope of less than 5° in the LOLA topography maps. This ensures that if a lunar module lands on any pixel within the delineated polygons, it will have a safety margin of at least 100 m up to a pixel with a slope greater than 5°.

### 3. Results

#### 3.1. Generation of the potential landing locations (alternatives)

The buffer applied results in 732 polygons that meet the aforementioned slope conditions. The areas of these polygons range between 25 m<sup>2</sup> and 25,000 m<sup>2</sup>. Figure 2 (left) shows the polygons that meet the buffer requirements along with concentric rings of 1° in latitude. Due to computational constraints, we

select all pixel points within the polygons imposing a resolution of 50 m/pixel. Figure 2 (right) shows an example of a more detailed visualization of the Site DM2 is provided. Each of the points located inside each polygon corresponds to a potential landing location, constituting one of the alternatives to be evaluated. Considering all the points, there are a total of 1247 alternatives to rank in the decision problem. Table 1 lists the number of locations by region, together with the new official name of each region.

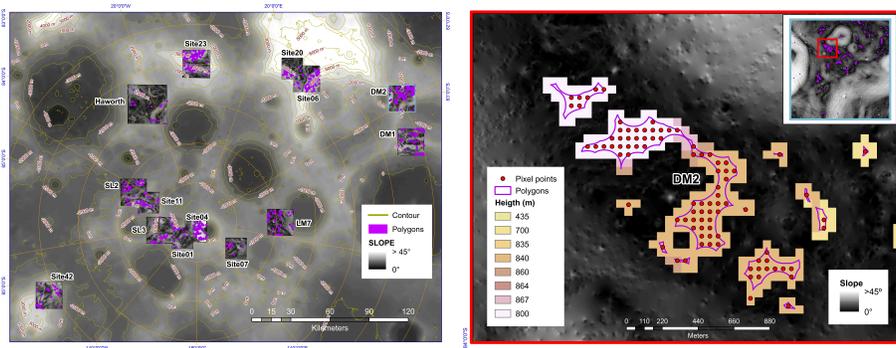


Figure 2: Left: All polygons that meet HLS landing requirements for slope compliance. Right: Example of the polygons and pixel point (alternatives; landing locations) within the DM2 site.

### 3.2. Criteria to evaluate the potential landing locations

#### 3.2.1. Criterion $C_1$ .- Total visibility

The first criterion is the total visibility of the lunar surface from the lander, which can provide scientific opportunities for intra-vehicular activities. Visibility from each point is evaluated using the method described in Section 2 and the most updated lunar topography [48]. The objective is to identify the surface areas visible or hidden from an observer located at a height of 40 meters in the windows of the HLS [57]. Lunar curvature is considered, as the lunar horizon is about 12 km from flat terrain, but the furthest visible areas in our analysis are at distances of up to 200 km. The total visible area, measured in square kilometers, constitutes this criterion. Figure 3 shows the result of the visible areas in red for a point located on Site SL2.

Table 1: Number of points per region. We include the new official name of each region.

Region	Official name	Points
DM1	Amundsen Rim	149
DM2	Nobile Rim 2	473
Haworth		20
LM7	Faustini Rim A	80
Site01	Connecting Ridge	20
Site04		56
Site06	Nobile Rim 1	94
Site07	Peak Near Shackleton	19
Site11	de Gerlache Rim 1	15
Site20	Leibnitz Beta Plateau	23
Site23	Malapert Massif	102
Site42	de Gerlache-Kocher Massif	56
SL2	de Gerlache Rim 2	104
SL3	Connecting Ridge Extension	36
TOTAL		1247

### 3.2.2. Criterion $C_2$ .- Explorable area visibility

One feature that could facilitate astronauts' EVA and enhance their safety is maintaining a direct line of sight to the lander for reference. Therefore, we compute the percentage of the explorable walking surface, defined by a 2 km radius constrained by mission requirements, where the lander remains visible. The percentage of surface visible within this 2 km radius is the value of this criterion. Figure 3 illustrates the explorable visible area in green for a point located on Site SL2.

### 3.2.3. Criterion $C_3$ .- PSRs and solar illumination

This criterion evaluates both the incident solar illumination [50] at the potential landing site, critical for energy supply, and the possibility of exploring PSRs with astronauts during EVAs, important for the mission's success. Both

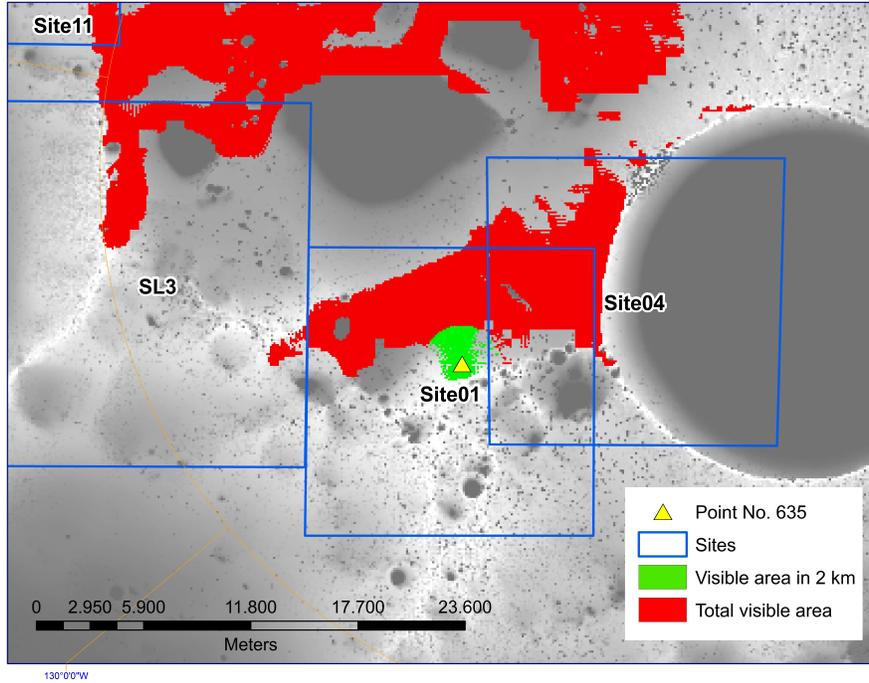


Figure 3: Visible area from point number 635 located in Site 01. The area in red color represents the total visibility from that point. The area in green color shows the percentage of visibility for a 2 km radius.

features are derived from the illumination map. We seek a balance between these two parameters, as an area with perfect illumination but no PSRs to visit, or vice versa, is of limited interest. Therefore, we multiply these two parameters, ensuring that if one is deficient, it overrides the other. Thus, the value of this criterion is the product of the average illumination and the percentage of PSR within the 2 km radius explorable by astronauts. Figure 4 shows the average solar illumination of the AEZ.

#### 3.2.4. Criterion $C_4$ .- Direct communication with Earth

This criterion assesses the potential for direct communication between the lunar surface and Earth by evaluating sunlight reflected by Earth [50] onto the AEZ. The level of reflected sunlight indicates the site's ability to maintain a line

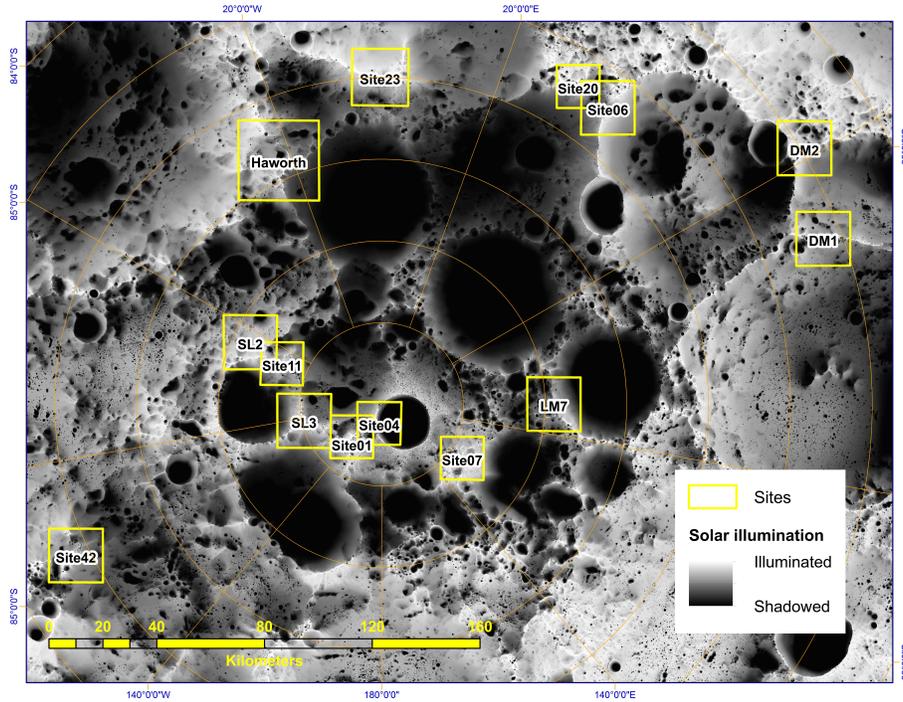


Figure 4: Average solar illumination of the AEZ. Concentric rings at steps of  $1^\circ$  in latitude.

of sight with Earth. Figure 5 shows the illumination map used.

### 3.2.5. Criterion $C_5$ .- Geological units in explorable area

To enhance the geological return of the mission, this criterion evaluates the number of distinct geological units within a 2 km radius of the landing site. This assessment determines the variety of geological units that astronauts can explore during an EVA. The evaluation utilizes the Unified Geological Map of the Moon at a 1:5M scale [52]. Figure 6 illustrates the map of geological units for the Astronaut Exploration Zone (AEZ).

### 3.2.6. Criterion $C_6$ .- Mineralogy

On the Moon, the rich basalts that make up the surface of lunar maria are a primary source of mafic minerals, containing high proportions of magnesium and iron. In the context of lunar exploration and *in situ* resource utilization,

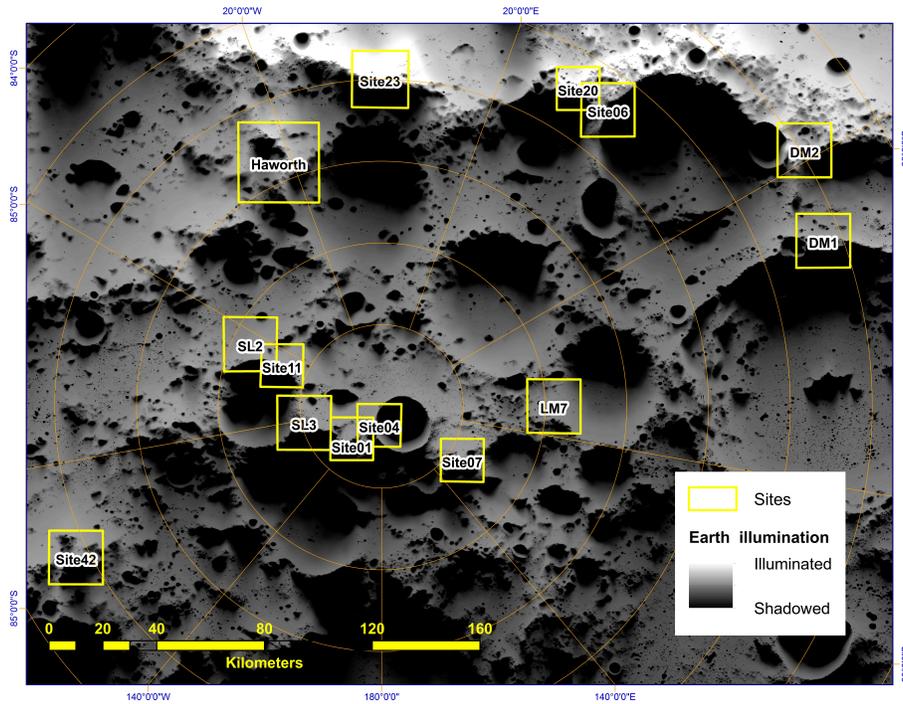


Figure 5: Sunlight reflected by Earth on the AEZ indicates the direct communication of the lunar surface with Earth. Concentric rings at steps of  $1^\circ$  in latitude.

these minerals are particularly valuable due to their composition, which includes elements useful for various applications. For example, mafic materials with higher olivine and pyroxene content melt at lower temperatures, simplifying processing, and they also contain more potentially extractable metallic phases. The strongest mafic signatures are associated with the South Pole-Aitken Basin, indicating the presence of impact melting and basin ejecta that can be sampled and characterized during the Artemis III mission [58]. Utilizing data from the Moon Mineralogy Mapper on band depths of  $1 \mu\text{m}$ , it is possible to characterize mafic mineral abundances, as this absorption band is sensitive to the presence of pyroxene and olivine basalts [58]. Figure 7 provides the mafic mineral signature map for the AEZ.

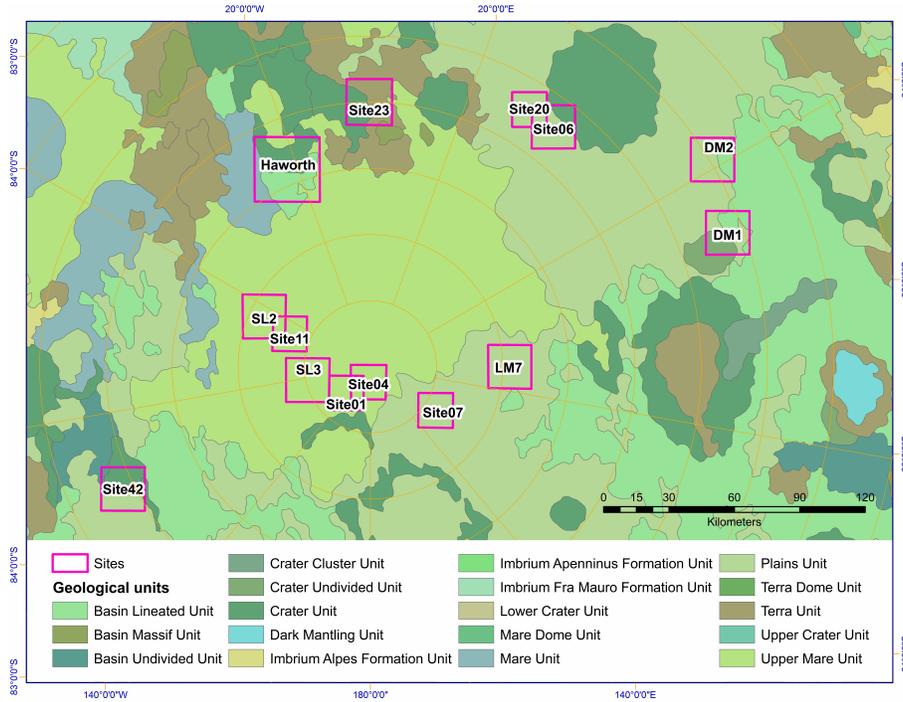


Figure 6: Geological units of the AEZ. Concentric rings at steps of 1° in latitude.

### 3.3. Prioritization of the alternatives

Once the values for each criterion have been calculated for each potential landing location, the generated layers form a decision matrix comprising 1247 alternatives evaluated against 6 criteria. This matrix serves as the foundation for applying the TOPSIS multi-criteria analysis methodology, which facilitates the prioritization and selection of the most favorable areas for the lunar landing in the context of the Artemis III mission. The decision matrix is schematically represented in Table 2. This decision matrix corresponds to stage 1 of the TOPSIS multi-criteria decision technique and therefore constitutes the starting point of the process of prioritization of alternatives according to methodology described in Section 2.

By executing each stage of the TOPSIS algorithm with equal weighting for all criteria, we generate a ranking of alternatives based on their relative

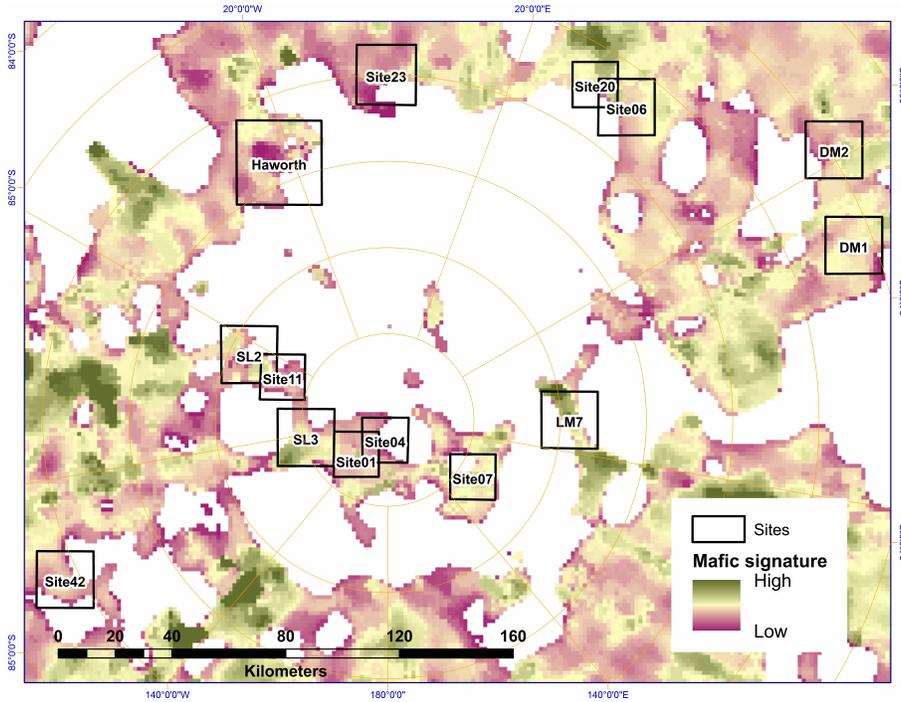


Figure 7: Mafic mineral signature in the AEZ. Concentric rings at steps of 1° in latitude.

closeness to the ideal solution,  $R_i$ . Figure 8 shows the TOPSIS ranking of potential lunar landing sites using a color-coded map. The Site DM2 (Nobile Rim 2) features several locations ranked at the top. Table 3 lists the 20 best locations in descending order according to the TOPSIS methodology, including their coordinates and values for each criterion. The optimal location, identified as point no. 358, is situated at the DM2 site. We note that Site DM2 exhibits an excellent combined engineering suitability, as analyzed by [59].

Figure 9 provides detailed information regarding the criteria for this location. Analysis of the top 100 locations reveals that 36% are in Site DM2, 30% in Site 23, and 13% in Site DM1, highlighting these as the most promising lunar landing sites. In contrast, no top 100 locations are found in Sites SL3, 20, and Haworth. The fact that the best location is within the DM2 candidate region could have been anticipated to some extent, as DM2 has the largest surface area meeting

Table 2: Decision matrix schema for 1247 alternatives evaluated against 6 criteria.

ID	Region	C <sub>1</sub>	C <sub>2</sub>	C <sub>3</sub>	C <sub>4</sub>	C <sub>5</sub>	C <sub>6</sub>
1	Site23	4239.53	79.86	0.00	24986.00	1	2.13
2	Site23	4111.69	80.02	0.00	0.00	2	0.84
3	Site20	75.00	75.72	2632.09	15780.00	2	7.10
4	Site06	4076.70	67.12	0.00	13112.00	1	5.58
5	Site06	4076.70	67.12	0.00	13112.00	1	5.58
6	Site06	4302.12	69.03	0.00	13471.00	1	6.35
7	Site06	3234.12	80.10	0.00	0.00	1	4.63
8	Site06	1189.28	89.18	0.00	0.00	1	4.42
9	DM2	393.20	54.78	4736.33	13053.00	1	4.62
...	...	...	...	...	...	...	...
1247	Haworth	1624.02	82.89	2667.67	13391.00	1	3.33

the HLS landing requirements among all candidate regions, and therefore the highest number of potential landing points.

Specifically, the optimal point for the lunar landing is located at latitude 84°12'5.61" S and longitude 60°41'59.61" E, within Site DM2. It exhibits medium mafic abundance and, like most locations, includes one explorable geological unit. It maintains direct communication with Earth for one-third of the time and offers the best ratio of explorable PSR and solar illumination at the landing point. Additionally, half of the explorable area retains direct sight with the HLS, and it is among the locations with the most visible total lunar surface.

### 3.4. Sensitivity analysis

To analyze the robustness of our methodology, we modified the weights of the criteria, giving extra weight to those potentially more relevant for the Artemis III mission: high presence of PSRs and high solar illumination (C3), and direct communication with Earth (C4). Under these premises, we assigned a weight of 40% to criterion C3 and another 40% to criterion C4, distributing the remaining 20% equally among the other criteria. We obtain a new ranking of alternatives

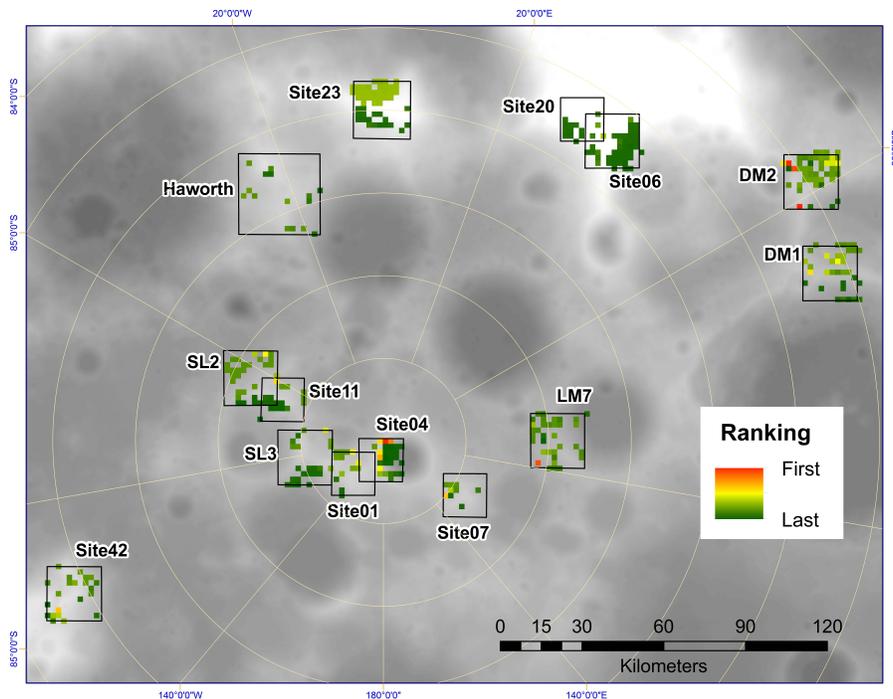


Figure 8: Map of the potential lunar landing sites according to the Ranking TOPSIS. Concentric rings at steps of  $1^\circ$  in latitude.

by re-executing the TOPSIS algorithm with these new weights. Comparing the 20 best locations, we found that the top-ranked location (point 358 at the DM2 site) remained unchanged, and the top 19 locations were consistent, with only slight changes in their order starting from the ninth position (see Table 4). We also note that C5 has minimal impact on the ranking, as most locations allow access to only one geological unit. This sensitivity analysis confirms the robustness of the leading alternatives and validates the multi-criteria methodology applied.

Additionally, we compare our results against three MCDC methods that have distinct theoretical foundations and computational procedures: MABAC [27], VIKOR [60], and CoCoSo [28]. MABAC constructs a normalized decision matrix, each attribute is then adjusted by subtracting the border approximation

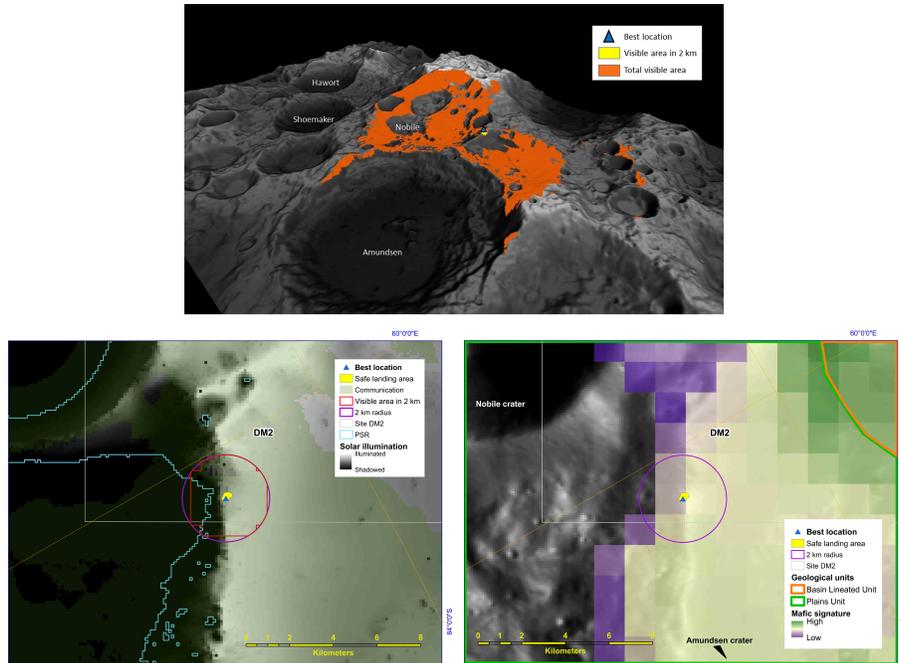


Figure 9: Best location map (point no. 358 located in DM2 site). Top: 3D local topography (vertical exaggeration of x2.5) and visibility from the HLS window. Bottom-left: Direct communication with Earth, visible explorable area, PSRs, and solar illumination. Bottom-right: geological units and mafic mineral signature,

area, and the alternatives are ranked based on these adjusted values. VIKOR considers the proximity to the ideal solution and the maximum group utility, balancing between the majority's and the minority's preferences. CoCoSo determines weighted normalized decision matrices, computing the sum of weighted normalized performance ratings, and calculating the compromise score. Table 5 shows the comparison of the ranking position for the best 25 potential landing locations, as evaluated by each method.

The results reveal a high degree of consistency in the top rankings across the four methodologies. Specifically, the best and second-best alternatives are consistently prioritized, indicating a strong consensus on the top-performing options and enhancing confidence in their suitability. However, as we move

Table 3: Ranking of the 20 best locations according to the TOPSIS methodology. All criteria have equal weight.

ID	Region	$R_i$ (TOPSIS)	Latitude	Longitude	$C_1$	$C_2$	$C_3$	$C_4$	$C_5$	$C_6$
358	DM2	0.6916	84°12'5.61" S	60°41'59.61" E	4067.5	44.8	140592.7	8315	1	3.70
356	DM2	0.6869	84°12'2.71" S	60°41'8.51" E	4067.5	44.8	138178.2	7746	1	3.70
357	DM2	0.6711	84°11'57.55" S	60°41'37.19" E	4067.5	44.8	129545.1	7746	1	3.70
354	DM2	0.6684	84°11'59.82" S	60°40'17.42" E	4026.2	44.5	128637.8	7746	1	3.70
350	DM2	0.6610	84°11'56.91" S	60°39'26.35" E	4026.2	44.5	126065.2	7016	1	3.70
355	DM2	0.6487	84°11'54.65" S	60°40'46.11" E	4026.2	44.5	120518.5	7746	1	3.70
352	DM2	0.6455	84°11'46.59" S	60°40'23.74" E	4115.9	41.3	119584.2	6935	1	3.70
351	DM2	0.6408	84°11'51.75" S	60°39'55.05" E	4026.2	44.5	118202.8	7016	1	3.70
353	DM2	0.6220	84°11'41.43" S	60°40'52.41" E	4115.9	41.3	111646.1	6935	1	3.70
1121	DM1	0.5653	84°11'30.63" S	67°13'44.55" E	313.7	49.6	108843.5	13506	1	4.59
1122	DM1	0.5649	84°11'30.78" S	67°13'10.37" E	313.7	49.6	110778.4	13506	1	3.88
995	DM2	0.5353	84°5'2.79" S	55°33'15.48" E	1968.4	31.5	104013.3	0	1	2.60
661	Site04	0.5294	89°57'33.08" S	135°49'6.44" E	327.1	60.2	115220.9	0	1	0.20
998	DM2	0.4916	84°2'16.50" S	56°50'50.63" E	994.2	43.2	88687.8	13587	1	3.22
1223	Site07	0.4689	89°0'18.22" S	125°18'33.49" E	2346.7	94.9	81886.9	12997	1	0.78
744	LM7	0.4567	88°5'13.01" S	98°21'19.76" E	362.4	82.6	88951.3	9121	1	0.00
1043	DM2	0.4373	83°46'3.73" S	56°39'32.63" E	449.1	69.8	73931.0	12981	1	4.52
657	Site04	0.4179	89°55'18.86" S	78°44'15.06" E	323.9	57.3	82422.2	0	1	0.17
726	SL2	0.3907	88°30'56.38" S	61°10'2.35" O	804.4	74.3	67061.3	14271	2	0.24
1005	Site07	0.3714	89°0'42.35" S	131°16'44.46" E	527.1	97.1	61877.1	10233	1	2.93

down the rankings, the similarity among the methods begins to diminish. While the top positions show remarkable agreement, the lower-ranking alternatives exhibit more variability. Notably, MABAC, VIKOR, and CoCoSo agree on the last position. Conversely, the alternative ranked last by TOPSIS is classified as fifth or sixth by the other three methods.

#### 4. Conclusions

This study reaffirms the effectiveness of integrating GIS software with MCDM methodologies for addressing prioritization problems. The application of the TOPSIS technique reveals that the optimal candidate region for the Artemis III landing is located in Site DM2 (Nobile Rim 2). Specifically, the optimal point is at latitude 84°12'5.61" S and longitude 60°41'59.61" E. This potential landing location meets the HLS requirements and demonstrates the best balance among

Table 4: Ranking of the 20 best locations according to the TOPSIS methodology. 80% of the weight is given to  $C_3$  and  $C_4$ .

ID	Region	All criteria with same weight		$C_3$ and $C_4$ with 80% of weight	
		$R_i$ (TOPSIS)	Ranking	$R_i$ (TOPSIS)	Ranking
358	DM2	0.6916	1	0.8453	1
356	DM2	0.6869	2	0.8383	2
357	DM2	0.6711	3	0.8186	3
354	DM2	0.6684	4	0.8157	4
350	DM2	0.6610	5	0.8019	5
355	DM2	0.6487	6	0.7841	6
352	DM2	0.6455	7	0.7752	7
351	DM2	0.6408	8	0.7693	8
353	DM2	0.6220	9	0.7366	11
1121	DM1	0.5653	10	0.7476	10
1122	DM1	0.5649	11	0.7587	9
995	DM2	0.5353	12	0.6629	13
661	Site04	0.5294	13	0.7131	12
998	DM2	0.4916	14	0.6212	14
1223	Site07	0.4689	15	0.5754	16
744	LM7	0.4567	16	0.6084	15
1043	DM2	0.4373	17	0.5232	18
657	Site04	0.4179	18	0.5411	17
726	SL2	0.3907	19	0.4807	19
1005	Site07	0.3714	20	0.4365	22

all possible points across all regions regarding visibility, PSRs, solar illumination, direct communication with Earth, geological units, and abundance of mafic materials. Sensitivity analysis shows that this location is robust, remaining the best despite readjusting the criteria weights to prioritize lighting, PSRs, and communication with Earth, as well as using other MCDC methods. In general terms, Site DM2 holds the best locations, followed by Site DM1. On the other hand, Sites SL3, 20, and Haworth do not possess any locations within the top

ID	Region	TOPSIS	MABAC	CoCoSo	VIKOR
358	DM2	1	1	1	1
356	DM2	2	2	2	2
357	DM2	3	3	3	4
354	DM2	4	4	4	5
350	DM2	7	5	6	6
355	DM2	5	6	7	7
352	DM2	9	8	9	9
351	DM2	8	7	8	8
353	DM2	10	10	10	10
1121	DM1	14	12	12	12
1122	DM1	17	17	14	17
995	DM2	22	22	22	22
661	Site04	23	23	23	23
998	DM2	18	19	18	19
1223	Site07	15	11	11	11
744	LM7	21	21	21	21
1043	DM2	13	16	13	16
657	Site04	25	25	25	25
726	SL2	19	9	5	3
1005	Site07	20	18	16	18
398	DM1	11	14	19	14
637	Site04	24	24	24	24
658	Site04	16	20	20	20
399	DM1	12	15	15	15
876	DM1	6	13	17	13

Table 5: Comparative ranking position of the best 25 potential landing locations using different MCDC methods.

100.

The flexibility of the approach allows for the addition or removal of criteria, adjustment of weightings, and application to new zones. However, computation time increases exponentially with higher resolution, particularly for visibility

calculations, while the rest of the criteria and TOPSIS processing can be considered almost instantaneous.

As a result of the demonstrated applicability of the GIS-MCDM combination for lunar exploration, we propose to replicate this combination of tools and techniques on other celestial bodies with available cartographic information from remote sensors. Mars, given its prominence in upcoming space agency science goals, could be an excellent candidate. This approach would enable similar preliminary analyses for future Solar System exploration.

### **Acknowledgement**

EP-A and JMS-L have carried out this work in the framework of the project Fundación Seneca (22069/PI/22), Spain. EP-A has received support from the LUMIO project funded by the Agenzia Spaziale Italiana. JMS-L thanks funding from the Ministerio de Ciencia e Innovación of Spain (grants PID2020-112754GB-I00 and PID2021-128062NBI00).

### **References**

- [1] NASA, Apollo 11 preliminary science report sp-214 (1969).  
URL <https://www.nasa.gov/history/alsj/a11/a11psr.html>
- [2] NASA, Apollo 12 preliminary science report sp-235 (1970).  
URL <https://www.nasa.gov/history/alsj/a12/a12psr.html>
- [3] NASA, Apollo 14 preliminary science report sp-272 (1971).  
URL <https://www.nasa.gov/history/alsj/a14/a14psr.html>
- [4] NASA, Apollo 15 preliminary science report sp-289 (1972).  
URL <https://www.nasa.gov/history/alsj/a15/a15psr.html>
- [5] NASA, Apollo 16 preliminary science report sp-315 (1972).  
URL <https://www.nasa.gov/history/alsj/a16/a16psr.html>

- [6] NASA, Apollo 17 preliminary science report sp-330 (1973).  
URL <https://www.lpi.usra.edu/lunar/documents/NASA%20SP%20330.pdf>
- [7] NASA, Artemis plan: Nasa’s lunar exploration program overview, Tech. Rep. NP-2020-05-2853-HQ, NASA, 74 p. (2020).
- [8] D. A. Kring, V. T. Bickel, C. H. van der Bogert, A. L. Fagan, L. R. Gaddis, H. Hiesinger, J. M. Hurtado, K. H. Joy, M. Lemelin, C. A. Looper, G. R. Osinski, G. Pösges, M. Siegler, S. M. Tikoo, K. Zacny, Elevation changes and slope that may affect eva workload near potential artemis landing sites, in: 2023 IEEE Aerospace Conference, 2023, pp. 1–17. doi:10.1109/AERO55745.2023.10115539.
- [9] R. C. Weber, S. J. Lawrence, B. A. Cohen, J. E. Bleacher, J. W. Boyce, M. R. Collier, D. Draper, A. L. Fagan, C. I. Fassett, L. Gaddis, J. Gross, J. E. Gruener, J. L. Heldmann, F. M. McCubbin, J. L. Mitchell, A. L. Nahm, D. H. Needham, S. Noble, C. M. Pieters, N. Petro, K. Y. Sato, J. Spann, K. E. Young, The Artemis III Science Definition Team Report, in: 52nd Lunar and Planetary Science Conference, Lunar and Planetary Science Conference, 2021, p. 1261.
- [10] V. T. Bickel, D. A. Kring, Lunar south pole boulders and boulder tracks: Implications for crew and rover traverses, *Icarus* 348 (2020) 113850. doi:10.1016/j.icarus.2020.113850.
- [11] K. M. Cannon, D. T. Britt, Accessibility Data Set for Large Permanent Cold Traps at the Lunar Poles, *Earth and Space Science* 7 (10) (2020) e01291. doi:10.1029/2020EA001291.
- [12] A. J. Gawronska, N. Barrett, S. J. Boazman, C. M. Gilmour, S. H. Halim, Harish, K. McCanaan, A. V. Satyakumar, J. Shah, H. M. Meyer, D. A. Kring, Geologic context and potential EVA targets at the lunar south pole, *Advances in Space Research* 66 (6) (2020) 1247–1264. doi:10.1016/j.asr.2020.05.035.

- [13] E. C. Czapinski, E. M. Harrington, S. K. Bell, G. D. Tolometti, B. E. Farrant, V. T. Bickel, C. I. Honniball, S. N. Martinez, A. Rogaski, H. M. Sargeant, D. A. Kring, Human-assisted Sample Return Mission at the Schrödinger Basin, Lunar Far Side, Using a New Geologic Map and Rover Traverses, *Planetary Science Journal* 2 (2) (2021) 51. doi:10.3847/PSJ/abdb34.
- [14] M. Lemelin, S. Li, E. Mazarico, M. A. Siegler, D. A. Kring, D. A. Paige, Framework for Coordinated Efforts in the Exploration of Volatiles in the South Polar Region of the Moon, *Planetary Science Journal* 2 (3) (2021) 103. doi:10.3847/PSJ/abf3c5.
- [15] V. T. Bickel, B. Moseley, E. Hauber, M. Shirley, J. P. Williams, D. A. Kring, Cryogeomorphic Characterization of Shadowed Regions in the Artemis Exploration Zone, *Geophysical Research Letters* 49 (16) (2022) e99530. doi:10.1029/2022GL099530.
- [16] N. Kumari, J. M. Bretzfelder, I. Ganesh, A. Lang, D. A. Kring, Surface Conditions and Resource Accessibility at Potential Artemis Landing Sites 007 and 011, *Planetary Science Journal* 3 (9) (2022) 224. doi:10.3847/PSJ/ac88c2.
- [17] S. J. Boazman, J. Shah, Harish, A. J. Gawronska, S. H. Halim, A. V. Satyakumar, C. M. Gilmour, V. T. Bickel, N. Barrett, D. A. Kring, The Distribution and Accessibility of Geologic Targets near the Lunar South Pole and Candidate Artemis Landing Sites, *Planetary Science Journal* 3 (12) (2022) 275. doi:10.3847/PSJ/aca590.
- [18] H. Bernhardt, M. S. Robinson, A. K. Boyd, Geomorphic map and science target identification on the Shackleton-de Gerlache ridge, *Icarus* 379 (2022) 114963. doi:10.1016/j.icarus.2022.114963.
- [19] E. Peña-Asensio, J. Sutherland, P. Tripathi, K. Mason, A. Goodwin, V. T. Bickel, D. A. Kring, Automated astronaut traverses with minimum metabolic workload: Accessing permanently shadowed regions

near the lunar south pole, *Acta Astronautica* 214 (2024) 324–342.  
doi:<https://doi.org/10.1016/j.actaastro.2023.10.010>.

URL <https://www.sciencedirect.com/science/article/pii/S0094576523005179>

- [20] Williams, Catherine E., Artemis iii: Nasa’s first human mission to the lunar south pole (2023).

URL <https://www.nasa.gov/missions/artemis/artemis-iii/>

- [21] E. Triantaphyllou, *Multi-Criteria Decision Making Methods: A Comparative Study*, Kluwer Academic Publishers, Dordrecht, The Netherlands, 2000.

- [22] T. L. Saaty, *The Analytic Hierarchy Process*, McGraw Hill International, 1980.

- [23] C. L. Hwang, K. Yoon, *Multiple attribute decision methods and applications*, Berlin Heidelberg; Springer, 1981.

- [24] B. Roy, ELECTRE III: Un algorithme de classements fonde sur une representation floue des preference en presence de criteres multiples, *Cahiers de CERO* 20 (1978) 3–24.

- [25] J. P. Brans, B. Mareschal, P. Vincke, PROMETHEE: A new family of outranking methods in multicriteria analysis, Brans JP, editor. *Operational research*. Amsterdam: North-Holland, 1984.

- [26] A. Gabus, E. Fontela, *World problems, an invitation to further thought within the framework of dematel*, 1972.

URL <https://api.semanticscholar.org/CorpusID:148882619>

- [27] D. Pamučar, G. Čirović, The selection of transport and handling resources in logistics centers using multi-attributive border approximation area comparison (MABAC), *Expert Systems with Applications* 42 (6) (2015) 3016–3028. doi:<https://doi.org/10.1016/j.eswa.2014.11.057>.

URL <https://www.sciencedirect.com/science/article/pii/S0957417414007568>

- [28] M. Yazdani, P. Zarate, E. Kazimieras Zavadskas, Z. Turskis, A combined compromise solution (cocoso) method for multi-criteria decision-making problems, *Management Decision* 57 (9) (2019) 2501–2519. doi:10.1108/MD-05-2017-0458.

URL <https://doi.org/10.1108/MD-05-2017-0458>

- [29] E. K. Zavadskas, Z. Turskis, A new additive ratio assessment (aras) method in multicriteria decision-making, *Ukio Technologinis ir Ekonominis Vystymas* 16 (2) (2010) 159–172. doi:10.3846/tede.2010.10.

URL <https://www.tandfonline.com/doi/abs/10.3846/tede.2010.10>

- [30] M. S. Robinson, S. M. Brylow, M. Tschimmel, D. Humm, S. J. Lawrence, P. C. Thomas, B. W. Denevi, E. Bowman-Cisneros, J. Zerr, M. A. Ravine, M. A. Caplinger, F. T. Ghaemi, J. A. Schaffner, M. C. Malin, P. Mahanti, A. Bartels, J. Anderson, T. N. Tran, E. M. Eliason, A. S. McEwen, E. Turtle, B. L. Jolliff, H. Hiesinger, Lunar Reconnaissance Orbiter Camera (LROC) Instrument Overview, *Space Science Reviews* 150 (1-4) (2010) 81–124. doi:10.1007/s11214-010-9634-2.

- [31] P. Jankowski, Integrating geographical information systems and multiple criteria decision-making methods, *International journal of geographical information systems* 9 (3) (1995) 251–273. doi:10.1080/02693799508902036.

URL <https://doi.org/10.1080/02693799508902036>

- [32] N.-B. Chang, G. Parvathinathan, J. B. Breeden, Combining gis with fuzzy multicriteria decision-making for landfill siting in a fast-growing urban region, *Journal of Environmental Management* 87 (1) (2008) 139–153. doi:<https://doi.org/10.1016/j.jenvman.2007.01.011>.

URL <https://www.sciencedirect.com/science/article/pii/S0301479707000230>

- [33] Y. Chen, J. Yu, S. Khan, Spatial sensitivity analysis of multi-criteria weights in gis-based land suitability evaluation, *Environmental Modelling & Software* 25 (12) (2010) 1582–1591. doi:<https://doi.org/10.1016/j.envsoft.2010.06.001>.  
URL <https://www.sciencedirect.com/science/article/pii/S1364815210001842>
- [34] J. M. Sánchez-Lozano, J. Teruel-Solano, P. L. Soto-Elvira, M. S. García-Cascales, Geographical information systems (gis) and multi-criteria decision making (mcdm) methods for the evaluation of solar farms locations: Case study in south-eastern spain.
- [35] J. M. Sánchez-Lozano, C. Henggeler Antunes, M. S. García-Cascales, L. C. Dias, Gis-based photovoltaic solar farms site selection using electre-tri: Evaluating the case for torre pacheco, murcia, southeast of spain, *Renewable Energy* 66 (2014) 478–494. doi:<https://doi.org/10.1016/j.renene.2013.12.038>.  
URL <https://www.sciencedirect.com/science/article/pii/S0960148114000093>
- [36] M. Tahri, M. Hakdaoui, M. Maanan, The evaluation of solar farm locations applying geographic information system and multi-criteria decision-making methods: Case study in southern morocco, *Renewable and Sustainable Energy Reviews* 51 (2015) 1354–1362. doi:<https://doi.org/10.1016/j.rser.2015.07.054>.  
URL <https://www.sciencedirect.com/science/article/pii/S1364032115007017>
- [37] H. Z. Al Garni, A. Awasthi, Solar pv power plant site selection using a gis-ahp based approach with application in saudi arabia, *Applied Energy* 206 (2017) 1225–1240. doi:<https://doi.org/10.1016/j.apenergy.2017.10.024>.

URL <https://www.sciencedirect.com/science/article/pii/S030626191731437X>

- [38] K. Khosravi, H. Shahabi, B. T. Pham, J. Adamowski, A. Shirzadi, B. Pradhan, J. Dou, H.-B. Ly, G. Gróf, H. L. Ho, H. Hong, K. Chapi, I. Prakash, A comparative assessment of flood susceptibility modeling using multi-criteria decision-making analysis and machine learning methods, *Journal of Hydrology* 573 (2019) 311–323. doi:<https://doi.org/10.1016/j.jhydrol.2019.03.073>.

URL <https://www.sciencedirect.com/science/article/pii/S0022169419303026>

- [39] M. Shao, Z. Han, J. Sun, C. Xiao, S. Zhang, Y. Zhao, A review of multi-criteria decision making applications for renewable energy site selection, *Renewable Energy* 157 (2020) 377–403. doi:<https://doi.org/10.1016/j.renene.2020.04.137>.

URL <https://www.sciencedirect.com/science/article/pii/S0960148120306753>

- [40] P. Dehghan Rahimabadi, M. Behnia, S. Nasabpour Molaee, H. Khosravi, H. Azarnivand, Assessment of groundwater resources potential using improved water quality index (impwqi) and entropy-weighted topsis model, *Sustainable Water Resources Management* 10 (7) (2023).

URL <https://doi.org/10.1007/s40899-023-00988-y>

- [41] J. Romero-Ramos, J. Gil, J. Cardemil, R. Escobar, I. Arias, M. Pérez-García, A gis-ahp approach for determining the potential of solar energy to meet the thermal demand in southeastern spain productive enclaves, *Renewable and Sustainable Energy Reviews* 176 (2023) 113205. doi:<https://doi.org/10.1016/j.rser.2023.113205>.

URL <https://www.sciencedirect.com/science/article/pii/S1364032123000618>

- [42] R. Mohamed Mouhoumed, Ömer Ekmekcioğlu, M. Özger, A hybrid

- mcdm approach for delineating sites suitable for artificial groundwater recharge using drywells, *Journal of Hydrology* 620 (2023) 129387. doi:<https://doi.org/10.1016/j.jhydrol.2023.129387>.  
URL <https://www.sciencedirect.com/science/article/pii/S0022169423003293>
- [43] S. Aloui, A. Zghibi, A. Mazzoni, A. Elomri, T. Al-Ansari, Identifying suitable zones for integrated aquifer recharge and flood control in arid qatar using gis-based multi-criteria decision-making, *Groundwater for Sustainable Development* 25 (2024) 101137. doi:<https://doi.org/10.1016/j.gsd.2024.101137>.  
URL <https://www.sciencedirect.com/science/article/pii/S2352801X24000602>
- [44] I. Zandi, P. Pahlavani, B. Bigdeli, A. Lotfata, A. A. Alesheikh, C. Garau, Gis-enabled multi-criteria assessment for hospital site suitability: A case study of tehran, *Sustainability* 16 (5) (2024).  
URL <https://www.mdpi.com/2071-1050/16/5/2079>
- [45] G. Arabatzis, G. Kolkos, A. Stergiadou, A. Kantartzis, S. Tampekis, Optimal allocation of water reservoirs for sustainable wildfire prevention planning via ahp-topsis and forest road network analysis, *Sustainability* 16 (2) (2024) 936. doi:[10.3390/su16020936](https://doi.org/10.3390/su16020936).  
URL <https://www.mdpi.com/2071-1050/16/2/936>
- [46] T.-C. Wang, T.-H. Chang, Application of topsis in evaluating initial training aircraft under a fuzzy environment, *Expert Systems with Applications* 33 (4) (2007) 870–880. doi:<https://doi.org/10.1016/j.eswa.2006.07.003>.  
URL <https://www.sciencedirect.com/science/article/pii/S0957417406002193>
- [47] A. Mardani, A. Jusoh, E. K. Zavadskas, Fuzzy multiple criteria decision-making techniques and applications – two decades review from 1994 to

- 2014, *Expert Systems with Applications* 42 (8) (2015) 4126–4148. doi:  
<https://doi.org/10.1016/j.eswa.2015.01.003>.
- [48] M. K. Barker, E. Mazarico, G. A. Neumann, D. E. Smith, M. T. Zuber, J. W. Head, Improved lola elevation maps for south pole landing sites: Error estimates and their impact on illumination conditions, *Planetary and Space Science* 203 (2021) 105119. doi:<https://doi.org/10.1016/j.pss.2020.105119>.  
URL <https://www.sciencedirect.com/science/article/pii/S0032063320303329>
- [49] NASA, Plan for sustainable lunar exploration and development (2020).  
URL [https://www.nasa.gov/sites/default/files/atoms/files/a\\_sustained\\_lunar\\_presence\\_nspc\\_report4220final.pdf](https://www.nasa.gov/sites/default/files/atoms/files/a_sustained_lunar_presence_nspc_report4220final.pdf)
- [50] E. Mazarico, G. A. Neumann, D. E. Smith, M. T. Zuber, M. H. Torrence, Illumination conditions of the lunar polar regions using LOLA topography, *Icarus* 211 (2) (2011) 1066–1081. doi:[10.1016/j.icarus.2010.10.030](https://doi.org/10.1016/j.icarus.2010.10.030).
- [51] D. P. Moriarty, N. E. Petro, Mineralogical Characterization of the Lunar South Polar Region: 1. The Artemis Exploration Zone, *Journal of Geophysical Research (Planets)* 129 (4) (2024) e2023JE008266. doi:[10.1029/2023JE008266](https://doi.org/10.1029/2023JE008266).
- [52] C. Fortezzo, P. Spudis, S. Harrel, Release of the digital unified global geologic map of the moon at 1:5,000,000, in: 51st Lunar and Planetary Science Conference, Lunar and Planetary Institute. at The Woodlands, Texas, 2020, p. 2760.  
URL <https://ui.adsabs.harvard.edu/abs/2020LPI...51.2760F/abstract>
- [53] ESRI, Arcgis. discover your power with arcgis (2024).  
URL <https://www.esri.com/en-us/arcgis/about-arcgis/overview>

- [54] B. M. Geographics, Global mapper (2024).  
URL <https://www.bluemarblegeo.com/global-mapper/>
- [55] D. Coan, Exploration eva system concept of operations, Tech. Rep. EVA-EXP-0042, NASA (2020).
- [56] NASA, Hls-rqmt-001. human landing system (hls) requirements document (2019).  
URL [https://www.google.com/url?sa=t&source=web&rct=j&opi=899784449&url=https://forum.nasaspaceflight.com/index.php%3Faction%3Ddlattach%3Btopic%3D50843.0%3Battach%3D1944357%3Bsess%3D0&ved=2ahUKEwjXwYXUjuqGAX\\_rsIHWdfDEAQFnoECBEQAQ&usg=A0vVaw3B37XXZDlxPr5\\_0dynSwzN](https://www.google.com/url?sa=t&source=web&rct=j&opi=899784449&url=https://forum.nasaspaceflight.com/index.php%3Faction%3Ddlattach%3Btopic%3D50843.0%3Battach%3D1944357%3Bsess%3D0&ved=2ahUKEwjXwYXUjuqGAX_rsIHWdfDEAQFnoECBEQAQ&usg=A0vVaw3B37XXZDlxPr5_0dynSwzN)
- [57] L. Watson-Morgan, L. Hawkins, J. Crisler, L. Gagliano, R. Ortega, T. K. Percy, T. Polsgrove, J. Vermette, Nasa’s initial artemis human landing system, in: 73rd International Astronautical Congress (IAC), 2022, pp. 1–17.  
URL [https://ntrs.nasa.gov/api/citations/20220013431/downloads/HLS%20IAC\\_Final.pdf](https://ntrs.nasa.gov/api/citations/20220013431/downloads/HLS%20IAC_Final.pdf)
- [58] D. P. Moriarty, N. E. Petro, Mineralogical Characterization of the Lunar South Polar Region: 1. The Artemis Exploration Zone, *Journal of Geophysical Research (Planets)* 129 (4) (2024) e2023JE008266. doi:10.1029/2023JE008266.
- [59] Q. Huang, S. Liu, X. Yang, X. Tong, Artemis III pre-selected landing sites engineering suitability analysis with illumination, communication and slope, based on LOLA terrain, in: *International Conference on Remote Sensing, Mapping, and Geographic Systems (RSMG 2023)*, Vol. 12815, 2023, p. 1281522. doi:10.1117/12.3010268.
- [60] S. Opricovic, Multicriteria optimization of civil engineering systems, *Faculty of civil engineering, Belgrade* 2 (1) (1998) 5–21.