Analytical Gradient and Hessian Evaluation for System Identification using State-Parameter Transition Tensors

Premjit Saha, Tarunraj Singh

Mechanical and Aerospace Engineering, University at Buffalo, Buffalo, NY 14260, USA

Abstract:

In this work, the Einstein notation is utilized to synthesize state and parameter transition matrices, by solving a set of ordinary differential equations. Additionally, for the system identification problem, it has been demonstrated that the gradient and Hessian of a cost function can be analytically constructed using the same matrix and tensor metrics. A general gradient-based optimization problem is then posed to identify unknown system parameters and unknown initial conditions. Here, the analytical gradient and Hessian of the cost function are derived using these state and parameter transition matrices. The more robust performance of the proposed method for identifying unknown system parameters and unknown initial conditions over an existing conventional quasi-Newton method-based system identification toolbox (available in MATLAB) is demonstrated by using two widely used benchmark datasets from real dynamic systems. In the existing toolbox, gradient and Hessian information, which are derived using a finite difference method, are more susceptible to numerical errors compared to the analytical approach presented.

Keywords: Gradient-based Optimization, Transition matrix and tensors, Gradient and Hessian, System identification.

1. INTRODUCTION

The primary goal of system identification is to estimate or infer models, typically in the form of mathematical equations or transfer functions, that capture the dynamics and relationships within a system. Often it involves evaluation of system parameters and initial conditions such that the states derived using the mathematical model for the system closely follow the observed states of the system with a desired degree of accuracy. There is a vast body of literature presenting algorithms and methods for system identification Aström and Eykhoff (1971); Eykhoff (1968). Nandi and Singh (2018) have presented an adjoint sensitivity-based approach to determine the gradients and Hessians of cost functions for system identification of dynamical systems. More and Sorensen (1982) reported that including the Hessian in Newton's method enables faster (quadratic) convergence compared to methods using only first-order information like the gradient. Majii et al. (2008) have presented an analytical approach for developing an estimation framework (called the J^{th} Moment Extended Kalman Filter (JMEKF)) which can be used for system identification in conjunction with estimating states. While in their work, they used state transition tensors to compute different orders of statistical moments in the extended Kalman filter framework, this article presents a generalized approach to providing the analytical gradient and Hessian of a cost function using the same state and parameter transition matrices, along with other higher-dimensional tensors. The stated matrix and higher dimensional tensors are evaluated by solving a set of ordinary differential equations (ODEs). The concepts of state and parameter transition matrix and other higher dimensional state and parameter transition tensors are inspired from Turner et al. (2008). There are also challenges, such as computational cost and issues with ill-conditioned Hessians, that need to be addressed More and Sorensen (1982); Broyden (1970). In practice, variations like quasi-Newton methods (e.g., BFGS) are often used to tackle these challenges while retaining some benefits of second-order optimization Buckley (1978b,a); Coleman and Moré (1983). However, the accuracy of quasi-Newton methods can be affected by the numerical errors accumulated from first-order information derived by explicit finite difference-based methods Sod (1978); Smith (1985); Kunz and Luebbers (1993). The analytical gradient and Hessian developed using the proposed methodology can facilitate computationally efficient and numerically stable execution of necessary calculations in each iteration of the optimization process for a general Newton method-based system identification approach for dynamical systems. The accuracy of the proposed system identification technique has been tested on widely used benchmark datasets associated with real dynamic systems Wigren (2010); Wigren and Schoukens (2013). The proposed method's performance is also compared with an existing conventional quasi-Newton method-based system identification toolbox, where both first-order and secondorder information are derived using the finite difference method.

2. FRAMEWORK FOR ESTIMATING STATE AND PARAMETER TRANSITION MATRICES

A general form of a nonlinear system is chosen, which is written in state space form and is sensitive to the perturbation of both initial values of the states ($\vec{x}(t_0) :=$ \vec{x}_0) and system parameters (\vec{p}) of the system as follows:

$$\overrightarrow{\boldsymbol{x}}(t, \overrightarrow{\boldsymbol{x}}_{0}, \overrightarrow{\boldsymbol{p}}) = \overrightarrow{\boldsymbol{F}}(\overrightarrow{\boldsymbol{x}}(t, \overrightarrow{\boldsymbol{x}}_{0}, \overrightarrow{\boldsymbol{p}})) \text{where} \quad \overrightarrow{\boldsymbol{x}}(t, \overrightarrow{\boldsymbol{x}}_{0}, \overrightarrow{\boldsymbol{p}}), \quad \overrightarrow{\boldsymbol{F}}(\overrightarrow{\boldsymbol{x}}(t, \overrightarrow{\boldsymbol{x}}_{0}, \overrightarrow{\boldsymbol{p}})) \in \mathbb{R}^{N}$$
(1a)

$$\overrightarrow{p} = 0$$
 where $\overrightarrow{p} \in \mathbb{R}^M$. (1b)

The nonlinear equation can also be rewritten in Einstein's tensorial notation as:

$$\dot{x}_{i_1} = \mathcal{F}_{i_1}(x_k(t, \overrightarrow{x}, \overrightarrow{p})) \text{ where } i_1, k = 1, 2, 3 \dots N$$
 (2a)

$$\dot{p}_{i_2} = 0$$
 where $i_2 = 1, 2, 3...M$ (2b)

The practice of representing equations in both vector form and Einstein's tensorial notation will continue in the beginning part of the section to establish a better understanding of the process. The solution for Eq. (1a-1b) with the initial condition $\vec{x}(t_0)$ and system parameters (\vec{p}) is:

$$\vec{\boldsymbol{x}}(t, \vec{\boldsymbol{x}}_{0}, \vec{\boldsymbol{p}}) = \vec{\boldsymbol{x}}_{0} + \int_{t_{0}}^{t} \vec{\boldsymbol{F}}(\vec{\boldsymbol{x}}(\tau, \vec{\boldsymbol{x}}_{0}, \vec{\boldsymbol{p}}) d\tau \quad (3)$$

Hence, from Eq.(3), the sensitivity of the solution \overrightarrow{x} $(t, \overrightarrow{x}_0, \overrightarrow{p})$ with respect to the initial conditions (\overrightarrow{x}_0) , which is also defined as state transition matrix, can be expanded as:

$$\begin{split} \frac{\partial \overrightarrow{\boldsymbol{x}}(t, \overrightarrow{\boldsymbol{x}}_{0}, \overrightarrow{\boldsymbol{p}})}{\partial \overrightarrow{\boldsymbol{x}}_{0}} &= \mathcal{I}_{N \times N} \\ &+ \int_{t_{0}}^{t} \left(\frac{\partial \overrightarrow{\boldsymbol{F}}(\overrightarrow{\boldsymbol{x}})}{\partial \overrightarrow{\boldsymbol{x}}} \frac{\partial \overrightarrow{\boldsymbol{x}}(\tau, \overrightarrow{\boldsymbol{x}}_{0}, \overrightarrow{\boldsymbol{p}})}{\partial \overrightarrow{\boldsymbol{x}}_{0}} + \frac{\partial \overrightarrow{\boldsymbol{F}}(\overrightarrow{\boldsymbol{x}})}{\partial \overrightarrow{\boldsymbol{p}}} \frac{\partial \overrightarrow{\boldsymbol{p}}}{\partial \overrightarrow{\boldsymbol{x}}_{0}} \right) d\tau \\ &\frac{\partial x_{i_{1}}}{\partial x_{0_{j_{1}}}} = \delta_{i_{1}j_{1}} + \int_{t_{0}}^{t} \left(\frac{\partial \mathcal{F}_{i_{1}}}{\partial x_{m}} \frac{\partial x_{m}}{\partial x_{0_{j_{1}}}} + \frac{\partial \mathcal{F}_{i_{1}}}{\partial p_{n}} \frac{\partial p_{n}}{\partial x_{0_{j_{1}}}} \right) d\tau \\ \text{where } i_{1}, m, j_{1} = 1, 2, 3 \dots N \text{ and } n = 1, 2, 3 \dots M. \end{split}$$

Eq.(4) can further be differentiated with respect to time to derive the following equation:

$$\frac{d}{dt} \left(\frac{\partial x_{i_1}(t, \overrightarrow{\boldsymbol{x}}_{0}, \overrightarrow{\boldsymbol{p}})}{\partial x_{0_{j_1}}} \right) = \frac{\partial \mathcal{F}_{i_1}}{\partial x_m} \frac{\partial x_m}{\partial x_{0_{j_1}}} + \frac{\partial \mathcal{F}_{i_1}}{\partial p_n} \frac{\partial p_n}{\partial x_{0_{j_1}}}$$
with $\frac{\partial x_{i_1}(t, \overrightarrow{\boldsymbol{x}}_{0}, \overrightarrow{\boldsymbol{p}})}{\partial x_{0_{j_1}}} \bigg|_{t=t_0} = \delta_{i_1j_1}$: Kronecker delta
or, $\frac{d\Phi_{i_1,j_1}(t,t_0)}{dt} = \mathcal{F}_{xi_1,m}(t)\Phi_{m,j_1}(t,t_0) + \mathcal{F}_{p}_{i_1,n}(t)\frac{\partial p_n}{\partial x_{0_{j_1}}}$
with $\frac{\partial x_{i_1}(t, \overrightarrow{\boldsymbol{x}}_{0}, \overrightarrow{\boldsymbol{p}})}{\partial x_{0_{j_1}}} \equiv \Phi_{i_1,j_1}(t,t_0)$, $\Phi_{i_1,j_1}(t_0,t_0) = \delta_{i_1j_1}$
(5)

where $()_x = \frac{\partial()}{\partial \overrightarrow{x}}$ and $()_p = \frac{\partial()}{\partial \overrightarrow{p}}$. Similarly the sensitivity of the solution $\overrightarrow{x}(t, \overrightarrow{x}_0, \overrightarrow{p})$ with respect to the set of system parameters \overrightarrow{p} , which is also defined as parameter transition matrix, leads to the following equation:

$$\frac{\partial \vec{x}(t, \vec{x}_{0}, \vec{p})}{\partial \vec{p}} = \frac{\partial \vec{x}_{0}}{\partial \vec{p}} + \int_{t_{0}}^{t} \left(\frac{\partial \vec{F}(\vec{x}(\tau, \vec{x}_{0}, \vec{p}))}{\partial \vec{x}} \frac{\partial \vec{x}(\tau, \vec{x}_{0}, \vec{p})}{\partial \vec{p}} \right) \\
+ \frac{\partial \vec{F}(\vec{x}(t, \vec{x}_{0}, \vec{p}))}{\partial \vec{p}} \right) d\tau \\
\frac{\partial x_{i_{1}}(t, \vec{x}_{0}, \vec{p})}{\partial p_{j_{2}}} = \frac{\partial x_{0_{i_{1}}}}{\partial p_{j_{2}}} + \int_{t_{0}}^{t} \left(\frac{\partial \mathcal{F}_{i_{1}}}{\partial x_{m}} \frac{\partial x_{m}}{\partial p_{j_{2}}} + \frac{\partial \mathcal{F}_{i_{1}}}{\partial p_{j_{2}}} \right) d\tau \\
\text{where } i_{1}, m = 1, 2, 3 \dots N \text{ and } j_{2} = 1, 2, 3 \dots M.$$
(6)

It is further assumed that the initial conditions of the states $(\vec{x}(t_0) := \vec{x}_0)$ and system parameters (\vec{p}) of the system are not correlated i.e. $\frac{\partial \vec{x}(t, \vec{x}_0, \vec{p})}{\partial \vec{p}}\Big|_{t=t_0} = \frac{\partial \vec{x}_0}{\partial \vec{p}} = \frac{\partial \vec{x}_0}{\partial \vec{p}} = \frac{\partial \vec{p}}{\partial \vec{p}}$

$$\frac{\partial \vec{x}_{0}}{\partial \vec{p}} = \mathbf{0}_{N \times M} \text{ and } \left. \frac{\partial \vec{p}}{\partial \vec{x}(t, \vec{x}_{0}, \vec{p})} \right|_{t=t_{0}} = \left. \frac{\partial \vec{p}}{\partial \vec{x}_{0}} \right|_{t=t_{0}} = \mathbf{0}_{M \times N}.$$
 Hence, Eq.(5-6) can be rewritten as

$$\frac{d\Phi_{i_{1},j_{1}}(t,t_{0})}{dt} = \mathcal{F}_{x \ i_{1},m}(t)\Phi_{m,j_{1}}(t,t_{0}) + \mathcal{F}_{p \ i_{1},n}(t) \frac{\partial p_{n}}{\partial x_{0_{j_{1}}}};$$
or,
$$\frac{d\Phi_{i_{1},j_{1}}(t,t_{0})}{dt} = \mathcal{F}_{x \ i_{1},m}(t)\Phi_{m,j_{1}}(t,t_{0});$$
with
$$\Phi_{i_{1},j_{1}}(t_{0},t_{0}) = \delta_{i_{1}j_{1}}$$
(7)

and

$$\frac{\partial x_{i_1}(t, \overrightarrow{\boldsymbol{x}}_{\mathbf{0}}, \overrightarrow{\boldsymbol{p}})}{\partial p_{j_2}} = \frac{\partial x_{0_1}}{\partial p_{j_2}} + \int_{t_0}^t \left(\frac{\partial \mathcal{F}_{i_1}}{\partial x_m} \frac{\partial x_m}{\partial p_{j_2}} + \frac{\partial \mathcal{F}_{i_1}}{\partial p_{j_2}}\right) d\tau$$
(8)

Δ

Eq.(8) can be differentiated with respect to time to derive the following equation:

$$\frac{d}{dt} \left(\frac{\partial x_{i_1}(t, \overrightarrow{\boldsymbol{x}}_{\mathbf{0}}, \overrightarrow{\boldsymbol{p}})}{\partial p_{j_2}} \right) = \frac{\partial \mathcal{F}_{i_1}}{\partial x_m} \frac{\partial x_m}{\partial p_{j_2}} + \frac{\partial \mathcal{F}_{i_1}}{\partial p_{j_2}}$$
or,
$$\frac{d\Theta_{i_1,j_2}(t,t_0)}{dt} = \mathcal{F}_{x \ i_1,m}(t)\Theta_{m,j_2}(t,t_0) + \mathcal{F}_{p \ i_1,j_2}(t);$$
with
$$\frac{\partial x_{i_1}(t, \overrightarrow{\boldsymbol{x}}_{\mathbf{0}}, \overrightarrow{\boldsymbol{p}})}{\partial p_{j_2}} \equiv \Theta_{i_1,j_2}(t,t_0) , \ \Theta_{i_1,j_2}(t_0,t_0) = 0_{i_1j_2}$$
(9)

Eq.(1b) can also similarly be used to result in the following equations:

$$\frac{d}{dt} \left(\frac{\partial p_{i_2}}{\partial x_{j_1}} \right) = 0_{i_2 j_1} \quad \text{with} \quad \frac{\partial p_{i_2}}{\partial x_{j_1}} \bigg|_{t=t_0} = 0_{i_2 j_1} \qquad (10a)$$

$$\frac{d}{dt} \left(\frac{\partial p_{i_2}}{\partial p_{j_2}} \right) = 0_{i_2 j_2} \quad \text{with} \quad \left. \frac{\partial p_{i_2}}{\partial p_{j_2}} \right|_{t=t_0} = \delta_{i_2 j_2}.$$
(10b)

Eq.(10a-10b) along with their initial conditions, ensure that the state transition tensors satisfy, $\frac{\partial \vec{p}}{\partial \vec{x}_0} = \mathbf{0}_{M \times N}$ and $\frac{\partial \vec{p}}{\partial \vec{p}} = \mathcal{I}_{M \times M}$ for all time respectively. Similarly, the following higher dimensional transition tensor is defined

$$\frac{\partial}{\partial \overrightarrow{x}_{0}} \left(\frac{\partial \overrightarrow{x}(t, \overrightarrow{x}_{0}, \overrightarrow{p})}{\partial \overrightarrow{x}_{0}} \right) = \\
\int_{t_{0}}^{t} \left(\left(\frac{\partial \overrightarrow{x}(\tau, \overrightarrow{x}_{0}, \overrightarrow{p})}{\partial \overrightarrow{x}_{0}} \right)^{T} \frac{\partial}{\partial \overrightarrow{x}} \left(\frac{\partial \overrightarrow{F}}{\partial \overrightarrow{x}} \right) \frac{\partial \overrightarrow{x}(\tau, \overrightarrow{x}_{0}, \overrightarrow{p})}{\partial \overrightarrow{x}_{0}} \right) \\
+ \frac{\partial \overrightarrow{F}}{\partial \overrightarrow{x}} \frac{\partial}{\partial \overrightarrow{x}_{0}} \left(\frac{\partial \overrightarrow{x}(\tau, \overrightarrow{x}_{0}, \overrightarrow{p})}{\partial \overrightarrow{x}_{0}} \right) \\
+ \left(\frac{\partial \overrightarrow{x}(\tau, \overrightarrow{x}_{0}, \overrightarrow{p})}{\partial \overrightarrow{x}_{0}} \right)^{T} \frac{\partial}{\partial \overrightarrow{p}} \left(\frac{\partial \overrightarrow{F}}{\partial \overrightarrow{x}} \right) \frac{\partial \overrightarrow{p}}{\partial \overrightarrow{x}_{0}} \\
+ \frac{\partial \overrightarrow{F}}{\partial \overrightarrow{x}} \frac{\partial}{\partial \overrightarrow{p}} \left(\frac{\partial \overrightarrow{x}(\tau, \overrightarrow{x}_{0}, \overrightarrow{p})}{\partial \overrightarrow{x}_{0}} \right)^{T} \frac{\partial}{\partial \overrightarrow{p}} \left(\frac{\partial \overrightarrow{F}}{\partial \overrightarrow{x}} \right) \frac{\partial \overrightarrow{p}}{\partial \overrightarrow{x}_{0}} \\
+ \frac{\partial \overrightarrow{F}}{\partial \overrightarrow{x}} \frac{\partial}{\partial \overrightarrow{p}} \left(\frac{\partial \overrightarrow{x}(\tau, \overrightarrow{x}_{0}, \overrightarrow{p})}{\partial \overrightarrow{x}_{0}} \right) \frac{\partial \overrightarrow{p}}{\partial \overrightarrow{x}_{0}} \right) d\tau \tag{11}$$

Eq.(11) can be differentiated with respect to time, with the conditions depicted in Eq.(10a) applied to derive the following equation:

$$\frac{d\Phi_{i_{1}j_{1}k_{1}}^{1}(t,t_{0})}{dt} = \frac{d\Phi_{i_{1},j_{1}k_{1}}(t,t_{0})}{dt}
= \mathcal{F}_{xx} _{i_{1},mn}(t)\Phi_{m,j_{1}}(t,t_{0})\Phi_{n,k_{1}}(t,t_{0})
+ \mathcal{F}_{x} _{i_{1},m}(t)\Phi_{m,j_{1}k_{1}}(t,t_{0})
where \Phi_{i_{1},j_{1}k_{1}}(t_{0},t_{0}) \equiv \Phi_{i_{1}j_{1}k_{1}}^{1}(t_{0},t_{0}) = \mathcal{O},
and i_{1},k_{1},j_{1},m,n = 1,2,3...N.$$
(12)

and
$$\frac{\partial^2 x_{i_1}(t, \overrightarrow{x}_0, \overrightarrow{p})}{\partial x_{0_{k_1}} \partial x_{0_{j_1}}} \equiv \Phi_{i_1, j_1 k_1}(t, t_0) \equiv \Phi^1_{i_1 j_1 k_1}(t, t_0).$$

Similarly, time evolution for the following higher dimensional transition tensor can be written as $J \Omega^1$ 10

$$\frac{d\Theta_{i_{1}j_{2}k_{2}}^{i}}{dt} = \frac{d\Theta_{i_{1},j_{2}k_{2}}}{dt} = \mathcal{F}_{xx\ i_{1},mn}\Theta_{m,j_{2}}\Theta_{n,k_{2}}
+ \mathcal{F}_{px\ i_{1},j_{2}m}\Theta_{m,k_{2}} + \mathcal{F}_{xp\ i_{1},mk_{2}}\Theta_{m,j_{2}}
+ \mathcal{F}_{x\ i_{1},m}\Theta_{m,j_{2}k_{2}} + \mathcal{F}_{pp\ i_{1},j_{2}k_{2}}
with\ \Theta_{i_{1},j_{2}k_{2}}(t_{0},t_{0}) \equiv \Theta_{i_{1}j_{2}k_{2}}^{1}(t_{0},t_{0}) = \mathcal{O};
i_{1},m,n = 1, 2, 3 \dots N; \quad j_{2},k_{2} = 1, 2, 3 \dots M;$$
(13)

while
$$\frac{\partial^2 x_i(t, \overrightarrow{x}_0, \overrightarrow{p})}{\partial x_{k_2} \partial x_{j_2}} \equiv \Theta^1_{i_1 j_2 k_2}(t, t_0) \equiv \Theta_{i_1, j_2 k_2}(t, t_0).$$

Time evolution for two more higher dimensional transition tensors can be further developed. First,

$$\frac{d\chi^{1}_{i_{1}j_{1}k_{2}}}{dt} = \frac{d}{dt} \left(\frac{\partial \Phi_{i_{1},j_{1}}}{\partial p_{k_{2}}} \right) = \mathcal{F}_{xx \ i_{1},mn} \Phi_{m,j_{1}} \Theta_{n,k_{2}}
+ \mathcal{F}_{xp \ i_{1},mk_{2}} \Phi_{m,j_{1}} + \mathcal{F}_{x \ i_{1},m} \chi_{mj_{1}k_{2}}
with \chi^{1}_{i_{1}j_{1}k_{2}}(t_{0},t_{0}) = \mathcal{O}; \ i_{1},j_{1},m,n = 1,2,3...N;
and k_{2} = 1,2,3...M;$$
(14)

while
$$\frac{\partial^2 x_i(t, \overrightarrow{\boldsymbol{x}}_0, \overrightarrow{\boldsymbol{p}})}{\partial p_{k_2} \partial x_{0_{j_1}}} \equiv \chi^1_{i_1 j_1 k_2}(t, t_0).$$
 Second,

$$\frac{d\chi^2_{i_1 j_2 k_1}}{dt} = \frac{d}{dt} \left(\frac{\partial \Theta_{i_1, j_2}}{\partial x_{0_{k_1}}} \right) = \mathcal{F}_{xx \ i_1, mn} \Theta_{m, j_2} \Phi_{n, k_1}$$

$$+ \mathcal{F}_{x \ i_1, m} \chi_{m j_2 k_1} + \mathcal{F}_{px \ i_1, j_2 m} \Phi_{m, k_1}$$
(15)
with χ^2 , $(t_0, t_0) = \mathcal{O}; \ i_1, k_1, m, n = 1, 2, 3, \ldots, N;$

 $\chi_{\tilde{i}_1 j_2 k_1}(t_0, t_0) = \mathcal{O}; \ i_1, k_1, m, n =$ 1, 2, 3. and $j_2 = 1, 2, 3 \dots M$;

while
$$\frac{\partial^2 x_i(t, \overrightarrow{\boldsymbol{x}}_0, \overrightarrow{\boldsymbol{p}})}{\partial x_{0_{k_1}} \partial p_{j_2}} \equiv \chi^2_{i_1 j_2 k_1}(t, t_0)$$

In this section, along with the governing differential equation in Eq.(1a-1b), a set of other differential equations have been developed depicting the evolution of state transition tensor Φ , parameter transition tensor Θ , and more higher dimensional state transition tensors $(\Phi^1, \Theta^1, \chi^1, \text{and } \chi^2)$ with respect to time.

3. GRADIENT AND HESSIAN USING HIGHER ORDER TRANSITION TENSORS

The cost (J) of the minimization problem is:

$$\min J = \sum_{h=0}^{P} \left(\overrightarrow{\boldsymbol{y}}_{obs}(t_h) - \overrightarrow{\boldsymbol{y}}(t_h) \right)^{T} \left(\overrightarrow{\boldsymbol{y}}_{obs}(t_h) - \overrightarrow{\boldsymbol{y}}(t_h) \right)$$

such that

such that

$$\dot{x}_{i}(t_{h}) = \mathcal{F}_{i}(x_{k}(t_{h}, \overrightarrow{x}_{0}, \overrightarrow{p}))
\tilde{y}_{g}(t_{h}) = C_{g}\left(\overrightarrow{x}(t_{h}, \overrightarrow{x}_{0}, \overrightarrow{p}), \overrightarrow{p}\right), \text{ where } C_{g}: \overrightarrow{x} \to \tilde{y}_{g}
\text{ with } i = 1, 2, 3 \dots N; \text{ and } g = 1, 2, 3 \dots S;$$
(16)

In Eq.(16) ()_{obs} signifies measured variables, whereas () signifies simulated variables from the system model. In this section, the state transition matrix and other higher dimensional state transition tensors will be used to construct the gradient and Hessian of the cost function. The gradient of the cost (J) can be defined as:

$$\frac{\partial J}{\partial x_{0_{j_1}}} = -2\sum_{h=0}^{P} \left(y_{obs_g}(t_h) - \tilde{y}_g(t_h) \right) C_{xg,i} \Phi_{i,j_1}(t_h, t_0)$$

where $i, j_1 = 1, 2, 3 \dots N; \ g = 1, 2, 3, \dots S;$ (17)

and

$$\frac{\partial J}{\partial p_{j_2}} = -2 \sum_{h=0}^{P} (y_{obs_g}(t_h) - \tilde{y}_g(t_h)) (C_{xg,i}\Theta_{i,j_2} + C_{pg,j_2})$$

where $i = 1, 2, 3 \dots N; \ j_2 = 1, 2, 3 \dots M;$
and $g = 1, 2, 3, \dots S.$ (18)

Similarly, the Hessian of the cost (J) can be defined as the following:

$$\frac{\partial}{\partial x_{0_{k_1}}} \left(\frac{\partial J}{\partial x_{0_{j_1}}} \right) = -2 \sum_{h=0}^{P} \left(y_{obs_g}(t_h) - \tilde{y}_g \right) \left(C_{x \ g,i} \Phi_{i,j_1 k_1} + C_{xx \ g,i \ m} \Phi_{i,j_1} \Phi_{m,k_1} \right) + 2 \sum_{h=0}^{P} C_{x \ g,m} \Phi_{m,k_1} \ C_{x \ g,i} \Phi_{i,j_1}$$

where $i, j_1, k_1, m = 1, 2, 3 \dots N$; and $g = 1, 2, 3, \dots S$;
(19)

$$\frac{\partial}{\partial p_{k_2}} \left(\frac{\partial J}{\partial x_{0_{j_1}}} \right) = \sum_{h=0}^{P} -2(y_{obs_g}(t_h) - \tilde{y}_g(t_h)) \left(C_{x \ g,i} \chi^1_{ij_1k_2} + C_{xp \ g,ik_2} \Phi_{i,j_1} + C_{xx \ g,i} m \Phi_{i,j_1} \Theta_{m,k_2} \right) \\
+ 2 \sum_{h=0}^{P} \left(C_{x \ g,m} \Theta_{m,k_2} C_{x \ g,i} \Phi_{i,j_1} + C_{p \ g,k_2} C_{x \ g,i} \Phi_{i,j_1} \right) \\
\text{where } i, j_1, m = 1, 2, 3 \dots N; \ k_2 = 1, 2, 3 \dots M; \\
\text{and } g = 1, 2, 3, \dots S;$$
(20)

$$\frac{\partial}{\partial x_{0_{k_1}}} \left(\frac{\partial J}{\partial p_{j_2}} \right) = -2 \sum_{h=0}^{P} (y_{obs_g}(t_h) - \tilde{y}_g(t_h)) \left(C_{x \ g,i} \chi^2_{ij_2k_1} + C_{xx \ g,im} \Phi_{m,k_1} \Theta_{i,j_2} + C_{px \ g,j_2m} \Phi_{m,k_1} \right) \\
+ 2 \sum_{h=0}^{P} \left(C_{x \ g,m} \Phi_{m,k_1} C_{x \ g,i} \Theta_{i,j_2} + C_{x \ g,m} \Phi_{m,k_1} C_{p \ g,j_2} \right) \\
\text{where } i, k_1, m = 1, 2, 3 \dots N; \ j_2 = 1, 2, 3 \dots M; \\
g = 1, 2, 3, \dots S;$$
(21)

and finally,

$$\frac{\partial}{\partial p_{k_2}} \left(\frac{\partial J}{\partial p_{j_2}} \right)$$

$$= -2 \sum_{h=0}^{P} \left(y_{obs_g}(t_h) - \tilde{y}_g(t_h) \right) \left(C_{xx \ g,im} \Theta_{m,k_2} \Theta_{i,j_2} + C_{x \ g,i} \Theta_{i,j_2k_2} + C_{pp \ g,j_2k_2} + C_{px \ g,j_2 \ m} \Theta_{m,k_2} \right) + 2 \sum_{h=0}^{P} \left(C_{x \ g,m} \Theta_{m,k_2} C_{x \ g,i} \Theta_{i,j_2} + C_{x \ g,m} \Theta_{m,k_2} C_{p \ g,j_2} + C_{p \ g,k_2} C_{x \ g,i} \Theta_{i,j_2} + C_{p \ g,k_2} C_{p \ g,j_2} \right)$$
where $i, m = 1, 2, 3 \dots N; \ j_2, k_2 = 1, 2, 3 \dots M;$
and $g = 1, 2, 3, \dots S;$

$$(22)$$

We now have presented a systematic approach for determining analytical gradient and Hessian to improve upon finite difference-based evaluation of gradients and Hessian which for some systems can serve as a difference between convergence and non-convergence of the system identification problem.

4. NUMERICAL EXAMPLE

In this section, two widely used datasets, available for development and benchmarking in nonlinear system identification, will be used to test the presented general Newton method based optimization technique. Additionally, the performance of the proposed method will be compared for accuracy with the existing commercial system identification toolbox (Grey-Box Model Structure) available in MATLAB.

4.1 Silver box model

The first data set, which will be used, is the silver box model Pintelon and Schoukens (2005); Schoukens et al. (2003). The experimental data is available for download from Wigren (2010) and more information on the experimental silver box data can be found in Wigren and Schoukens (2013). The silver box model describes an electronic implementation of a nonlinear system governed by the following nonlinear second-order differential equation.

$$m\frac{d^2y(t)}{dt^2} + d\frac{dy(t)}{dt} + k(y(t))y(t) = u(t)$$
(23)
where, $k(y(t)) = a + by^2(t)$.

The system consists of a moving mass m, a viscous damping d, and a nonlinear spring k(y(t)). The sampling

time of the voltage signals' measurements is $T_s = \frac{2^{14}}{10^7}s$ Wigren and Schoukens (2013); Kocijan (2018). Datapoints from 10585 to 11608 for u(t) and y(t) are used as a training data set for estimation of the system parameters and initial conditions Wigren (2010). Data points from 11609 to 13655 are used for validation of the model parameters. The cost minimization problem to identify the unknown system parameters (m,d, and k(y(t))) and unknown initial condition $\dot{y}(t_0)$ can be posed as:

$$\min_{\vec{p}', \dot{y}(t_0)} J = \sum_{h=0}^{P} (z_{obs}(t_h) - \tilde{z}(t_h))^2$$
such that $\dot{y}(t_h) = \dot{x}_1(t_h) = x_2(t_h)$

$$\ddot{y}(t_h) = \dot{x}_2(t_h) = u(t_h) - \frac{d}{m}x_2(t_h) - \frac{a}{m}x_1(t_h) - \frac{b}{m}x_1^3(t_h)$$

$$\dot{\vec{p}} = \mathbf{0};$$

$$\tilde{z}(t_h) = C_x \,\vec{x}'(t_h); \text{ where } C_x = [1 \ 0],$$

$$\vec{x}'(t_h) = [x_1(t_h) \ x_2(t_h)]^T; \quad \vec{p} = [m \ d \ a \ b]^T$$
(24)

The optimization problem is solved using the **fmincon** function of MATLAB, The implementation involves incorporation of both gradient and Hessian of the cost function, which are derived using the methodology introduced in this study, alongside the cost function. The initial guesses for unknown initial condition and system parameters are chosen to be $\dot{y}(t_0) = 0$ and $m = 5.1025 \times 10^{-6}, d = 2.15 \times 10^{-6}$ 10^{-4} , a = 0.968, b = 3.976 respectively (initial guesses in Kocijan (2018) are used for reference to come up with the present choices of initial guesses). After going through 27 iteration of optimization the final values for the unknown initial condition and system parameters are $\dot{y}(t_0) =$ 5.1112×10^{-9} and $m = 5.271 \times 10^{-6}$, $d = 2.1491 \times 10^{-4}$ a = 0.9675, b = 3.975 respectively. It can be observed that the initial guesses are in a very close neighborhood of the final values for the parameters. This is because the relative order of the system parameters is quite high.




Fig. 1. Comparison of model y data and observation y data over the training data set.

Fig.(1) displays the comparison between the observed training data set and simulated model data derived from Eq.(23) with estimated system parameters and unknown initial condition.

Fig.(2) displays the comparison between the observed validation data set and simulated model data set derived

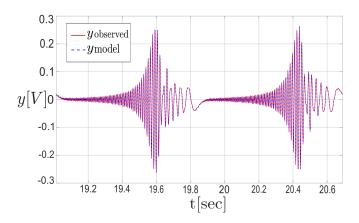


Fig. 2. Comparison of model y data and observation y data over the validation data set.

from Eq.(23) with estimated system parameters albeit the initial condition, $\dot{y}(t_0)$ is unknown during the validation process. Hence, during validation process $\dot{y}(t_0) = 0$ is assumed. In order to validate the model's simulation response across the entire validation signal, the goodness of fit (GOF) which is the complement of the normalized root mean square error (NRMSE) criterion is employed.

$$GOF = 1 - NRMSE = 1 - \frac{||z_{obs} - \tilde{z}||}{||z_{obs} - E(z_{obs})||}$$
(25)

where z_{obs} is the vector of the validation data set. \tilde{z} is the vector of simulated model data set. $E(z_{obs})$ is the mean value of of z_{obs} . GOF attains a value of 1 in cases of a perfect match and it approaches 0 when the variance of the model estimates is the same as the variance of the observed data. The obtained GOF value for the validation data set is GOF = 0.96258343 = 96.258343 % which can be considered as a very good fit. The same initial guesses were used when testing the performance of the system identification toolbox available in MATLAB.

The MATLAB compiler aborts the computation because, for the chosen initial guesses for unknown initial condition and system parameters, the optimization could not be initiated when the relative tolerance and absolute tolerance of the cost function are set to the order of 10^{-14} . Next, each initial guess was randomly perturbed within 20% higher and lower than the original guess, and it was then used as an initial guess for optimization in the MATLAB toolbox. Out of 100 randomly chosen sets of initial guesses, not a single set within the vicinity of the original initial guesses could initiate the optimization process in the MATLAB compiler. Next, the relative tolerance and absolute tolerance of the cost function are set to the order of 10^{-12} , and this time only three sets out of 100 randomly chosen sets of initial guesses within the vicinity of the original initial guesses could initiate the optimization process in the MATLAB compiler. Same process is also followed while setting the relative tolerance and absolute tolerance of the cost function to the order of 10^{-10} . This time, both the original choice for initial guesses and any random perturbation within its vicinity successfully initiated the MATLAB optimizer, allowing for the estimation of both unknown initial conditions and system parameters. In all cases for different order of relative tolerance and absolute tolerance of the cost function GOF of the model is measured using the obtained optimal unknown initial condi-

tion and system parameters. Table 1 compares the best goodness-of-fit (GOF) achieved for each case of relative tolerance (ReTol) and absolute tolerance (AbsTol) orders using both the MATLAB toolbox and the proposed system identification method. This allows for a clear comparison of performance between the two methods.

GOF	ReTol, AbsTol		
	10^{-14}	10^{-12}	10^{-10}
Proposed Method	96.527%	96.258%	96.251%
MATLAB Greybox	Aborted	55.627%	76.782%

Table 1. Proposed and Matlab Grey-Box system identification toolbox comparison

4.2 Two-tank problem

 \mathbf{S}

The second data set is associated with the two-tank problem that has been used for testing system identification methods widely in the literature Wigren and Schoukens (2013). The system dynamics is governed by the following nonlinear differential equation:

$$\dot{x}_1(t) = -p_1 \sqrt{x_1(t)} + p_2 u(t)$$

$$\dot{x}_2(t) = -p_3 \sqrt{x_2(t)} + p_4 \sqrt{x_1(t)}$$
(26)

where $x_1(t)$ and $x_2(t)$ represent the water level in tanks 1 and 2 respectively. The objective is to estimate the system parameters p_1, p_2, p_3 and p_4 following a gradient descent optimization technique, where the gradient and Hessian of the cost function are derived using the methodology introduced in this study. In this example, the complete data set (501 data points with a sampling period of 5.0 s) will be used for system identification. The data set is available in Wigren (2010). Next, using estimated system parameters water level in tank 1 $(x_1(t))$ and tank 2 $(x_2(t))$ will be derived from the model governing differential equation. Finally, x_2 from the model simulation and experimental observation will be compared. The cost minimization problem as it is described in Wigren and Schoukens (2013) can be formulated as:

$$\min_{\vec{p}} J = \sum_{h=0}^{P} (z_{obs}(t_h) - \tilde{z}(t_h))^2$$

where $\dot{x}_1(t_h) = -p_1 \sqrt{x_1(t_h)} + p_2 u(t_h)$
 $\dot{x}_2(t_h) = -p_3 \sqrt{x_2(t_h)} + p_4 \sqrt{x_1(t_h)}$
 $\tilde{z}(t_h) = C_x \vec{x}(t_h);$ (27)

$$\overrightarrow{\boldsymbol{p}} = \boldsymbol{0} \text{ where } C_x = \begin{bmatrix} 0 & 1 \end{bmatrix},$$

$$\overrightarrow{\boldsymbol{x}}(t_h) = \begin{bmatrix} x_1(t_h) & x_2(t_h) \end{bmatrix}^T; \quad \overrightarrow{\boldsymbol{p}} = \begin{bmatrix} p_1 & p_2 & p_3 & p_4 \end{bmatrix}^T$$

The optimization problem has been solved using the **fminunc** function of MATLAB. The gradient and Hessian of the cost function, which are derived using the methodology introduced in this study, are user-provided in the implementation of the optimization along with the cost function. The initial guesses chosen for unknown system parameters are $p_1 = 0.04$, $p_2 = 0.02$, $p_3 = 0.02$, and $p_4 = 0.04$ (initial guesses in Nandi and Singh (2018) are used for reference to come up with the present choices of initial guesses). After 100 iterations the optimization converge the system parameters to $p_1 = 0.0418$, $p_2 = 0.0235$, $p_3 = 0.0221$, and $p_4 = 0.0590$. Fig.(3) displays the comparison between observed training data set and simulated




Fig. 3. Comparison of model y data and observation y data over the validation data set.

model data derived from Eq.(26) with estimated system parameters. The obtained GOF value for the training data set is GOF = 0.79088 = 79.088 % which can be considered as a fairly good fit. In this example, for different orders of relative tolerance and absolute tolerance of the cost function, both the originally chosen initial guesses and any random perturbation within their vicinity successfully initiated the MATLAB optimizer, allowing for the estimation of both unknown initial conditions and system parameters. In all cases for different order of relative tolerance and absolute tolerance ($10^{-14} - 10^{-10}$) of the cost function, GOF = 0.79088 = 79.088 % is achieved for the model.

5. CONCLUSION

In this work, a generalized approach for determining the analytical gradient and Hessian of a cost function, constituted by state and parameter transition matrices, as well as higher-dimensional state and parameter transition tensors, is presented. Furthermore, it has been demonstrated that these matrices and tensors can be calculated by solving a set of ODEs. A general Newton method-based cost function minimization problem can be formulated, relying on gradient and Hessian information determined using the proposed approach. This method serves as a viable approach for identifying unknown system parameters and unknown initial conditions for the system states. When tested using two benchmark datasets, the proposed method for identifying system parameters and initial conditions has shown greater robustness against numerical instability, resulting in improved accuracy (goodness-of-fit) compared to the existing commercial system identification toolbox available in MATLAB.

REFERENCES

- Åström, K.J. and Eykhoff, P. (1971). System identification—a survey. *Automatica*, 7(2), 123–162. doi: 10.1016/0005-1098(71)90059-8.
- Broyden, C.G. (1970). The convergence of single-rank quasi-newton methods. *Mathematics of Computation*, 24(110), 365. doi:10.2307/2004483.
- Buckley, A. (1978a). Extending the relationship between the conjugate gradient and bfgs algorithms.

Mathematical Programming, 15(1), 343–348. doi: 10.1007/BF01609038.

- Buckley, A.G. (1978b). A combined conjugate-gradient quasi-newton minimization algorithm. *Mathematical Programming*, 15(1), 200–210. doi:10.1007/BF01609018.
- Coleman, T.F. and Moré, J.J. (1983). Estimation of sparse jacobian matrices and graph coloring blems. SIAM Journal on Numerical Analysis, 20(1), 187–209. doi: 10.1137/0720013.
- Eykhoff, P. (1968). Process parameter and state estimation. Automatica, 4(4), 205–233. doi:10.1016/0005-1098(68)90015-0.
- Kocijan, J. (2018). Parameter estimation of a nonlinear benchmark system. Science, Engineering & Education, 1, 3–10.
- Kunz, K.S. and Luebbers, R.J. (1993). The finite difference time domain method for electromagnetics. CRC Press, Boca Raton.
- Majji, M., Junkins, J.L., and Turner, J.D. (2008). A high order method for estimation of dynamic systems. *The Journal of the Astronautical Sciences*, 56(3), 401–440. doi:10.1007/BF03256560.
- More, J.J. and Sorensen, D.C. (1982). Newton's method. doi:10.2172/5326201.
- Nandi, S. and Singh, T. (2018). Adjoint- and hybrid-based hessians for optimization problems in system identification. Journal of Dynamic Systems, Measurement, and Control, 140(10), 1725. doi:10.1115/1.4040072.
- Pintelon, R. and Schoukens, J. (2005). System Identification: A Frequency Domain Approach. John Wiley & Sons, Hoboken.
- Schoukens, J., Nemeth, J.G., Crama, P., Rolain, Y., and Pintelon, R. (2003). Fast approximate identification of nonlinear systems. *Automatica*, 39(7), 1267–1274. doi: 10.1016/S0005-1098(03)00083-9.
- Smith, G.D. (1985). Numerical solution of partial differential equations: Finite difference methods. Oxford applied mathematics and computing science series. Clarendon Press and Oxford University Press, Oxford Oxfordshire and New York, 3rd ed. edition.
- Sod, G.A. (1978). A survey of several finite difference methods for systems of nonlinear hyperbolic conservation laws. *Journal of Computational Physics*, 27(1), 1– 31. doi:10.1016/0021-9991(78)90023-2.
- Turner, J., Majji, M., and Junkins, J. (2008). High-order state and parameter transition tensor calculations. In AIAA/AAS Astrodynamics Specialist Conference and Exhibit, 6453.
- Wigren, T. and Schoukens, J. (2013). Three free data sets for development and benchmarking in nonlinear system identification. In 2013 European Control Conference (ECC), 2933–2938. IEEE. doi: 10.23919/ECC.2013.6669201.
- Wigren, T. (2010). Input-output data sets for development and benchmarking in nonlinear identification.