

A Blockchain Embedded Peer-to-Peer Access Control Framework for IoT Systems

Huang, Yongtao
University of Texas at Dallas
huang.yongtao@utdallas.edu

I-Ling Yen
University of Texas at Dallas
ilyen@utdallas.edu

Farokh Bastani
University of Texas at Dallas
bastani@utdallas.edu

Abstract—We consider access control for IoT systems that involves shared accesses to the IoT devices as well as their data. Since IoT devices are dispersed all over the edge of the Internet, traditional centralized access control has problems. Blockchain based decentralized access control is thus the new solution trend. However, existing blockchain based access control methods do not focus on performance issues and may incur a high communication overhead.

In this paper, we develop a Pruned Blockchain based Access Control (PBAC) protocol to cutdown the unnecessary message rounds and achieve high efficiency in access validations and policy management. The protocol includes a shortcut and a Role and Device Hierarchy-Based Access Control (R&D-BAC) approaches for different environment settings. To realize the PBAC protocol, it is necessary to carefully engineer the system architecture, which is also discussed in the paper. Experiments demonstrate the efficacy of the PBAC protocol, specifically, the shortcut mechanism reduces access time by approximately 43%, and R&D-BAC outperforms traditional blockchain based RBAC by more than two folds.

Index Terms—Internet of Things (IoT); Blockchain; Access Control; Peer-to-Peer (P2P) Network;

I. INTRODUCTION

Internet of Things (IoT) is growing in volume as well as importance. An IoT system connects a diverse range of devices, from wearable, home, industrial, surveillance, agricultural, and smart city sensors to mobile devices, autonomous vehicles, drones, etc., and is becoming indispensable in enhancing the convenience and efficiency of our daily operations. This rapid expansion of IoT yields great social benefits, but at the same time, introduces security challenges.

Improper use of some IoT devices can cause significant consequences. For example, attackers gain control of the traffic direction lights can induce catastrophic accidents. If a self-driving car is compromised, the attacker can lead the car to generate disastrous situations. A compromised drone can be used for invading privacy. An attacker can open doors of smart homes to conduct crimes. Also, many IoT devices generate sensitive information and should be protected. An adversary can gain home monitoring camera to invade the privacy of the owner. Medical data from IoT devices may be abused if its privacy is compromised. Thus, accesses to IoT devices and their data should be carefully controlled.

Current IoT systems typically use basic encryption-based handshakes or Single Sign-On (SSO) gateways for access control [1]. While handshakes are simple, they lack the com-

plexity needed for sharing resources effectively. Conversely, SSO relies on a stable internet connection, often leaving users without access during outages, a notable issue in smart homes where unreachable remote server-managed authentication can block accesses that is completely local. Moreover, some manufacturers control device management through proprietary social networks or apps, requiring account registration and “family” joins, which centralizes control and raises security and privacy concerns. Advanced users may circumvent these issues with solutions like dynamic DNS, reverse proxies, and SSL certificates, but these can be complex and insecure for the average user.

Several cloud vendors, such as AWS [2], Microsoft Azure [3] and Oracle IoT [4], also provide IoT system platforms to facilitate the computation on the edge for IoT devices. However, most of these platforms are extensions of their existing cloud platforms. The access control models in some of these cloud-extended systems are more sophisticated, supporting policy-based access control. However, the system structure for managing access control in these systems is still centralized. Thus, users still need to go to the central certificate authority (or named differently but with the same functionality) to get access validation and authorization.

Due to the pervasive nature of the IoT systems, centralized access control has the inherent communication overheads as well as the local access disruption problem during Internet disconnection period. Thus, it is essential to consider decentralized access control. The most reliable and trustworthy approach in decentralized access control is to utilize the blockchain technology. There are some existing works in blockchain based access control in the literature. [5] [6] [7] and [8] are based on public blockchains and [9] [10] are based on consortium blockchains. Among them, [6] [7] [8] also explore smart contract backed by Ethereum Virtual Machine (EVM) [11].

While integrating access control into blockchain offers security, reliability, and resilience benefits, the required number of messaging rounds in the blockchain protocols can lead to significant latency. The choice of the underlying blockchain technologies and the design of the blockchain based access control mechanisms can greatly impact the access latency and overall system performance. Many blockchain based access control systems [5] [6] [7] [8] [9] build their platforms using existing blockchain mechanisms, such as Bitcoin [12],

Ethereum [13] and Hyperledger Fabric [14], without considering the potential overhead. Neither do they consider the specific interaction protocols for access validation.

We develop a pruned blockchain based access control (PBAC) protocol for IoT systems, which prunes the unnecessary interactions between the IoT devices, their AC hubs, and the blockchain. We also engineered the underlying blockchain support based on a bespoke consortium blockchain specifically optimized for access control. The PBAC protocol includes bootstrapping, access request handling, and access policy validation algorithms. As with many other blockchain based access control solutions, PBAC also provides a robust crash recovery mechanism that is specific to our protocol, making it versatile for use in large-scale IoT systems with IoT resource sharing.

The PBAC pruning mechanisms include a shortcut approach that can be used for IoT systems with permanent and long term users and a role and device hierarchy-based access control (R&D-BAC) for organizations with many IoT devices organized in a hierarchy.

For access request handling, we require that both the device domain and the blockchain service to validate the access rights of the request against the policies. With a little additional overhead due to duplicated processing, we enable a significant reduction in the number of message rounds via a shortcut mechanism, which allows full access validation being done in parallel with local access authorization. This can benefit accesses by permanent users, such as the owner, and by recurrent accessors, which occur frequently in real-world access patterns.

To further enhance the performance in blockchain based access control, we consider dealing with accesses to IoT devices organized in a hierarchy. Resource hierarchy is widely adopted by many major IoT providers. Since users frequently have the tendency to access resources that are correlated, e.g., in a subtree of a device hierarchy, we design a novel R&D-BAC access control model and design the associated access validation mechanism to greatly reduce the number of message rounds required for blockchain related validation.

Experimental results show that shortcut accesses, compared with normal full path accesses, shorten the latency by over 40%. The R&D-BAC approach further improves the performance of blockchain based RBAC by more than two folds.

II. LITERATURE SURVEY

Most of the works in blockchain based access control embed access control in established blockchain platforms, including public blockchain platforms, such as Bitcoin and Ethereum, and consortium blockchain platforms, such as Hyperledger Fabric [14] and FISCO-BCOS [15]. Different platforms result in different architectures, performance, and embedding mechanisms. On Bitcoin and Consortium blockchains, the embedding mechanism is transactional where creation and updating of access control policies are issued as transactions to the blockchain. On the other hand, Ethereum based access

control embed policies as smart contracts, making use of the contract languages offered by Ethereum.

[5] is a Bitcoin based access control mechanism. In this work, policy creation, update, and revocation are implemented as blockchain transactions on the Policy Enforcement Point (PEP). The common policy language XACML [16] cannot be fully translated to blockchain transactions easily. Thus, this paper devised a three-element tuple encoding scheme to translate some basic attributed based access control (ABAC) rules. The encoding table for these tuples is maintained off-chain and is immutable once established. The mechanism also allows Right Transfer Transaction (RTT). In RTT, a permission can be transferred from one subject to another, analogizing transferring ownership in DAC. During transfer, the permission can be restricted but cannot be expanded.

In general, there are several shortcomings in Bitcoin based access control. First, the transaction protocol is predefined, therefore, special encoding scheme is required to embed customized information into the blockchain transactions. Also, the proposed solution requires digital currency for recording transactions. The transaction history is stored on all bitcoin peers and, hence, wasting space for non-participants. The slow block update time of Bitcoin (~ 10 minutes), and its CPU-intensive Proof-of-Work (PoW) consensus method render Bitcoin unsuitable for time-sensitive work.

An Ethereum based work, IoTChain [7], uses smart contract in Solidity language. It combines token distribution with blockchain. In IoTChain, resources (mainly data) on IoT devices are encrypted by asymmetric cryptography keys, which are generated by key servers. Resource owners issue access control policies encoded in smart contracts to the blockchain, which are verified by the authorization servers (which act like miners). Client accesses are validated also by the authentication servers by executing the corresponding smart contracts and tokens are generated and returned to the accessor client. A client can use the token to connect to a resource held by an IoT device or through a proxy server.

[6] is also an Ethereum based approach. This work attempts to simplify the system by using only a single smart contract deployed on the blockchain for access control. Each management hub, an entity introduced in the proposed architecture and manages access control for a group IoT devices, executes the blockchain transactions based on this single smart contract. Multiple management hubs do not interact directly, but interact through this smart contract. Also, the use of management hubs decentralized at the edge can offer scalability and attend to low powered IoT devices that cannot handle blockchain functionalities.

[17] proposes an Ethereum based authentication scheme and addresses scalability by Fog nodes, which is in charge of access control for a group of IoT devices. The admin node creates the smart contract for the registered fog nodes and IoT devices and associates the IoT devices with the fog nodes. The admin may also assign end users with access permission to certain IoT devices. A Fog node interfaces to Ethereum smart contracts to authenticate users for their accesses to the IoT

devices under its supervision.

[8] also explores smart contract based approach. An Access Control Contract (ACC) is deployed by the object and executed by the subject. A subject-object pair is controlled by only one ACC, and an ACC can be used by multiple subject-object pairs. The content of ACC discussed in this paper mostly resembles discretionary access control. Besides, an ACC can point to a Judge Contract (JC) with Time of Last Request (ToLR) field. JC limits frequency of successive visits by blocking the subject for a preset duration. The relation of subject-object pair and its ACC is registered by Register Contract (RC) at ABI granularity. RC can only be mutated by its creator.

Different architectures are designed in the Ethereum based access control solutions given above. [7] relies on the IoT devices for managing accesses, while the other three works attempt to balance scalability and the potentially limited capabilities of IoT devices and use some mediator nodes to manage the interactions with the blockchain for the IoT devices they are in charge of. The problem with these three approaches is that the mediator nodes may fail and cannot ensure continuous operations. Also, none of the approaches specify how to encode access control policies into smart contracts. Such encoding can be difficult for expressing some XACML rules, such as timing related ones, though the contract language is Turing complete. A more serious problem with Ethereum based solutions is still the performance concerns. It greatly improves over Bitcoin and has around ~ 12 seconds latency. Also, the requirement of digital currency still exists. Moreover, the execution time of smart contracts is untrackable because which miners would accept the request and whether the miners will win the competition are unknown.

Consortium blockchain involves a preselected set of validators instead of public miners for managing the blockchain. Compared to public blockchain, consortium block chain does not rely on Proof-of-Work, Proof-of-Stake, or Proof-of-Anything to achieve consensus among all peers. Instead, Practical Byzantine Fault Tolerance (PBFT) between dedicated validators is sufficient and can yield a much shorter update time. Moreover, most consortium blockchains do not require any cryptocurrency, avoiding unnecessary involvement of a large number of miners for maintaining the chain. Thus, it is much more reasonable and practical to integrate access control with consortium blockchain and it is the design choice by more recent works.

[9] proposes ABAC based access control framework for IoT. Requests are validated by attribute authorities, members of a consortium blockchain. The policy itself should be recorded by transactions, but the paper does not specify the transaction format or what subset of ABAC is supported. The authors conducted performance study on Hyperledger Fabric platform to measure storage and computation overhead against the number of ABAC attributes and participants.

Another consortium blockchain based work [10] is deployed on FISCO-BCOS [15]. The authors propose a Decentralized Identifiers (DIDs) based authorization framework. Users and

devices from various vendors are registered within the same network. User requests are routed according to their registration information to device's corresponding vendor authorization service. Responses are recorded on blockchain in a form analogous to Access Control List (ACL). All visits to IoT endpoints go through gateways, which synchronize with blockchain to obtain updated ACLs. Besides vendor services, the device owner can also grant permission to other users by updating ACLs directly.

Though the performance of consortium blockchain based access control is relatively reasonable, much better than that of public blockchains, there is still rooms for improvements. Our focus is to improve the interaction protocols between the mediators and the blockchain to achieve better performance.

III. SYSTEM OVERVIEW

A. System Entities

The important entities involved in our blockchain based access control protocols are depicted in Figure 1 and each entity is further defined and elaborated subsequently.

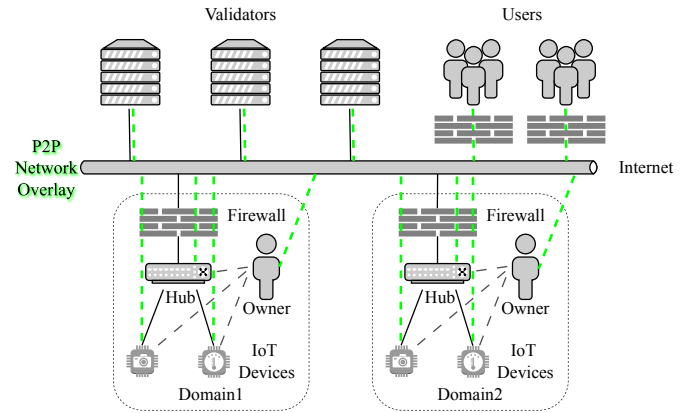


Fig. 1. System Architecture

IoT Devices offer a wide spectrum of IoT services. As how they are placed in the current Internet, we consider them hidden in the subnets behind firewalls. Services provided by the IoT devices are defined via manufacturer-provided templates, which can be used for semantic based service discovery. Each IoT device can be the basic element for access control and policies can be assignable on a per-service basis.

Users can access the IoT devices in the network according to the access control policies for the devices. A user can represent a diverse range of entities, including an independent individual, an individual in a domain, a software program or a service, or even some IoT entity or its service.

Owners Device owner can be an individual, an organization or another device in hierarchical setup. The entity who owns the device has full access rights to the device. Ownership is immutable once device is registered.

Domains A domain is a higher-level entity in the system that consists of a group of IoT devices. IoT devices and their owners shall be in the same domain. A single IoT

device with sufficient capabilities can choose to form its own domain. Many IoT devices are limited in memory and storage, rendering them incapable of performing complex operations. To enable access control on constrained devices not belonging to specific administrative units, they can be grouped together to form a domain managed by more powerful AC hubs. In many cases, domains are established for certain administrative units, such as homes, factories, companies, organizations, etc. In these cases, the domain may host a generic policy for the devices or device groups in the domain instead of defining policies for individual IoT devices. Frequently, the IoT devices in the domain form a resource hierarchy and access control policies can be defined based on the hierarchy (will be discussed later).

Validator Cluster A cluster of validators are used to realize the blockchain based decentralized access control. To avoid performance overhead, we consider a consortium of blockchain validators, consisting of dedicated servers provided by prominent IoT vendors. Validators maintain the blockchain’s complete state and are responsible for adding new blocks, using the Ditto [18] consensus protocol—a 2-chain HotStuff [19] variant—for network consensus. The data structure, based on the JellyFish Merkle tree [20] from the Diem project [21], is optimized for storage efficiency and I/O overhead.

These validators are pre-certified by the consortium’s security standards to ensure their trustworthiness. However, individual validators may fail or be compromised, the consensus protocol ensures the trustworthiness of the cluster.

Access Control Hubs Each domain has an AC hub to manage access control and blockchain related tasks for the IoT devices in the domain. For operational efficacy, the AC hubs maintain the local domain state, including up-to-date access control policies for all connected devices, and the recent states necessary for their functionality.

Note that some domain formations are not based on specific organizations, thus, the domain hubs may not always be trusted. Also, for organizational domains, we consider that their domain AC hubs may be compromised and become untrusted.

B. PBAC Bootstrapping

Access control policies for each domain in the system are codified into the blockchain via domain registration. An authorized entity of a domain must first execute a registration transaction to join the system and associating its devices and owners with the domain. (Note that a domain could be a single device with sufficient computation and storage capabilities.) The access control policies of the domain are established subsequently via blockchain transactions by the authorized entities, such as the corresponding owners or security officers of the domain. Domain and device registration related transactions are specified as follows:

- **Domain Registration** involves recording the creator’s ID id_{issuer} , domain ID uid_{domain} , owner’s ID uid_{owner} , and a policy descriptor pd submitted in a transaction

($id_{issuer}, uid_{domain}, uid_{owner}, pd$). The policy descriptor either points to a predefined common access control model, such as models we will discuss in the later subsections, or a user defined policy through smart contract.

- **Device Registration** should be applied equally to AC hubs and IoT devices (an IoT device may serve as its own AC hub). The transaction is represented by ($id_{issuer}, uid_{domain}, did, uid_{owner}, \{sv, \dots\}$), where uid_{domain} and uid_{owner} are as defined earlier and $\{sv, \dots\}$ is the list of service names.
- **Device Revocation** with parameters (id_{issuer}, did) nullifies a registered device did .

Once registered, the device record in blockchain is immutable. Changes in ownership require releasing by the current owner and re-registration by the new owner.

IV. ACCESS VALIDATION IN PBAC

In existing works that embed access control policies in the block-chain [8] [9], access validation is always performed at the validator cluster or miners. We call this the **full path** validation. This remote validation can introduce significant delays. To shorten the latency for access validation, we consider a basic pruning technique in PBAC, the **shortcut** protocol, for accesses to devices by trusted users, such as the owners and pre-registered long-term users. In the shortcut protocol, validation is executed at the AC hub of a domain first and the full validation at the validator is done in parallel in the background. The benefit of the shortcut protocol is not only the greatly reduced access latency, but also allowing continued accesses in local areas when the internet connection is disrupted. This can benefit many local IoT systems, such as home IoT systems and IoT systems in factories, farms, hospitals, small companies, etc. The blockchain embedded access control would have been undesirable for local IoT systems or even infeasible for critical local systems while our shortcut protocol, with simple pruning, makes it highly applicable.

ShadowDP Data Structure To facilitate the realization of the shortcut protocol, the access control policies for individual devices and domains should not only be logged in the blockchain, but also maintained at the AC hub. AC policy changes will not only be reflected at the validator cluster, but also at the domain AC hub. For organizational domains, this policy maintenance is natural and changes generally happen at the domain AC hubs anyway. For domains with low power devices of independent administrative units, the up-to-date policies are also maintained by the corresponding AC hubs. We consider the hub copy of the policies as the **shadowDP**. Also, in existing blockchain based access control, the access control policies are only be logged as transactions in the blockchain, including the original establishment and the subsequent modifications of the policies. Thus, the validators need to rebuild the policies from these logs to get the view of the policies, which can be highly inefficient during access validation. To address this problem, we extend the **shadowDP** to the validator side. Each validator maintains indices to access

control (AC) policy entries in the blockchain and keeps another shadow copy of the most recent policies in memory to ensure efficient access validations.

The shortcut versus the full path access validation procedure is depicted in Figure 2.

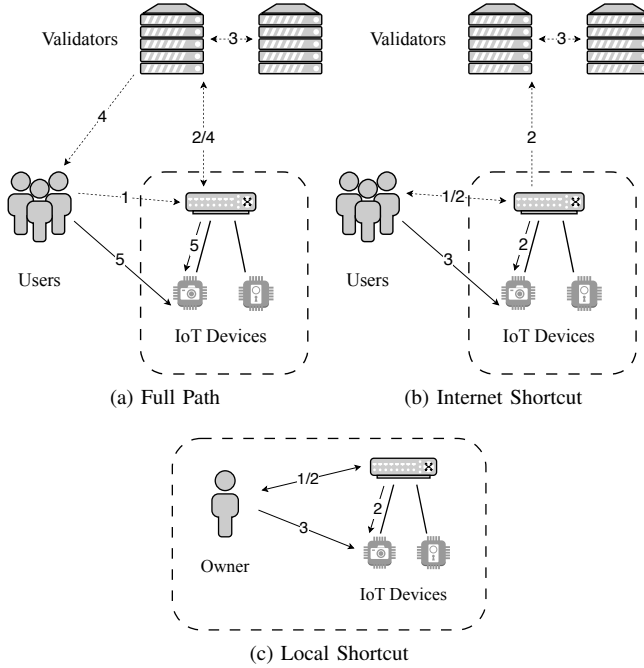


Fig. 2. Full Path and Shortcut Access

Full Path (normal) access validation If a user with identity uid trying to access an IoT device with identity did and its corresponding service sv (optional) with permission type pt for the first time, then it issues the access request $req = (uid, did, pt, sv)$ to the AC hub of did (which could be did itself). The AC hub, with identity hid , upon receiving req , validates req against its access control policy ACP , and after successful validation, generates a permission $per = (uid, did, pt, sv, et, ul)$ and sign it into a token $t = s_{hid}(uid, did, pt, sv, et, ul)$, where et is the optional expiration time, ul is the optional usage limitations, and s_{hid} is the signature for the token t . Token t is then forwarded to the Validator Cluster for endorsement. Validators, after successfully double validating the access rights for permission per against ACP in its shadowDP, perform Byzantine agreement (BA) to reach consensus on per , and add t to the blockchain with majority's signature $s_{v_1, \dots, v_n}(uid, did, pt, sv, et', ul')$ and return the endorsement. After getting the endorsement from a majority of Validators, the AC hub creates a session key $k(uid, did, pt, sv, et', ul')$ and sends it to the device did which enables uid 's access via t . Also, token t is returned to uid to allow its access.

If uid has accessed did before and still has the key-value pair (req, t) in its cache (where t is the corresponding token for req), uid can simply use t for direct re-entry without requiring further validation, unless the token expires or the

session key is lost due to insufficient memory, power outages, or reboots on did . The use of paired token (for user) and session key (for device) expedites repeated accesses.

Shortcut Access Validation In the shortcut protocol, a domain AC hub maintains a list T_u , which records such users. The AC hub, upon receiving accesses from users in T_u , sends out the token to the accessor without waiting for the endorsement by Validators to complete (which is done in parallel instead). In the highly unlikely occasions of failed endorsement, remedy actions such as reconstructing the endorsement or revoking the session key as well as other mitigation steps can be taken to protect the system. Also, the use of ECDSA key pairs supports long token expiration time and facilitates shortcut and other designs to achieve high performance gains.

The PBAC access validation algorithms by the requester, the AC hub, and the Validators are illustrated in Figure 2 and detailed in Algorithms 1, 2, and 3 (modifications captured in them will be discussed later).

Algorithm 1 User uid requests to connects to device did

```

procedure REQUEST( $req = (uid, did, pt, sv)$ )
  if search in  $uid$ 's cache with key  $req$  returns  $t$  then
    reuse  $t$  to request connection to  $did$ 
  if connection established then
    proceed to access  $did$ 
    exit procedure
  end if
  end if ▷ No token or session key expires
  send  $req$  to AC hub  $hid$ 
  wait for token  $t = s_{hid}(uid, did, pt, sv, et, ul)$ 
  if  $t$  has been received then
    cache key-value pair  $(req, t)$ 
    use  $t$  to request connection to  $did$ 
  if connection established then
    proceed to access  $did$ 
  else
    temporary failure, retry later
  end if
  end if
end procedure

```

Light workload for IoT devices and Continued accesses upon Internet disconnection The access control validation algorithm is designed to minimize the workload on the IoT devices. The devices are not involved in the validation procedure and only need to maintain the session keys and accordingly accept or reject the incoming accesses.

In scenarios where internet connectivity is lost as shown in Figure 2c, our system supports intranet accesses, allowing token validation and device access within a local network. This capability ensures continuous operations, with synchronization to the blockchain resumed upon connectivity restoration.

Algorithm 2 AC hub hid validates request req

```
procedure VALIDATE( $req = (uid, did, pt, sv)$  )  
  if  $req$  satisfies  $ACP$  in shadowDP then  
     $\triangleright$   $ACP$  is the access control policy  
    find the corresponding  $(et_p, ul_p)$  in  $ACP$   
     $per \leftarrow (uid, did, pt, sv, et_p, ul_p)$   
     $t \leftarrow s_{hid}(per)$   
    if  $uid \in T_u$  then  $\triangleright$  Shortcut  
      send session key  $k(per)$  to  $did$   
      send token  $t$  to  $uid$   
      multi-cast  $s_{v_i, hid}(per)$  to Validator Cluster  
    else  $\triangleright$  Full path  
      multi-cast  $s_{v_i, hid}(per)$  to Validator Cluster  
      wait for endorsed token  $s_{v_i, \dots, hid}(per)$   
        from majority of Validators  
      send session key  $k(per)$  to  $did$   
      send token  $t$  to  $uid$   
    end if  
  else  
    send  $reject$  to  $uid$   
  end if  
end procedure
```

Algorithm 3 Validator endorses the token

```
procedure ENDORSE( $s_{hid}(per)$ )  
  if  $req$  satisfies  $ACP$  in shadowDP then  
     $v_i$  multi-cast  $s_{v_i, hid}(per)$  to other validators  
    if BFT consensus is achieved then  
       $v_i$  sends  $s_{v_i, \dots, hid}(per)$  to AC hub  $hid$   
      Commit to blockchain  
    end if  
  end if  
end procedure
```

V. PBAC FOR VARIOUS ACCESS CONTROL MODELS

To illustrate the compatibility of PBAC, we integrate several established models, including Discretionary Access Control (DAC), Attribute-Based Access Control (ABAC), and Role-Based Access Control (RBAC), with PBAC in Subsections V-A, V-B and V-C. For each model, the permission transaction structure and the specific revocation and recovery mechanisms are discussed.

A. Discretionary Access Control (DAC) in PBAC

In DAC, permissions are structured in Access Control List (ACL) at the device hub. Each ACL entry records granted permission tuples that mirror blockchain transactions. ACL and its index are stored in ShadowDP. Invalid entries due to expired et or now violated access limitation ul are purged by monitoring timers.

Blockchain captures permission transactions instead of the full ACL. Each transaction record captures the ID of the issuer, the permission tuple, as well as et and ul . Different types of transactions and their fields are formally defined as follows.

- **Permission Granted** ($id_{issuer}, uid, did, pt, sv, et, ul$)
- **Permission Revoked** ($id_{issuer}, uid, did, pt, sv, et, ul$)

Revoking access involves dispatching a revocation session key to the device. Following acknowledgment, the corresponding permission entry is expunged from the ACL.

The sequential recording in the blockchain inherently supports the reconstruction of ACLs on AC hubs by replaying pertinent permission transactions since domain registration. Although a centralizing ACL could pose risks in an enterprise setting, synchronizing ACLs across multiple AC hubs within the same domain enhances fault tolerance. This flexible architecture permits the addition or removal of AC hubs as needed, without impacting the overall system integrity and functionality.

B. Role-Based Access Control (RBAC) in PBAC

In a RBAC domain, permissions are aligned with user roles rather than individual identities, represented by the tuple (rid, did, pt, sv) . Here rid is a universally unique identifier assigned to each role, distinct from libp2p network peer identities. The uniqueness of rid is verified through validator authentication upon role creation. Roles may also be associated with user-friendly names (rn), which are encrypted by default to protect privacy across domains, given that cross-domain access utilizes rid . For simplicity and without loss of generality, we omit the optional fields et and ul .

Transactions specific to RBAC for role creation, modification, and deletion are itemized as follows.

- **New Role** (id_{issuer}, id, rid, rn) where id is domain ID.
- **Delete Role** (id_{issuer}, rid)
- **Assign Role User** (id_{issuer}, rid, uid)
- **Remove Role User** (id_{issuer}, rid, uid)
- **Assign Role Permission** ($id_{issuer}, rid, did, pt, sv$)
- **Revoke Role Permission** ($id_{issuer}, rid, did, pt, sv$)

Each AC hub maintains a bidirectional mapping between users and their respective roles ($map_{ur} = uid : [rid, \dots]$ and $map_{ru} = rid : [uid, \dots]$) in ShadowDP. When a user requests access, the AC hub retrieves the user's role rid and verifies if the requested permission (rid, did, pt, sv) is authorized. Adding a user to a role involves updating both map_{ur} and map_{ru} to reflect the new association. Conversely, removing a user from a role necessitates the issuance of a revocation session key to the relevant device(s) before adjusting the mappings, mirroring the revocation process in DAC.

The elimination of a role necessitates a comprehensive re-evaluation of permissions for all users associated with that role, considering that an individual's access rights might still be valid through other roles they hold. Below is an algorithm detailing this re-evaluation process.

Similar to the DAC model, an AC hub administering RBAC policies can reconstruct its state by replaying recorded permission transactions. This capability ensures that the system can recover from disruptions and maintain consistent access control policies, even after hub failures or network disruptions.

Algorithm 4 Re-evaluation of user permissions

```
function RE-EVALUATE(rid)
  original  $\leftarrow$  all permission set of rid in ACL
  for all  $u \in \text{map}_{ru}[rid]$  do
    new_set  $\leftarrow \emptyset$ 
    for all  $r \in \text{map}_{ur}[u]$  do
      add permission set of r to new_set
    end for
    revoked_set  $\leftarrow (original - new\_set)$ 
    for all  $d \in \text{revoked\_set}$  do
      send revocation session key
    end for
  end for
end function
```

C. Attribute-Based Access Control (ABAC) in PBAC

ABAC extends the functionality of DAC by incorporating a versatile attribute list and context-based access policies. Similar to RBAC, attributes in ABAC are assigned a unique identifier and can have a user-friendly name (*aname*), which is encrypted by default to ensure privacy. However, ABAC differentiates itself by allowing attributes to be associated with both devices and users, with permissions defined by the tuple ($aid_{user}, aid_{device}, pt, sv$), where *aid* represents the attribute identifier for either the user or device. Different types of transactions for ABAC are enlisted in the following.

- **New Attribute** ($id_{issuer}, id, aid, aname$). *id* is domain ID.
- **Delete Attribute** (id_{issuer}, aid)
- **Assign Attribute Device** ($id_{issuer}, aid, did, sv$)
- **Remove Attribute Device** ($id_{issuer}, aid, did, sv$)
- **Assign Attribute User** (id_{issuer}, aid, uid)
- **Remove Attribute User** (id_{issuer}, aid, uid)
- **Assign Attribute Permission**
($id_{issuer}, aid_{user}, aid_{device}, pt$)
- **Revoke Attribute Permission**
($id_{issuer}, aid_{user}, aid_{device}, pt$)

The access validation and assignment procedures and the reconstruction of access control policies in an ABAC system mirror those established in RBAC and is not discussed further.

VI. ROLE AND DEVICE HIERARCHY-BASED ACCESS CONTROL (R&D-BAC)

In enterprise settings, where devices and users proliferate, they are often organized hierarchically to support more systematic access control policy definitions. Though there are well defined access control theories and models for role hierarchy, the access control models for device hierarchy is lagging.

Within a device hierarchy (DH), an interior node generally represents a device group owned by a subdomain in the organization. In a role hierarchy, permissions granted to an ancestor node are extended to its descendants. Similarly, we consider that in a DH, granting permissions for accessing a device group implicitly implies that the same permissions are granted for accessing all the devices in the subtree (subdomain).

The device hierarchy based access control model can greatly simplify access right assignments. Instead of assigning access rights to a large number of individual devices, domain/subdomain administrators can assign desired access permissions to a device group at any level in the DH. Upper level subdomains in the DH offer more limited access rights to more limited accessor groups, while additional permissions can be assigned to the lower level subdomains closer to the actual devices.

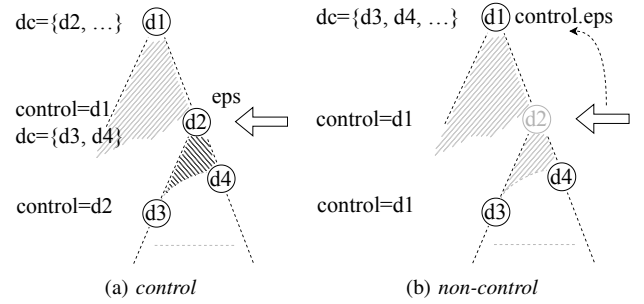


Fig. 3. Visit control and non-control Device

Control Devices and Control Pointers Upon assigning a permission tuple (rid, did, pt, sv) to a device *did* in the DH, the designated device becomes a control device. Devices without direct permissions look up to this control device for access validation. Correspondingly, each node maintains a control pointer ($did.control$) to its closest control device in its ancestry. Additionally, a control device keeps track of a list of pointers $did.dc$, pointing to the control devices within its closest descendants along different paths.

As illustrated in Figure 3a, device d_2 functions as a control device. Its ancestor control node pointer $d_2.control$ points to d_1 . Also, $d_3.control$ and $d_4.control$ point up to d_2 . On the other hand, $d_1.dc$ contains d_2 and $d_2.dc$ contains d_3 and d_4 .

Control devices cache both the permissions directly assigned to them ($did.ps$) and a cumulative permission set inherited from their ancestor control devices ($did.eps$), where $did.eps$ includes $did.ps$. When a user seeks permission to access a control device (e.g., d_2), the device reviews its effective permission set *eps* and, upon finding the request permissible, accept the access. Conversely, if the accessed device is not a control device, it refers to its control device pointer (e.g., $d_2.control = d_1$). The request is then relayed to its control device to determine the request's validity and communicates the outcome accordingly. This procedure is outlined in Algorithm 5.

Assigning permission to a non-control device transforms it into a control device, whereas revoking the last permission from a control device reverts it to a non-control status. This transition is visually represented in Figures 4 and outlined in Algorithm 6.

Permission assignment may involve propagating the permission down along the control device tree as depicted in Algorithm 7.

Algorithm 5 Device validates permission

```
procedure VALIDATE( $req = (uid, did, pt, sv)$  )  
  if ControlValidate( $req$ ) then  
     $t \leftarrow s_{did}(per) \leftarrow \text{sign } per$        $\triangleright$  Access granted  
    store session key  $k(per)$   
    multi-cast  $t$  to validators or forward  $t$  to AC hub  
    response  $t$  to  $uid$   
  else  
    response  $reject$   
  end if  
end procedure  
function CONTROLVALIDATE( $req = (rid, did, pt, sv)$  )  
  if  $did.ps \neq \emptyset$  then       $\triangleright$  control device  
    return check  $req \in did.eps$   
  else       $\triangleright$  non control device  
    return  $did.control.validate(per)$        $\triangleright$  check its  
    control device for result  
  end if  
end function
```

Algorithm 6 Transformation of control state

```
function INSERTCONTROL( $did$ )  
  add  $did$  to  $did.control.dc$   
  for all  $d \in \text{descendants of } did$  do       $\triangleright$  Search down  
  device tree  
     $d.control \leftarrow did$   
    if  $d.ps \neq \emptyset$  then       $\triangleright$  Control device  
      add  $d$  to  $did.dc$   
      remove  $d$  from  $did.control.dc$   
      stop searching down  
    end if  
  end for  
end function  
function REMOVECONTROL( $did$ )  
  remove  $did$  from  $did.control.dc$   
  empty  $did.eps$   
  for all  $d \in \text{descendants of } did$  do  
     $d.control \leftarrow did.control$   
    if  $d.ps \neq \emptyset$  then       $\triangleright$  Control device  
      add  $d$  to  $did.control.dc$   
      remove  $d$  from  $did.dc$   
      stop searching down  
    end if  
  end for  
end function
```

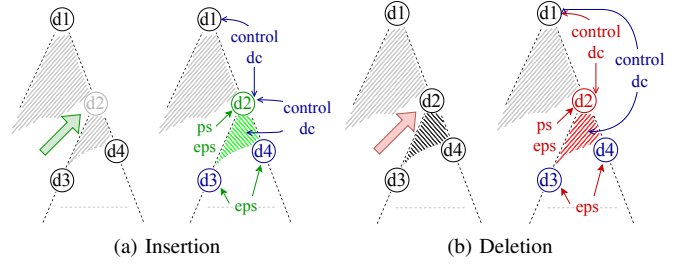


Fig. 4. Insert and Remove Control Device

Algorithm 7 Permission assignment

```
function ASSIGN( $per = (rid, did, pt, sv)$  )  
  if  $did.ps = \emptyset$  then  
    InsertControl( $did$ )       $\triangleright$  To control device  
  end if  
  if  $per \notin did.ps$  then  
    add  $per$  to  $did.ps$   
    PropagateEps( $did$ )  
  end if  
end function  
function REVOKE( $per = (rid, did, pt, sv)$  )  
  if  $per \in did.ps$  then  
    remove  $per$  from  $did.ps$   
    PropagateEps( $did$ )  
  end if  
  if  $did.ps = \emptyset$  then  
    RemoveControl( $did$ )       $\triangleright$  To non-control device  
  end if  
end function  
function PROPAGATEEPS( $did$ )       $\triangleright$  Traverse down control  
  devices tree  
   $new\_eps \leftarrow did.ps \cup did.control.eps$   
  if  $did.eps \neq new\_eps$  then  
     $did.eps \leftarrow new\_eps$   
    for all  $d \in did.dc$  do  
      PropagateEps( $d$ )  
    end for  
  end if  
end function
```

For example, in the configuration depicted Figure 4a, d_1 , d_3 and d_4 serve as control devices, with d_2 initially a non-control device. Upon the assignment of permission to d_2 , which changes it to control device, adjustments are made to the control device tree to reflect this change. Specifically, d_2 is added to $d_1.dc$ while d_3 and d_4 are removed from $d_1.dc$ and added to $d_2.dc$. The control pointers for all devices situated between d_2 , d_3 and d_4 inclusive that previously pointing to d_1 are redirected to d_2 .

This conversion of d_2 into a control device, necessitates the revision of its ps and eps with the latter being disseminated down to d_3 and d_4 . Consequently, the eps of d_3 and d_4 are updated to mirror these changes. The process of reverting

a control device back to a non-control status operates in a manner analogous to its initial conversion.

Upon the registration of a new device at the leaf level, its *control* pointer is set to its immediate parent control device. If the parent is a non-control device, the *control* pointer is then set to mirror the *control* pointer of the parent. When revoking a control device, it is removed from its *control.dc*.

The transaction protocol, policy recovery and management of roles within this context follows the same principles as established in RBAC. Control devices hold only segments of the role-user (*map_{ur}*) and user-role (*map_{ru}*) mappings relevant to their permissions *eps*. Updates to these mappings are efficiently disseminated across the network through a control device tree

VII. EXPERIMENTAL STUDY

A. Environment Setup

We utilized commodity hardware to simulate a real-world IoT system scenario with the following entities.

- **Validators Platform** In our experiment, we set up 4 validators, each is an Intel NUC Skull Canyon with a quad-core i7-6770HQ processor, 64GB RAM, and a 2TB M.2 SSD.
- **AC Hub** utilizes a virtual server platform, which is a Synology DS1522+ NAS, powered by a dual-core Ryzen R1600 processor with 8GB RAM, of which 1GB is allocated for the virtual machine.
- **IoT Device** is simulated by a Raspberry Pi 3 B+, featuring a quad-core BCM2837B0 processor and 1GB RAM.
- **Client** A Macbook Pro is used for client operations.

This array of devices is networked together using both wired and wireless connections to a central switch, with internet access provided via a router and cable modem. Additionally, a cellphone with AT&T hotspot serves as a secondary internet access point, enabling us to simulate internet-to-internet communication.

B. Network Setup and Latency Testing

Network Initialization For the initial network connection, bootstrapping employs techniques like Distributed Hash Table (DHT), Zero Configuration Networking (zeroconf), or rendezvous points from a static list or previous peerstore. Although bootstrap time varies, it's a one-time background process not factored into latency assessments.

Firewall Navigation P2P connections navigate firewalls using manual or uPnP port forwarding, hole punching, or fallback methods when hole punching fails. While port forwarding offers immediate connection, hole punching—requiring two communication stages after a temporary relayed connection [22]—presents variability in connection times. Libp2p development tests reveal average connection times of 0.89s and up to 7.78s for successful P2P connections [23]. Due to its significant variability, our experiments primarily utilize uPnP for firewall traversal.

Latency Measurements Libp2p developer tests show pub-sub communication latency typically stays below 150ms, peaking at 165ms (P_{99}) in a 1000-node network using gossipsub-v1.1 [24]. Local network round trip times are generally less than 1ms.

When considering real-world scenarios, there is no need to cold start every communication. Specifically in our experiments, only the client process is restarted every time, not the AC hubs or the validators. Thus, we redo the latency evaluation for the pub-sub communication considering our cases. We test the latency of internet-to-internet pub-sub communication for 2,000 messages, comparing the case of continuous operations without cold start and the case of "cold start" for testing peers, i.e., after each process run, we terminated it, and then restarted it, simulating independent connections.

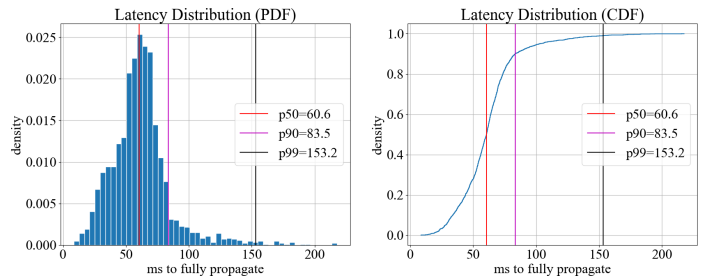


Fig. 5. Pub-sub Latency Distribution (Cold Start)

We observed that continuous operations without cold start led to a convergence of delivery time, indicating an underlying network optimization that enhances communication efficiency.

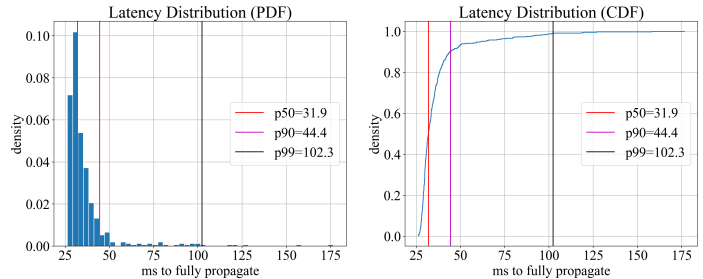


Fig. 6. Pub-sub Latency Distribution (Convergence)

C. Access Validation Latency: Full Path versus Shortcut

As discussed earlier, we do not cold start the AC hub and validators, only client process is restarted every time. Figures 7, 8 and 9 represent the latency distributions of 500 times of access validations conducted via full path, shortcut from internet, and shortcut from intranet, respectively.

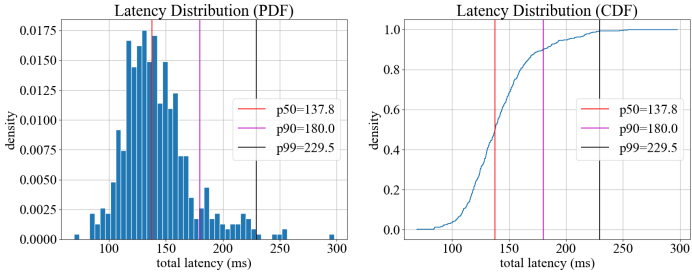


Fig. 7. Full Path Access Latency Distribution

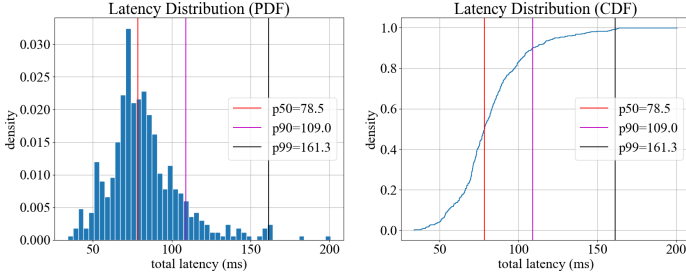


Fig. 8. Shortcut Access from Internet Latency Distribution

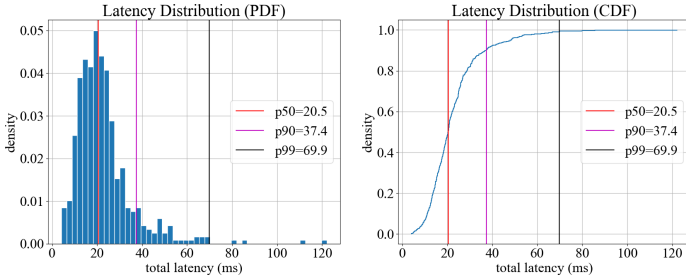


Fig. 9. Shortcut Access from Intranet Latency Distribution

The results from the figures show that in the median case (P_{50}), utilizing shortcut access over the internet yields a 43% reduction in access time, while intranet shortcuts offer saving of approximately 73.9% compared to internet shortcuts. In the worst-case scenario (P_{99}), internet shortcut access provides a savings of about 29.7%, and leveraging intranet shortcuts further saves approximately 56.7%.

D. Access Validation Latency of R&D-BAC

To evaluate the performance of R&D-BAC, we compare it with the baseline case, i.e., RBAC without device hierarchy. In the baseline case, for each device access of did , if a token for accessing did is cached by the accessor uid , uid establishes the session with did directly; otherwise, it executes the normal access procedure, directing the request to the AC hub of did .

The experiments are carried out through a simulator, which simulates local network and processing time in R&D-BAC domain. The DH in an R&D-BAC domain is simulated via a random tree generator based on specified parameters, including tree **depth** (H) and **degree** (D), which are the number of layers and the average number of child nodes in the DH,

correspondingly. The number of child nodes of each node is generated in a Poisson distribution with $\lambda = D$. In our experiment, we choose $H = 10$ and $D = 20$.

We randomly generate permission assignment requests to simulate the control nodes in the device hierarchy. The designated nodes for the permission assignment requests are selected based on a normal distribution, with mean ($\mu = 0.6$) and standard deviation ($\sigma = 0.1$). This setup skews permission assignments towards the middle to lower depths of the device hierarchy (0 for root and 1 for leaf).

Access validation latency was evaluated based on the configuration with 1,000,000 devices, 100 roles, and 100,000 users. The performance impact was measured by consider different numbers of control devices, ranging from empty to fully populated: 100, 1,000, 10,000 and 100,000. This allowed us to observe and quantify the effect of scaling the number of control devices on the R&D-BAC efficiency and responsiveness. The experimental results are presented in Figure 10.

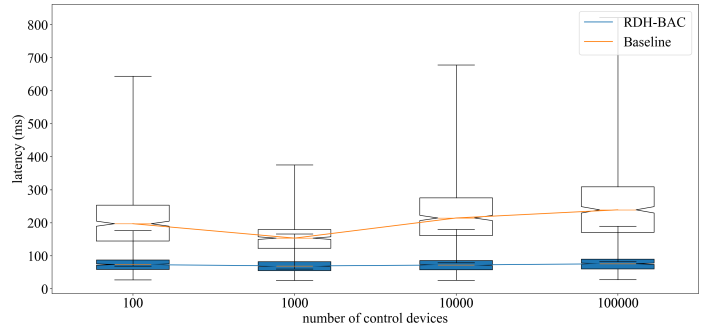


Fig. 10. Assignment Latency

As demonstrated in Figure 10, the R&D-BAC scheme consistently outperforms traditional RBAC access control methods. On average, R&D-BAC achieves a latency time saving of 63.8% (P_{50}), and in the 99th percentile of cases (P_{99}), it delivers saving of 71.7%.

VIII. CONCLUSION

In this paper, we consider efficiency in blockchain based access control and introduce the design of our PBAC protocols. PBAC focuses on pruning the full scale blockchain based access control validation procedure and introduces a shortcut protocol as well as the novel R&D-BAC approach. R&D-BAC leverages the device hierarchy concept and offers a new access control model. Accordingly, a strategy built on top of R&D-BAC model for reducing the access validation latency due to blockchain has been developed. A thorough performance study for the PBAC protocols has been conducted and results show that it achieves significant performance improvements compared to the traditional blockchain based access control schemes.

REFERENCES

- [1] D. Hardt, "The OAuth 2.0 Authorization Framework," Internet Engineering Task Force, Request for Comments RFC 6749, Oct. 2012, num Pages: 76. [Online]. Available: <https://datatracker.ietf.org/doc/rfc6749>
- [2] "Secure IoT Gateway, IoT Gateway Device - AWS IoT Core - AWS." [Online]. Available: <https://aws.amazon.com/iot-core/>
- [3] "IoT Hub | Microsoft Azure." [Online]. Available: <https://azure.microsoft.com/en-us/products/iot-hub/>
- [4] "IoT Intelligent Applications | Oracle." [Online]. Available: <https://www.oracle.com/internet-of-things/>
- [5] D. Di Francesco Maesa, P. Mori, and L. Ricci, "Blockchain Based Access Control," in *Distributed Applications and Interoperable Systems*, L. Y. Chen and H. P. Reiser, Eds. Cham: Springer International Publishing, 2017, vol. 10320, pp. 206–220, series Title: Lecture Notes in Computer Science. [Online]. Available: https://link.springer.com/10.1007/978-3-319-59665-5_15
- [6] O. Novo, "Blockchain Meets IoT: An Architecture for Scalable Access Management in IoT," *IEEE Internet of Things Journal*, vol. 5, no. 2, pp. 1184–1195, Apr. 2018. [Online]. Available: <https://ieeexplore.ieee.org/document/8306880>
- [7] O. Alphand, M. Amoretti, T. Claeys, S. Dall'Asta, A. Duda, G. Ferrari, F. Rousseau, B. Tourancheau, L. Veltri, and F. Zanichelli, "IoTChain: A blockchain security architecture for the Internet of Things," in *2018 IEEE Wireless Communications and Networking Conference (WCNC)*. Barcelona: IEEE, Apr. 2018, pp. 1–6. [Online]. Available: <https://ieeexplore.ieee.org/document/8377385>
- [8] Y. Zhang, S. Kasahara, Y. Shen, X. Jiang, and J. Wan, "Smart Contract-Based Access Control for the Internet of Things," *IEEE Internet of Things Journal*, vol. 6, no. 2, pp. 1594–1605, Apr. 2019. [Online]. Available: <https://ieeexplore.ieee.org/document/8386853>
- [9] S. Ding, J. Cao, C. Li, K. Fan, and H. Li, "A Novel Attribute-Based Access Control Scheme Using Blockchain for IoT," *IEEE Access*, vol. PP, pp. 1–1, Mar. 2019.
- [10] L. Tan, N. Shi, K. Yu, M. Aloqaily, and Y. Jararweh, "A Blockchain-empowered Access Control Framework for Smart Devices in Green Internet of Things," *ACM Transactions on Internet Technology*, vol. 21, no. 3, pp. 1–20, Aug. 2021. [Online]. Available: <https://dl.acm.org/doi/10.1145/3433542>
- [11] E. Hildenbrandt, M. Saxena, N. Rodrigues, X. Zhu, P. Daian, D. Guth, B. Moore, D. Park, Y. Zhang, and A. Stefanescu, "Kevm: A complete formal semantics of the ethereum virtual machine," in *2018 IEEE 31st Computer Security Foundations Symposium (CSF)*. IEEE, 2018, pp. 204–217. [Online]. Available: <https://ieeexplore.ieee.org/document/8429306>
- [12] S. Nakamoto, "Bitcoin: A peer-to-peer electronic cash system," 2008. [Online]. Available: <https://assets.pubpub.org/d8wct41f/31611263538139.pdf>
- [13] V. Buterin, "Ethereum: A Next-Generation Smart Contract and Decentralized Application Platform." 2014.
- [14] E. Androulaki, A. Barger, V. Bortnikov, C. Cachin, K. Christidis, A. De Caro, D. Enyeart, C. Ferris, G. Laventman, Y. Manevich, S. Muralidharan, C. Murthy, B. Nguyen, M. Sethi, G. Singh, K. Smith, A. Sorniotti, C. Stathakopoulou, M. Vukolić, S. W. Cocco, and J. Yellick, "Hyperledger fabric: a distributed operating system for permissioned blockchains," in *Proceedings of the Thirteenth EuroSys Conference*, ser. EuroSys '18. New York, NY, USA: Association for Computing Machinery, Apr. 2018, pp. 1–15. [Online]. Available: <https://dl.acm.org/doi/10.1145/3190508.3190538>
- [15] H. Li, Y. Chen, X. Shi, X. Bai, N. Mo, W. Li, R. Guo, Z. Wang, and Y. Sun, "FISCO-BCOS: An Enterprise-grade Permissioned Blockchain System with High-performance," in *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*, ser. SC '23. New York, NY, USA: Association for Computing Machinery, Nov. 2023, pp. 1–17. [Online]. Available: <https://dl.acm.org/doi/10.1145/3581784.3607053>
- [16] OASIS Standard, "eXtensible Access Control Markup Language (XACML) Version 3.0." 2013. [Online]. Available: <https://docs.oasis-open.org/xacml/3.0/xacml-3.0-core-spec-os-en.pdf>
- [17] R. Almadhoun, M. Kadadha, M. Alhemeiri, M. Alshehhi, and K. Salah, "A user authentication scheme of IoT devices using blockchain-enabled fog nodes," in *2018 IEEE/ACS 15th international conference on computer systems and applications (AICCSA)*. IEEE, 2018, pp. 1–8. [Online]. Available: <https://ieeexplore.ieee.org/document/8612856>
- [18] R. Gelashvili, L. Kokoris-Kogias, A. Sonnino, A. Spiegelman, and Z. Xiang, "Jolteon and Ditto: Network-Adaptive Efficient Consensus with Asynchronous Fallback," in *Financial Cryptography and Data Security*, I. Eyal and J. Garay, Eds. Cham: Springer International Publishing, 2022, pp. 296–315.
- [19] M. Yin, D. Malkhi, M. K. Reiter, G. G. Gueta, and I. Abraham, "HotStuff: BFT Consensus with Linearity and Responsiveness," in *Proceedings of the 2019 ACM Symposium on Principles of Distributed Computing*. Toronto ON Canada: ACM, Jul. 2019, pp. 347–356. [Online]. Available: <https://dl.acm.org/doi/10.1145/3293611.3331591>
- [20] Z. Gao, Y. Hu, and Q. Wu, "Jellyfish Merkle Tree," Diem Association, Tech. Rep., Jan. 2021. [Online]. Available: <https://developers.diem.com/docs/technical-papers/jellyfish-merkle-tree-paper>
- [21] Z. Amsden, R. Arora, S. Bano, M. Baudet, S. Blackshear, A. Bothra, G. Cabrera, C. Catalini, K. Chalkias, E. Cheng, A. Ching, A. Chursin, G. Danezis, G. D. Giacomo, D. L. Dill, H. Ding, N. Doudchenko, V. Gao, Z. Gao, F. Garillot, M. Gorven, P. Hayes, J. M. Hou, Y. Hu, K. Hurley, K. Lewi, C. Li, Z. Li, D. Malkhi, S. Margulis, B. Maurer, P. Mohassel, L. de Neurois, V. Nikolaenko, T. Nowacki, O. Orlov, D. Perelman, A. Pott, B. Proctor, S. Qadeer, D. Russi, B. Schwab, S. Sezer, A. Sonnino, H. Venter, L. Wei, N. Wernerfelt, B. Williams, Q. Wu, X. Yan, T. Zakian, and R. Zhou, "The Libra Blockchain," Diem Association, Tech. Rep., May 2020. [Online]. Available: <https://developers.diem.com/docs/technical-papers/the-diem-blockchain-paper>
- [22] M. Seemann, M. Inden, and D. Vyzovitis, "Decentralized Hole Punching," in *2022 IEEE 42nd International Conference on Distributed Computing Systems Workshops (ICDCSW)*. Bologna, Italy: IEEE, Jul. 2022, pp. 96–98. [Online]. Available: <https://ieeexplore.ieee.org/document/9951368>
- [23] IPFS, "libp2p NAT Hole Punching Success Rate - @dennistra - Measuring IPFS," Aug. 2022. [Online]. Available: <https://www.youtube.com/watch?v=fyhZWIDbcyM>
- [24] D. Vyzovitis, Y. Napora, D. McCormick, D. Dias, and Y. Psaras, "Gossipsub-v1.1 Evaluation Report," Protocol Labs, Tech. Rep., Apr. 2020. [Online]. Available: <https://research.protocol.ai/publications/gossipsub-v1.1-evaluation-report/>