

# Semantic-Geometric-Physical-Driven Robot Manipulation Skill Transfer via Skill Library and Tactile Representation

Mingchao Qi, Yuanjin Li, Xing Liu\*, Zhengxiong Liu, Panfeng Huang

**Abstract**—Deploying robots in open-world environments involves complex tasks characterized by long sequences and rich interactions, necessitating efficient transfer of robotic skills across diverse and complex scenarios. To address this challenge, we propose a skill library framework based on knowledge graphs, which endows robots with high-level skill awareness and spatial semantic understanding. The framework hierarchically organizes operational knowledge by constructing a “task graph” and a “scene graph” to represent task and scene semantic information, respectively. We introduce a “state graph” to facilitate interaction between high-level task planning and low-level scene information. Furthermore, we propose a hierarchical transfer framework for operational skills. At the task level, the framework integrates contextual learning and chain-of-thought prompting within a four-stage prompt paradigm, leveraging large language models’ (LLMs) reasoning and generalization capabilities to achieve task-level subtask sequence transfer. At the motion level, an adaptive trajectory transfer method is developed using the A\* algorithm and the skill library, enabling motion-level adaptive trajectory transfer. At the physical level, we introduce an adaptive contour extraction and posture perception method based on tactile perception. This method dynamically obtains high-precision contour and posture information from visual-tactile texture data and adjusts transferred skills, such as contact positions and postures, to ensure effectiveness in new environments. Experimental results validate the effectiveness of the proposed methods. Project website: [https://github.com/MingchaoQi/skill\\_transfer](https://github.com/MingchaoQi/skill_transfer)

## I. INTRODUCTION

Deploying robots in open-world environments involves managing complex operational scenarios, particularly when dealing with long sequences and contact-rich manipulation tasks [1], [2], [3]. The diversity of these scenarios makes it impractical to program specific responses for each situation, necessitating a high degree of skill generalization. This ensures that robots can efficiently transfer learned skills to similar new scenarios. For instance, tasks such as opening doors and drawers require fundamental skills like approaching, grasping, pulling, and releasing, despite differences in objects and motion patterns. In these contexts, robots must flexibly transfer and integrate these skills.

A prevalent method for skill transfer in robotic platforms is Learning from Demonstration (LfD), which enables robots to learn strategies from human or heuristic demonstrations. For long-horizon tasks, robots must plan, execute, and sequence

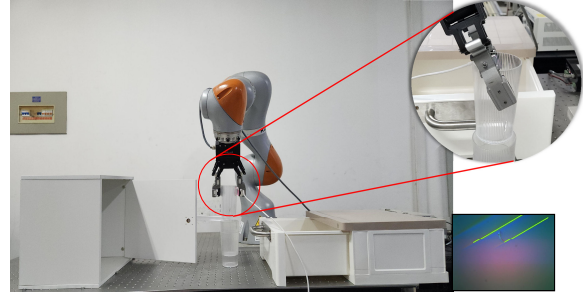


Fig. 1. Skill Transfer for Manipulation: The task for the KUKA robot involves transferring the skill of opening a drawer to retrieve and stack cups to the task of opening a door to retrieve and stack cups in various orientations.

a set of interconnected actions over an extended period to achieve a final goal. Traditional LfD methods, such as Behavioral Cloning (BC), often perform poorly in these scenarios due to their inability to transfer the advanced skills necessary for completing complex tasks [3]. Recent advances in end-to-end robot learning [4], [5], [6], [7] have developed potent multimodal strategies that exhibit better generalization for tasks involving the same skill sequences. However, these methods require vast amounts of data, posing significant challenges for scalability in robotics.

The second type is a hierarchical design incorporating skill primitives and task planning. In this framework, each task is broken down into a hierarchy of skills managed by specific scripts or learning controllers, and these skills are stored in a constructed robot skill library for reuse in new tasks [8], [9], [10]. However, it often prioritizes the combination of high-level skills while neglecting object properties and low-level contact issues, leading to difficulties in generalizing skills for contact-rich tasks. Tactile sensors like Gelsight [11] offer high-resolution tactile information, which can be utilized for precise estimation of object contours, textures, poses, forces, and torques, thereby supporting manipulation tasks [12]. Nonetheless, existing methods frequently rely on complete symbolic labels of objects or prior knowledge, such as known shapes, which makes it challenging to ensure robustness in diverse scenarios [13].

We present the following contributions, as illustrated in the Figure 2:

- 1) A method for constructing a hierarchical skill library that integrates operational task information with scene semantic information is proposed. This approach represents complex operational tasks hierarchically at both the task and action levels, linking them with spa-

Mingchao Qi and Yuanjin Li contributed equally to this work.

This work was supported by the National Natural Science Foundation of China under Grant 92370123, 62103334, and 62273280.

Mingchao Qi, Yuanjin Li, Xing Liu (Corresponding author), Zhengxiong Liu, and Panfeng Huang are with the Research Center for Intelligent Robotics, School of Astronautics, Northwestern Polytechnical University, Xi’an, China, 710072. [xingliu@nwpu.edu.cn](mailto:xingliu@nwpu.edu.cn)

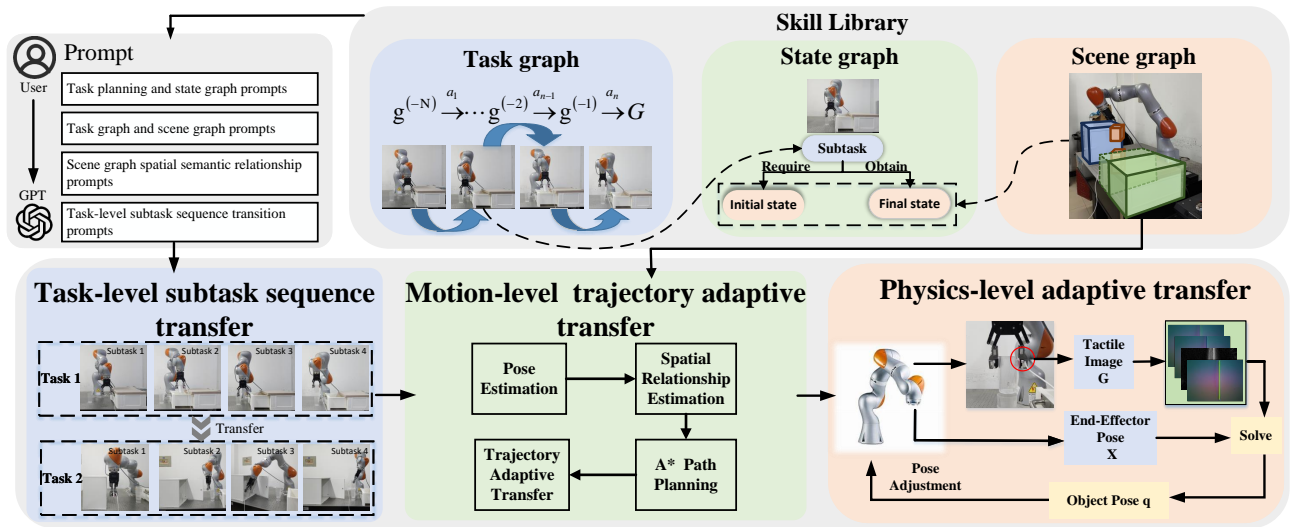


Fig. 2. Our skill transfer method consists of two processes: the construction of a skill library and the hierarchical transfer of operational skills. Initially, the skill library encapsulates task and scenario semantic information using “task graph” and “scenario graphs”, facilitating interaction via “state graph” through the “require” and “obtain” mechanisms. For hierarchical transfer, at the task level, a four-stage prompt system based on LLM is integrated with the skill library to accomplish sub-task sequence transfer. At the motion level, trajectory adaptive transfer is enabled through the use of “scenario graphs” and the A\* algorithm. At the physical level, an adaptive method based on tactile perception is introduced to dynamically adjust contact positions and postures via contour extraction and posture perception, thereby enhancing the effectiveness of skill transfer.

tial semantic information to facilitate hierarchical skill transfer.

- 2) A hierarchical transfer framework for operational skills is proposed. Utilizing the skill library, the framework enables task-level subtask sequence transfer, motion-level trajectory adaptive transfer, and physical-level tactile perception-driven adaptive transfer. This approach aims to facilitate the transfer of entire complex tasks.
- 3) A method for adaptive contour extraction and pose perception based on tactile sensing is proposed. This method dynamically acquires high-precision contour and pose information from texture data extracted from visuo-tactile images. It also internally adapts the transferred skills to ensure their effectiveness in new environments.

## II. RELATED WORK

### A. Skill Library

A robot skill library is a structured set of skills, each corresponding to a specific task’s operational process. These libraries are built through Imitation Learning and Reinforcement Learning, aimed at enabling skill reuse and composition for improved multi-tasking. Earlier robotic systems were task-specific with limited generalization. To improve adaptability, researchers proposed generalized skill libraries using modular skills for task planning [14]. These libraries include basic and complex skills can be categorized as task-specific or general [15], [16]. Skills are often represented using behavior trees or finite state machines [17], and transfer learning allows robots to apply skills to new tasks.

### B. Skill Transfer

Skill transfer reduces training time and sample requirements by transferring knowledge from a source to a target

domain. Key approaches include transfer learning, multitask learning, and meta-learning. Sun et al. [18] proposed a self-supervised method for robots to adapt to dynamic environments. Yu et al. [19] demonstrated skill transfer through similar task examples, improving a robot’s object grasping ability. Multitask learning boosts efficiency across tasks by sharing representations [20]. Meta-learning, like MAML, helps robots adapt quickly with few samples [21]. RL with transfer learning, such as Progressive Neural Networks (PNNs) by Rusu et al. [22], shows strong skill transfer in complex tasks.

### C. Tactile Perception

Li et al. developed a method for precise widget positioning, enabling accurate USB connector placement using advanced matching techniques [23]. Izatt et al. enhanced this by integrating a filtering algorithm that merges vision and tactile data for object pose tracking, enabling precise tool operations [24]. Both used model-based tracking with predefined geometries. Daolin Ma et al. addressed locating contact points on unknown objects by solving for constraints [25]. Yu She et al. applied thresholding and PCA to deduce cable orientation from depth maps [26]. Achu Wilson et al. combined tactile feedback with vision for cable routing [27].

## III. METHOD

### A. The Construction of Skill Library

This paper proposes a knowledge graph-based skill library framework designed to enable robots to comprehend high-level skills and spatial semantic information in scenes, facilitating the transfer of robot skills across similar scenarios. The skill library is depicted using a formalized semantic model

knowledge graph (KG) [28], [29], [30]. This framework hierarchically structures knowledge by decomposing complex long-sequence tasks into sequences of subtasks, resulting in a "task graph" for robot operations. To effectively represent operational object information and physical constraints, this paper introduces a "scene graph" to depict spatial semantic information and employs a "state graph" to enable the interaction between operational tasks and scenes. The knowledge graph of the skill library is implemented using Neo4j.

**The Construction of Operational Task Graph.** A complex task can be represented as a collection of subtasks  $T = T_1, T_2, \dots, T_n$ , where each subtask  $T_i$  is a triple  $(S_i, V_i, O_i)$  consisting of a subject  $S_i$ , predicate  $V_i$ , and object  $O_i$ . The predicate  $V_i$  is mapped to a sequence of robot-executable action primitives through a function  $f: V_i \rightarrow A^*$ , such that  $f(V_i) = (A_{i1}, A_{i2}, \dots, A_{ik})$ , where each action primitive  $A_{ij}$  corresponds to a low-level robot control command.

Based on the aforementioned theory, this paper decomposes a complex long-horizon task into two distinct levels: the task level and the action level. The task level includes the complex task  $T$  and a sequence of subtasks  $\{T_1, T_2, \dots, T_n\}$  derived through planning, where subtasks are considered as skills or high-level actions. The action level consists of action primitives, where a sequence of action primitives  $\{A_1, A_2, \dots, A_n\}$  accomplishes a subtask. Action primitives refer to low-level, short-term tasks that can be directly executed through motion planning [31]. To represent robotic operational skills, this paper constructs a knowledge graph  $G = (V, E)$  to model the hierarchical relationships among tasks, subtasks, and action primitives. In this graph, nodes  $V$  represent tasks, subtasks, and action primitives, while edges  $E$  illustrate the relationships between them, forming an operational "task graph". The hierarchical node relationships include "contain", "next step", "start" and "end".

**The Construction of Operational Scene Graph.** A scene graph can be represented as a directed graph  $G = \{O, E\}$ , where  $O = \{O_1, O_2, \dots, O_n\}$  denotes the set of objects in the scene. Each object  $O_i = \{O_i, B_i, A_i\}$  consists of an object category  $O_i$ , a position  $B_i$ , and a set of attributes  $A_i$ . The set of directed edges  $E = \{E_1, E_2, \dots, E_m\}$  represents relationships, with each edge  $E_k = \{O_i, r_{i \rightarrow j}, O_j\}$  being an object-relationship-object triplet, indicating a relationship  $r_{i \rightarrow j}$  between objects  $O_i$  and  $O_j$ .

For robots to effectively manage skill transfer tasks, it is essential to consider not only their task planning and action execution strategies but also the spatial semantic information of their environment. To address this, this paper introduces the concept of a "scene graph," which represents the structural composition of the environment. In this graph, each component and its configuration are modeled as subgraphs, allowing the robot to selectively focus on relevant parts while disregarding irrelevant information.

The drawer box and the main body can be represented as two objects,  $O_{\text{drawer}}$  and  $O_{\text{body}}$ , connected by a prismatic joint, represented as the directed edge  $E_k = \{O_{\text{drawer}}, r_{\text{slider}}, O_{\text{body}}\}$  where  $r_{\text{slider}}$  denotes the sliding relationship. The motion range of the joint, damping, friction,

and other physical properties are represented as attributes  $A_i$ , while the dimensions and relative positions of the objects are summarized as attributes  $B_i$ . Using this approach, a scene graph containing physical information can be constructed and incorporated into a knowledge graph using Neo4j. This method allows the creation of a comprehensive scene graph that includes operational spatial semantic information, which can then be transformed into a knowledge graph using Neo4j.

**The Construction of Operational State Graph.** The "task graph" and "scene graph" outlined earlier are mutually isolated. To resolve this issue, this paper introduces the concept of a "state graph", which integrates the "task graph" and "scene graph", thus forming a comprehensive knowledge graph for the robot operation skill library. Essentially, this process involves linking the subtask sequences in the task graph with the entity relationship information in the scene graph. To achieve this connection, the concepts of "Require" and "Obtain" are introduced during the robot's subtask sequence execution. "Require" denotes the state that the robot and operating environment must meet before commencing the subtask sequence, which can be retrieved from the scene graph. "Obtain" refers to the state of the robot and operating environment after completing the subtask sequence, also feeding back into the scene graph for real-time updates, thereby providing information for the execution of subsequent subtask sequences.

## B. Hierarchical Transfer Framework of Operational Skills

The primary design of this framework is based on the previously constructed skill library knowledge graph. It implements task-level subtask sequence transfer, motion-level trajectory adaptive transfer, and operation adaptive transfer driven by physical-level tactile perception.

**Task-level subtask sequence transfer.** Subtask sequences planned in similar task scenarios are always akin, such as in the tasks of opening doors and drawers. To enable the transfer of task-level subtask sequences across similar scenarios, it is essential for the agent to have a comprehensive understanding of the transfer tasks and scenarios. In this context, we introduce LLM, leveraging its powerful reasoning and generalization capabilities to achieve the aforementioned goals. This paper is based on the contextual learning and thought-chain prompts in prompt-based learning, constructing a new four-stage prompt word paradigm.

First, we provide the LLM with a comprehensive description of the complex planning task and the state graph descriptions from the skill library. This includes detailed accounts of long-horizon operations tasks, their subtask sequences, and the meanings and specific components associated with "Require" and "Obtain" in the state graphs.

Next, we enable the LLM to comprehend the entire knowledge graph of the operations skill library. We input the skill library into the LLM as Neo4j-based code, which helps the model understand subtask sequences in the task graph, components of objects in the scene graph, their connections, and their relative positional relationships.

In the third step, we guide the LLM to deeply understand the spatial semantic information in the scene graph of the skill library. Despite the initial stages, the LLM may still have deficiencies in understanding this complex spatial semantic information—such as relationships between objects and the connections between object components. To address these issues, we customize a specific form of expression: “object - connection type - object” for relationships.

Finally, we provide reference planning for existing complex tasks and subtask sequence migration requirements for new scenes. In this step, constraints and regulations noted in the “notes” are crucial to ensure that our subtask sequence migration remains within specified limits and does not generate redundant information. Consequently, the LLM can achieve complex task planning from the existing scene to the new scene and associate planned subtasks with spatial semantic information in the new scene, aligning with the state graph information corresponding to the subtasks.

**Motion-level adaptive trajectory transfer.** The transferred subtask sequences, represented in human semantic knowledge, cannot be directly translated into action primitives executable by robots. Therefore, transferring motion-level trajectories becomes necessary. Direct trajectory transfer can face challenges, especially in tasks like opening doors and drawers, where the mechanisms differ significantly—drawers require pushing or pulling along a translational axis, whereas doors operate around a rotational axis. Deviations from the ideal trajectory by the robot can exert excessive lateral forces, potentially causing damage. Additionally, changes in obstacles along the path during door or drawer operations may lead to collisions.

We propose an adaptive trajectory transfer method leveraging the A\* algorithm and a robotic operation skill library to achieve motion-level trajectory adaptation for robot skills. This method initially employs the skill library’s “scene graph” to retrieve spatial semantic information and generate a corresponding three-dimensional discretized model. Subsequently, it identifies the trajectory’s start and end points based on the new task’s subtask sequence and “state graph” information, which is generated in an earlier phase with the assistance of a LLM. Finally, the A\* algorithm autonomously plans the trajectory and avoidance tasks using task and scene information. This approach enables the robot’s operational trajectory to adapt to various tasks, ensuring smooth and safe task completion in new environments.

**Physical-level tactile perception-driven adaptive manipulation transfer.** Task-level and motion-level transfers facilitate the generalization of specific tasks in new environments. However, for tasks involving intricate tactile interactions, robots must manage the variability of object attributes and the complexity of underlying contact mechanisms, which constrains the adaptability and generalization of their skills.

This paper introduces an adaptive learning mechanism that dynamically adjusts operational strategies based on real-time feedback from high-resolution visuotactile sensors such as Gelsight. The feedback encompasses information about an object’s contours, textures, posture, forces, and torques. For

example, when grasping objects with varying textures, robots can modify their force and grip angle in response to perceived hardness or slip characteristics, thereby maintaining stability and precision under different contact conditions and adapting to diverse operational environments.

However, existing tactile perception methods struggle to maintain robustness across diverse scenarios. To achieve physical-level tactile perception-driven operational adaptive transfer, this study proposes an adaptive method for contour extraction and pose estimation based on tactile perception, which will be introduced in the following section.

### C. Haptic Contour Extraction Algorithm Based on Image Texture

To accurately distinguish contours in tactile images, it is necessary to divide the contact area into three regions: texture region, contour region, and non-contact region. The contour region is characterized by sharp gradient changes; the non-contact region primarily exhibits scattered, low-gradient noise; and the texture region is determined by the surface and contact conditions of the touched object, typically displaying regular patterns with moderate gradient strength.

The algorithm first defines the texture threshold ( $T_{texture}$ ) as the floor value of the average of non-zero gradient values in the gradient map  $G$ , given by the following equation:

$$T_{texture} = \left\lfloor \frac{1}{|G|} \sum_{i,j:G_{i,j} \neq 0} G_{i,j} \right\rfloor \quad (1)$$

Next, each pixel  $(i, j)$  in the image  $I$  is smoothed by applying a Gaussian kernel  $G_k$ , resulting in the smoothed image  $S$ . Then, the gradient magnitude  $G_{i,j}$  and gradient direction  $\Theta_{i,j}$  are computed for each pixel. Non-maximum suppression is applied to retain local maximum gradient values, refining the contour points. A dual-threshold detection is then performed on these contour points using dynamically adjusted high and low thresholds ( $T_{high}$  and  $T_{low}$ ), optimized to match the texture information. Through this process, the final set of contour points  $C$  is determined. Finally, the Hough Transform is used to extract lines from the contour point set and compute the line direction vectors  $H$ , providing the necessary data for further processing or analysis.

The haptic contour extraction algorithm based on image texture is designed to process a 320x240 resolution Gelsight image and extract contour point sets and line direction vectors using the Hough transform. The complete processing flow and pseudocode are presented in Figure 3 and Algorithm 1, respectively.

## IV. EXPERIMENTS

### A. Experimental Setup

In this paper, the robotic arm utilized is the KUKA LBR iiwa 14 R820. The tactile sensor employed is the Gelsight mini, with a sampling frequency of 10Hz. For low-level control, we use position control in the end-effector’s

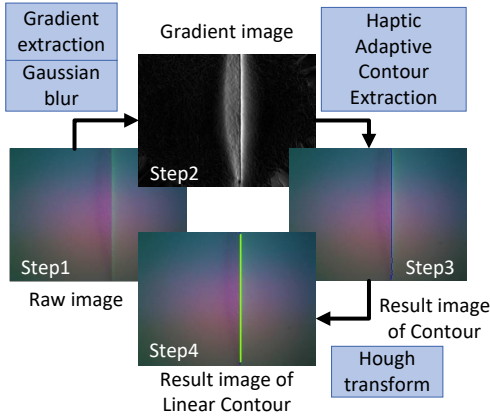


Fig. 3. Adaptive contour extraction process diagram. The blue scatter represents the extracted edges, while the green line indicates the direction obtained from the Hough transform

---

**Algorithm 1** Haptic Contour Extraction Algorithm Based on Image Texture

---

- 1: **Input:** A 320x240 Gelsight image  $I$
  - 2: **Output:** Contour point set  $C$  and line direction vectors obtained by Hough transform  $H$
  - 3: **procedure** CONTOUREXTRACTION
  - 4:  $T_{texture} \leftarrow \{G\}$  with equation 1
  - 5: **for** each pixel  $(i, j)$  in  $I$  **do**
  - 6:  $S_{i,j} \leftarrow \text{smooth } I \text{ with } G_k$
  - 7:  $G_{i,j} = \sqrt{(S_{i+1,j} - S_{i-1,j})^2 + (S_{i,j+1} - S_{i,j-1})^2}$
  - 8:  $\Theta_{i,j} = \arctan\left(\frac{S_{i,j+1} - S_{i,j-1}}{S_{i+1,j} - S_{i-1,j}}\right)$
  - 9: **end for**
  - 10: **for** each pixel  $(i, j)$  in  $G$  **do**
  - 11:  $N_{i,j} \leftarrow \{G, \Theta\}$  non-maximum suppression
  - 12:  $C_{i,j} \leftarrow \{G, T_{texture}\}$  dual threshold detection
  - 13: **end for**
  - 14:  $T_{high}, T_{low} \leftarrow \text{adjust with } T_{texture}$
  - 15:  $H \leftarrow \{C\}$  with Hough Transform
  - 16: **end procedure**
  - 17: **Return:**  $C$  and  $H$
- 

Cartesian space at a frequency of 100 Hz, enabling the generation of smooth interpolated trajectories.

### B. Validation of the Effectiveness of the Hierarchical Skill Transfer Framework

In our experiments, we set up a drawer and a cabinet with doors containing vertically striped mugs in various positions. We aimed to transfer the skills of opening a drawer and retrieving a mug to a designated stacking location to the task of opening a cabinet door and retrieving mugs in different positions for stacking.

In this transfer scenario, the robot is required to complete the transfer of a long sub-task sequence, which includes approaching, grasping, pulling, and releasing the handles of drawers or doors, followed by approaching, picking, and moving to the designated location to accurately stack mugs. Throughout the movement process, the robot must

adaptively complete the trajectory planning tasks based on the scenario information provided by the skill library. During the mug stacking phase, the robot adjusts its orientation adaptively, utilizing the tactile representation of physical-level information such as the mug's contour and orientation, to successfully complete the stacking. As illustrated in the Figure 4, the experimental results demonstrate that the robot successfully completed the aforementioned tasks using the hierarchical skill transfer framework described in this paper, confirming the framework's effectiveness in handling complex manipulative tasks with long sequences and rich contact interactions.

### C. Evaluation of the Skill Transfer Framework

When addressing new operating scenarios, reinforcement learning (RL) methods are frequently employed for policy exploration. However, the training process demands extensive interaction with the environment, which is often inefficient and poses safety risks. Consequently, this paper focuses on a specific aspect of skill transfer: transferring the drawer-opening skill to the door-opening task. Experiments were conducted within the simulated environment, Robosuite.

To evaluate the efficiency of the hierarchical skill transfer method proposed in this paper, we implemented the hierarchical transfer framework for operational skills in a simulated environment and compared its performance with that of the direct policy transfer method. The direct policy transfer approach involves pre-training with the SAC reinforcement learning algorithm in a drawer-opening environment, followed by the direct transfer of the policy network learned by the SAC algorithm to an untrained door-opening task to observe the performance of the transferred policy in the new task. The design of the reward function for the drawer-opening task is as follows:

$$r = \begin{cases} 2 & \text{success} \\ 0.25 \times (1 - \tanh(10 \times d)) & \text{unsuccess} \end{cases} \quad (2)$$

where *success* and *unsuccess* indicate whether the task of opening the drawer is completed, and  $d$  represents the Euclidean distance between the robot gripper and the target position on the drawer handle.

Train the drawer-opening algorithm using the SAC algorithm from Stable Baselines3 for 1000 episodes, each with a fixed length of 1000 time steps. The training results are presented in the Figure 5. Then, transfer the trained policy network to the door-opening task and test its performance over 50 episodes, each consisting of 1000 steps. Finally, record the success rate.

The results indicate that the success rate of the direct transfer strategy is 0% within 50 episodes, while our method achieves a 100% success rate within the same timeframe. This suggests that our approach is more effective and robust when applied to various environments and tasks.

### D. Verification of Adaptive Tactile Threshold Algorithm

The goal of this experiment is to evaluate the performance of a tactile-based adaptive contour extraction algorithm in

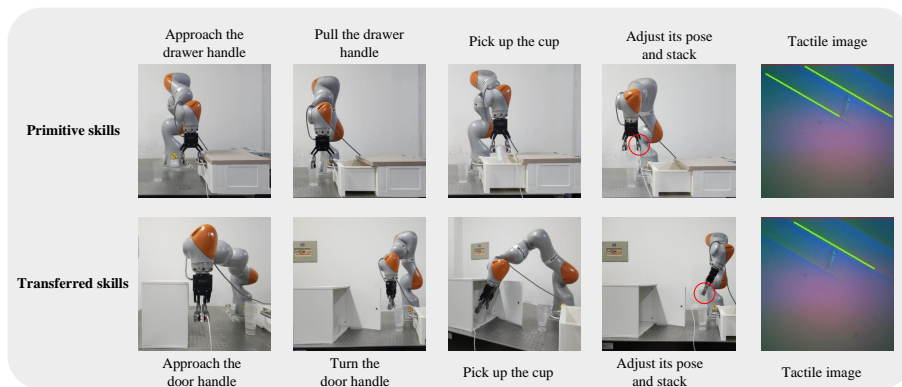


Fig. 4. **Skill Transfer Result Diagram.** The first row illustrates the initial skills, while the second row depicts the process of effectively completing tasks after skill transfer. During this process, tactile feedback is integrated into the control loop.

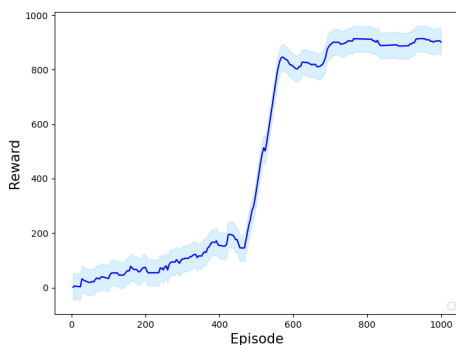


Fig. 5. Results of training the SAC algorithm on the drawer-opening task in the Robosuite simulation environment.

various scenarios, with a focus on the accuracy and reliability of extracting six typical contours. To achieve this, we employ our adaptive method and compare its performance with a fixed-threshold edge extraction method.

During the experiment, multiple data collection sessions were conducted for each sample at a sampling rate of 10 Hz, with each session lasting approximately 5 seconds. To assess the differences in performance between the adaptive contour extraction algorithm and the fixed-threshold method, we utilized Root Mean Square Error (RMSE) to measure the positional error between the extracted contours and the ground truth. A lower RMSE indicates better algorithm performance. Figure 6 shows the results of our algorithm intuitively and Table I summarizes the RMSE positional and angular errors under different conditions for both algorithms.

The experimental data demonstrate that the adaptive contour extraction algorithm outperforms the fixed-threshold method when handling various geometric shapes and complex surfaces. Notably, the adaptive algorithm exhibits stronger robustness in scenarios with multiple edges (complex geometry) or contours located at the edge of the sensor’s field of view (challenging contact conditions).

## V. CONCLUSION

This paper introduces a method designed to create a skill library and a hierarchical skill transfer framework,

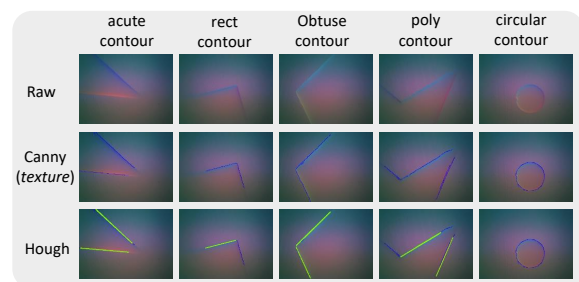


Fig. 6. Tactile adaptive contour extraction results. The blue scatter points represent the extracted contour points, while the green lines represent the straight edges perceived through the Hough line transform applied to the contour points.

TABLE I  
RMSE OF TACTILE ADAPTIVE AND FIXED THRESHOLDS ON VARIOUS GEOMETRICAL SHAPES.

	Rect	Acute	Right	Circle
Fixed Threshold	39.31	101.76	112.81	326.04
<b>Tactile Adaptive</b>	<b>37.15</b>	<b>61.52</b>	<b>62.38</b>	<b>63.80</b>
	Pentagon		Line Bundle	
	General	Edge	General	Edge
Fixed Threshold	123.30	203.59	117.44	214.16
<b>Tactile Adaptive</b>	<b>61.87</b>	<b>102.05</b>	<b>103.03</b>	<b>193.92</b>

Rect, acute, right represent straight line, acute angle, right angle respectively. A smaller numerical value indicates better performance.

which facilitates the transfer of robotic skills in complex environments. It employs “task graph” and “scene graph” to delineate task and scene information respectively, and uses “state graph” for interactive purposes. This approach enables the transfer of subtask sequences at the task level, adaptive trajectory transfer at the motion level, and tactile-based skill adjustments at the physical level. The method’s adaptability in complex environments has been confirmed through experimental verification.

## REFERENCES

- [1] Y. Lee, E. S. Hu, and J. J. Lim, "Ikea furniture assembly environment for long-horizon complex manipulation tasks," in *2021 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2021, pp. 6343–6349.
- [2] M. Heo, Y. Lee, D. Lee, and J. J. Lim, "Furniturebench: Reproducible real-world benchmark for long-horizon complex manipulation," *arXiv preprint arXiv:2305.12821*, 2023.
- [3] H. Lin, R. Corcodel, and D. Zhao, "Generalize by touching: Tactile ensemble skill transfer for robotic furniture assembly," *arXiv preprint arXiv:2404.17684*, 2024.
- [4] A. Brohan, N. Brown, J. Carbajal, Y. Chebotar, X. Chen, K. Chormanski, T. Ding, D. Driess, A. Dube, C. Finn, *et al.*, "Rt-2: Vision-language-action models transfer web knowledge to robotic control," *arXiv preprint arXiv:2307.15818*, 2023.
- [5] D. Driess, F. Xia, M. S. Sajjadi, C. Lynch, A. Chowdhery, B. Ichter, A. Wahid, J. Tompson, Q. Vuong, T. Yu, *et al.*, "Palm-e: An embodied multimodal language model," *arXiv preprint arXiv:2303.03378*, 2023.
- [6] Y. Jiang, A. Gupta, Z. Zhang, G. Wang, Y. Dou, Y. Chen, L. Fei-Fei, A. Anandkumar, Y. Zhu, and L. Fan, "Vima: General robot manipulation with multimodal prompts," *arXiv preprint arXiv:2210.03094*, vol. 2, no. 3, p. 6, 2022.
- [7] C. Lynch, A. Wahid, J. Tompson, T. Ding, J. Betker, R. Baruch, T. Armstrong, and P. Florence, "Interactive language: Talking to robots in real time," *IEEE Robotics and Automation Letters*, 2023.
- [8] A. Mandlekar, D. Xu, R. Martín-Martín, S. Savarese, and L. Fei-Fei, "Learning to generalize across long-horizon tasks from human demonstrations," *arXiv preprint arXiv:2003.06085*, 2020.
- [9] X. Yang, Z. Ji, J. Wu, Y.-K. Lai, C. Wei, G. Liu, and R. Setchi, "Hierarchical reinforcement learning with universal policies for multistep robotic manipulation," *IEEE Transactions on Neural Networks and Learning Systems*, vol. 33, no. 9, pp. 4727–4741, 2021.
- [10] A. Li, L. Pinto, and P. Abbeel, "Generalized hindsight for reinforcement learning," *Advances in neural information processing systems*, vol. 33, pp. 7754–7767, 2020.
- [11] W. Yuan, S. Dong, and E. H. Adelson, "Gelsight: High-resolution robot tactile sensors for estimating geometry and force," *Sensors*, vol. 17, no. 12, p. 2762, 2017.
- [12] J.-T. Lee, D. Bollegala, and S. Luo, "'touching to see" and "seeing to feel": Robotic cross-modal sensory data generation for visual-tactile perception," in *2019 International Conference on Robotics and Automation (ICRA)*. IEEE, 2019, pp. 4276–4282.
- [13] S. Dragiev, M. Toussaint, and M. Gienger, "Uncertainty aware grasping and tactile exploration," in *2013 IEEE International Conference on Robotics and Automation*. IEEE, 2013, pp. 113–119.
- [14] O. Kroemer, S. Niekum, and G. Konidaris, "A review of robot learning for manipulation: Challenges, representations, and algorithms," *Journal of machine learning research*, vol. 22, no. 30, pp. 1–82, 2021.
- [15] L. Rozo, P. Jiménez, and C. Torras, "A robot learning from demonstration framework to perform force-based manipulation tasks," *Intelligent service robotics*, vol. 6, no. 1, pp. 33–51, 2013.
- [16] R. Rahmatizadeh, P. Abolghasemi, L. Bölöni, and S. Levine, "Vision-based multi-task manipulation for inexpensive robots using end-to-end learning from demonstration," in *2018 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2018, pp. 3758–3765.
- [17] M. Colledanchise and P. Ögren, *Behavior trees in robotics and AI: An introduction*. CRC Press, 2018.
- [18] I. Achituve, H. Maron, and G. Chechik, "Self-supervised learning for domain adaptation on point clouds," in *Proceedings of the IEEE/CVF winter conference on applications of computer vision*, 2021, pp. 123–133.
- [19] W. Yu, G. Turk, and C. K. Liu, "Learning symmetric and low-energy locomotion," *ACM Transactions on Graphics (TOG)*, vol. 37, no. 4, pp. 1–12, 2018.
- [20] X. Du, R. Tang, S. Yin, Y. Zhang, and S. Li, "Direct segmentation-based full quantification for left ventricle via deep multi-task regression learning network," *IEEE journal of biomedical and health informatics*, vol. 23, no. 3, pp. 942–948, 2018.
- [21] C. Finn, P. Abbeel, and S. Levine, "Model-agnostic meta-learning for fast adaptation of deep networks," in *International conference on machine learning*. PMLR, 2017, pp. 1126–1135.
- [22] A. A. Rusu, N. C. Rabinowitz, G. Desjardins, H. Soyer, J. Kirkpatrick, K. Kavukcuoglu, R. Pascanu, and R. Hadsell, "Progressive neural networks," *arXiv preprint arXiv:1606.04671*, 2016.
- [23] R. Li, R. Platt, W. Yuan, A. Ten Pas, N. Roscup, M. A. Srinivasan, and E. Adelson, "Localization and manipulation of small parts using gelsight tactile sensing," in *2014 IEEE/RSJ International Conference on Intelligent Robots and Systems*. IEEE, 2014, pp. 3988–3993.
- [24] G. Izatt, G. Mirano, E. Adelson, and R. Tedrake, "Tracking objects with point clouds from vision and touch," in *2017 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2017, pp. 4000–4007.
- [25] D. Ma, S. Dong, and A. Rodriguez, "Extrinsic contact sensing with relative-motion tracking from distributed tactile measurements," in *2021 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2021, pp. 11 262–11 268.
- [26] Y. She, S. Wang, S. Dong, N. Sunil, A. Rodriguez, and E. Adelson, "Cable manipulation with a tactile-reactive gripper," *The International Journal of Robotics Research*, vol. 40, no. 12-14, pp. 1385–1401, 2021.
- [27] A. Wilson, H. Jiang, W. Lian, and W. Yuan, "Cable routing and assembly using tactile-driven motion primitives," in *2023 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2023, pp. 10 408–10 414.
- [28] S. Chernova, V. Chu, A. Daruna, H. Garrison, M. Hahn, P. Khante, W. Liu, and A. Thomaz, "Situating bayesian reasoning framework for robots operating in diverse everyday environments," in *Robotics Research: The 18th International Symposium ISRR*. Springer, 2020, pp. 353–369.
- [29] M. Beetz, D. Beßler, A. Haidu, M. Pomarlan, A. K. Bozcuoğlu, and G. Bartels, "Know rob 2.0—a 2nd generation knowledge processing framework for cognition-enabled robotic agents," in *2018 IEEE International Conference on Robotics and Automation (ICRA)*. IEEE, 2018, pp. 512–519.
- [30] A. Daruna, W. Liu, Z. Kira, and S. Chetnova, "Robocse: Robot common sense embedding," in *2019 International Conference on Robotics and Automation (ICRA)*. IEEE, 2019, pp. 9777–9783.
- [31] D. Zhong, S. Miao, R. Miao, F. Sun, Z. Wen, H. Huang, and N. Wang, "Skill manipulation method of industrial robot based on knowledge graph for assembly scene," in *International Conference on Cognitive Computation and Systems*. Springer, 2022, pp. 280–290.