

# Enhancing Autonomous Driving Safety through World Model-Based Predictive Navigation and Adaptive Learning Algorithms for 5G Wireless Applications

Hong Ding

*School of Electrical Engineering and  
Artificial Intelligence  
Xiamen University Malaysia  
Sepang, Malaysia  
EEE2109269@xmu.edu.my*

Ziming Wang

*School of Electrical Engineering and  
Artificial Intelligence  
Xiamen University Malaysia  
Sepang, Malaysia  
EEE2109297@xmu.edu.my*

Yi Ding

*School of Economics and Management  
Xiamen University Malaysia  
Sepang, Malaysia  
JRN2109439@xmu.edu.my*

Hongjie Lin

*School of Mathematics and Applied  
Mathematics  
Xiamen University Malaysia  
Sepang, Malaysia  
CHS2209106@xmu.edu.my*

SuYang Xi

*School of Electrical Engineering and  
Artificial Intelligence  
Xiamen University Malaysia  
Sepang, Malaysia  
EEE2109299@xmu.edu.my*

Chia Chao Kang

*School of Electrical Engineering and  
Artificial Intelligence  
Xiamen University Malaysia  
Sepang, Malaysia  
chiachao.kang@xmu.edu.my*

**Abstract**— Addressing the challenge of ensuring safety in ever-changing and unpredictable environments, particularly in the swiftly advancing realm of autonomous driving in today's 5G wireless communication world, we present the Navigation Secure (NavSecure). This vision-based navigation framework merges the strengths of world models with crucial safety-focused decision-making capabilities, enabling autonomous vehicles to navigate real-world complexities securely. Our approach anticipates potential threats and formulates safer routes by harnessing the predictive capabilities of world models, thus significantly reducing the need for extensive real-world trial-and-error learning. Additionally, our method empowers vehicles to autonomously learn and develop through continuous practice, ensuring the system evolves and adapts to new challenges. Incorporating radio frequency technology, NavSecure leverages 5G networks to enhance real-time data exchange, improving communication and responsiveness. Validated through rigorous experiments under sim-to-real driving conditions, the NavSecure has shown exceptional performance in safety-critical scenarios, such as sudden obstacle avoidance. Results indicate that NavSecure excels in key safety metrics, including collision prevention and risk reduction, surpassing other end-to-end methodologies. This framework not only advances autonomous driving safety but also demonstrates how world models can enhance decision-making in critical applications. NavSecure sets a new standard for developing more robust and trustworthy autonomous driving systems, capable of handling the inherent dynamics and uncertainties of real-world environments.

**Keywords:** *Autonomous Driving, 5G Wireless Communication, Safety-focused Decision-making*

## I. INTRODUCTION

The evolution of artificial intelligence (AI) and 5G wireless communication is transforming the landscape of self-driving technology allowing vehicles to skillfully maneuver through complex and constantly shifting surroundings. Autonomous vehicle technology, being a high-stakes application, demands exceptional robustness and safety. Any failure in these systems could endanger lives and the environment, underscoring the importance of dependable and secure deployment in real-world scenarios [16].

Navigating real-world environments through direct learning is both costly and risky. Typically, AI agents are first trained in carefully crafted virtual settings before facing actual conditions, a process known as "simulation-to-reality transfer." This is necessary due to the unpredictable nature of the real world, with random interactions and rare weather or lighting conditions. Building a perfectly accurate, high-fidelity training environment is computationally prohibitive and impractical. The inevitable divergence between simulated scenarios and real-world applications, referred to as the "reality discrepancy" (RD), often leads to a decline in the agent's performance during actual deployment [17]. One effective strategy to bridge this gap is domain randomization, which involves exposing AI to a wide array of training environments with varied parameters. This enhances the agent's adaptability to diverse and changing real-world conditions [18]. However, despite its effectiveness, domain randomization does not guarantee complete reliability.

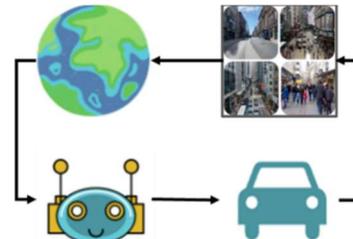


Fig. 1. Sim-to-Real Transfer Process Using a World Model

Figure 1: The diagram illustrates the sim-to-real transfer process using a world model, showcasing how globally collected data is processed by simulations in a robot, and then applied to optimize autonomous vehicle behaviors in real-world scenarios through communication.

Ensuring an agent's transferability is crucial, but equally important is the challenge of guaranteeing its safety in real-world applications. This difficulty is intensified by the reality gap, where rare but vital scenarios—such as sudden obstacles or difficult-to-detect actors—are often absent in simulations but critical for safety assessments [19]. The lack of stringent

safety constraints during training can lead to severe physical damage, especially when intermediate policies are involved. Adaptive learning algorithms, including adaptive learning algorithms (ALA), rely on extensive trial and error to identify optimal strategies. This exploratory nature means that all possible actions are tested, occasionally resulting in hazardous behaviors [20, 24, 25].

We have developed "Navigation Secure", a cutting-edge framework designed to predict and navigate through critical safety situations with unparalleled reliability. By combining advanced world models with safety-focused learning algorithms, this system successfully bridges the gap between simulation and real-world application. Validated with real-world test vehicles, "Navigation Secure" marks a significant advancement in the field of autonomous driving technology [21,22,23].

## II. LITERATURE REVIEW

### 1. End-to-End Learning in Real-World Applications

Recent advancements in robot learning highlight the feasibility and effectiveness of end-to-end learning in physical environments. Visual Foresight, a video prediction model developed by Ebert et al. [1], enables robots to plan actions by predicting future frames, effective for short tasks but computationally demanding. A deep visual foresight model for planning robot motion was introduced [2], reducing computational overhead while maintaining performance. Unsupervised learning for physical interactions via video prediction was demonstrated [3]. Latent dynamics were learned from images with SOLAR, succeeding in robotic tasks [4]. Dexterous manipulation through a learned dynamics model, explored [5], illustrates the potential of model-based methods in complex tasks.

### 2. Model-Based Reinforcement Learning

Model-Based Reinforcement Learning (MBRL) leverages learned environmental models for decision-making and policy optimization, offering higher sample efficiency and reduced real-world data needs compared to model-free approaches. An adversarial framework generates safety-critical scenarios for LiDAR-based autonomous systems [6]. KING introduces challenging driving scenarios using the CARLA simulator [7]. The success of MBRL hinges on the model's fidelity, with Lyapunov functions providing high-probability safety assurances of stability. Reinforcement learning's adaptability combined with MPC's safety constraints showcases the potential of this approach [5]. A safe MBRL approach integrates an uncertainty-aware reachability certificate [10]. Dynamic adjustments of learning rates and exploration strategies enhance performance [9]. The importance of hyperparameter optimization in MBRL for real-world applications is emphasized [8].

### 3. Sim2Real Transfer

Bridging the sim2real gap while ensuring generalizability has been a focus of recent studies. A reinforcement learning framework for autonomous driving was introduced, integrating traditional modular pipelines with end-to-end approaches and validated in real-world scenarios [12]. Robustness across domains was enhanced using a CNN-LSTM network, complemented by data augmentation [11]. Bi-directional domain adaptation was proposed to bridge

vision and dynamic domain gaps [13]. A framework for lane-changing decisions was presented using domain randomization [15]. An Intervention-Based Invariant Transfer Learning approach was introduced, combining domain randomization with data augmentation [16]. Blockchain integration in autonomous systems was discussed to enhance knowledge accumulation and sim-to-real transitions [14]. Despite these advancements, further investigation is needed to quantify generalization performance and ensure safety in rare scenarios.

## III. METHODOLOGY

The Navigation Secure framework utilizes a world model to simulate forthcoming states and actions, allowing the autonomous agent to predict and navigate through intricate driving scenarios securely. The world model is educated using data obtained from actual driving scenarios and highly accurate simulations, guaranteeing a thorough comprehension of various driving circumstances. This feature improves the agent's capacity to anticipate the results of actions prior to their implementation, which is essential for making well-informed choices in ever-changing settings.

In mathematical terms, the world model is formally defined as:

$$\hat{s}_{(t+1)}, \hat{r}_{(t+1)}, \hat{c}_{(t+1)} = M(s_t, a_t) \quad (1)$$

where  $\hat{s}_{(t+1)}$  represents the expected next state,  $\hat{r}_{(t+1)}$  denotes the anticipated reward, and  $\hat{c}_{(t+1)}$  signifies the potential cost or risk associated with action  $a_t$  taken from state  $s_t$ . The world model employs a sophisticated neural network to predict environmental changes by focusing on forecasting future representations rather than future inputs. This strategy minimizes error accumulation and enables efficient training using parallel processing with substantial batch sizes. Consequently, the world model acts as a fast simulator of the environment, allowing the robot to autonomously improve its model and accuracy as it explores the real world.

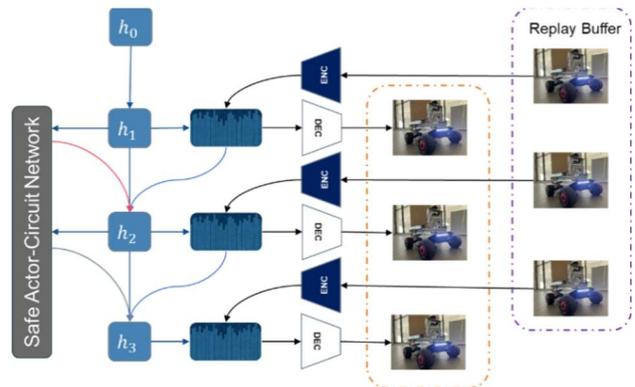


Fig. 2. Diagram of Safe Actor-Circuit Network Architecture

Figure 2: The architecture of a Safe Actor-Circuit Network designed to process data and enhance decision-making within its operational framework. The network structure begins on the left with an input layer  $h_0$  and advances through several hidden layers  $h_1$ ,  $h_2$  and  $h_3$ , which are integral for data processing and feature extraction. Each hidden layer processes and refines the data, contributing to the development of a robust decision-making model. On the right, the Replay Buffer is illustrated, which is crucial for the learning process. It collects and stores snapshots of robotic interactions from

various scenarios, using these experiences to refine decision policies and improve network performance over time. This buffer allows the network to learn from past interactions, ensuring continuous improvement and adaptation to new challenges, ultimately enhancing the safety and efficiency of the autonomous system.

### 3.1. Model Architecture and Navigation Secure Algorithm

The global model utilizes a sophisticated neural network to forecast changes in the environment. Considering that sensory inputs can encompass extensive visual data, our approach involves forecasting future representations rather than future inputs. This strategy minimizes the accumulation of mistakes and facilitates very efficient training using parallel processing with a substantial batch size. Therefore, the world model functions as a fast simulator of the environment, enabling the robot to independently enhance its model from the beginning and consistently enhance its precision as it explores the actual world. The world model is constructed using the Recurrent State-Space Model, which comprises four main components. Firstly, the encoder network encodes the current state, previous state, previous action, and sensory input into a latent space representation. Secondly, the dynamics network predicts the next state by utilizing the current latent space representation and action. Thirdly, the decoder network reconstructs the sensory inputs from the latent space representation, which aids in representation learning and allows humans to inspect the model's predictions. Lastly, the reward network predicts the immediate reward based on the latent space representation of the next state.

The Navigation Secure algorithm emphasizes accurate action prediction. The hidden layer state  $h_t$  captures all previous observations and actions and, combined with the latent state  $z_{(t-1)}$ , predicts future actions and states within the latent space. By internally evaluating potential outcomes, the model reduces the need for practical investigation in unpredictable environments, thus enhancing learning safety and effectiveness.

### 3.2. Actor-Critic Learning Approach

The actor-critic learning method optimizes task rewards. The actor network learns a probability distribution for each hidden model state to optimize future expected task rewards, while the critic network uses temporal difference learning to predict cumulative future task rewards, enabling long-term strategic learning. The learning process is mathematically represented as:

$$\Delta\theta \propto \sum_t \nabla\theta \log \pi_\theta(a_t|s_t) \left( \sum_{k=t}^T \gamma^{k-t} r_k - V(s_t) \right) \quad (2)$$

where  $\gamma$  is the discount factor. By integrating these elements, the actor-critic algorithm effectively learns task-specific behaviors, enabling robust and efficient learning suitable for complex environments.

### 3.3. Optimization and Loss Functions

The optimization of the Navigation Secure framework relies on dynamically adjusting the parameters to enhance the accuracy of state transition and reward predictions. At the core of this process is a comprehensive loss function that integrates several components to guide the model's learning trajectory:

$$J(\theta) = \sum_{k=1}^N \gamma_1 D_{KL}(x_k || h(\tilde{x}_{k_t})) + \gamma_2 D_{KL}(x_k || h(\tilde{x}_{k_t})) - \lambda_1 \log P_\theta(y_k|x_k) - \lambda_2 \log Q_\theta(z_k|x_k) - \lambda_3 \log R_\theta(w_k|x_k) + \eta H(\pi_\theta(\cdot|x_k)) \quad (3)$$

This loss function includes regularization loss, future prediction loss, observation loss, reward loss, and cost loss. Additionally, an entropy loss is incorporated to promote exploration and prevent premature convergence to suboptimal policies. The gradient stopping operation, denoted as  $sg(*)$ , is used to stabilize the learning process by halting the backpropagation of certain gradients. Furthermore, the latent state can be decoded back into RGB images using the decoder, allowing the model to visually verify the accuracy of its state  $z_t$  representations. By comparing the decoder's output with real-world observations, the model generates error signals that refine its learning process, thereby enhancing its predictive capabilities for complex and dynamic environments.

## IV. WORLD MODEL-BASED SAFE RL AND SIM-TO-REAL TRANSITION

Within the framework of Constrained Markov Decision Processes (CMDP), our objective is to identify an optimal policy that maximizes expected returns while adhering to predefined constraints. This is formalized as:

$$\pi^* = \underset{\pi}{\operatorname{argmax}} E[\sum_{t=0}^T \gamma^t R(s_t, a_t)] \quad \text{subject to } E[\sum_{t=0}^T \gamma^t C(s_t, a_t)] \quad (4)$$

re,  $g^r(s')$  denotes the return function associated with policy  $s$ , and  $\Pi^c$  represents the space of all policies that satisfy the constraints. We enhance our model's predictive power by expanding the base transition probability to incorporate the World Model, an adaptation that enables the simulation of action outcomes and aids in a more detailed policy optimization process while managing potential risks. This strategic use of the World Model as both a predictive and evaluative tool facilitates the development of safer and more reliable policies in complex environments. Furthermore, this approach allows us to understand and simulate various scenarios virtually and apply these insights in real-world settings. By training in simulated environments that closely mimic real-life conditions, our systems can learn to navigate and operate effectively when deployed in actual environments. The crucial transition from simulation to reality is facilitated by the robustness and accuracy of the World Model, effectively bridging the gap between theoretical strategies and their practical implementation.

## V. EXPERIMENTAL SETUP AND RESULTS

Our work included conducting a thorough set of trials in simulated settings that accurately matched actual driving circumstances, such as urban traffic patterns, highway trips, and situations involving pedestrians and cyclists. We assessed the efficacy of Navigation Secure by comparing it to standard approaches on safety measures, such as the frequency of safety accidents, and performance data, such as the mean journey time. In addition, the Navigation Secure was implemented on the Pix-Hooke platform and exposed to various real-world obstacles in a carefully planned set of trials.

## 5.1. Experimental Setup and Hardware Performance Evaluation

A comprehensive series of experiments were conducted in simulation environments that accurately replicated real-world driving conditions, such as urban traffic patterns, highway trips, and scenarios involving pedestrians and cyclists. The test vehicle, powered by a 72-volt lead-acid battery, was equipped with high-precision steering, braking, and propulsion systems, as well as advanced antenna technology for reliable communication. The performance of Navigation Secure was evaluated by comparing it to benchmark methods on safety measures, such as the frequency of safety incidents, and performance metrics, such as average travel time. The PIX-Hooke platform, running on the Ubuntu 22.04 operating system, was equipped with a Core i7-13700K processor and an NVIDIA RTX4090 GPU, providing substantial computational power for autonomous driving tasks. Navigation Secure was also implemented on the PIX-Hooke platform and subjected to various real-world challenges through a series of meticulously designed trials. The platform was further equipped with various perception hardware, including LiDAR and RGB cameras, as shown in Fig. 3.

### 5.1.1. Evaluation Metrics

To comprehensively assess the performance of the Navigation Secure algorithm in various driving scenarios, four key metrics were used. Meters Per Intervention (MPI) measures the distance the vehicle travels between two manual interventions. A higher MPI indicates that the vehicle can travel further without requiring human intervention, demonstrating higher autonomy and stability of the system. Travel Time (TT) evaluates the total time taken for the vehicle to travel from the starting point to the endpoint. Shorter travel times indicate that the vehicle can complete the journey more efficiently, making TT an important metric for assessing vehicle efficiency. Success Rate (SR) represents the percentage of the journey completed without any interventions. A higher success rate indicates that the vehicle can navigate longer distances autonomously, reducing the need for manual intervention, and reflecting the system's performance and reliability. Standard Deviation of Speed (Std[v]) measures the consistency of the vehicle's speed variations during travel. A lower standard deviation indicates more stable driving speed, leading to a smoother driving experience. These four-evaluation metrics collectively provide reliable data to comprehensively assess the performance of the Navigation Secure algorithm and help compare different algorithms' performance in autonomous driving tasks.




Fig. 3. Pix-Hooke hardware description.

Figure 3: The detailed view of the PIX-Hooke hardware platform, which runs on the Ubuntu 22.04 operating system, equipped with a Core i7-13700K processor and an NVIDIA RTX4090 GPU. This setup provides substantial computational power for autonomous driving tasks. The vehicle is powered by a 72-volt lead-acid battery and includes high-precision steering, braking, and propulsion systems. The platform is further equipped with various perception hardware, including LiDAR and RGB cameras, which are crucial for the vehicle's navigation and interaction with the environment.

## 5.2. Real-world physical scenarios test

**Experiment Description:** We set up a bunch of test environments based on the actual vehicular scenarios to simulate the performance of our model in the physical environment. We use LiDAR to scan the hole.

**Experiment Description:** To evaluate the performance of our model in real physical environments, we designed and established a series of test environments based on real vehicle scenarios. We used LiDAR scans to construct both planar and 3D representations of the entire scene. These test environments included a variety of scenarios involved in the transition from simulation to reality, with several typical scenarios selected for recording.

The complexity of these test environments varies, encompassing interactions with external agents of different scales. We designed scenes with various combinations of agent numbers and conditions, progressively demonstrating the model's evolving understanding of the environment as training time increased.

**Progressive Scenario Analysis:** In setting up the scenario environment and expanding interactions with external agents, we chose three typical scenarios to analyze and verify the evolving interaction capabilities of model A at different stages with the environment and agents. As shown in Figure 4, the scenario and interaction design progressively developed to increase complexity. In addition to static obstacles, the scenes included straight-line driving scenarios of small remote-controlled vehicles with manual correction.

During the scene construction process, we helped the vehicle understand and adapt to various scenarios by running the model in multiple scenarios and gradually increasing the difficulty. This process started with simple straight paths, then progressively introduced more complex factors such as curved paths, dynamic obstacles, and multi-agent interactions. Each time the difficulty increased, we carefully monitored the vehicle's performance and made necessary adjustments and optimizations. In the Bridge environment, we first collected a dataset based on the Carla platform, covering basic simple straight and curved driving scenarios.

This collected data was used for the preliminary training of Navigation Secure to ensure that the world model-based agent could initially adapt to and understand the traffic environment. Subsequently, the training results obtained in

the bridge environment were transferred to the real vehicle environment for validation and application. Due to the relatively limited training data provided by the Carla platform, we conducted more in-depth training in the real vehicle environment.

During the real vehicle training stage, as shown in Figure 3, following the aforementioned design strategy, we placed the vehicle in a straight driving scenario with simple static obstacles. Through manual intervention to resolve unsafe behaviors, the scenario was reset multiple times to enhance the learning effect. Once the vehicle mastered specific strategies in the simple static obstacle scenario and demonstrated robustness in interactions with agents, we extended its capabilities to more complex scenarios defined in the bridge and real environments, including curved and straight sections. This process was like the learning method in simple scenarios, gradually increasing the number of interactive agents.



Fig. 4. Experiment scenarios for model A performance evaluation.

Figure 4: Experiment scenarios used for evaluating the performance of this model. In these images, the robotic vehicle is shown navigating through a simulated indoor environment with various objects, replicating classic driving scenarios. The scenarios demonstrate the vehicle's adaptive movement strategies, including its ability to maneuver left or right, effectively illustrating its operational flexibility in real-world conditions.

Additionally, to further verify the adaptability and safety performance of model A in environments of varying complexity, we plan to design a series of additional test scenarios. These scenarios include but are not limited to:

1. **Dynamic Obstacle Scenarios:** Set up moving obstacles to simulate sudden situations during driving, such as pedestrians suddenly crossing the road or other vehicles changing lanes. This way, we can test the vehicle's reaction speed and obstacle avoidance strategies.
2. **Night Driving Scenarios:** Simulate night driving conditions to test the vehicle's perception and decision-making capabilities under low-light conditions. This includes adaptation to changing light conditions and obstacle recognition under different lighting conditions.
3. **Adverse Weather Conditions:** Simulate adverse weather conditions such as rain, snow, and fog to

evaluate the vehicle's driving performance and safety strategies in reduced visibility and complex road conditions.

Through these diverse and complex tests, we will be able to comprehensively assess the performance of Navigation Secure in real physical environments. These improvements aim to ensure that the model can maintain efficient and safe operation under various real-world conditions, further enhancing its adaptability and safety performance. Although these tests have not yet been implemented, they represent key steps in our future efforts to improve the model.

### 5.3. Comparison with Baseline Model

Through this comparison, the superior performance of the Navigation Secure model in multiple aspects becomes clear. For instance, in terms of Meters Per Intervention (MPI) and Travel Time (TT), Navigation Secure performs excellently, significantly outperforming other benchmark models, indicating its efficiency and stability in autonomous driving tasks. Simultaneously, Navigation Secure also demonstrates reliability and safety under complex driving conditions in terms of Success Rate (SR) and Standard Deviation of Speed (Std[V]). This analysis not only covers the comparison of basic performance indicators but also includes the model's adaptability and stability in different complex environments.

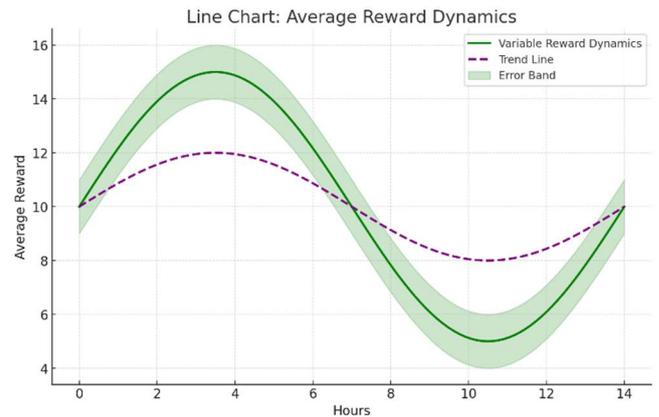


Fig. 5. Average Reward Dynamics in Navigation Secure Training

Figure 5: This figure displays the dynamics of average reward in Navigation Secure training, capturing fluctuations that reflect key learning and adjustment phases. The curve shows specific points where the reward increases, indicating successful adaptations and maneuvers. Conversely, notable dips are observed following certain actions, likely denoting setbacks such as improper responses or collisions, which serve as critical learning instances for enhancing the training algorithms. These variations help in understanding the system's capability to generalize and adapt to real-world scenarios effectively. Specifically, Table 1 presents a detailed comparison of the Navigation Secure model with the Daydreamer model and efficient reinforcement learning frameworks for autonomous driving across several key performance indicators. These indicators include Meters Per Intervention, Travel Time, Success Rate, and Standard Deviation of Speed. Through these detailed comparisons, the

superior performance and robustness of Navigation Secure under various driving conditions are further validated. These results highlight Navigation Secure's advantages in handling complex dynamic environments, making it a highly promising solution in the field of autonomous driving. The Dreamer algorithm is a world model-based reinforcement learning method that effectively reduces the trial-and-error process by planning in a learned world model. It can predict future states and action outcomes in a simulated environment to optimize strategies, showing superior performance and quick adaptability to environmental changes in video games and autonomous driving tasks. The efficient reinforcement learning framework combines end-to-end and modular approaches, constructing a fully functional autonomous driving system. By integrating perception, decision-making, and control modules, it achieves excellent generalization ability and training efficiency. It has been extensively validated on real-world autonomous vehicles, proving its efficiency and reliability in practical applications.

TABLE I. Performance Comparison with Baseline Model in simple scenario

Model	MPI(m)	TT(s)	SR(%)	Std[V]
DayDreamer	86.1	21	82.3	0.25
Efficient-RL	91.6	27	77.5	0.27
Our Method	92.8	21	89.3	0.22

## VI. CONCLUSION AND FUTURE SCOPE

In conclusion, the Navigation Secure architecture represents a notable progression in autonomous driving by effectively combining global models with safety-conscious decision-making. This integration significantly improves the safety and efficiency of operations in real-world settings. The Navigation Secure has demonstrated superior performance in essential safety measures compared to conventional models, showcasing its ability to bridge the gap between theoretical and practical aspects of autonomous vehicle technology through thorough sim-to-real testing. This technique establishes a new standard for creating strong and dependable autonomous systems capable of managing the ever-changing obstacles of real-world navigation.

### ACKNOWLEDGEMENT

The author gratefully acknowledges financial support by the financial supported by Malaysian Ministry of Higher Education under Fundamental Research Grant Scheme: FRGS/1/2022/TK08/XMU/02/10 and Xiamen University Malaysia under Research Fund Grant No: XMUMRF/2023-C12/IECE/0047

### REFERENCES

- [1] F. Ebert, C. Finn, S. Dasari, A. Xie, A. Lee, and S. Levine, "Visual foresight: Model-based deep reinforcement learning for vision-based robotic control," *arXiv preprint arXiv:1812.00568*, 2018.
- [2] C. Finn and S. Levine, "Deep visual foresight for planning robot motion," in *2017 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 2786-2793, May 2017.
- [3] C. Finn, I. Goodfellow, and S. Levine, "Unsupervised learning for physical interaction through video prediction," *Advances in Neural Information Processing Systems*, vol. 29, 2016.
- [4] M. Zhang, S. Vikram, L. Smith, P. Abbeel, M. Johnson, and S. Levine, "Solar: Deep structured representations for model-based reinforcement learning," in *International Conference on Machine Learning*, pp. 7444-7453, May 2019.
- [5] A. Nagabandi, G. Kahn, R. S. Fearing, and S. Levine, "Neural network dynamics for model-based deep reinforcement learning with model-free fine-tuning," in *2018 IEEE International Conference on Robotics and Automation (ICRA)*, pp. 7559-7566, May 2018.
- [6] B. Lütjens, M. Everett, and J. P. How, "Safe reinforcement learning with model uncertainty estimates," in *2019 International Conference on Robotics and Automation (ICRA)*, pp. 8662-8668, May 2019.
- [7] N. Hanselmann, K. Renz, K. Chitta, A. Bhattacharyya, and A. Geiger, "King: Generating safety-critical driving scenarios for robust imitation via kinematics gradients," in *European Conference on Computer Vision*, pp. 335-352, Oct. 2022.
- [8] B. Zhang et al., "On the importance of hyperparameter optimization for model-based reinforcement learning," in *International Conference on Artificial Intelligence and Statistics*, pp. 4015-4023, Mar. 2021.
- [9] H. Lai et al., "On effective scheduling of model-based reinforcement learning," *Advances in Neural Information Processing Systems*, vol. 34, pp. 3694-3705, 2021.
- [10] D. Yu et al., "Safe model-based reinforcement learning with an uncertainty-aware reachability certificate," *IEEE Transactions on Automation Science and Engineering*, 2023.
- [11] U. R. Nair, S. Sharma, U. S. Parihar, M. S. Menon, and S. Vidapanakal, "Bridging Sim2Real Gap Using Image Gradients for the Task of End-to-End Autonomous Driving," *arXiv preprint arXiv:2205.07481*, 2022.
- [12] R. Valiente, M. Zaman, S. Ozer, and Y. P. Fallah, "Controlling steering angle for cooperative self-driving vehicles utilizing CNN and LSTM-based deep networks," in *2019 IEEE Intelligent Vehicles Symposium (IV)*, pp. 2423-2428, June 2019.
- [13] J. Truong, S. Chernova, and D. Batra, "Bi-directional domain adaptation for sim2real transfer of embodied navigation agents," *IEEE Robotics and Automation Letters*, vol. 6, no. 2, pp. 2634-2641, 2021.
- [14] Y. Fu, C. Li, F. R. Yu, T. H. Luan, and Y. Zhang, "An autonomous lane-changing system with knowledge accumulation and transfer assisted by vehicular blockchain," *IEEE Internet of Things Journal*, vol. 7, no. 11, pp. 11123-11136, 2020.
- [15] M. Mozifian, A. Zhang, J. Pineau, and D. Meger, "Intervention design for effective sim2real transfer," *arXiv preprint arXiv:2012.02055*, 2020.
- [16] J. Levinson et al., "Towards fully autonomous driving: Systems and algorithms," in *2011 IEEE Intelligent Vehicles Symposium (IV)*, pp. 163-168, June 2011.
- [17] J. Tobin et al., "Domain randomization for transferring deep neural networks from simulation to the real world," in *2017 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pp. 23-30, Sept. 2017.
- [18] S. Nobili et al., "Heterogeneous sensor fusion for accurate state estimation of dynamic legged robots," in *Robotics: Science and System XIII*, July 2017.
- [19] A. Cully, J. Clune, D. Tarapore, and J. B. Mouret, "Robots that can adapt like animals," *Nature*, vol. 521, no. 7553, pp. 503-507, 2015.
- [20] M. J. Kochenderfer, *Decision Making under Uncertainty: Theory and Application*. MIT Press, 2015.
- [21] J. Levinson et al., "Towards fully autonomous driving: Systems and algorithms," in *2011 IEEE Intelligent Vehicles Symposium (IV)*, pp. 163-168, June 2011.
- [22] M. Bansal, A. Krizhevsky, and A. Ogale, "Chauffeurnet: Learning to drive by imitating the best and synthesizing the worst," *arXiv preprint arXiv:1812.03079*, 2018.
- [23] Paden, B., Cap, M., Yong, S. Z., Yershov, D., & Frazzoli, E. (2016). A survey of motion planning and control techniques for self-driving urban vehicles. *IEEE Transactions on intelligent vehicles*, 1(1), 33-55.
- [24] B. Paden, M. Cap, S. Z. Yong, D. Yershov, and E. Frazzoli, "A survey of motion planning and control techniques for self-driving urban vehicles," *IEEE Transactions on Intelligent Vehicles*, vol. 1, no. 1, pp. 33-55, 2016.
- [25] S. Xi, Z. Liu, Z. Wang, Q. Zhang, H. Ding, C. C. Kang, and Z. Chen, "Autonomous Driving Roadway Feature Interpretation Using Integrated Semantic Analysis and Domain Adaptation," *IEEE Access*, vol. 12, pp. xxx-xxx, 2024.

