

Reflecting Intelligent Surfaces-Assisted Multiple-Antenna Coded Caching

Xiaofan Niu*, Minquan Cheng[†], Kai Wan*, Robert Caiming Qiu*,
Giuseppe Caire[§]

*Huazhong University of Science and Technology, 430074 Wuhan, China,
{nxfan,kai_wan,caiming}@hust.edu.cn

[†] Guangxi Normal University, 541004 Guilin, China, chengqinshi@hotmail.com

[§] Technische Universität Berlin, 10587 Berlin, Germany, caire@tu-berlin.de

Abstract

Reconfigurable intelligent surface (RIS) has been treated as a core technique in improving wireless propagation environments for the next generation wireless communication systems. This paper proposes a new coded caching problem, referred to as Reconfigurable Intelligent Surface (RIS)-assisted multiple-antenna coded caching, which is composed of a server with multiple antennas and some single-antenna cache-aided users. Different from the existing multi-antenna coded caching problems, we introduce a passive RIS (with limited number of units) into the systems to further increase the multicast gain (i.e., degrees of freedom (DoF)) in the transmission, which is done by using RIS-assisted interference nulling. That is, by using RIS, we can ‘erase’ any path between one transmission antenna and one receive antenna. We first propose a new RIS-assisted interference nulling approach to search for the phase-shift coefficients of RIS for the sake of interference nulling, which converges faster than the state-of-the-art algorithm. After erasing some paths in each time slot, the delivery can be divided into several non-overlapping groups including transmission antennas and users, where in each group the transmission antennas serve the contained users without suffering interference from the transmissions by other groups. The division of groups for the sake of maximizing the DoF could be formulated into a combinatorial optimization problem. We propose a grouping algorithm which can find the optimal solution with low complexity, and the corresponding coded caching scheme achieving this DoF.

Index Terms

Coded caching, reconfigurable intelligent surface, zero-forcing

I. INTRODUCTION

Coded Caching was introduced to address content-related traffic congestion in networks. In addition to the local caching gain (i.e., when a user requires some content which has been already stored, the server does not need to transmit), the strategy of coded caching involves transmitting multicast messages and leveraging cached content to eliminate interference such that a single transmission can serve multiple users, resulting in a preferable multicast gain and showing a great potential to alleviate a significant part of the traffic. The original coded caching work was introduced by Maddah-Ali and Niesen (MN) in [1] for a Single Input Single Output (SISO) shared-link model, where a central server with access to a library containing N files connects to k cache-aided users via an error-free shared link. Each user is equipped with a cache of size M files. The coded caching process contains two phases: placement and delivery. During the placement phase, each user stores parts of content from each file without knowing future demands. During the delivery phase, each user requests a random file from the library. The server broadcasts coded messages based on users' caches and requests to satisfy all users' demands. The objective is to minimize the worst-case transmission load among all possible demands (or equivalently maximize the worst-cast coded caching gain). If each file is stored totally $t = KM/N$ times by users, the seminal MN coded caching scheme constructs multicast messages, each of which is useful to $t + 1$ users, i.e., the coded caching gain is $t + 1$ (the corresponding load is $(K - t)/(t + 1)$ where $K - t$ represents the local caching gain). It was shown in [2], [3] that under the constraint of uncoded cache placement (i.e., each user directly caches a subset of the library bits) and $N \geq K$, the achieved coded caching gain was proved to be optimal [2], [3].

Built upon the groundbreaking coded caching strategy, considerable research has been dedicated to wireless coded caching problems, with an emphasis on harnessing the benefits of coded caching gain. Multi-antenna coded caching problem was originally proposed in [4], where K_T transmitters with memory size M_T and K_R receivers with memory size M_R are connected through a wireless network. By smartly combining spatial multiplexing gain and coded caching gain, a multi-antenna coded caching scheme was proposed in [4] with a total degree-of-freedom (sum-DoF, i.e., overall multiplexing gain) $\min\{\frac{K_T M_T + K_R M_R}{N}, K_R\}$, which was proved to be optimal under the constraint of uncoded cache placement and one-shot linear delivery. Following the work in [4], numerous works have been proposed for various multi-antenna coded caching

problems to find out coded caching schemes to maximizing the multiplexing gain; just list a few works [4]–[10]. A new combinatorial structure on multi-antenna coded caching schemes with uncoded cache placement and one-shot zero-forcing delivery, referred to as Multiple-Antenna Placement Delivery Array (MAPDA), was proposed in [11], [12], by extending the placement delivery array (PDA) proposed in [13] for the original shared-link coded caching problem. Under this structure, designing a coded caching scheme could be transformed into designing an array satisfying some constraints, where the latter one is a combinatorial problem and could be solved by using combinatorial tools.

In this paper, we introduce Reconfigurable Intelligent Surfaces (RIS), seen as a promising technique for the next generation wireless systems to reconfigure wireless propagation environment [14]–[18], into coded caching systems in order to further increase the sum-DoF. As illustrated in Fig. 1, RIS serves as a passive configurable relay (by its phase-shift coefficients) in the channel, where the system channel transition matrix is equal to the product of the transition matrix from the transmitter to the RIS, the RIS phase-shift matrix, and the transition matrix from the RIS to the receiver. Several information theoretic works have been proposed on RIS-assisted interference management, in order to increase the sum-DoF. In [19] the authors considered RIS-assisted K -user interference channel. RIS-assisted interference alignment scheme was proposed for different numbers of RIS units. With the increasing of the RIS units, the sum-DoF can be increased from $K/2$ to K . Following the RIS-assisted K -user interference channel, the authors in [20] proposed a RIS-assisted interference nulling approach with zero-forcing transmission, which achieves the sum-DoF equal to K when the number of RIS units is over than a threshold approximately equal to $2K(K - 1)$. This is done by using RIS to ‘erase’ all the interfering paths for the users. To find out the RIS phase-shift coefficients for interference nulling, an alternating projection algorithm was proposed in [20]. Then RIS-assisted zero-forcing and interference alignment were also extended to Multiple-Input-Multiple-Output (MIMO) networks in [21], [22], in order to increase the sum-DoF.

Main Contribution: We propose a RIS-assisted multiple-input single-output (MISO) broadcast coded caching system, for fixed numbers of antennas at the transmitter and of RIS units. Our main contribution on constructing RIS-assisted multi-antenna coded caching schemes is as follows.

- We first propose a new RIS-assisted interference nulling approach to ‘erase’ some paths in the wireless channel, which outputs the needed RIS phase-shift coefficients with a faster

convergence rate than the algorithm in [20].

- With the help of RIS-assisted interference nulling, we can divide the transmission in each time slot of the delivery phase into multiple groups including transmission antennas and users, where in each group the transmission antennas serve the contained users without suffering interference from the transmissions by other groups. By formulating the grouping optimization to maximize the sum-DoF as a combinatorial optimization problem, we propose an low-complexity algorithm to find out the optimal grouping method.
- After determining a new combinatorial structure, we design the two-phase coded caching scheme under the new struture, referred to as RMAPDA, by adding a new constraint on group-based delivery.

Notation Convention: Scalars are denoted by lowercase letters, vectors by bold lowercase letters, and matrices by bold uppercase letters. For a matrix \mathbf{A} , \mathbf{A}^T represents the transpose of the matrix, \mathbf{A}^* represents the conjugate. $|v|$ denotes the magnitude of a complex scalar. "Re[.]" denotes taking the real part of a complex number. "." represents the element-wise multiplication of matrices. " \odot " indicates the Hadamard product. For a vector \mathbf{v} , $diag(\mathbf{v})$ represents the diagonal matrix whole diagonal elements are the elements in \mathbf{v} . Define that $[a] = \{1, 2, \dots, a\}$. Let $\binom{\mathcal{X}}{y} = \{\mathcal{S} \subseteq \mathcal{X} : |\mathcal{S}| = y\}$ where $|\mathcal{X}| \geq y > 0$.

II. SYSTEM MODEL AND PRELIMINARY RESULTS

A. System model

As illustrated in Fig. 1, we consider an (L, G, K, M, N) RIS-assisted MISO broadcast coded caching system. The RIS assists the communication, while the transmission follows the one-shot linear delivery scheme proposed in [4]. A server has L transmission antennas and can access to a library containing N files, denoted by $\mathcal{W} = \{\mathbf{W}_n \mid n \in [N]\}$. Each file \mathbf{W}_n consists of F packets, defined as $\mathbf{W}_n \triangleq \{\mathbf{W}_{n,f} \mid f \in [F]\}$. Each user is equipped with one antenna and a cache capable of storing MF packets, where $0 \leq M \leq N$.

A coded caching scheme consists of two phases:

Placement Phase: During this phase, F data packets of each file are strategically placed into the users' caches without knowledge of the specific demands.

Delivery Phase: Each user $k \in [K]$ requests an arbitrary file \mathbf{W}_{d_k} from the library, where $d_k \in [N]$. The required vector is denoted as $\mathbf{d} = (d_1, d_2, \dots, d_K)$, we first encode each packet of desired files by Gaussian encoding with rate $\log P$ to obtain a coded packet, where P represents

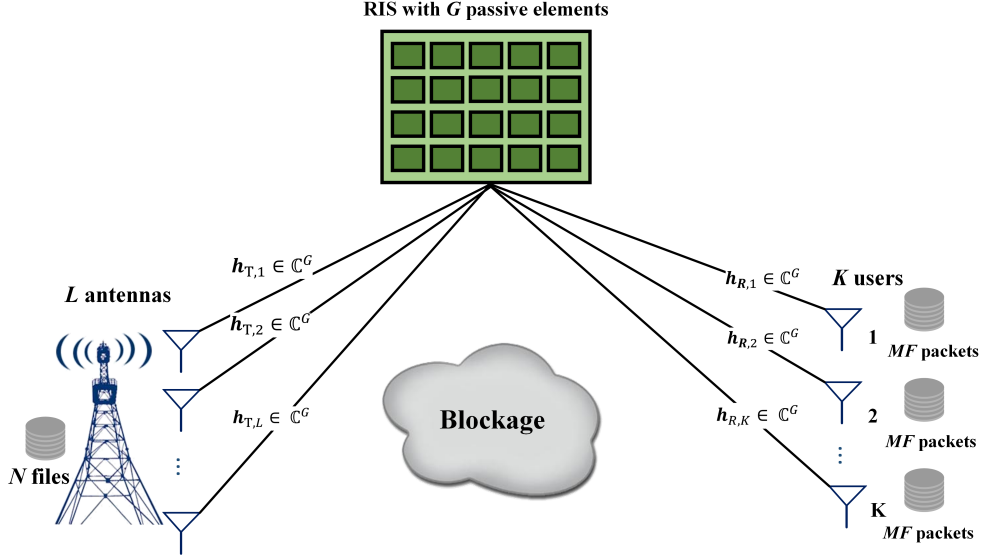


Fig. 1: RIS-assisted MISO broadcast system.

the Signal-to-Noise (SNR) ratio. If P is large enough, each coded packet carries one Degree-of-Freedom (DoF). Then each packet is encoded as $\widetilde{W}_{n,f}$.

The communication process contains S time slots, each denoted by $s \in [S]$. In time slot s , the sever transmits a subset of requested packets, denoted by $\mathcal{D}_s = \{\widetilde{W}_{d_{k_1}, f_1}, \widetilde{W}_{d_{k_2}, f_2} \dots \widetilde{W}_{d_{k_{r_s}}, f_{r_s}}\}$ desired by r_s users in $\mathcal{K}_s \subseteq [K]$. The signal transmitted by antenna i is denoted by $X_i(s)$, which is a linear combination of some coded packets given by

$$X_i(s) = \sum_{j \in [r_s]} m_{i,k_j}(s) \widetilde{W}_{d_{k_j}, f_j} \quad (1)$$

where each $m_{i,k_j}(s)$ is a scalar complex coefficient in the precoding matrix to be designed.

In the wireless channel, there exists a passive RIS with G units. For the ease of description, we assume that the direct paths between the transmitters and receivers are blocked. As shown in [20], the RIS-assisted interference nulling method proposed in this case of no direct path could be directly extended to ‘erase’ the path between a transmission antenna and a user for the systems where direct paths exist. Define $\mathbf{h}_{T,j}$ as the channel transition vector with dimension G between the j -th transmission antenna (or equivalently called the j -th transmitter) and the RIS, and define $\mathbf{h}_{R,k}$ as the channel transition vector with dimension G between the RIS and the k -th receiver. It is assumed that the coefficients in these vectors are i.i.d over some continuous distributed and that channel state information (CSI) is fully known to the server and users. The reflection coefficients of the RIS are given by $\mathbf{v} = [e^{j\omega_1}, e^{j\omega_2}, \dots, e^{j\omega_G}]^T \in \mathbb{C}^G$, where

$\omega_i \in (0, 2\pi)$ indicates the phase-shift coefficient of the i -th unit of the RIS. Note that the phase-shift vector \mathbf{v} could be re-configured during each time slot. Each receiver k receives a reflected signal from the RIS at time slot s , which can be expressed as

$$Y_k(s) = \sum_{j=1}^L \mathbf{h}_{R,k}^T \text{diag}(\mathbf{v}) \mathbf{h}_{T,j} X_j(s) + n_k(s) \quad (2a)$$

$$= \sum_{j=1}^L \mathbf{a}_{k,j}^T \mathbf{v} X_j(s) + n_k(s), \quad (2b)$$

where $\mathbf{a}_{k,j} \triangleq \text{diag}(\mathbf{h}_{T,j}) \mathbf{h}_{R,k}$ and $n_k(s)$ represents the additive Gaussian white noise at receiver k . Assume that the delivery is one-shot: in time slot s , each user $k \in \mathcal{K}_s$ should recover one coded packet from $Y_k(s)$ and its cache content.

Objective: Consider the sum-DoF as the metric. Under the one-shot linear delivery, the sum-DoF indicates the average number of users served per time slot. Our objective is to maximize the worst-case sum-DoF among all possible demands.

B. MAPDA

Definition 1 (MAPDA, [11]). For any positive integers L, K, F, Z , and S , an $F \times K$ array $\mathbf{P} = (\mathbf{P}(j, k))_{j \in [F], k \in [K]}$ composed of "*" and $[S]$ is called an (L, K, F, Z, S) multiple-antenna placement delivery array (MAPDA) if it satisfies the following conditions:¹

- C1: The symbol * appears Z times in each column;
- C2: Each integer $s \in [S]$ occurs at least once in the array;
- C3: Each integer s appears at most once in each column;
- C4: For any integer $s \in [S]$, define $\mathbf{P}^{(s)}$ to be the subarray of \mathbf{P} including the rows and columns containing s , and let $r'_s \times r_s$ denote the dimensions of $\mathbf{P}^{(s)}$. The number of integer entries in each row of $\mathbf{P}^{(s)}$ is less than or equal to $\min\{L, K\}$, i.e.,

$$\left| \{k_1 \in [r_s] \mid \mathbf{P}^{(s)}(f_1, k_1) \in [S]\} \right| \leq \min\{L, K\}, \quad \forall f_1 \in [r'_s].$$

If each integer appears g times in MAPDA \mathbf{P} , then \mathbf{P} is a g -regular MAPDA, denoted by g - (L, K, F, Z, S) MAPDA.

Each MAPDA corresponds to a specific coded caching scheme where the cache ratio $\frac{M}{N}$ equals $\frac{Z}{F}$. This process is summarized in Algorithm 1.

¹An array is composed of * and integers. Each column represents a user and each row represents a packet of files. A * appears in the position (i, j) of the array, meaning that user j stores the i -th packet of each file. Each integer corresponds to a multicast message transmitted in one time slot.

Algorithm 1 Caching Scheme Based on MAPDA in [11]

```

1: procedure PLACEMENT( $\mathbf{P}, \mathcal{W}$ )
2:   Split each file  $W_n \in \mathcal{W}$  into  $F$  packets, i.e.,  $W_n = \{W_{n,f} | f = 1, 2, \dots, F\}$ .
3:   for  $k \in [K]$  do
4:      $Z_k \leftarrow \{W_{n,f} | \mathbf{P}(f, k) = *, n \in [N], f \in [F]\}$ 
5:   end for
6: end procedure
7: procedure DELIVERY( $\mathbf{P}, \mathcal{W}, d$ )
8:   for  $s = 1, 2, \dots, S$  do
9:     Server uses  $L$  antennas to send  $\mathbf{W}_{d_k, j}$  where  $\mathbf{P}(j, k) = s$  to the users.
10:  end for
11: end procedure

```

Note that when $L = 1$ the MAPDA reduces to the PDA in [13]. Given a g -MAPDA, we can obtain a multi-antenna coded caching scheme for the system containing a server with L antennas and K single-antenna users with $M/N = Z/F$, which has sum-DoF g . We review some PDA and MAPDA that will be used later.

Lemma 1 (Maximum DoF [11]). Under the MAPDA structure, the maximum achievable sum-DoF is $\min\{K, L + KM/N\}$, when KM/N is an integer.

Lemma 2 (MN PDA [1]). For any positive integers K and t with $t < K$, there exists a $(K, \binom{K}{t}, \binom{K-1}{t-1}, \binom{K}{t+1})$ PDA with the maximum DoF $t + 1$

Construction 1 (MN PDA [1]). For any integer t within the set $[K]$, we can construct a $(K, \binom{K}{t}, \binom{K-1}{t-1}, \binom{K}{t+1})$ PDA called MN PDA $\mathbf{P} = (\mathbf{P}(\mathcal{T}, k)_{\mathcal{T} \subseteq \binom{[K]}{t}, k \in [K]})$ with the sum-DoF $t + 1$. For each $\mathcal{T} \subseteq \binom{[K]}{t}$ and $k \in [K]$, the entry of \mathbf{P} is defined as follows

$$\mathbf{P}(\mathcal{T}, k) = \begin{cases} * & \text{if } k \in \mathcal{T}, \\ \mathcal{T} \cup \{k\} & \text{otherwise.} \end{cases}$$

Example 1. For $K = 7, t = 1$, we have a $(7, 7, 1, 21)$ MN PDA in Table I.

Lemma 3 (MS MAPDA [6]). For any positive integers K and t , there exists a $(L_1, K, \binom{K}{t} \binom{K-t-1}{L_1-1}, \binom{K-1}{t-1} \binom{K-t-1}{L_1-1}, \binom{K}{t+L_1} \binom{t+L_1-1}{t})$ MAPDA with the maximum DoF $t + L_1$.

Construction 2 (MS MAPDA [6]). For any integers t, L_1 and K with $t + L_1 \in [K]$, we can construct a $(L_1, K, \binom{K}{t} \binom{K-t-1}{L_1-1}, \binom{K-1}{t-1} \binom{K-t-1}{L_1-1}, \binom{K}{t+L_1} \binom{t+L_1-1}{t})$ MAPDA with the sum-DoF $t + L_1$ called MS MAPDA $\mathbf{P} = (\mathbf{P}(\mathcal{T}, \mathcal{L}, k))$ where $\mathcal{T} \in \binom{[K]}{t}, \mathcal{L} \in \binom{[K-t-1]}{L_1-1}, k \in [K]$, whose

	1	2	3	4	5	6	7
1	*	{1, 2}	{1, 3}	{1, 4}	{1, 5}	{1, 6}	{1, 7}
2	{1, 2}	*	{2, 3}	{2, 4}	{2, 5}	{2, 6}	{2, 7}
3	{1, 3}	{2, 3}	*	{3, 4}	{3, 5}	{3, 6}	{3, 7}
4	{1, 4}	{2, 4}	{3, 4}	*	{4, 5}	{4, 6}	{4, 7}
5	{1, 5}	{2, 5}	{3, 5}	{4, 5}	*	{5, 6}	{5, 7}
6	{1, 6}	{2, 6}	{3, 6}	{4, 6}	{5, 6}	*	{6, 7}
7	{1, 7}	{2, 7}	{3, 7}	{4, 7}	{5, 7}	{6, 7}	*

TABLE I: A (7, 7, 1, 21) MN PDA

dimension is $\binom{K}{t} \binom{K-t-1}{L_1-1} \times K$:

$$\mathbf{P}(\mathcal{T}, \mathcal{L}, k) = \begin{cases} * & \text{if } k \in \mathcal{T}, \\ (\mathcal{S}(\mathcal{T}, \mathcal{L}, k), \text{order}(\mathcal{S}(\mathcal{T}, \mathcal{L}, k))) & \text{otherwise,} \end{cases}$$

where $\mathcal{S}(\mathcal{T}, \mathcal{L}, k) = \mathcal{T} \cup ([K] \setminus (\mathcal{T} \cup \{k\}))[\mathcal{L}] \cup \{k\}$ and $\text{order}(\mathcal{S})$ as the order of appearance of the set \mathcal{S} in each column.

Example 2. For $K = 7, t = 1, L = 2$, we have a (2, 7, 35, 5, 70) MS MAPDA in Table II.

III. IMPROVED RIS-ASSISTED INTERFERENCE NULLING ALGORITHM

In this section, we will propose a new RIS-assisted interference nulling algorithm to find out the phase-shift vector to eliminate some paths in the channel. When we want to eliminate the path from the j -th transmission antenna to user k , we need to have $\mathbf{a}_{k,j}^T \mathbf{v} = 0$ in (2b). It was shown in [20] that to eliminate p paths, the number of RIS units needs to be slightly larger than $2p$. In this paper, for ease of presentation, we assume that the elimination p paths requires $2p$ RIS units.

Assume that for user k , we want to eliminate the paths between itself and antennas $j_{k,1}, j_{k,2}, \dots, j_{k,q_k}$ where $j_q \in [L]$, and q_k denotes the total number of paths that user k needs to eliminate. Considering all users, the total number of paths needed to eliminate is $\sum_{k \in [K]} q_k$, which requires slightly more than $G = 2 \sum_{k \in [K]} q_k$. Subsequently, we will assume that this is approximately equal to this value.

Define that

$$\mathbf{A} = [\mathbf{a}_{1,j_{1,1}}, \dots, \mathbf{a}_{1,j_{1,q_1}}, \mathbf{a}_{2,j_{2,1}}, \dots, \mathbf{a}_{K,j_{K,q_K}}]. \quad (3)$$

Then our aim can be rewritten as

$$\mathcal{S}_1 = \{\mathbf{A}^T \mathbf{v} = 0\}. \quad (4)$$

	1	2	3	4	5	6	7
1	*	{1,2,3}	{1,2,3}	{1,2,4}	{1,2,5}	{1,2,6}	{1,2,7}
2	{1,2,3}	*	{1,2,3}	{1,2,4}	{1,2,5}	{1,2,6}	{1,2,7}
3	{1,2,3}	{1,2,3}	*	{1,3,4}	{1,3,5}	{1,3,6}	{1,3,7}
4	{1,2,4}	{1,2,4}	{1,3,4}	*	{1,4,5}	{1,4,6}	{1,4,7}
5	{1,2,5}	{1,2,5}	{1,3,5}	{1,4,5}	*	{1,5,6}	{1,5,7}
6	{1,2,6}	{1,2,6}	{1,3,6}	{1,4,6}	{1,5,6}	*	{1,6,7}
7	{1,2,7}	{1,2,7}	{1,3,7}	{1,4,7}	{1,5,7}	{1,6,7}	*
1	*	{1,2,4}	{1,3,4}	{1,3,4}	{1,3,5}	{1,3,6}	{1,3,7}
2	{1,2,4}	*	{2,3,4}	{2,3,4}	{2,3,5}	{2,3,6}	{2,3,7}
3	{1,3,4}	{2,3,4}	*	{2,3,4}	{2,3,5}	{2,3,6}	{2,3,7}
4	{1,3,4}	{2,3,4}	{2,3,4}	*	{2,4,5}	{2,4,6}	{2,4,7}
5	{1,3,5}	{2,3,5}	{2,3,5}	{2,4,5}	*	{2,5,6}	{2,5,7}
6	{1,3,6}	{2,3,6}	{2,3,6}	{2,4,6}	{2,5,6}	*	{2,6,7}
7	{1,3,7}	{2,3,7}	{2,3,7}	{2,4,7}	{2,5,7}	{2,6,7}	*
1	*	{1,2,5}	{1,3,5}	{1,4,5}	{1,4,5}	{1,4,6}	{1,4,7}
2	{1,2,5}	*	{2,3,5}	{2,4,5}	{2,4,5}	{2,4,6}	{2,4,7}
3	{1,3,5}	{2,3,5}	*	{3,4,5}	{3,4,5}	{3,4,6}	{3,4,7}
4	{1,4,5}	{2,4,5}	{3,4,5}	*	{3,4,5}	{3,4,6}	{3,4,7}
5	{1,4,5}	{2,4,5}	{3,4,5}	{3,4,5}	*	{3,5,6}	{3,5,7}
6	{1,4,6}	{2,4,6}	{3,4,6}	{3,4,6}	{3,5,6}	*	{3,6,7}
7	{1,4,7}	{2,4,7}	{3,4,7}	{3,4,7}	{3,5,7}	{3,6,7}	*
1	*	{1,2,6}	{1,3,6}	{1,4,6}	{1,5,6}	{1,5,6}	{1,5,7}
2	{1,2,6}	*	{2,3,6}	{2,4,6}	{2,5,6}	{2,5,6}	{2,5,7}
3	{1,3,6}	{2,3,6}	*	{3,4,6}	{3,5,6}	{3,5,6}	{3,5,7}
4	{1,4,6}	{2,4,6}	{3,4,6}	*	{4,5,6}	{4,5,6}	{4,5,7}
5	{1,5,6}	{2,5,6}	{3,5,6}	{4,5,6}	*	{4,5,6}	{4,5,7}
6	{1,5,6}	{2,5,6}	{3,5,6}	{4,5,6}	{4,5,6}	*	{4,6,7}
7	{1,5,7}	{2,5,7}	{3,5,7}	{4,5,7}	{4,5,7}	{4,6,7}	*
1	*	{1,2,7}	{1,3,7}	{1,4,7}	{1,5,7}	{1,6,7}	{1,6,7}
2	{1,2,7}	*	{2,3,7}	{2,4,7}	{2,5,7}	{2,6,7}	{2,6,7}
3	{1,3,7}	{2,3,7}	*	{3,4,7}	{3,5,7}	{3,6,7}	{3,6,7}
4	{1,4,7}	{2,4,7}	{3,4,7}	*	{4,5,7}	{4,6,7}	{4,6,7}
5	{1,5,7}	{2,5,7}	{3,5,7}	{4,5,7}	*	{5,6,7}	{5,6,7}
6	{1,6,7}	{2,6,7}	{3,6,7}	{4,6,7}	{5,6,7}	*	{5,6,7}
7	{1,6,7}	{2,6,7}	{3,6,7}	{4,6,7}	{5,6,7}	{5,6,7}	*

TABLE II: A (2, 7, 35, 5, 70) MS MAPDA

Since the RIS is passive, it is essential to also ensure that

$$\mathcal{S}_2 = \{|v_i| = 1\}. \quad (5)$$

The algorithm presented in [20] operates by performing alternating projections between these two sets, i.e.

$$\Pi_{\mathcal{S}_1}(\mathbf{v}) = \mathbf{v} - \mathbf{A}^*(\mathbf{A}^T \mathbf{A}^*)^{-1} \mathbf{A}^T \mathbf{v} \quad (6)$$

$$\Pi_{\mathcal{S}_2}(\mathbf{v}) = \frac{\mathbf{v}}{|\mathbf{v}|} \quad (7)$$

thereby gradually converging to the intersection of these sets.

Different from the alternative projection algorithm in [20], we adopt the approach of projecting onto the tangent space to accelerate convergence rate which increases the step size of each

projection to speeds up the convergence. The pseudo code of the improved algorithm is given in Algorithm 2.

Algorithm 2 Improved Alternating Projection Algorithm

- 1: Initialize reflection coefficients \mathbf{v} , channel matrix \mathbf{A}_k , and number of iterations m
 - 2: Start with initial value $\mathbf{v} = \mathbf{v}^0 \in \mathcal{S}_2$
 - 3: **for** $t = 0, 1, 2, \dots, m$ **and** interference not nullified **do**
 $\mathbf{y}^t = \mathbf{v}^t - \Pi_{\mathcal{S}_1}(\mathbf{v}^t)$
 $\mathbf{m}^t = \mathbf{y}^t - \Pi_{\mathbf{v}^t}(\mathbf{y}^t)$
 $\tilde{\mathbf{v}}^t = \mathbf{v}^t - 2\mathbf{m}^t$
 $\mathbf{v}^{t+1} = \Pi_{\mathcal{S}_2}(\tilde{\mathbf{v}}^t)$
 - 4: **end for**
 - 5: **if** iteration limit reached or interference nullified **then**
 Stop iteration
 - 6: **end if**
 - 7: Output the resulting reflection coefficients \mathbf{v}^{t+1}
-

In Algorithm 2, $\mathbf{y} = \mathbf{A}^*(\mathbf{A}^T \mathbf{A}^*)^{-1} \mathbf{A}^T \mathbf{v}$ represents the projection of \mathbf{v} onto the orthogonal complement space of set \mathcal{S}_1 . Then we project vector \mathbf{y} onto \mathbf{v} . i.e. $\mathbf{m} = \mathbf{y} - \text{Re}(\mathbf{v}^* \odot \mathbf{y}) \cdot \mathbf{v}$. Subtract $2\mathbf{m}$ from \mathbf{v} , where the coefficient 2 is to achieve a larger step size. In essence, the operation still entails subtracting the direction that is orthogonal to the set \mathcal{S}_1 .² After that, \mathbf{v} is projected onto \mathcal{S}_2 , resulting in a larger step size compared to the projection onto \mathcal{S}_2 as described in (7).

Simulation: Next we compare Algorithm 2 with the RIS-assisted interference nulling algorithm in [20], in the K -transmitter and K -user interference channel. In this channel, we need to use RIS eliminate $K - 1$ interference paths for each user; thus there are totally $K(K - 1)$ paths to eliminate. Assume that $K = 10$ and the number of RIS units G is 300. The channel coefficients are i.i.d. over a standard normal distribution. The number of algorithm's iterations is set to be 500. For each iteration, we compute the interference power at users in dB, defined as $\sum_{j \neq k} |\mathbf{a}_{k,j} \mathbf{v}|^2$.

It can be seen from Fig. 2 that Algorithm 2 performs significantly better than the algorithm in [20] in terms of interference power with the same number of iterations.

²This step is the primary difference from the algorithm presented in [20], namely, projecting onto the tangent plane of the current \mathbf{v} prior to projecting onto the set \mathcal{S}_2 .

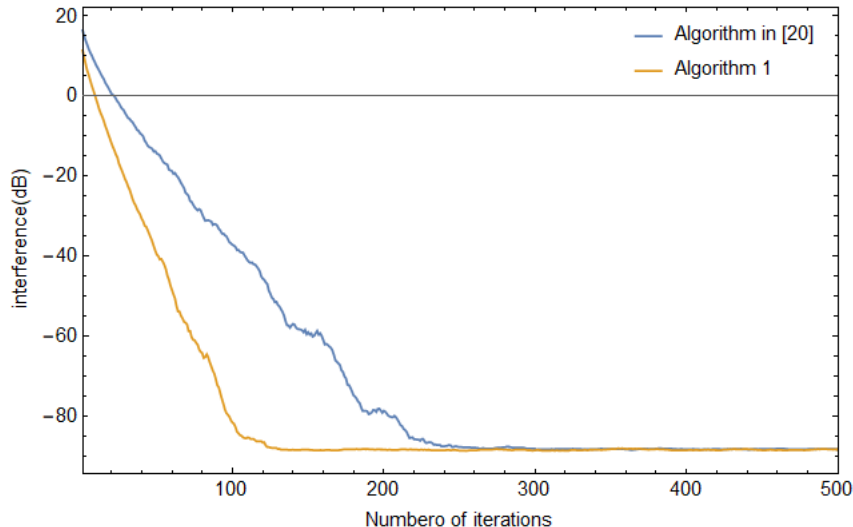


Fig. 2: Comparison of two algorithms in interference

IV. OPTIMAL GROUPING APPROACH

By RIS-assisted interference nulling method proposed in the last section, we can divide the transmission in each time slot of the delivery phase into multiple groups; inside each group the contained antennas serve the contained users without suffering interference from the transmissions by other groups. In this section, we aim to find out the optimal grouping method leading to the maximum sum-DoF.

Given the total number of antennas L , cache ratio M/N and K users, assume that the number of active antennas is $L_0 \leq L$, i.e., we can keep some antenna ‘silent’. L_0 antennas are divided into r groups each of which contains L_i antennas, $\sum_{i=1}^r L_i = L_0$. Consider an integer $t = KM/N$. By Lemma 1 and the grouping method, we have the following sum-DoF:³

$$g = \sum_{i=1}^r (L_i + t) = L_0 + tr. \quad (8)$$

Since the number of RIS elements can be expressed as twice the number of interference paths and the maximum of users served by each group is $L_i + t$, the number of RIS units G needed is at least

$$G = 2 \sum_{i=1}^r (L_i + t)(L_0 - L_i). \quad (9)$$

³For the ease of description, we assume that g in (8) is no larger than K . If $g > K$, we can add $g - K$ virtual users into the systems and use the same grouping method as $g = K$.

Algorithm 3 Optimal Grouping Scheme

```

1: Input: Initialize total antennas  $L$ ,  $t$ , sum-DoF  $g$ 
2: Compute initial  $L_{\min} = \lceil \frac{g}{t+1} \rceil$  and  $L_{\max} = \min(L, g - t)$ 
3: while  $g \leq L(t + 1)$  do
4:   valid_found = false
5:   for  $L_0 = L_{\max}$  down to  $L_{\min}$  do
6:     Compute  $r = \frac{g-L_0}{t}$ 
7:     if  $r$  is an integer and  $r > 0$  then
8:       valid_found = true
9:       break
10:    end if
11:  end for
12:  if valid_found then
13:    break
14:  else
15:     $g \leftarrow g + 1$ 
16:  end if
17: end while
18: Calculate  $\lambda_0 = \text{solve for } f(\lambda) = 0 \text{ and } \lambda_0 \neq 0$ 
19: Compute maximum  $\lambda_{\max} = \lfloor \frac{L_{\max}-r}{t+1} \rfloor$ 
20: if  $\lambda_{\max} \geq \lambda_0$  then
21:    $L_{\text{opt}} = L_{\max} - \lambda_{\max} \cdot t$ 
22:    $r_{\text{opt}} = r + \lambda_{\max}$ 
23:    $G_{\text{opt}} = G + f(\lambda_{\max})$ 
24: else
25:    $L_{\text{opt}} = L_{\max}$ ,  $r_{\text{opt}} = r$ ,  $G_{\text{opt}} = G$ 
26: end if
27: Output:  $L_{\text{opt}}, r_{\text{opt}}, G_{\text{opt}}$ 

```

We consider an alternative optimization task, which is more feasible: given a task sum DoF g , we want to minimize the needed number of RIS units; i.e.,

$$\begin{aligned}
 & \underset{L_i \in \mathbb{Z}^+}{\text{minimize}} && G \\
 & \text{subject to} && L_0 \leq L, r \leq L, g = L_0 + tr.
 \end{aligned} \tag{10}$$

Theorem 1. *Given the sum-DoF $g = L_0 + tr$, the number of groups r and the number of active antennas L_0 , the grouping scheme with minimum number of RIS elements is that $L_1 = L_0 - (r - 1)$ and $L_2 = \dots = L_r = 1$. The minimum of RIS elements is*

$$G = 2(r - 1)[(t + 2)L_0 - r]. \tag{11}$$

The proof of Theorem 1 (i.e., the proof of the closed-form solution for the optimization problem in (10)) could be found in Appendix A. By Theorem 1, we only need to determine r

and L_0 that minimize (11).

Algorithm 3 can find the optimal grouping scheme with complexity up to $O(L^2)$. For the case that there exists a scheme where the sum-DoF exactly equal to the given g , Algorithm 3 can find the optimal grouping scheme with complexity up to $O(L)$. Detailed analysis and design process of it can be find in Appendix B.

V. RIS-ASSISTED GROUPING CODED CACHING SCHEME

After finding the solution for the grouping optimization problem, we then propose how to construct a coded caching scheme based on the $L_{opt} = L_0$ and $r_{opt} = r$. Recall that by grouping, the transmission for each time slot could be divided into multiple separate transmissions, each of which is for one group.

A. The definition of RMAPDA

Inspired by MAPDA, our scheme can also be represented in the form of an array. Similar to MAPDA, the symbol "*" is used to denote cached content at the users. For transmission, our objective is to enable simultaneous broadcasting across r groups.

From our previous analyses, the antenna groups are limited to two configurations: one consisting of $L_1 = L_0 - r + 1$ antennas with $t + L_1$ users, and the other consisting of $L_2 = L_3 = \dots = L_r = 1$ antenna with $t + 1$ users. So our objective is to serve $g = (t + 1)(r - 1) + (t + L_0 - r + 1)$ users per time slot. Besides meeting requirements C1, C2, C3 in definition 1, it must also satisfy the following condition.

C4: For any integer $s \in [S]$, define $\mathbf{P}_1^{(s)}, \mathbf{P}_2^{(s)}, \dots, \mathbf{P}_r^{(s)}$ to be the subarrays of \mathbf{P} including the rows and columns containing s . These subarrays are mutually disjoint in columns. One of the subarrays has integer entries in each row less than or equal to $L_0 - r + 1$, while the remaining $r - 1$ subarrays each have integer entries in each row no more than 1.

The new structure proposed for the RIS-assisted MISO coded caching problem is called RMAPDA.

Definition 2 (RMAPDA). For any positive integers L_0, K, F, Z, r and S , an $F \times K$ array P composed of "*" and $[S]$ is called an (L_0, K, F, Z, r, S) RIS-assisted multiple-antenna placement delivery array (RMAPDA) if it satisfies the following conditions:

C1: The symbol "*" appears Z times in each column;

C2: Each integer from 1 to S occurs at least once in the array;

C3: Each integer s appears at most once in each column;

C4: For any integer $s \in [S]$, define $\mathbf{P}_1^{(s)}, \mathbf{P}_2^{(s)}, \dots, \mathbf{P}_r^{(s)}$ to be the subarrays of \mathbf{P} including the rows and columns containing s . These subarrays are mutually disjoint in columns. One of the subarrays has integer entries in each row less than or equal to $L_0 - r + 1$, while the remaining $r - 1$ subarrays each have integer entries in each row no more than 1.

B. Construction of RMAPDA

In the following, we propose our construction of a RMAPDA based on the MN PDA in Lemma 2 and MS MAPDA in Lemma 3. The MS MAPDA is used to serve the users in the first group (i.e., the group containing $t + L_1$ users), while the MN PDA is used to serve the users in each of the other group (containing $t + 1$ users). However, the numbers of integers (i.e., the number of time slots) in the MS MAPDA and the MN PDA do not match. We propose to replicate the MS MAPDA and the MN PDA certain times to make their time slots coinciding with each other.

Proposition 1 (Proposed RMAPDA). Given any positive integers K, L_0, M, N , and r satisfying $t = \frac{KM}{N} < K$, which leads to the optimal grouping approach in Theorem 1, there always exists a corresponding RMAPDA with the sum-DoF $\min\{K, L_0 + tr\}$.

In the following, we propose our construction for Proposition 1 based on the bipartite graph. For the ease of description, we assume that $L_0 + tr \leq K$; if $L_0 + tr \geq K$, as explained in Footnote 3, we can add virtual users.

a) Bipartite Graph: In order to show our construction method, the bipartite graph will be utilized, and the following symbol notations are utilized in the following analysis. Basically, a graph can be denoted by $\mathbf{G} = (\mathcal{V}, \mathcal{E})$, where \mathcal{V} is the set of vertices and \mathcal{E} is the set of edges, and a subset of edges $\mathcal{M} \subseteq \mathcal{E}$ is a matching if no two edges of \mathcal{M} have a common vertex. A bipartite graph, denoted by $\mathbf{G} = (\mathcal{X}, \mathcal{Y}; \mathcal{E})$, is a graph whose vertices are divided into two disjoint parts \mathcal{X} and \mathcal{Y} such that every edge in \mathcal{E} connects a vertex in \mathcal{X} to one in \mathcal{Y} . The degree of a vertex is defined as the number of vertices adjacent to it. If every vertex of \mathcal{X} has the same degree, we call it the degree of \mathcal{X} and denote it as $d(\mathcal{X})$.

Next, we explain the construction process of the RMAPDA by combining it with the bipartite graph construction. Specifically, we demonstrate how the total replication numbers of the MS MAPDA and the MN PDA are determined.

b) *Determination of Replication Numbers:* First, we need to obtain the parameters K , L_0 , M , N , r , and $t = \frac{KM}{N}$.

- **Step 1.** We first construct an MN PDA \mathbf{P}_0 and an MS MAPDA \mathbf{Q}_0 from Construction 1 with $K, t = KM/N$ and Construction 2 with $K, L_1 = L_0 - r + 1, t = KM/N$, respectively.

- **Step 2.** Now we can define a bipartite graph $G_1 = (\mathcal{X}_1, \mathcal{Y}_1; \mathcal{E}_1)$ where $\mathcal{X}_1 = \binom{[K]}{t+L_1}$ and

$$\mathcal{Y}_1 = \left\{ \{\mathcal{S}_1, \mathcal{S}_2, \dots, \mathcal{S}_{r-1}\} \mid \mathcal{S}_i \cap \mathcal{S}_j = \emptyset, \mathcal{S}_i, \mathcal{S}_j \in \binom{[K]}{t+1}, i, j \in [r-1] \right\}.$$

Each vertex $\mathcal{A} \in \mathcal{X}_1$ is adjacent to a vertex $\mathcal{S} = \{\mathcal{S}_1, \mathcal{S}_2, \dots, \mathcal{S}_{r-1}\} \in \mathcal{Y}_1$ if and only if $\mathcal{A} \cap \mathcal{S}_i = \emptyset$ for each integer $i \in [r-1]$. Each vertex of \mathcal{X}_1 represents a scenario where $t + L_1$ users are selected from K users. Each vertex of \mathcal{Y}_1 represents a scenario where $(r-1)(t+1)$ users are selected from K and evenly divided into $(r-1)$ groups.

By the construction, it can be checked that⁴

$$|\mathcal{X}_1| = \binom{K}{t+L_1}, \quad (12)$$

$$|\mathcal{Y}_1| = \frac{\binom{K}{t+1} \binom{K-(t+1)}{t+1} \dots \binom{K-(r-2)(t+1)}{t+1}}{(r-1)!}, \quad (13)$$

$$d(\mathcal{X}_1) = \frac{\binom{K-(t+L_1)}{t+1} \binom{K-(t+L_1)-(t+1)}{t+1} \dots \binom{K-(t+L_1)-(r-2)(t+1)}{t+1}}{(r-1)!}, \quad (14)$$

$$d(\mathcal{Y}_1) = \binom{K - (r-1)(t+1)}{t+L_1}. \quad (15)$$

- **Step 3.** Recall that in the construction of MS MAPDA, the number of multicast messages (each containing $t + L_1$ packets) useful to a subset of $t + L_1$ users, is $\binom{t+L_1-1}{t}$. Then we can obtain a new bipartite graph $G_2 = (\mathcal{X}_2, \mathcal{Y}_2; \mathcal{E}_2)$ where \mathcal{X}_2 is obtained by replicating \mathcal{X}_1 $\binom{t+L_1-1}{t}$ times, $\mathcal{Y}_2 = \mathcal{Y}_1$, and the definition of edge is the same as G_1 . Clearly we have $d(\mathcal{X}_2) = d(\mathcal{X}_1)$ and $d(\mathcal{Y}_2) = d(\mathcal{Y}_1) \binom{t+L_1-1}{t}$. Then in this case we can regard each vertex in \mathcal{X}_2 as the users served at a time slot of MS MAPDA.

Next, we focus on the remaining groups, each of which contains $t+1$ users. Since the vertices in \mathcal{Y}_2 have the same meaning as those in \mathcal{Y}_1 , to calculate the number of occurrences of each $(t+1)$ -user group, it suffices to compute the total number of ways to select $(r-2)$ $(t+1)$ -user groups from the remaining users after excluding these $(t+1)$ users from K

⁴ $|\mathcal{X}_1|$ represents total number of ways to select $t + L_1$ users from K users. $|\mathcal{Y}_1|$ represents the total number of ways to select $(r-1)$ groups each with $(t+1)$ users from K users. $d(\mathcal{X}_1)$ represents the total number of ways to select $(r-1)$ groups each with $(t+1)$ users, from the remaining users after excluding $t + L_1$ users from K users. $d(\mathcal{Y}_1)$ represents the total number of ways to select $t + L_1$ users from the remaining users after excluding $(r-1)(t+1)$ users from K users.

users.

We can check that each subset of $(t + 1)$ users, say \mathcal{B} , occurs in

$$\frac{\binom{K-(t+1)}{t+1} \dots \binom{K-(r-2)(t+1)}{t+1}}{(r-2)!}$$

Each integer occurs in a unique set containing $(t + 1)$ columns of MN PDA. This implies that the $(t + 1)$ -subset \mathcal{B} corresponds to exactly one time slot. Therefore, in order to generate the vertex set \mathcal{Y}_2 , we should replicate the MN PDA.

$$\begin{aligned} n_1 &= \frac{\binom{K-(t+1)}{t+1} \dots \binom{K-(r-2)(t+1)}{t+1}}{(r-2)!} \\ &= \frac{\prod_{i=1}^{r-2} \binom{K-i(t+1)}{t+1}}{(r-2)!} \end{aligned} \quad (16)$$

times, and then place all the $(t + 1)$ -subsets into the different $r - 1$ groups. Then the vertices of \mathcal{Y}_2 are represented by the users served at each time slot of replicated MN PDA. After replication, the number of vertices of \mathcal{X}_2 and \mathcal{Y}_2 are

$$|\mathcal{X}_2| = \binom{t + L_1 - 1}{t} \binom{K}{t + L_1} \quad (17)$$

$$|\mathcal{Y}_2| = \frac{\binom{K}{t+1} \binom{K-(t+1)}{t+1} \dots \binom{K-(r-2)(t+1)}{t+1}}{(r-1)!} \quad (18)$$

- **Step 4.** In order to obtain a bipartite graph such that its two vertex parts have the same vertices, we can replicate \mathcal{X}_2 and \mathcal{Y}_2 m times and n_2 times respectively to obtain the \mathcal{X} and \mathcal{Y} where n_2 and m satisfy the following condition:

$$m \binom{t + L_1 - 1}{t} \binom{K}{t + L_1} = n_2 \frac{\binom{K}{t+1} \binom{K-(t+1)}{t+1} \dots \binom{K-(r-2)(t+1)}{t+1}}{(r-1)!}. \quad (19)$$

In this case we have a our desired bipartite graph $G = (\mathcal{X}, \mathcal{Y}, \mathcal{E})$ where the edge is defined as the same as the G_1 . We can use the least common multiple (LCM) to determine m and n_2 . The least common multiple of a and b is represented as $\text{lcm}(a, b)$. From Eq. (19), we can get

$$\begin{aligned} m &= \frac{\text{lcm}\left(\binom{t+L_1-1}{t} \binom{K}{t+L_1}, \frac{\binom{K}{t+1} \binom{K-(t+1)}{t+1} \dots \binom{K-(r-2)(t+1)}{t+1}}{(r-1)!}\right)}{\binom{t+L_1-1}{t} \binom{K}{t+L_1}} \\ &= \frac{\text{lcm}\left(\binom{t+L_1-1}{t} \binom{K}{t+L_1}, \frac{\prod_{i=0}^{r-2} \binom{K-i(t+1)}{t+1}}{(r-1)!}\right)}{\binom{t+L_1-1}{t} \binom{K}{t+L_1}} \end{aligned} \quad (20)$$

and

$$\begin{aligned}
n_2 &= \frac{\text{lcm}\left(\binom{t+L_1-1}{t} \binom{K}{t+L_1}, \frac{\binom{K}{t+1} \binom{K-(t+1)}{t+1} \dots \binom{K-(r-2)(t+1)}{t+1}}{(r-1)!}\right)}{\frac{\binom{K}{t+1} \binom{K-(t+1)}{t+1} \dots \binom{K-(r-2)(t+1)}{t+1}}{(r-1)!}} \\
&= \frac{\text{lcm}\left(\binom{t+L_1-1}{t} \binom{K}{t+L_1}, \frac{\prod_{i=0}^{r-2} \binom{K-i(t+1)}{t+1}}{(r-1)!}\right)}{\frac{\prod_{i=0}^{r-2} \binom{K-i(t+1)}{t+1}}{(r-1)!}} \tag{21}
\end{aligned}$$

In conclusion, the MS MAPDA has been totally replicated m times, while the MN PDA has been replicated $n_1 n_2$ times. After replication, the time slot of MS MAPDAS and the time slot of MN PDAs is matched.

In addition, the total number of subpaketization F of this scheme is

$$F = m \binom{K-t-1}{L_1-1} \binom{K}{t} + n_1 n_2 \binom{K}{t}. \tag{22}$$

Substitute Eq. (19) into the Eq. (22)

$$\begin{aligned}
F &= \frac{\text{lcm}\left(\binom{t+L_1-1}{t} \binom{K}{t+L_1}, \frac{\prod_{i=0}^{r-2} \binom{K-i(t+1)}{t+1}}{(r-1)!}\right)}{\binom{t+L_1-1}{t} \binom{K}{t+L_1}} \binom{K-t-1}{L_1-1} \binom{K}{t} \\
&+ \frac{\prod_{i=1}^{r-2} \binom{K-i(t+1)}{t+1}}{(r-2)!} \frac{\text{lcm}\left(\binom{t+L_1-1}{t} \binom{K}{t+L_1}, \frac{\prod_{i=0}^{r-2} \binom{K-i(t+1)}{t+1}}{(r-1)!}\right)}{\frac{\prod_{i=0}^{r-2} \binom{K-i(t+1)}{t+1}}{(r-1)!}} \binom{K}{t}. \tag{23}
\end{aligned}$$

The construction process is summarized as Algorithm 4.

By the construction, we have the following lemma, whose proof is given in Appendix C.

Lemma 4. The proposed RMAPDA in Algorithm 4 satisfies Conditions C1-C4 of RMAPDA.

We then propose an example to illustrate the construction process based on the MAPDA in Lemma 3 and MN PDA in Lemma 2.

Example 3. Consider a system with $K = 7$, $L_0 = 4$, $M = 1$, $t = KM/N = 1$, dividing antennas into $r = 3$ groups, one group with $L_1 = 2$ antennas and the other two groups both have only one antenna.

- **Step 1.** Construction of MS MAPDA \mathbf{Q}_0 and MN PDA \mathbf{P}_0 .
 - **Step 1.1.** By construction 1, we can get a 7×7 array \mathbf{P}_0 in Table I.
 - **Step 1.2.** By construction 2, we can get a 35×7 array \mathbf{Q}_0 in Tabel II.
- **Step 2.** Construction of \mathbf{P} .
 - Based on the analysis of replication numbers in the previous content, to ensure that each

Algorithm 4 General Construction Process of RMAPDA

- 1: **procedure** CONSTRUCT RMAPDA(K, L_0, M, N, r)
- 2: $t \leftarrow \frac{KM}{N}$
- 3: $L_1 \leftarrow L_0 - r + 1$ ▷ Divide antennas into r groups, one with L_1 antennas, others with one antenna
- 4: **Step 1: Construct MS MAPDA Q_0 and MN PDA P_0**
- 5: $P_0 \leftarrow$ CONSTRUCTION OF MN_PDA(K, t)
- 6: $Q_0 \leftarrow$ CONSTRUCTION OF MS_MAPDA(K, t, L_1)
- 7: **Step 2: Construct P**
- 8: Determine n_1 and n_2 such that

$$n_1 \leftarrow \frac{\prod_{i=1}^{r-2} \binom{K-i(t+1)}{t+1}}{(r-2)!}$$

$$n_2 \leftarrow \frac{\text{lcm}\left(\binom{t+L_1-1}{t} \binom{K}{t+L_1}, \frac{\prod_{i=0}^{r-2} \binom{K-i(t+1)}{t+1}}{(r-1)!}\right)}{\frac{\prod_{i=0}^{r-2} \binom{K-i(t+1)}{t+1}}{(r-1)!}}$$
- 9: $P \leftarrow \left. \begin{array}{c} \left[\begin{array}{c} P_0 \\ P_0 \\ \vdots \\ P_0 \end{array} \right] \end{array} \right\} n_1 n_2 \text{ times}$
- 10: **Step 3: Construct Q**
- 11: Determine m such that

$$m \leftarrow \frac{\text{lcm}\left(\binom{t+L_1-1}{t} \binom{K}{t+L_1}, \frac{\prod_{i=0}^{r-2} \binom{K-i(t+1)}{t+1}}{(r-1)!}\right)}{\binom{t+L_1-1}{t} \binom{K}{t+L_1}}$$
- 12: $Q \leftarrow \left. \begin{array}{c} \left[\begin{array}{c} Q_0 \\ Q_0 \\ \vdots \\ Q_0 \end{array} \right] \end{array} \right\} m \text{ times}$
- 13: **Step 4: Combine P and Q**
- 14: $T_1 \leftarrow \left[\begin{array}{c} P \\ Q \end{array} \right]$
- 15: **Step 5: Determine the user groups served in each time slot s and rewrite them in terms of s to obtain T**
- 16: **return** T
- 17: **end procedure**

case of $(r - 1)$ groups of $(t + 1)$ -user subset appears exactly once, each $(t + 1)$ -user subset needs to appear

$$n_1 = \frac{\prod_{i=1}^{r-2} \binom{K-i(t+1)}{t+1}}{(r-2)!} = \binom{5}{2} = 10$$

times. Since in each MN PDA, each $(t + 1)$ -user subset appears only once, the P_0 must be replicated 10 times.

From Eq. (19), to ensure the total number of time slots of MN PDA and MS MAPDA

are the same, we further replicate it

$$n_2 = \frac{\text{lcm}\left(\binom{t+L_1-1}{t} \binom{K}{t+L_1}, \frac{\prod_{i=0}^{r-2} \binom{K-i(t+1)}{t+1}}{(r-1)!}\right)}{\frac{\prod_{i=0}^{r-2} \binom{K-i(t+1)}{t+1}}{(r-1)!}} = \frac{210}{105} = 2$$

times.

The \mathbf{P} represents the array after replicating \mathbf{P}_0 $n = n_1 n_2 = 20$ times vertically.

• **Step 3.** Construction of \mathbf{Q} .

- Similarly, From Eq. (19), the MS MAPDA \mathbf{Q}_0 should be replicated m times vertically where

$$m = \frac{\text{lcm}\left(\binom{t+L_1-1}{t} \binom{K}{t+L_1}, \frac{\prod_{i=0}^{r-2} \binom{K-i(t+1)}{t+1}}{(r-1)!}\right)}{\binom{t+L_1-1}{t} \binom{K}{t+L_1}} = 210/70 = 3.$$

to obtain \mathbf{Q} .

• **Step 4.** Combine \mathbf{P} and \mathbf{Q}

- Combine \mathbf{P} and \mathbf{Q} vertically to form a new array \mathbf{T}_1 , which corresponds to the array of the entire cache placement scheme.

• **Step 5.** Determine the users served in each time slot.

- **Step 5.1.** Each time slot we will choose a $t + L_1$ -user group from \mathbf{Q} and $r - 1$ groups of $t + 1$ -user subset from \mathbf{P} , and there is no overlap between users in different groups. The number of time slots required for transmitting to each $(t + L_1)$ -user group in \mathbf{Q} is

$$S_1 = \binom{t + L_1 - 1}{t} = \binom{2}{1} = 2.$$

In contrast, each $(t + 1)$ -user group requires only

$$S_2 = 1$$

time slot. To ensure time slot alignment, we can first select a group of $(t + L_1)$ users, followed by iterating over all possible combinations of the remaining users.

In this example, after excluding the $(t + L_1) = 3$ users, there are

$$\binom{K - (t + L_1)}{(r - 1)(t + 1)} \frac{[(r - 1)(t + 1)]!}{((t + 1)!)^{(r-1)}(r - 1)!} = \binom{4}{4} \frac{4!}{(2!)^2 \cdot 2!} = 3$$

possible ways to select $(r - 1)(t + 1)$ users from the remaining pool. These selected users are then divided into $(r - 1)$ groups, each consisting of $(t + 1)$ users.

- **Step 5.2.** Select a $t + L_1$ -user group from \mathbf{Q} . For example, choose the set $\{1, 2, 3\}$ from \mathbf{Q} as the $(t + L_1)$ -users group. This set occupies two time slots in \mathbf{Q}_0 . Each \mathbf{Q} contains 3 \mathbf{Q}_0 , thus occupying a total of 6 time slots.

	1	2	3	4	5	6	7
1	*	{1,2,3}	{1,2,3}	{1,2,4}	{1,2,5}	{1,2,6}	{1,2,7}
2	{1,2,3}	*	{1,2,3}	{1,2,4}	{1,2,5}	{1,2,6}	{1,2,7}
3	{1,2,3}	{1,2,3}	*	{1,3,4}	{1,3,5}	{1,3,6}	{1,3,7}
	1	2	3	4	5	6	7
1	*	{1,2,3}	{1,2,3}	{1,2,4}	{1,2,5}	{1,2,6}	{1,2,7}
2	{1,2,3}	*	{1,2,3}	{1,2,4}	{1,2,5}	{1,2,6}	{1,2,7}
3	{1,2,3}	{1,2,3}	*	{1,3,4}	{1,3,5}	{1,3,6}	{1,3,7}
	1	2	3	4	5	6	7
1	*	{1,2,3}	{1,2,3}	{1,2,4}	{1,2,5}	{1,2,6}	{1,2,7}
2	{1,2,3}	*	{1,2,3}	{1,2,4}	{1,2,5}	{1,2,6}	{1,2,7}
3	{1,2,3}	{1,2,3}	*	{1,3,4}	{1,3,5}	{1,3,6}	{1,3,7}
	1	2	3	4	5	6	7
1	*	{1,2}	{1,3}	{1,4}	{1,5}	{1,6}	{1,7}
2	{1,2}	*	{2,3}	{2,4}	{2,5}	{2,6}	{2,7}
3	{1,3}	{2,3}	*	{3,4}	{3,5}	{3,6}	{3,7}
4	{1,4}	{2,4}	{3,4}	*	{4,5}	{4,6}	{4,7}
5	{1,5}	{2,5}	{3,5}	{4,5}	*	{5,6}	{5,7}
6	{1,6}	{2,6}	{3,6}	{4,6}	{5,6}	*	{6,7}
7	{1,7}	{2,7}	{3,7}	{4,7}	{5,7}	{6,7}	*
	1	2	3	4	5	6	7
1	*	{1,2}	{1,3}	{1,4}	{1,5}	{1,6}	{1,7}
2	{1,2}	*	{2,3}	{2,4}	{2,5}	{2,6}	{2,7}
3	{1,3}	{2,3}	*	{3,4}	{3,5}	{3,6}	{3,7}
4	{1,4}	{2,4}	{3,4}	*	{4,5}	{4,6}	{4,7}
5	{1,5}	{2,5}	{3,5}	{4,5}	*	{5,6}	{5,7}
6	{1,6}	{2,6}	{3,6}	{4,6}	{5,6}	*	{6,7}
7	{1,7}	{2,7}	{3,7}	{4,7}	{5,7}	{6,7}	*

Fig. 3: Example of $t + L_1$ -users $\{1, 2, 3\}$

One time slot's $\{1, 2, 3\}$ corresponds to two $(t + 1)$ -users group, i.e., two sets of two users. The remaining four users are divided into two groups of two users with three possible combinations: $(\{4, 5\}, \{6, 7\})$, $(\{4, 6\}, \{5, 7\})$, $(\{4, 7\}, \{5, 6\})$. In each time slot of $\{1, 2, 3\}$, select one of these three combinations in \mathbf{P} to correspond to it, choosing each combination twice, which exactly matches the time slots of $\{1, 2, 3\}$. This is illustrated in Fig. 3, each color represents a time slot. And the final time slots corresponding to $\{1, 2, 3\}$ can be filled as shown in Fig. 4.

Similarly, other $(t + L_1)$ -users in \mathbf{Q} also select the corresponding combinations in \mathbf{P} to match them, writing the same number for the same time slot. The earlier content on bipartite graphs has already proven that the user groups in \mathbf{Q} can be perfectly matched with the user groups in \mathbf{P} .

If, after excluding the $(t + L_1)$ group, the remaining users exceed $(r - 1)(t + 1)$, then all possible combinations must be considered. Begin by selecting $(r - 1)(t + 1)$ users from the remaining pool, yielding $\binom{K - (t + L_1)}{(r - 1)(t + 1)}$ combinations. For each combination, assign

	1	2	3	4	5	6	7
1	*	1	1	{1,2,4}	{1,2,5}	{1,2,6}	{1,2,7}
2	1	*	2	{1,2,4}	{1,2,5}	{1,2,6}	{1,2,7}
3	2	2	*	{1,3,4}	{1,3,5}	{1,3,6}	{1,3,7}
	1	2	3	4	5	6	7
1	*	3	3	{1,2,4}	{1,2,5}	{1,2,6}	{1,2,7}
2	3	*	4	{1,2,4}	{1,2,5}	{1,2,6}	{1,2,7}
3	4	4	*	{1,3,4}	{1,3,5}	{1,3,6}	{1,3,7}
	1	2	3	4	5	6	7
1	*	5	5	{1,2,4}	{1,2,5}	{1,2,6}	{1,2,7}
2	5	*	6	{1,2,4}	{1,2,5}	{1,2,6}	{1,2,7}
3	6	6	*	{1,3,4}	{1,3,5}	{1,3,6}	{1,3,7}
	1	2	3	4	5	6	7
1	*	{1,2}	{1,3}	{1,4}	{1,5}	{1,6}	{1,7}
2	{1,2}	*	{2,3}	{2,4}	{2,5}	{2,6}	{2,7}
3	{1,3}	{2,3}	*	{3,4}	{3,5}	{3,6}	{3,7}
4	{1,4}	{2,4}	{3,4}	*	1	2	3
5	{1,5}	{2,5}	{3,5}	1	*	3	2
6	{1,6}	{2,6}	{3,6}	2	3	*	1
7	{1,7}	{2,7}	{3,7}	3	2	1	*
	1	2	3	4	5	6	7
1	*	{1,2}	{1,3}	{1,4}	{1,5}	{1,6}	{1,7}
2	{1,2}	*	{2,3}	{2,4}	{2,5}	{2,6}	{2,7}
3	{1,3}	{2,3}	*	{3,4}	{3,5}	{3,6}	{3,7}
4	{1,4}	{2,4}	{3,4}	*	4	5	5
5	{1,5}	{2,5}	{3,5}	4	*	6	6
6	{1,6}	{2,6}	{3,6}	5	6	*	4
7	{1,7}	{2,7}	{3,7}	6	5	4	*

Fig. 4: Example of time slots 1-6

user groups to time slots as outlined in the previous example. Upon completing one combination, proceed to the next $(r-1)(t+1)$ selection and repeat. Once all combinations are exhausted, advance to the next $(t + L_1)$ group and continue this allocation process.

REFERENCES

- [1] M. A. Maddah-Ali and U. Niesen, "Fundamental limits of caching," *IEEE Transactions on information theory*, vol. 60, no. 5, pp. 2856–2867, 2014.
- [2] K. Wan, D. Tuninetti, and P. Piantanida, "An index coding approach to caching with uncoded cache placement," *IEEE Transactions on Information Theory*, vol. 66, no. 3, pp. 1318–1332, Mar. 2020.
- [3] Q. Yu, M. A. Maddah-Ali, and S. Avestimehr, "The exact rate-memory tradeoff for caching with uncoded prefetching," *IEEE Trans. Infor. Theory*, vol. 64, no. 2, pp. 1281–1296, Feb. 2018.
- [4] N. Naderializadeh, M. A. Maddah-Ali, and A. S. Avestimehr, "Fundamental limits of cache-aided interference management," *IEEE Transactions on Information Theory*, vol. 63, no. 5, pp. 3092–3107, 2017.
- [5] E. Lampiridis and P. Elia, "Adding transmitters dramatically boosts coded-caching gains for finite file sizes," *IEEE Journal on Selected Areas in Communications*, vol. 36, no. 6, pp. 1176–1188, 2018.

- [6] S. P. Shariatpanahi, S. A. Motahari, and B. H. Khalaj, "Multi-server coded caching," *IEEE Transactions on Information Theory*, vol. 62, no. 12, pp. 7253–7271, 2016.
- [7] J. Hachem, U. Niesen, and S. N. Diggavi, "Degrees of freedom of cache-aided wireless interference networks," *IEEE Transactions on Information Theory*, vol. 64, no. 7, pp. 5359–5380, 2018.
- [8] S. P. Shariatpanahi, G. Caire, and B. H. Khalaj, "Physical-layer schemes for wireless coded caching," *IEEE Transactions on Information Theory*, vol. 65, no. 5, pp. 2792–2807, 2018.
- [9] S. Mohajer and I. Bergel, "Miso cache-aided communication with reduced subpacketization," in *ICC 2020-2020 IEEE International Conference on Communications (ICC)*. IEEE, 2020, pp. 1–6.
- [10] E. Piovano, H. Joudeh, and B. Clerckx, "Generalized degrees of freedom of the symmetric cache-aided miso broadcast channel with partial csit," *IEEE Transactions on Information Theory*, vol. 65, no. 9, pp. 5799–5815, 2019.
- [11] T. Yang, K. Wan, M. Cheng, R. C. Qiu, and G. Caire, "Multiple-antenna placement delivery array for cache-aided miso systems," *IEEE Transactions on Information Theory*, 2023.
- [12] K. K. Namboodiri, E. Peter, and B. S. Rajan, "Extended placement delivery arrays for multi-antenna coded caching scheme," *IEEE Transactions on Communications*, 2023.
- [13] Q. Yan, M. Cheng, X. Tang, and Q. Chen, "On the placement delivery array design for centralized coded caching scheme," *IEEE Transactions on Information Theory*, vol. 63, no. 9, pp. 5821–5833, 2017.
- [14] T. J. Cui, M. Q. Qi, X. Wan, J. Zhao, and Q. Cheng, "Coding metamaterials, digital metamaterials and programmable metamaterials," *Light: science & applications*, vol. 3, no. 10, pp. e218–e218, 2014.
- [15] Q. Wu and R. Zhang, "Towards smart and reconfigurable environment: Intelligent reflecting surface aided wireless network," *IEEE Communications Magazine*, vol. 58, no. 1, pp. 106–112, 2020.
- [16] M. Di Renzo, A. Zappone, M. Debbah, M.-S. Alouini, C. Yuen, J. De Rosny, and S. Tretyakov, "Smart radio environments empowered by reconfigurable intelligent surfaces: How it works, state of research, and the road ahead," *IEEE journal on selected areas in communications*, vol. 38, no. 11, pp. 2450–2525, 2020.
- [17] C. Pan, H. Ren, K. Wang, J. F. Kolb, M. ElKashlan, M. Chen, M. Di Renzo, Y. Hao, J. Wang, A. L. Swindlehurst, X. You, and L. Hanzo, "Reconfigurable intelligent surfaces for 6g systems: Principles, applications, and research directions," *IEEE Communications Magazine*, vol. 59, no. 6, pp. 14–20, 2021.
- [18] Y. Liu, X. Liu, X. Mu, T. Hou, J. Xu, M. Di Renzo, and N. Al-Dhahir, "Reconfigurable intelligent surfaces: Principles and opportunities," *IEEE communications surveys & tutorials*, vol. 23, no. 3, pp. 1546–1577, 2021.
- [19] A. H. A. Bafghi, V. Jamali, M. Nasiri-Kenari, and R. Schober, "Degrees of freedom of the k -user interference channel in the presence of intelligent reflecting surfaces," *arXiv preprint arXiv:2012.13787*, 2020.
- [20] T. Jiang and W. Yu, "Interference nulling using reconfigurable intelligent surface," *IEEE Journal on Selected Areas in Communications*, vol. 40, no. 5, pp. 1392–1406, 2022.
- [21] M. Fu, Y. Zhou, and Y. Shi, "Reconfigurable intelligent surface for interference alignment in mimo device-to-device networks," in *2021 IEEE International Conference on Communications Workshops (ICC Workshops)*. IEEE, 2021, pp. 1–6.
- [22] S. Zheng, B. Lv, T. Zhang, Y. Xu, G. Chen, R. Wang, and P. Ching, "On dof of active ris-assisted mimo interference channel with arbitrary antenna configurations: When will ris help?" *IEEE transactions on vehicular technology*, 2023.
- [23] Q. Zhang, L. Zheng, M. Cheng, and Q. Chen, "On the dynamic centralized coded caching design," *IEEE Transactions on Communications*, vol. 68, no. 4, pp. 2118–2128, 2020.

APPENDIX A
PROOF OF THEOREM 1

Given the number of active antennas L_0 , the total number G of RIS elements used must satisfy the following inequality.

$$\begin{aligned}
\frac{G}{2} &\geq \sum_{i=1}^r (L_i + t)(L_0 - L_i) \\
&= \sum_{i=1}^r (L_0 L_i + t L_0 - L_i^2 - t L_i) \\
&= (L_0 - t) \sum_{i=1}^r L_i + t r L_0 - \sum_{i=1}^r L_i^2 \\
&= L_0(L_0 - t) + t r L_0 - \sum_{i=1}^r L_i^2 \tag{24}
\end{aligned}$$

We prefer to design a scheme such that the value G is as small as possible. This implies that given the parameters L , r and t , the value of $\sum_{i=1}^r L_i^2$ is as large as possible under the condition $\sum_{i=1}^r L_i = L_0$. Without loss of generality, we assume that $L_1 \geq L_2 \geq \dots \geq L_r \geq 1$. When we move a_2, a_3, \dots, a_r antennas from the second, third, \dots , r th group respectively to the first group, then the first group has $L'_1 = L_1 + a_1 + a_2 + \dots + a_{k-1}$ and the i th group has $L'_i = L_i - a_i$ antennas for each $2 \leq i \leq r$ where $a_i < L_i$. Now let us consider the value of $\sum_{i=1}^r L_i'^2$ and obtain the following equality

$$\begin{aligned}
&L_1'^2 + L_2'^2 + \dots + L_r'^2 \\
&= (L_1 + a_2 + a_3 + \dots + a_r)^2 + (L_2 - a_2)^2 + (L_3 - a_3)^2 \\
&\quad + \dots + (L_r - a_r)^2 \\
&= L_1^2 + L_2^2 + L_3^2 + \dots + L_r^2 + (a_2 + a_3 + \dots + a_r)^2 \\
&\quad + 2a_2(L_1 - L_2) + 2a_3(L_1 - L_3) + \dots + 2a_r(L_1 - L_r).
\end{aligned}$$

Clearly $L_1 - L_2, L_1 - L_3, \dots, L_1 - L_r$ are all non-negative. Therefore, we have $\sum_{i=1}^r L_i'^2 \geq \sum_{i=1}^r L_i^2$. This implies that the more antennas a_1, a_2, \dots, a_r are moved to the group with the highest number of antennas, the greater increase of the sum of squares $\sum_{i=1}^r L_i^2$. Clearly the extreme cases is that the first group has exactly $L_0 - r + 1$ antennas and each of the last $r - 1$ groups has exactly one antenna.

APPENDIX B

DETAILED ANALYSIS AND DESIGN PROCESS OF ALGORITHM 3

Based on the analysis of scenarios where the number of used antennas is known, it can be deduced that even if some antennas is allowed to be silenced, dividing antennas into r groups, with $r-1$ groups containing one antenna each, and the remaining group consisting of $L_0 - (r-1)$ antennas is still is considered optimal only under the conditions specified for grouping.

Assuming two schemes have the same sum-DoF, denoted as g , and the number of active antennas for these schemes are L_0 and L'_0 respectively. Let us assume that $L_0 > L'_0$ and the L_0 antennas and L'_0 antennas are divided into r and r' groups respectively. By our hypothesis we have $g = L_0 + tr = L'_0 + tr'$ for each t , i.e., $L_0 - L'_0 = t(r' - r) > 0$. So we have $r < r'$ and let $\lambda = r' - r$.

From (24), the required number of RIS elements G for L_0 antennas is

$$\begin{aligned} \frac{G}{2} &= (t+1)(L_0 - 1) + (L_0 - (r-1) + t)(r-1) \\ &= (r-1)[(t+2)L_0 - r] \end{aligned} \quad (25)$$

and the number of RIS elements G' for L'_0 antennas is

$$\begin{aligned} \frac{G'}{2} &= (t+1)(L'_0 - 1) + (L'_0 - (r'-1) + t)(r'-1) \\ &= (\lambda + r - 1)[(t+2)(L_0 - \lambda t) - (\lambda + r)] \\ &= \lambda[(t+2)(L_0 - \lambda t) - (\lambda + r)] + (r-1)((t+2)L_0 - r) \\ &\quad + (r-1)[-(t+2)\lambda t - \lambda] \end{aligned} \quad (26)$$

Then we have

$$\begin{aligned} f(\lambda) &= G' - G \\ &= 2(\lambda((t+2)(L_0 - \lambda t) - (\lambda + r)) + \\ &\quad (r-1)(-(t+2)\lambda t - \lambda)) \\ &= 2(\lambda((-t^2 - 2t - 1)\lambda + (t+2)L_0 - \\ &\quad 2r + (1-r)t^2 - 2tr + 2t + 1)) \end{aligned} \quad (27)$$

The value of (27) represents the difference in the number of RIS elements between the original scheme and the scheme with fewer antennas.

For a given sum-DoF g , assume L_0 represents the maximum number of antennas used to

achieve this sum-DoF. Consider this scheme as the original scheme referred to in (27).

Starting from this maximum value, consider other schemes with fewer antennas(i.e. consider the value of λ). It is not difficult to check that $f(\lambda)$ in (27) is a downward-opening parabola that passes through the origin, with λ as the independent variable. This implies that if $f(\lambda) \geq 0$, the reducing the number of antennas $L_0 - L'_0$ leads to an increase or no change in RIS elements; if $f(\lambda) < 0$, the scheme with L'_0 antennas utilizes fewer RIS elements than the original scheme, making it more optimal. Additionally, the larger the value of λ , the greater the reduction in the number of RIS elements.

Since λ is positive, it is only necessary to determine whether λ can exceed another zero point. If it can, then by reducing the number of antennas, a more optimal scheme can be found. Otherwise, the scheme using the maximum number of antennas is the best solution.

- To find the scheme that uses the maximum number of antennas under a given sum-DoF g , it is necessary first to determine the range of L_0 .

First, when the used antennas is L_0 , the maximum achievable sum-DoF is $L_0(t + 1)$. Therefore, $g \leq L_0(t + 1)$, which implies $L_0 \geq \frac{g}{t+1}$. Since L_0 must be a positive integer, we have $L_0 \geq \lceil \frac{g}{t+1} \rceil$. From (8), we have the number of groups $r = \frac{(g-L_0)}{t} \geq 1$, i.e., $L_0 \leq g - t$. So we have the range for L_0 as follows,

$$\lceil \frac{g}{t+1} \rceil \leq L_0 \leq \min\{L, g - t\} \quad (28)$$

where L represents the total number of existing antennas.

In addition, the value of L_0 must also ensure that $r = \frac{(g-L_0)}{t}$ is a positive integer.

After determining the range and constraints for L_0 , it's possible to verify from the upper bound of L_0 downwards, checking each value whether it meets the condition that r is a positive integer. This process will help identify the scheme that uses the maximum number of antennas, along with the corresponding number of groups and RIS elements. Then substitute these values into the function $f(\lambda)$ and compute the non-zero roots λ_0 of $f(\lambda)$.

$$\lambda_0 = \frac{(t+2)L_0 - 2r + (1-r)t^2 - 2tr + 2t + 1}{(t+1)^2} \quad (29)$$

- After determining λ_0 , it is important to consider the range of possible values for λ .

Given that reducing the number of antennas by t results in an increase of one group, the reduced number of antennas L'_0 must be greater than or equal to the new number of groups r' , that is, $L'_0 \geq r'$. Substituting in the expressions for L'_0 and r' , we get $L_0 - \lambda t \geq \lambda + r$. Considering also that λ must be a positive integer, the range for λ can be determined as

follows,

$$0 \leq \lambda \leq \lfloor \frac{L_0 - r}{t + 1} \rfloor \quad (30)$$

Therefore, we only need to compare the maximum value of λ with λ_0 .

APPENDIX C

PROOF OF LEMMA 4

For condition C1, since we perform replication and vertical concatenation based on the MS MAPDA and MN PDA, and the number of "*" in each column of the MS MAPDA is identical to that in the MN PDA, the number of "*" in each column of the resulting array remains consistent after replication. Therefore, condition C1 is satisfied. Condition C2 can be satisfied simply by filling integers sequentially.

For Condition C3, it is guaranteed to be satisfied for the original MS MAPDA and MN PDA before replication. After replication, the selection of users served in each time slot ensures that the columns corresponding to each user do not overlap. Therefore, Condition C3 is also satisfied.

For Condition C4, since we select the users served in certain time slots from both the MS MAPDA and the MN PDA to be served simultaneously in the same time slot, it suffices to prove that the user groups in the MS MAPDA and the MN PDA can correspond in an optimal grouping manner. In other words, for each time slot, the $t + L_1$ users in the MS MAPDA and the $(r - 1)(t + 1)$ users in the MN PDA can be served simultaneously. If this condition is satisfied, then Condition C4 is also fulfilled.

We will use the following saturating matching lemma to prove that our construction process guarantees the time slots in the MS MAPDA and the MN PDA can be matched.

Lemma 5 (Matching, [23]). Given a bipartite graph $G = (\mathcal{X}, \mathcal{Y}; \mathcal{E})$, if there exist two positive integers m and n such that $d(x) = m$ and $d(y) = n$, then there is a saturating matching for \mathcal{X} if $m \geq n$, i.e., there exists a matching with $|\mathcal{X}|$ edges.

From the previous content, we constructed a bipartite graph $G_1 = (\mathcal{X}_1, \mathcal{Y}_1; \mathcal{E}_1)$, where the degrees of the two parts are given as:

$$d(\mathcal{X}_1) = \frac{\binom{K-(t+L_1)}{t+1} \binom{K-(t+L_1)-(t+1)}{t+1} \dots \binom{K-(t+L_1)-(r-2)(t+1)}{t+1}}{(r-1)!}.$$

$$d(\mathcal{Y}_1) = \binom{K - (r-1)(t+1)}{t+L_1}$$

Then we replicate \mathcal{X}_1 $\binom{t+L_1-1}{t}$ times and the definition of edge is the same as G_1 to obtain a new bipartite graph $G_2 = (\mathcal{X}_2, \mathcal{Y}_2; \mathcal{E}_2)$ where $d(\mathcal{X}_2) = d(\mathcal{X}_1)$ and $d(\mathcal{Y}_2) = d(\mathcal{Y}_1)\binom{t+L_1-1}{t}$.

Then we replicate \mathcal{X}_2 and \mathcal{Y}_2 m times and n_2 times respectively to obtain the \mathcal{X} and \mathcal{Y} . This obtain a bipartite graph such that its two vertex parts have the same vertices, i.e.

$$m \binom{t+L_1-1}{t} \binom{K}{t+L_1} = n_2 \frac{\binom{K}{t+1} \binom{K-(t+1)}{t+1} \dots \binom{K-(r-2)(t+1)}{t+1}}{(r-1)!}.$$

In this case we have a our desired bipartite graph $G = (\mathcal{X}, \mathcal{Y}, \mathcal{E})$ where the edge is defined as the same as the G_1 . Then we have $d(\mathcal{X}) = n_2 d(\mathcal{X}_2)$ and $d(\mathcal{Y}) = m d(\mathcal{Y}_2)$. Then

$$\begin{aligned} d(\mathcal{X}) &= n_2 d(\mathcal{X}_1) \\ &= n_2 \frac{\binom{K-(t+L_1)}{t+1} \binom{K-(t+L_1)-(t+1)}{t+1} \dots \binom{K-(t+L_1)-(r-2)(t+1)}{t+1}}{(r-1)!} \\ &= n_2 \frac{[K-(t+L_1)]!}{[(t+1)!]^{r-1} (r-1)! [K-(t+L_1)-(r-1)(t+1)]!} \end{aligned} \quad (31)$$

and

$$\begin{aligned} d(\mathcal{Y}) &= m d(\mathcal{Y}_2) \\ &= m \binom{t+L_1-1}{t} d(\mathcal{Y}_1) \\ &= m \binom{t+L_1-1}{t} \binom{K-(r-1)(t+1)}{t+L_1} d(\mathcal{Y}_1) \\ &= m \binom{t+L_1-1}{t} \binom{K}{t+L_1} \frac{[K-(t+L_1)]! [K-(r-1)(t+1)]!}{K! [K-(r-1)(t+1)-(t+L_1)]!} \\ &= n_2 \frac{[K-(t+L_1)]!}{[(t+1)!]^{r-1} (r-1)! [K-(t+L_1)-(r-1)(t+1)]!} = d(\mathcal{X}) \end{aligned} \quad (32)$$

Combining Eq. (32) with Lemma 5, we can prove that this bipartite graph must have a perfect matching. This implies that the multi-antenna groups and single-antenna groups can be perfectly matched to satisfy C4.