ERF: Energy Research and Forecasting Model

Aaron Lattanzi¹, Ann Almgren¹, Eliot Quon², Mahesh Natarajan¹, Branko Kosovic³, Jeffrey Mirocha⁴, Bruce Perry², David Wiersema⁴, Donald Willcox¹, Xingqiu Yuan⁵, Weiqun Zhang¹

 ${}^{1}\text{Lawrence Berkeley National Laboratory} \\ {}^{2}\text{National Renewable Energy Laboratory} \\ {}^{3}\text{Johns Hopkins University} \\ {}^{4}\text{Lawrence Livermore National Laboratory} \\ {}^{5}\text{Argonne National Laboratory}$

Key Points:

- The Energy Research and Forecasting (ERF) code is a next-generation atmospheric flow solver that can leverage modern computational resources.
- ERF contains key capabilities that enable the simulation of atmospheric flows relevant to atmospheric science and wind energy technology.
- ERF has been verified against benchmark data for a variety of idealized test cases.

Corresponding author: Aaron Lattanzi, amlattanzi@lbl.gov

Abstract

High performance computing (HPC) architectures have undergone rapid development in recent years. As a result, established software suites face an ever increasing challenge to remain performant on and portable across modern systems. Many of the widely adopted atmospheric modeling codes cannot fully (or in some cases, at all) leverage the acceleration provided by General-Purpose Graphics Processing Units (GPGPUs), leaving users of those codes constrained to increasingly limited HPC resources. Energy Research and Forecasting (ERF) is a regional atmospheric modeling code that leverages the latest HPC architectures, whether composed of only Central Processing Units (CPUs) or incorporating GPUs. ERF contains many of the standard discretizations and basic features needed to model general atmospheric dynamics as well as flows relevant to renewable energy. The modular design of ERF provides a flexible platform for exploring different physics parameterizations and numerical strategies. ERF is built on a state-of-the-art, well-supported, software framework (AMReX) that provides a performance portable interface and ensures ERF's long-term sustainability on next generation computing systems. This paper details the numerical methodology of ERF and presents results for a series of verification and validation cases.

Plain Language Summary

The Energy Research and Forecasting (ERF) model is a new code for simulating atmospheric flows that is able to efficiently model regional weather as well as local flow phenomena. ERF is built on a state-of-the-art, well-supported, software framework that allows ERF to run on computers from laptops through supercomputers. In addition to its key uses for numerical weather prediction, studying atmospheric dynamics, and wind energy research, ERF is designed to provide a flexible computational framework for the exploration and investigation of different physics representations and solution strategies.

1 Introduction

Computational modeling plays a major role in improving our fundamental understanding of atmospheric flow physics, with practical application to weather forecasting, insight into extreme weather events, and renewable energy research. The wide range of spatiotemporal scales present in such systems, from global to mesoscale to microscale, makes accurate modeling of atmospheric flows challenging.

Engineering applications tend to focus on the dynamics of the turbulent atmospheric boundary layer (ABL) in which wind farms typically operate. Research in these areas benefit from advances in high-performance computing (HPC) architectures, which can dramatically increase simulation throughput (Donahue et al., 2024), thereby enabling larger problem sizes and/or shorter times to solution. For example, studies of tropical cyclones can require large mesoscale domains $(3,000 \text{ km} \times 3,000 \text{ km})$ with high-resolution nested microscale patches ($80 \text{ km} \times 80 \text{ km}$) (Stern et al., 2021). Flow within the microscale domain is typically calculated with large-eddy simulation (LES) and grid spacing $\Delta \sim$ $\mathcal{O}(10)$ m (Stern et al., 2021; Sanchez Gomez et al., 2023). However, an order of magnitude higher resolution ($\Delta \sim \mathcal{O}(1)$ m) is needed to capture surface winds during a hurricane (Ma et al., 2024), which pushes the limit of computational resources if meso- and microscales are considered simultaneously. These resolution requirements for LES also apply to the simulation of canonical ABLs, with stable boundary layers requiring $\Delta \sim$ $\mathcal{O}(1)$ m (Beare et al., 2006a; Sauer & Muñoz-Esparza, 2020; Wurps et al., 2020), unless advanced turbulence models are used (Kosović & Curry, 2000; Basu & Porté-Agel, 2006; Zhou & Chow, 2011). Increased computational throughput also enables the simulation of more comprehensive ensembles that characterize uncertainty in renewable energy forecasts (Ren et al., 2015; Yan et al., 2022). For example, over 50 simulations of the Weather Research and Forecasting (WRF) (Skamarock et al., 2021) model were used to create

a European wind resource atlas (Hahmann et al., 2020); similar efforts have been undertaken with WRF in the U.S. both on- and off-shore (Draxl et al., 2015; Bodini, Optis, et al., 2024). While existing numerical weather prediction (NWP) models, such as WRF, have seen widespread use in regional weather prediction and dynamic downscaling of mesoscale conditions to turbulence-resolving microscale flows (Moeng et al., 2007; Mirocha et al., 2014), there is currently no established community code that can provide all of these modeling capabilities and leverage graphics processing units (GPUs) on modern HPC systems (Haupt et al., 2020). To address these needs, we have developed the open-source Energy Research and Forecasting (ERF) model (Almgren et al., 2023).

An improved understanding of atmospheric dynamics will inform next-generation turbine design, control strategies deployed in future wind farms or clusters of farms, and the integration of wind power into the electrical grid (Veers et al., 2019). Consequently, advances in computational science will directly support the integration and application of research across these areas. In particular, downscaling to the microscale, while computationally more expensive and complex, can provide substantial benefit, e.g., in terms of mean absolute error in predicted wind speeds (Sanz Rodrigo et al., 2021; Storey & Rauffus, 2024). Furthermore, using a microscale model with an actuator model to represent operating wind turbines allows one to resolve wind turbine wakes and their effects on downwind turbines. Downscaling combined with turbine modeling provides a real-world wind-farm simulation capability that can be used for retrospective studies of wind farm anomalies or evaluations of new wind-farm controls strategies. Ultimately, the application of these models will have economic consequences. For decadal to annual time scales, wind resource assessment can determine the viability of a wind project (Sanz Rodrigo et al., 2017; Lee & Fields, 2021). For daily to hourly time scales, wind forecasting can determine the dispatchability of wind power (Wang et al., 2011; Hodge et al., 2018) and the profitability of a wind project (Barthelmie et al., 2008; Lee & Fields, 2021).

Modeling, or more specifically "high-fidelity" first-principles based modeling, becomes increasingly indispensable in the offshore environment where limited observations exist but, at the same time, modeling complexity also increases due to coupling between wind and ocean wave fields in the marine ABL (Shaw et al., 2022). Model predictions of the atmospheric state (in terms of three-dimensional wind, density, temperature, and moisture fields) over disparate scales and different environments involves varying practices that depend upon the scales of interest, and modeling choices have implications for how results should be interpreted (Sanz Rodrigo et al., 2017; Haupt et al., 2023).

ERF provides an essential atmospheric simulation capability for renewable energy modelers. For wind energy deployment, it has been established that wind farms interact with the ABL (Allaerts & Meyers, 2018; Bleeg et al., 2018; Vanderwende et al., 2016; Calaf et al., 2010) and each other due to the persistence of wind-farm wakes (Siedersleben et al., 2018). The ability to accurately characterize atmospheric conditions for different deployment scenarios, especially in heterogeneous and dynamic environments—complex terrain, offshore, or coastal—is critical. Moreover, wind farms are growing in size and being developed in close proximity to one another, which necessitates simulations of increasing computational expense (Barthelmie et al., 2020; Maas & Raasch, 2022).

ERF incorporates many of the discretizations and algorithmic choices from WRF to provide a computationally efficient atmospheric simulation capability for mesoscale, idealized microscale, and mesoscale-to-microscale downscaled flows. However, it goes beyond the current WRF capabilities in three key ways: in performance portability across architectures; in the generality of the meshing strategies; and in providing an anelastic option as an alternative to the fully compressible equations. The most fundamental difference between the WRF and ERF dynamical cores is the terrain coordinate system; ERF utilizes height-following coordinates while WRF employs hybrid pressure-based coordinates. Furthermore, we emphasize that ERF is not a "port" of WRF to GPUs but rather an entirely new open-source C++ code base that incorporates existing algorithms

and discretizations. We also acknowledge that there are numerous physics and microphysics options accessible through WRF that are not yet available through ERF.

A summary of all global and regional atmospheric simulation codes is beyond the scope of this paper. Therefore, we briefly discuss *regional* simulation codes able to run on GPUs from at least one vendor. AceCAST (Abdi & Jankov, 2024), FastEddy (Sauer & Muñoz-Esparza, 2020; Muñoz-Esparza et al., 2022), NUMA (Giraldo et al., 2013), COSMO (Fuhrer et al., 2018) and ClimateMachine (Sridhar et al., 2022) solve the compressible form of the equations. AceCAST is self-described as a "modified implementation of the standard CPU-based WRF model", and includes refactored WRF physics and dynamics modules that have been enabled to run on GPUs by way of CUDA and OpenACC directives. AceCAST is not open source and, according to recent documentation, only targets NVIDIA architectures. FastEddy is a large-eddy simulation (LES) code with warm moisture physics and a generalized coordinate system for terrain-following coordinates. However, unlike WRF and ERF, it uses a co-located spatial discretization, rather than an Arakawa C-grid. Like AceCAST, FastEddy uses CUDA for GPU acceleration and thus targets NVIDIA GPUs only; COSMO uses OpenACC directives and also targets NVIDIA GPUs only. NUMA and ClimateMachine use a nodal discontinuous Galerkin (rather than finite volume) discretization and include adaptive mesh refinement through the use of p6est (Isaac et al., 2015), an extension to p4est (Burstedde et al., 2011).

GRASP (Dubovik & et al., 2014) (built from DALES (Heus et al., 2010; Ouwersloot & Attema, 2017)), AMR-Wind (Sharma et al., 2024) and MicroHH (van Heerwaarden et al., 2017) can solve the incompressible/Boussinesq or anelastic equation sets and target wind energy applications. MicroHH uses CUDA for GPU acceleration and thus targets NVIDIA GPUs only. AMR-Wind, also based on AMReX, is portable across multiple GPU architectures, but does not include terrain coordinates, grid stretching, moisture physics, or several other processes necessary for general atmospheric simulations.

While this is not a complete list, we are unaware of any other atmospheric modeling codes that run with NVIDIA (CUDA), AMD (HIP) and Intel (SYCL) GPUs, utilize adaptive mesh refinement in addition to grid stretching and terrain-following coordinates, and have the run-time option to switch between fully compressible and anelastic equation sets. We believe ERF is unique in this combination of capabilities.

In addition to the features above, ERF offers the capability to evolve Lagrangian particles in time. It is known that physical particles play a significant role in many atmospheric flows, such as pollutant and aerosol transport (Alam & Lin, 2008), atmospheric chemistry (Lin, 2013), Lagrangian cloud microphysics (Morrison et al., 2020), wind-borne debris (from tornadoes or hurricanes) (Zhao et al., 2021), and wind turbine blade erosion (Mishnaevsky et al., 2021). ERF "particles" can represent physical particles or particle aggregates; they can also be used as more generic tracer quantities advected with the flow. Using the AMReX support for particles and particle-mesh operations, ERF particles can also interact with the flow field and other quantities stored on the mesh. We show an example of passive particle transport by a moist flow in Section 4.

The paper is organized as follows. In Section 2, we describe the governing equations for compressible and anelastic flows as well as the turbulence and microphysics models, physical forcings, and options for initial and boundary conditions. In Section 3, we describe the numerical discretization of these equations, both spatial and temporal, and describe ERF's approach to mesh refinement. Also, since ERF is designed to be used for wind energy applications and general atmospheric simulations, we describe the wind turbine models included in ERF. To validate ERF's numerics and showcase ERF's capabalities, we present a set of general atmospheric test cases as well as simulations relevant to wind energy in Section 4. In Section 5, we give some background about AMReX and present performance results. Finally, we discuss current and future work in Section 6.

2 Governing equations

Two modes of operation are supported in the ERF dycore: in the first, the fully compressible fluid equations are solved on the mesh; in the second, the velocity field obeys an anelastic constraint and the density field is approximated with the hydrostatic density. Subgrid-scale models for large-eddy simulation (LES), planetary boundary layer (PBL) parameterizations, and additional source terms including microphysics, simplified radiative source terms, and additional forcing terms that can be used with both modes are discussed further below.

2.1 Fully compressible equation set

The compressible equations for the ERF model can be written as

$$\frac{\partial \rho_d}{\partial t} = -\nabla \cdot (\rho_d \mathbf{u}),\tag{1}$$

$$\frac{\partial(\rho_d \mathbf{u})}{\partial t} = -\nabla \cdot (\rho_d \mathbf{u} \mathbf{u}) - \frac{1}{1 + q_v + q_c} (\nabla p' - \delta_{i,3} \mathbf{B}) - \nabla \cdot \boldsymbol{\tau} + \mathbf{F}_u,$$
(2)

$$\frac{\partial(\rho_d \theta_d)}{\partial t} = -\nabla \cdot (\rho_d \mathbf{u} \theta_d) + \nabla \cdot (\rho_d \alpha_\theta \ \nabla \theta_d) + F_\theta + H_n + H_p, \tag{3}$$

$$\frac{\partial(\rho_d \boldsymbol{\phi})}{\partial t} = -\nabla \cdot (\rho_d \mathbf{u} \boldsymbol{\phi}) + \nabla \cdot (\rho_d \alpha_\phi \ \nabla \boldsymbol{\phi}) + \mathbf{F}_\phi, \tag{4}$$

$$\frac{\partial(\rho_d \mathbf{q_n})}{\partial t} = -\nabla \cdot (\rho_d \mathbf{u} \mathbf{q_n}) + \nabla \cdot (\rho_d \alpha_q \nabla \mathbf{q_n}) + \mathbf{F_n} + \mathbf{G_p},$$
(5)

$$\frac{\partial(\rho_d \mathbf{q}_p)}{\partial t} = -\nabla \cdot (\rho_d \mathbf{u} \mathbf{q}_p) + \partial_z \left(\rho_d \mathbf{w}_t \mathbf{q}_p\right) + \mathbf{F}_p.$$
(6)

where $\mathbf{u} = \begin{bmatrix} u & v & w \end{bmatrix}$ is the fluid velocity vector. This equation set is supplemented by an equation of state (EOS),

$$p = P_{00} \left(\frac{R_d \ \rho_d \ \theta_d \ (1 + \frac{R_v}{R_d} q_v)}{P_{00}} \right)^{\gamma}, \tag{7}$$

which allows us to diagnose pressure p from the dry density ρ_d , dry potential temperature θ_d , and water vapor mixing ratio q_v . Here $\gamma = c_p/(c_p - R_d)$, where R_d and c_p are the gas constant and specific heat capacity for dry air, respectively, and P_{00} is a reference value for pressure, set in ERF to be 1×10^5 [Pa].

We define a fixed-in-time base state (also referred to as background state) for pressure $p_0(z)$, density $\rho_0(z)$ and potential temperature $\theta_0(z)$, which are in hydrostatic equilibrium (HSE); see Section 3.8. Then $p' = p - p_0$, $\boldsymbol{\tau}$ is the stress tensor, $\mathbf{B} = -(\rho - \rho_0)\mathbf{g}$ is the buoyancy force, which can also be approximated in ERF as $-\rho_0(\theta - \theta_0)/\theta_0\mathbf{g}$ or $-\rho_0(T-T_0)/T_0\mathbf{g}$ where $T = \theta_d (p/P_{00})^{R_d/c_p}$ is the temperature and T_0 is the base state temperature. \mathbf{F}_u and F_{θ} are momentum and thermal forcing terms (see Section 3.7) and α_i is the diffusivity for scalar *i*.

The vector of transported scalars, $\boldsymbol{\phi} = [k \ \phi_0 \ \dots \ \phi_n]$, includes turbulent kinetic energy (TKE), k, along with arbitrarily many additional scalars, $\phi_i, i = 0, \dots, n$. Source terms for each scalar are contained in \mathbf{F}_{ϕ} and further details on the turbulence models will be provided in Section 2.3. ERF's ability to run with up to thousands of advected quantities allows it to serve as a core platform for atmospheric chemistry calculations where many chemical species must be transported. In general, the non-precipitating water mixing ratio vector $\mathbf{q_n} = [q_v \ q_c \ q_i]$ includes water vapor, q_v , cloud water, q_c , and cloud ice, q_i , although some models may not include cloud ice; similarly, the precipitating water mixing ratio vector $\mathbf{q_p} = [q_r \ q_s \ q_g]$ involves rain, q_r , snow, q_s , and graupel, q_g , though some models may not include these terms. The source terms for moisture variables, $\mathbf{F_p}$, $\mathbf{F_n}$, $\mathbf{G_p}$, and their corresponding impact on potential temperature, H_n and H_p , and the terminal velocity, $\mathbf{w_t}$, are all specific to the employed microphysics model.

2.2 Anelastic approximation

The anelastic equation set we define in ERF replaces the equation of state with a divergence constraint,

$$\nabla \cdot (\rho_0 \mathbf{u}) = 0, \tag{8}$$

where ρ_0 is the base state density as in 2.1. In much of the literature, the anelastic constraint is viewed as resulting from approximating ρ_d by the fixed-in-time ρ_0 in the continuity equation (Equation 1). However, more generally the constraint derives from taking the Lagrangian derivative of the equation of state and approximating the pressure by p_0 (see, e.g. Durran (1989)). This more general derivation does not require smallness of $\rho_d - \rho_0$. For the present purposes we supplement this derivation with the assumption that ρ_d is close to ρ_0 thus we can replace ρ_d by ρ_0 in the governing equations, which makes the continuity equation redundant. However, the separability of these assumptions (smallness of $p - p_0$ vs smallness of $\rho - \rho_0$) will allow us in the future to extend this option to more general applications where the density variations are non-negligible.

When using the anelastic approximation we define the buoyancy force, **B**, for dry air as $\rho_0(\theta - \theta_0)/\theta_0 \mathbf{g}$; other source terms are as defined for the compressible case. In this equation set the pressure perturbation, p', that enters the momentum equation is computed solely from the Poisson equation that results from the divergence constraint and does not enter the equation of state or contribute to any thermodynamic processes. We note that if the domain height is sufficiently small, the base state has negligible variation in the vertical direction, thus ρ_0 is effectively constant in space and the anelastic equation set reduces to the incompressible flow equations.

2.3 Turbulence models

ERF utilizes an expansion of the dynamic viscosity into molecular and turbulent components, $\mu = \mu_{\rm m} + \mu_{\rm t}$, when evaluating the fluid stress tensor

$$\boldsymbol{\tau} = -2\left(\mu_{\rm m} + \mu_{\rm t}\right)\boldsymbol{\sigma},\tag{9}$$

where $\boldsymbol{\sigma} = \mathbf{S} - \mathbf{D}, \mathbf{S} = 1/2 \quad (\nabla \mathbf{u} + \nabla \mathbf{u}^{\mathsf{T}})$ is the strain rate, $\mathbf{D} = 1/3 \quad (\nabla \cdot \mathbf{u}) \mathbb{I}$ is the expansion rate, and \mathbb{I} is the identity matrix. The molecular viscosity may be specified as a run-time constant while the turbulent viscosity is parameterized through various sub-grid scale (SGS) closures. The Smagorinsky (Smagorinsky, 1963; Lilly, 1967) model and 1.5–order TKE model of Deardorff (1980) are available for LES descriptions while the MYNN 2.5 model of Mellor & Yamada (1982) and Nakanishi & Niino (2009) is available for PBL descriptions. We note that PBL schemes, unlike eddy viscosity turbulence models, assume horizontal homogeneity on account of the coarse horizontal grid resolution used in the mesoscale regime and, therefore, only model vertical diffusion processes. Furthermore, while not considered here, PBL schemes may also be non-local, with fluxes depending on the atmospheric state throughout a column of air, and/or coupled to other models to account for microphysics and radiation.

2.4 Cloud Microphysics

Microphysics models describe the evolution of clouds, precipitation, and phase change in the atmosphere through statistical and physical modeling approaches. Currently, ERF includes only Eulerian models for the microphysics, but the particle capability in ERF allows for the development of efficient Lagrangian microphysics models in the future.

The microphysics models in ERF may be broadly grouped into models that include only cloud vapor, cloud water and rain, and those that, in addition, include cloud ice, graupel and snow. The default model of the first type follows that of Kessler (1969); Klemp & Wilhelmson (1978a). The default model for the second type follows the cloud resolving model of Khairoutdinov & Randall (2003), which is akin to the classic Purdue Lin model (Lin et al., 1983; Rutledge & Hobbs, 1984). ERF also allows users to run any of the models without the precipitating components.

3 Numerical Methodology

Here we describe the spatial and temporal discretizations used to approximate the continuous governing equations in Section 2. Additionally, discussions relevant to time step selection, initial/boundary conditions, and physical forcing terms are provided in the following sections.

3.1 Temporal Discretization: Compressible

When solving the fully compressible equations, ERF uses a low-storage third-order Runge-Kutta (RK3) scheme (Wicker & Skamarock, 2002), i.e. to solve

$$\frac{\mathrm{d}\mathbf{S}}{\mathrm{d}t} = f\left(\mathbf{S}\right),\tag{10}$$

where \mathbf{S} is the state vector, we take the following three steps:

$$\mathbf{S}^* = \mathbf{S}^n + \frac{1}{3} f\left(\mathbf{S}^n\right) \Delta t,\tag{11}$$

$$\mathbf{S}^{**} = \mathbf{S}^n + \frac{1}{2} f\left(\mathbf{S}^*\right) \Delta t, \qquad (12)$$

$$\mathbf{S}^{n+1} = \mathbf{S}^n + f(\mathbf{S}^{**}) \Delta t.$$
(13)

Here the superscript n refers to the previous timestep. It is noted that the above scheme is not total variation diminishing (TVD), i.e. it is not guaranteed to be monotonicity preserving. However, the low-storage TVD RK3 scheme of Gottlieb & Shu (1998) is not a significant departure from the above scheme. The third order accuracy of this RK3 scheme for linear advection in ERF has been verified through a convergence study.

As in WRF, the default timestepping scheme includes semi-implicit acoustic substepping within each Runge-Kutta stage although ERF provides options to alternatively use no substepping or explicit substepping. For the semi-implicit substepping we closely follow the scheme as written in Section 2 of Klemp et al. (2007); those equations are included in Appendix A. Here we give a high-level description but point the interested reader to Klemp et al. (2007) for further explanation and motivation for the design choices used here. We note that Equations 4–6 do not directly participate in the substepping; these variables are advanced as if there is no substepping, with the exception that the normal momenta used to define the advective fluxes, $(\rho_d \mathbf{u} \cdot \mathbf{n})$ (where **n** is the normal to that face), is the time average over the RK stage of the intermediate $(\rho_d \mathbf{u} \cdot \mathbf{n})$ values used to advance ρ_d each substep. Thus, algorithmically, in each stage, the solution of Equations 4–6 must always take place after the substepping is complete.

Without substepping, we compute the source term $f(\mathbf{S})$ in each RK stage, multiply it by the associated timestep $(\Delta t/3, \Delta t/2, \Delta t$ for the first, second and third stage, respectively), then add that contribution to the previous time solution \mathbf{S}^n .

When substepping, we define a new set of variables that represent perturbations from the solution at the RK stage where we have most recently computed $f(\mathbf{S})$. The (five) governing equations for the evolution of density, momenta and potential temperature perturbations are provided in Appendix A. In these equations, we use a linearization of the equation of state (valid for small departures from the solution at the previous RK stage) to express the pressure gradient in terms of the gradient of potential temperature. We also linearize the advective terms in each equation but leave the source terms unchanged. This results in five linear equations with five unknowns.

For both the explicit and semi-implicit substepping algorithms, we first update the horizontal momenta using pressure gradient terms evaluated at the previous substep and predicted slightly forward in time; this is the divergence damping approach described in Klemp et al. (2007). When using explicit substepping, we also update the vertical momentum explicitly, then use the updated momenta to compute the updated density and potential temperature. By contrast, when doing semi-implicit substepping, we reduce the (three) equations for vertical momentum, density and potential temperature to a single equation for vertical momentum in which all horizontal differences are computed explicitly but all vertical differences are treated semi-implicitly, resulting in a tridiagonal solve for each column. Due to linearization, coefficients in the tridiagonal matrix do not depend on the substepped solution and thus can be computed once per RK stage.

3.2 Temporal Discretization: Anelastic

When solving the anelastic equations, we instead use a second-order Runge-Kutta (RK2) scheme (with no substepping in each RK stage) which can be written as

$$\mathbf{S}^* = \mathbf{S}^n + f\left(\mathbf{S}^n\right) \Delta t,\tag{14}$$

$$\mathbf{S}^{n+1} = \mathbf{S}^n + \frac{1}{2} \left(f(\mathbf{S}^n) + f(\mathbf{S}^*) \right) \Delta t.$$
(15)

To enforce the anelastic constraint in each Runge-Kutta stage, we first perform the update in time, without considering the constraint, to define a provisional velocity field—e.g., $\mathbf{u}^{*,*}$ in the first stage $\mathbf{u}^{n+1,*}$ in the second. This update explicitly solves Equation 2 using a lagged pressure pertubation, p'. After the update, we project the velocity field by solving, e.g., in the case of the first Runge-Kutta stage,

$$\Delta t \,\nabla \cdot (\nabla \psi) = \nabla \cdot (\rho_0 \mathbf{u}^{*,*}),\tag{16}$$

and setting

$$\mathbf{u}^* = \mathbf{u}^{*,*} - \frac{\Delta t}{\rho_0} (\nabla \psi),$$

$$p' = p' + \psi.$$

An analogous procedure is followed in the second RK step. ERF provides several options for solving the Poisson equation: geometric multigrid, Fast Fourier Transforms (FFTs) and preconditioned GMRES.

3.3 Choosing the Timestep

The solver timestep can be fixed by the user or computed dynamically at each timestep based on the user-specified Courant-Friedrich-Lewy (CFL) number—i.e., adaptive time stepping. For the compressible equations, the adaptive timestep calculation uses the acoustic CFL constraint. We note that when using semi-implicit substepping, the vertical mesh spacing does not appear in the time step calculation. For the anelastic equations, the adaptive timestep calculation uses the advective CFL constraint, which is determined by the fluid speed rather than the sound speed and thus allows much larger timesteps.

When using substepping, if the substep size is not specified by the user (as a fixed value or an even number of substeps per timestep), ERF's default behavior is to utilize 6 substeps per timestep, which matches WRF. Both WRF and ERF default to using just one substep in the first RK stage since Wicker & Skamarock (2002) showed that using only one substep in the first RK stage had no noticeable loss of accuracy or stability.

We note that because acoustic substepping does not involve all the variables, and solving it does not require re-computation of source terms or evaluation of the equation of state, one substep is considerably computationally cheaper than one RK stage. Thus, substepping can be viewed as a way to reduce total computational cost by enabling a larger overall timestep Δt . The selection of the vertical direction to be treated implicitly reflects that the mesh spacing in the vertical is often smaller than the mesh spacing in the horizontal, thus this implicitness removes the vertical mesh spacing from the CFL time step limitation.

3.4 Spatial Discretization and Terrain Coordinates

The spatial discretization in ERF uses the classic Arakawa C-grid with scalar quantities at cell centers and normal velocities at cell faces. Simulations over complex topography use a terrain-following, height-based, vertical coordinate; see Klemp et al. (2007); Sullivan et al. (2014). When terrain-following coordinates are used, the surface topography is specified at nodes (cell corners) either analytically or through parsing a text file. Grid deformation (i.e., the change in the grid due to the presence of non-flat terrain) occurs only in the vertical direction. Metric terms resulting from mesh deformation are included in the governing equations in the same manner as Sullivan et al. (2014).

As in many atmospheric modeling codes, variable mesh spacing in the vertical direction is allowed with or without terrain. The heights of each level can be parsed from a text file as "z levels" (as in WRF), or calculated at run-time given an initial mesh spacing at the bottom surface and a specified growth rate. In the presence of non-flat terrain, the mesh is smoothed from the specified terrain at the bottom of the computational domain to a flat surface at the top of the domain; see Figure 1 for the terrain-fitted grid used in Section 4.3. Three smoothing approaches are offered in ERF: Basic Terrain Following ("BTF"), in which the influence of the terrain decreases linearly with height; Smoothed Terrain Following ("STF"), in which small-scale terrain structures are progressively smoothed out of the coordinate system as height increases; or Sullivan Terrain Following ("Sullivan"), where the influence of the terrain decreases with the cube of height.

Additionally, ERF includes the capability to apply several common isotropic map projections (e.g., Lambert Conformal, Mercator); the compressible equations including the map scale factors are given in Appendix B.




Figure 1: Vertically stretched mesh over the *Witch of Agnesi* hill. The terrain was specified with an analytic formula given in Section 4.3 and the "z levels" were specified in a text file read at runtime. The STF smoothing procedure was used.

3.5 Mesh Refinement

ERF also allows both dynamic and static mesh refinement with sub-cycling in time at finer levels of refinement. Arbitrary integer refinement ratios are allowed although typically ratios of 2, 3 or 4 are used; refinement can also be anisotropic, allowing refinement in one coordinate direction but not another. We utilize two-way coupling, in which the coarse solution is used to provide Dirichlet boundary conditions for the fine solution and the fine solution is averaged down onto the coarser level. In addition, we reflux all advected scalars to ensure conservation; refluxing involves the replacement of fluxes on a coarse mesh by the space-and-time-averaged fluxes on the fine mesh, such that conservation in the multilevel case matches that from a single-level simulation. For coarse-tofine communication, we provide "ghost cell" data for cell-centered data and tangential momentum components to the fine level by interpolating in space and time outside the region covered by the fine level. We also interpolate the normal momentum at the coarsefine interface itself; this ensures mass conservation since the normal momentum is in fact the flux for the density field. In order to ensure that the fine momentum on the coarsefine boundary stays consistent with the interpolated coarse values throughout a fine timestep, we also interpolate the source term for the normal momentum on the coarse-fine interface. When using the anelastic approximation, this ensures that the computation of the updates to the fine momentum do not use any pressure perturbation values from the coarser level, which are not synchronized between levels.

3.6 Advection Schemes

In ERF, the advective fluxes are obtained by multiplying the normal momentum, at the flux location, by the interpolated primitive variable (computed from one of the schemes below). When updating cell-centered quantities, the normal momentum is located at the flux location (cell face). When updating momenta, spatial averaging is utilized to obtain the normal momentum at the flux location. In the presence of complex terrain, we use $(\rho\Omega)$ rather than (ρw) on the vertical faces, where Ω is the velocity component normal to the face.

Default interpolation methods in ERF include second- through sixth-order stencils, which include both centered difference and upwind schemes. For variable q in direction m, the centered schemes (even) and upwind schemes (odd) are

$$q_{m-\frac{1}{2}}\Big|^{2nd} = \frac{1}{2}(q_m + q_{m-1}), \tag{17}$$

$$q_{m-\frac{1}{2}}\Big|_{c_{1}h}^{4th} = \frac{7}{12} \left(q_m + q_{m-1}\right) - \frac{1}{12} \left(q_{m+1} + q_{m-2}\right), \tag{18}$$

$$q_{m-\frac{1}{2}}\Big|_{0}^{6th} = \frac{37}{60} \left(q_m + q_{m-1}\right) - \frac{2}{15} \left(q_{m+1} + q_{m-2}\right) + \frac{1}{60} \left(q_{m+2} + q_{m-3}\right), \tag{19}$$

$$q_{m-\frac{1}{2}}\Big|_{1}^{3rd} = q_{m-\frac{1}{2}}\Big|_{1}^{4th} + \frac{\operatorname{sign}(u_m)}{12}\left[(q_{m+1} - q_{m-2}) - 3(q_m - q_{m-1})\right],$$
(20)

$$q_{m-\frac{1}{2}}\Big|^{5th} = q_{m-\frac{1}{2}}\Big|^{5th} + \frac{\operatorname{sign}(u_m)}{60} \left[(q_{m+2} - q_{m-1}) - 5(q_{m+1} - q_{m-2}) + 10(q_m - q_{m-1}) \right].$$
(21)

Advection of cell centered scalars may also be computed with third-, fifth-, or seventhorder weighted essentially non-oscillatory (WENO) schemes. Currently, ERF supports the classic WENO-JS (G.-S. Jiang & Shu, 1996), WENO-Z (Borges et al., 2008), and an improved third-order WENO-MZQ3 (Kumar et al., 2023) method that preserves order near critical points. For the sake of brevity, we again refer the interested reader to the cited works for more details on the WENO schemes.

The horizontal and vertical interpolation operators may differ when the centered and upwind methods are utilized. However, when using a WENO method, the same scheme must be applied to all directions. For each of the schemes above, the observed order accuracy has been verified to match the theoretical order of accuracy for linear advection.

3.7 Forcing and Sources

Physical forcings available in ERF comprise the standard source terms for atmospheric modeling: Coriolis and geostrophic forcing; Rayleigh damping and sponge layer(s); subsidence; simplified radiative thermal sources; and solution nudging towards a prescribed input sounding. General time- and height-varying tendencies may be included through user-defined functions.

ERF also supports models for wind farm parametrization in which the effects of wind turbines are represented by imposing a momentum sink on the mean flow and/or TKE. Currently, the Fitch (Fitch et al., 2012a), Explicit Wake Parametrization (EWP) (Volker

et al., 2015a), Simplified Actuator Disk (SAD) (Burton et al., 2011b), and Generalized Actuator Disk (GAD) (Mirocha et al., 2014) models are supported.

Removal of short-wavelength oscillations, $\mathcal{O}(2\Delta x)$, can be crucial to maintaining numerical stability. To control numerical dissipation and high frequency fluctuations, ERF includes optional source terms from a sixth-order numerical diffusion operator (Xue, 2000). By default, the sixth-order diffusion is not active and, unless otherwise stated, was not utilized to generate results herein.

3.8 Initial and Boundary Conditions

For realistic problems, the initial data and base state may be read from met_em files generated by the WRF Preprocessing System (WPS) (Skamarock et al., 2021) or from the wrfinput file generated during a WRF initialization, both of which are in NetCDF format. For idealized problems, the initial data and base state may be constructed from 1-D input sounding data or specified by the user. Custom perturbations, which are separately specified by the user, can be added to the initial and background state. When constructing the background (HSE) state during initialization, we use a Newton-Raphson approach to solving the non-linear root finding problem that stems from requiring that the density, pressure and potential temperature satisfy both the hydrostatic balance and the equation of state. Users have the option to define a dry or moist background state. For ideal simulations based on an input sounding (as in WRF), the background state is initialized in HSE starting from the surface pressure, potential temperature, and water vapor mixing ratio; the Newton-Raphson approach is used to match the input profiles of potential temperature and water vapor mixing ratio at every height.

Lateral boundary conditions in ERF can be specified for idealized simulations as periodic, inflow, outflow, or open. More realistic conditions include the use of time-varying values read in from external files, such as the met_em files generated by the WPS or wrfbdy files generated during a WRF initialization. If boundary files are used, ERF allows for nudging of the solution state, in a manner similar to WRF, towards the boundary data. ERF also has the option to run precursor simulations where planes of data are saved at specified times and later read in as boundary data, analogous to the wrfbdy files.

The bottom surface boundary condition can be specified as a simple (slip or noslip) wall or by specifying surface momentum and scalar fluxes using Monin-Obukhov similarity theory (MOST) (Monin & Obukhov, 1954; van der Laan et al., 2017). When utilizing MOST, the surface roughness, z_0 , may be specified as a constant, read from a file, or dynamically computed from the Charnock (Charnock, 1955) or shallow water (Jiménez & Dudhia, 2018) formulation. Time-varying land or sea surface temperatures may also be specified in conjunction with MOST.

4 Verification & Validation

Use cases for ERF are centered around numerical weather prediction and renewable energy deployment. In Section 4.1 we first consider simulations relevant to general atmospheric flows. Sections 4.2–4.3 then consider microscale ABL and flow over terrain, respectively. Finally, Section 4.4 presents simulation results relevant to wind energy applications. In Section 4.1.1 we explicitly compare anelastic and compressible results, with and without mesh refinement. However, in the interest of space, remaining simulation results were all run at a single level with the compressible formulation. Unless otherwise stated, the 3rd order advection scheme is utilized in the horizontal and vertical directions and compressible simulations employ acoustic substepping with 4-6 substeps per full timestep.

For a summary of the ERF simulation configurations considered in this section, we refer the reader to Appendix C and Table C1. Here, we briefly describe the organiza-

tion of Table C1. The domain extents describe the height of the domain in the 1-D singlecolumn model (SCM) case; the length and height of the domain for the 2-D cases; and the streamwise, lateral, and vertical extents of the domain for the 3-D cases. Parenthetical quantities are derived from other inputs and have been included for completeness. Initial fields are either uniform or vary with height based on an input sounding. Perturbations were superimposed on the initial fields to model the specific mesoscale problem of interest or to help initiate turbulence in the microscale. For the canonical, non-neutral ABL simulations, MOST specifies the surface kinematic heat flux for the BOMEX case and the surface temperature for the GABLS cases. Both Smagorinsky and Deardorff 1.5 order TKE turbulence closures have been utilized; with Deardorff, the model coefficients follow Moeng (1984). Several cases (as noted in Table C1) used Rayleigh damping to attenuate waves in the free atmosphere. When applicable, the damping strength, an inverse timescale, is provided and we note that ramping with a sine-squared function from 0 at the bottom of the damping layer to the specified value at the top was employed.

4.1 Atmospheric Dynamics

Generally speaking, realistic atmospheric flows involve a variety of complex physical processes that are strongly coupled to the flow field. The idealized test cases considered here exercise different physics that are relevant to realistic problems—e.g., buoyant transport induced by thermal or moisture effects. In the following subsections, ERF is compared to benchmark results for problems involving moist and dry bubbles, as well as convective cells with precipitation.

4.1.1 Density Current

Density currents are a crucial feature in a variety of atmospheric phenomena such as thunderstorms, sea breezes, and cold front passages (Droegemeier & Wilhelmson, 1987). The density current test case (Straka et al., 1993; Skamarock et al., 2012) is a well-defined benchmark to assess numerical models that simulate atmospheric flows. The test case consists of a cold bubble that descends to the ground due to negative buoyancy, in a quiescent, hydrostatic background.

The initial condition consists of a cold bubble characterized by a temperature decrement given by

$$\Delta T = \begin{cases} -15 \left[\frac{\cos(\pi L) + 1}{2} \right] & L < 1\\ 0 & L > 1, \end{cases}$$
(22)

where

$$L = \sqrt{\left(\frac{x - x_c}{x_r}\right)^2 + \left(\frac{z - z_c}{z_r}\right)^2},\tag{23}$$

with $x_c = 0.0 \text{ m}$, $z_c = 3 \times 10^3 \text{ m}$, $x_r = 4 \times 10^3 \text{ m}$, and $z_r = 2 \times 10^3 \text{ m}$. Constant diffusivities of $\nu = \alpha_{\theta} = 75 \text{ m}^2/\text{s}$ are employed; no turbulence model is used. Due to the symmetry of the initial conditions and the domain, here we run only half the domain with a symmetry boundary condition at x = 0.

As the simulation proceeds, the cold bubble descends due to negative buoyancy, hits the bottom surface, and spreads laterally. The Kelvin-Helmholtz shear instability results in the formation of vortices as the bubble propagates towards the right. Figure 2 shows the evolution of the perturbational potential temperature, $\theta'_d = \theta_d - 300$ K, at t = 300, 600, 900 s with the compressible and anelastic modes. Additionally, the same comparison is drawn in Figure 3 but with AMR enabled. For the AMR simulations, the first level of refinement provides the described grid resolution, while the base grid is twice

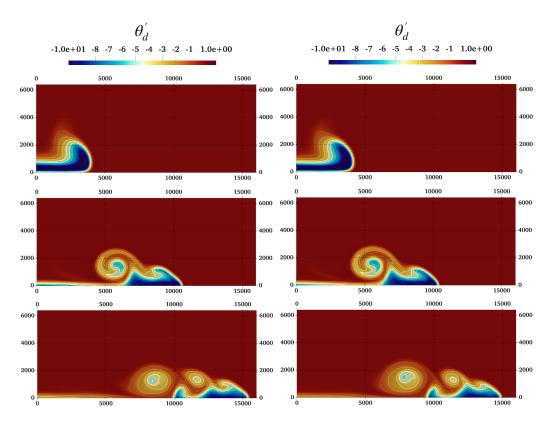


Figure 2: Perturbational potential temperature, $\theta'_d = \theta_d - 300$ K, (top to bottom) at t = 300, 600, 900 s for (left) compressible and (right) anelastic modes. Contour lines are spaced every 1 K.

as coarse; the tagging criterion for refinement is $\theta_d \leq 299$ K. For each simulation configuration (compressible and anelastic with and without AMR), the contours of perturbational potential temperature agree with those reported in Straka et al. (1993).

4.1.2 Dry and Moist Bubble rise

Here we compare dry and moist bubble rise simulations in ERF to benchmark data from Bryan & Fritsch (2002); Duarte et al. (2014). The bubble rise cases rigorously test the buoyancy source term as well as the latent heat associated with phase change from water vapor to cloud water.

For the dry bubble simulation, a base state in HSE is first established for the constant $\theta_d = 300$ K profile and a surface pressure of $p_b = 1 \times 10^5$ Pa. Thermal perturbations, $\Delta \theta_d$, are added to generate the warm bubble as follows

$$\Delta \theta_d = \begin{cases} 2\cos^2\left(\frac{\pi r}{2}\right) & r < 1\\ 0 & r > 1, \end{cases}$$
(24)

where

$$r = \sqrt{\left(\frac{x - x_c}{x_r}\right)^2 + \left(\frac{z - z_c}{z_r}\right)^2},\tag{25}$$

with $x_c = 10.0$ km, $z_c = 2.0$ km, and $x_r = z_r = 2.0$ km. The fluid is treated as inviscid.

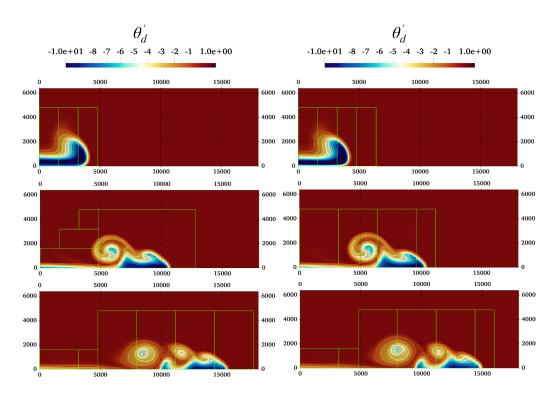


Figure 3: Perturbational potential temperature, $\theta'_d = \theta_d - 300$ K, (top to bottom) at t = 300, 600, 900 s for (left) compressible and (right) anelastic modes with AMR. Contour lines are spaced every 1 K and the green outline denotes the regions of refinement.

At constant pressure, the warm perturbations noted above yield negative density perturbations. Consequently, vertical buoyancy forces cause the bubble to rise, along with the formation of characteristic "rotors" at the edge of the stretched bubble and strong thermal gradients near the center line. The final state for the perturbational potential temperature and vertical velocity illustrate these features; see Figure 4. The final rise height of the bubble, 8 [km], agrees with the results provided in Bryan & Fritsch (2002).

For the moist bubble simulation, the initial HSE base state is characterized by a constant equivalent potential temperature, $\theta_e = 320$ K, and constant total moisture content $q_{t0} = q_{v0}+q_{c0} = 0.02$ kg/kg. Establishing the HSE background state for the moist bubble follows the same approach as all other cases, except that it requires embedded Newton-Raphson iterations to satisfy the constraint on equivalent potential temperature

$$\theta_e \stackrel{\text{def}}{\equiv} T_0 \left(\frac{p_0}{p_b}\right)^{-\frac{R}{c_p + c_{pl}q_{t0}}} \exp\left[\frac{L_v q_{vs0}}{(c_p + c_{pl}q_{t0})T_0}\right],\tag{26}$$

with q_{vs} being the vapor mixing ratio at saturation. Similar to the dry bubble case, buoyancy drives upward motion and rotors form at the bubble edge; see Figure 5. However, the latent heat due to phase change provides additional thermal sources that increase the fluctuations in equivalent potential temperature and lead to reduced rise height; see Figure 5 (left) versus Figure 4 (left).

4.1.3 Idealized two-dimensional squall line

A squall line is a continuous linear formation of thunderstorms or convective cells that may produce severe weather with heavy precipitation. There are a variety of fac-

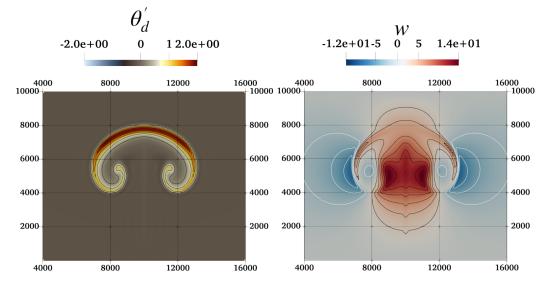


Figure 4: Dry bubble rise with (left) θ'_d contoured every 0.4 K and (right) w velocity contoured every 2 m/s. Black contours are positive and white contours are negative.

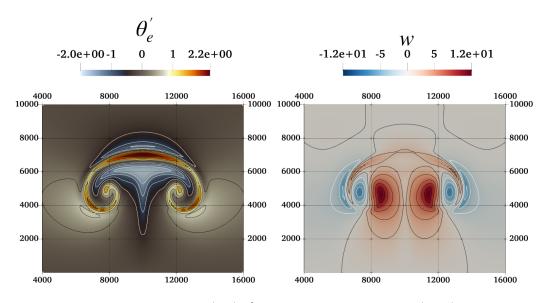


Figure 5: Moist bubble rise with (left) θ'_e contoured every 0.4 K and (right) w velocity contoured every 2 m/s. Black contours are positive and white contours are negative.

tors that determine the development of a squall line—moisture content, wind shear or squall (a sudden sharp increase in wind near the surface), atmospheric instability, and lifting mechanisms such as cold pool and gust front formation (Rotunno et al., 1988). In this section we describe an idealized, two-dimensional squall line test case that has been widely studied in the literature (Klemp & Wilhelmson, 1978b; Weisman & Klemp, 1984; Gabersek et al., 2011; Tissaoui et al., 2022). This test case incorporates many features that are significant for a wide range of atmospheric flows—buoyancy, phase change and associated latent heat release, precipitation and cloud formation.

The initial condition consists of an ellipse-shaped, warm, moist bubble in a moist, hydrostatic background with an initial wind shear profile. The potential temperature increment is given by

$$\Delta \theta_d = \begin{cases} 3\cos^2\left(\frac{\pi r}{2}\right) & r < 1\\ 0 & r > 1, \end{cases}$$
(27)

where

$$r = \sqrt{\left(\frac{x - x_c}{x_r}\right)^2 + \left(\frac{z - z_c}{z_r}\right)^2},\tag{28}$$

with $x_c = 75 \times 10^3$ m, $z_c = 2 \times 10^3$ m, $x_r = 10 \times 10^3$ m, and $z_r = 1.5 \times 10^3$ m. The initial profile for the horizontal velocity is given by

$$u(z) m/s = \begin{cases} -12.0 + 0.0048z & z \le 2500 m\\ 0.0 & z > 2500 m. \end{cases}$$
(29)

Constant diffusivities of $\nu = \alpha_i = 200 \text{ m}^2/\text{s}$ are utilized for all variables; no turbulence model is employed.

Development of the squall line at an early stage, t = 1500 s, and a mature stage, t = 7500 s, are illustrated in Figure 6. Initially, the density inside the warm bubble is lower than the background density and buoyant forces drive updrafts, as shown by the velocity vectors. The surface wind shear tilts the buoyant updrafts as they rise up. Furthermore, no condensation occurs initially since the initial condition is characterized by a water vapor mixing ratio that is less than the saturation mixing ratio at all heights. Cloud water formation begins to occur at $t \approx 420$ s due to the vertical transport of water vapor by the warm bubble; the latent heat release from this phase change further contributes to vertical transport. Outline of the cloud, as characterized by the black $q_c = 10^{-5}$ kg/kg isocontour, is also shown in Figure 6a). The cloud water begins to form rain through the processes of autoconversion and accretion at $t \approx 660$ s. The formation of cloud water and rain results in increased density (known as precipitation loading), and creates negative buoyancy, resulting in downdrafts; see Figure 6a.

Once formed, rain begins to fall with a downward terminal velocity and accumulation at the surface begins around $t \approx 1200$ s. As the rain reaches the surface, it absorbs latent heat from the surrounding air and evaporates to form water vapor. This results in a rain-cooled cold front, as shown in Figure 6b. The evaporation of rain and undersaturated cloud water creates more water vapor that rises and condenses to form clouds. This results in a feedback mechanism that sustains the thunderstorm, with a cold front that propagates to the right. The updrafts are strengthened as they rise into the cloud, which leads to the typical anvil cloud structure shown in Figure 6b.

Figure 7 illustrates the development of q_c , q_r , and θ'_d , which shows the warm and cold regions in the flow relative to the background, at three different times: t=3000, 6000, and 9000 s. It can be seen that the maximum height to which the cloud rises is ≈ 14 km. During the later stages (t=9000 s), a cold pool of rain-cooled air is formed at the bottom due to the evaporation of rain and the associated latent heat absorption from the

surrounding air. The cloud evolution, maximum height, and the potential temperature perturbation qualitatively agree with results presented in Tissaoui et al. (2022).

Accumulation of precipitation at the ground is a quantity of interest in a squall line simulation, and is computed using the values in the first mesh cell above the ground. The total accumulation over time T is obtained by adding the accumulation over each time step Δt , and is given by

$$h(x,y) = \sum_{t=0}^{T} \left(\frac{\rho_d q_r w_t \Delta t}{\rho_{\text{water}}} \right),$$

where ρ_d is the density of dry air, q_r is the mixing ratio of rain water, w_t is the terminal velocity of rain, and ρ_{water} is the density of water. A comparison of the rain accumulation obtained from ERF and WRF (Skamarock et al., 2021) is shown in Figure 8 at t = 3000, 6000, and 9000 s. The rainfall is confined to a strip of length 20 km about the center of the domain, which is typical in such simulations. Good quantitative comparison is observed between WRF and ERF.

In addition, to demonstrate ERF's ability to advect tracer particles in parallel, we show a simulation of the same two-dimensional squall line test case in which we initialize 20 tracer particles per grid cell inside the warm bubble. Figure 9 shows the location of the particles and the contours of cloud water mixing ratio at simulated times t=0, 3000, 6000, and 9000 s.

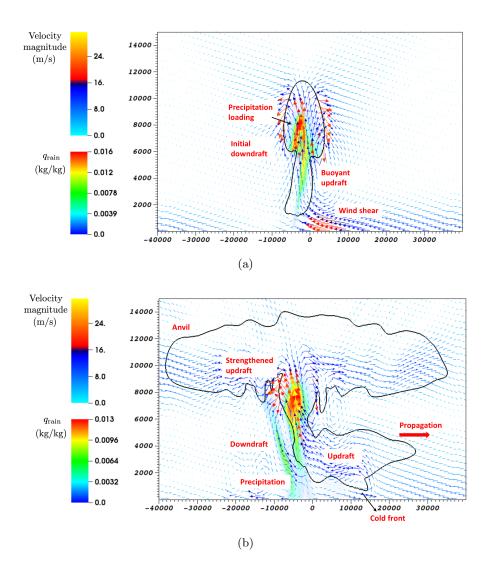


Figure 6: Development of the two-dimensional squall line. Vectors of velocity colored by velocity magnitude, $q_c = 10^{-5}$ kg/kg isocontour (black line), and contours of rain are shown: (a) at t=1500 s showing the surface wind shear, buoyant updrafts, precipitation accumulation inside the cloud, and initial downdrafts, and (b) at t=7500 s showing the propagation of the squall line, the cold front, updrafts and downdrafts, precipitation, and the anvil structure of the cloud.

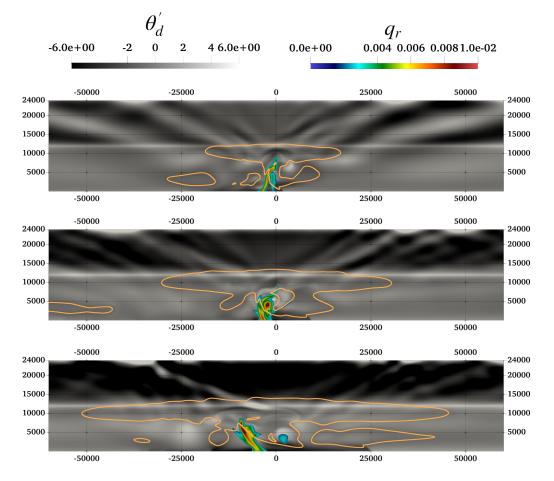


Figure 7: The squall line simulation at (top) 3000 s, (middle) 6000 s, and (bottom) 9000 s. The orange contour denotes the cloud $q_c=10^{-5}$ kg/kg and the perturbation potential temperature is given by $\theta'_d = \theta_d(t) - \theta_d(0)$ K. Note, the horizontal *x*-direction has been clipped to $[-60\ 60]$ km to highlight the region of interest around the cloud.




Figure 8: The rain accumulation, h(x), obtained from ERF (solid lines) versus WRF (markers) for the squall line case at times t = 3000,6000 and 9000 s.

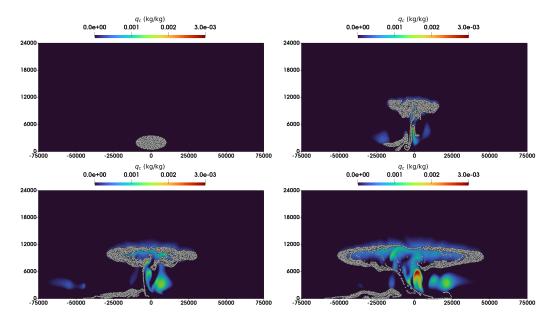


Figure 9: Two-dimensional squall line simulation with particles (row-wise) at t = 0, 3000, 6000 and 9000 s. The particles and contours of cloud water mixing ratio are shown.

4.1.4 Three-dimensional supercell

The supercell case is a three-dimensional version of the squall line described in Section 4.1.3, and has been recently studied by Tissaoui et al. (2022); Kang et al. (2024). The initial background state and the wind shear are the same as the squall line test case but the initial warm bubble is three-dimensional and characterized by Eq. 27, with

$$r = \sqrt{\left(\frac{x - x_c}{x_r}\right)^2 + \left(\frac{y - y_c}{y_r}\right)^2 + \left(\frac{z - z_c}{z_r}\right)^2},\tag{30}$$

with $x_c = 75 \times 10^3$ m, $y_c = 50 \times 10^3$ m, and $z_c = 2 \times 10^3$ m, $x_r = 10 \times 10^3$ m, $y_r = 10 \times 10^3$ m, and $z_r = 2 \times 10^3$ m. The initial horizontal wind velocity profile is the same as in Eq. 29. Constant diffusivities of $\nu = \alpha_i = 33.33$ m²/s are employed for all variables; no turbulence model is employed.

The evolution of the three-dimensional supercell is qualitatively similar to the twodimensional squall line; see Section 4.1.3. The initial warm, moist bubble rises upward due to buoyancy, and as the bubble rises, water vapor begins to condense to form cloud water at $t \approx 300$ s. The cloud water agglomerates to form rain at $t \approx 540$ s, and precipitation accumulation on the ground begins at $t \approx 800$ s. The under-saturated cloud water and the falling rain evaporate leading to the formation of more water vapor that rises and condenses, creating a feedback loop that intensifies the supercell. Figure 10 shows a ray-trace rendering of the supercell at t=7200 s, highlighting the the main features of the supercell evolution. The isocontour of cloud water mixing ratio ($q_c = 10^{-5}$ kg/kg) in white, rain water mixing ratio ($q_r = 10^{-4}$ kg/kg) in blue, the anvil cloud structure, rain-cooled cold front, and the storm propagation are shown.

Figure 11 shows the evolution of q_c , q_r , and θ'_d (y=0 and z=0 slices) at t=1800, 3600, 5400, and 7200 s. It can be seen from the cloud water isocontour that the cold front evolves into a characteristic bow-shaped structure and propagates to the right. The maximum height to which the cloud rises is ≈ 14 km. The z=0 slice of the potential temperature perturbation shows the formation of a region near the ground that is evaporatively cooled by rain. The q_r isocontour shows that the rain formation is confined to the central region of the supercell, spanning ≈ 20 km and 40 km in the x- and y-directions, respectively. Precipitation on the ground is further confined, with the heaviest accumulation observed within a region of 10 km and 5 km in the x- and y-directions, respectively.

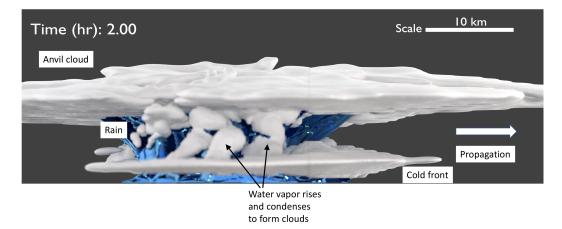


Figure 10: Ray trace rendering (in Blender v2.81 (Community, 2018)) of the supercell evolution highlighting the main features. Isocontours of cloud water ($q_c=10^{-5}$ kg/kg) in white and rain water ($q_r=10^{-4}$ kg/kg) in blue are shown.

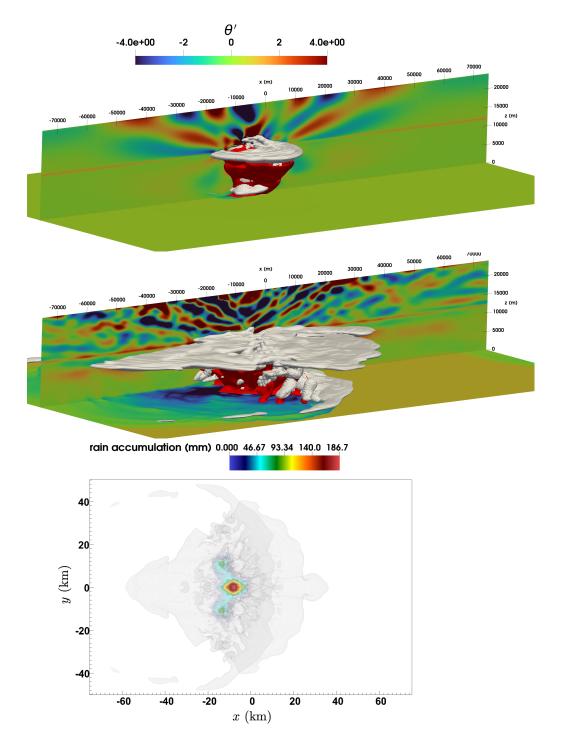


Figure 11: Evolution of the three dimensional supercell: Isocontour of cloud water mixing ratio $(q_c = 10^{-5} \text{ kg/kg})$ in white, rain water mixing ratio $(q_r = 10^{-4} \text{ kg/kg})$ in red, and contours of potential temperature perturbation (y=0 and z=0 slices) $(\theta'_d = \theta_d(t) - \theta_d(0) \text{ K})$ at t=1800 s (top), and 7200 s (middle), and the total rain accumulation on the ground in mm at t = 7200 s (bottom).

4.2 Microscale ABL

Having considered representative mesoscale phenomena in Section 4.1, we turn our attention to the microscale. Here we assess the ability of ERF to resolve realistic features of the turbulent ABL under varying atmospheric stability conditions, with and without moisture. We simulate canonical neutral and stable dry ABLs before turning to a convective ABL capped by shallow cumulus clouds. The latter case includes more realistic atmospheric forcings derived from field data. For all three ABL studies, we present our results alongside code intercomparisons found in literature.

4.2.1 Conventionally Neutral Atmospheric Boundary Layer

Evaluations of turbulence-resolving LES typically begin with the idealized, conventionally neutral boundary layer, also known as an inversion-capped or conditionally neutral ABL. This ABL is characterized by uniform mean potential temperature with overlying layers of stably stratified air. The capping inversion is a thin, strongly stable layer with a large temperature gradient, which prevents the growth of the ABL over time through the buoyant destruction of turbulence. Here, we evaluate an idealized neutral ABL that corresponds to realistic conditions observed at the U.S. Department of Energy's Scaled Wind Farm Technology facility (Mirocha et al., 2018).

We specifically base our model validation effort on the high-resolution cases from Mirocha et al. (2018). This benchmark study included a higher-order upwind scheme with 5^{th} (3rd)-order horizontal (vertical) advection operators, which mimics a typical WRF model configuration: and a 2nd-order central-differencing scheme that follows an established LES code, the Simulator for Wind Farm Applications (Churchfield et al., 2012). The higher-order upwind approach utilizes a grid with horizontal (vertical) spacing $\Delta x =$ 15 m ($\Delta z = 5$ m)—i.e., an aspect ratio of 3 that follows WRF best practices (Mirocha et al., 2010; Kirkil et al., 2012). The 2nd-order central approach utilized a uniform grid with $\Delta x = \Delta z = 7.5$ m. We initialize the solution from an idealized sounding: surface pressure of 1000 hPa; constant wind speed, equal to the geostrophic wind vector (U_a) V_a = (6.5, 0) m/s; constant potential temperature of 300 K up to base of the capping inversion at 500 m; a capping inversion between 500 and 650 m with strength of 10 K/km; and an overlying weakly stable layer with lapse rate of 3 K/m. The solution is advanced with $\Delta t = 0.2$ and 0.1 s for the high and low-order schemes, respectively. These timestep sizes corresponded to an acoustic CFL number of over 4 but an advective CFL of less than 0.1. To address the propagation of acoustic waves, we use 10 acoustic substeps per time step. A preliminary study (not shown) found that, for canonical conditions such as those under consideration here, larger timesteps with 10 or more accompanying substeps could be used with no ill effect. To encourage the development of turbulence, we follow Churchfield et al. (2012) and add deterministic, divergence-free, sinusoidal perturbations (with amplitude of $0.1U_q$ and 12 wave periods in the horizontal directions) to the lowest 500 m of the computational domain. While these ABL cases represent only a small subset of practical configurations of ERF, a comprehensive model sensitivity analysis is beyond the scope of the current paper.

As in the benchmark study of Mirocha et al. (2018), we advance the solution in time until a local maximum in the 10-min, planar-averaged wind speed at 80 m above ground level (AGL) is reached. The analysis period starts and ends 1 hr before and after the time corresponding to the wind-speed maximum. This reference time is at 14.2 hr and 14.7 hr for higher-order upwind and 2^{nd} -order central difference simulations, respectively . Horizontal and vertical slices through the solution field (Figure 12) show the elongated flow structures associated with a shear-driven ABL. Vertical slices illustrate the effectiveness of the capping inversion at limiting the growth of the ABL. With central differencing, numerical noise is seen in the free atmosphere, emanating from the inversion layer, but is effectively eliminated through the Rayleigh damping layer; see Figure 12d.

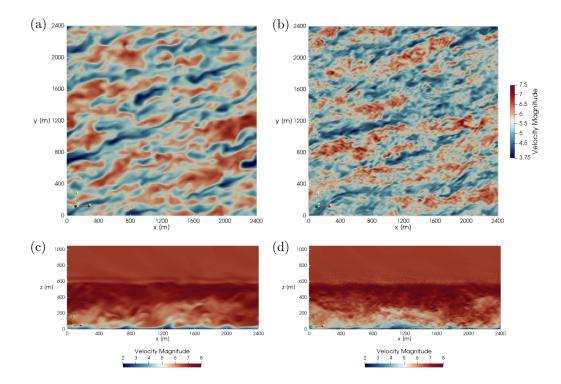


Figure 12: Contours of velocity magnitude from horizontal sampling surfaces at z=80 m AGL (a,b) and vertical sampling surfaces aligned with the geostrophic wind (c,d); the left panels (a,c) correspond to a WRF-like advection scheme with grid aspect ratio $\Delta x/\Delta z=15$ m / 5 m = 3 whereas the right panels (b,d) correspond to a 2nd-order scheme with uniform 7.5 m grid spacing. Each solution snapshot corresponds to the center of the analysis window.

The simulated mean wind profiles from two ERF model configurations are indistinguishable from two out of three reference simulations (Figure 13a). The time- and planaraveraged profiles, based on a time average over the two-hour analysis window, are within one standard deviation of the measured 10-minute wind speeds (indicated by the error bars) at all measurement heights. In relation to the theoretical logarithmic wind profile (Figure 14), a characteristic mismatch and overshoot is observed (e.g., as in Andren et al., 1994; Sullivan et al., 1994; Kosović, 1997; Brasseur & Wei, 2010; Mirocha et al., 2010) and, as various authors have noted, improvements can be realized through dynamic, nonlinear SGS modeling (Kosović, 1997; Chow et al., 2005; Kirkil et al., 2012; Lu & Porté-Agel, 2014) and judicious selection of model parameters (Brasseur & Wei, 2010).

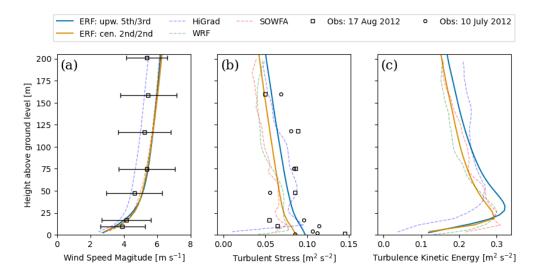


Figure 13: Planar-averaged profiles for the neutral ABL case in comparison with simulation and observational data from Mirocha et al. (2018)




Figure 14: Normalized mean wind profiles for the neutral ABL case in comparison with the log law and simulation data from Mirocha et al. (2018)

The turbulent velocity fields shown in Figure 12 may be quantified with single-point statistics. Results from both ERF models show excellent agreement with comparable models (Figure 13b,c) in terms of turbulent stress profiles $u_*^2 = (\langle u'w' \rangle)^2 + (\langle v'w' \rangle)^2$ (based on both resolved and SGS stresses) and TKE profiles $k = \frac{1}{2} [(\langle u'u' \rangle)^2 + (\langle v'v' \rangle)^2 + (\langle w'w' \rangle)^2]$ (based on resolved variances only). The ERF profiles are smoother than the reference simulation results due to the use of planar averaging. Reasonable agreement is seen between modeled and measured profiles for the turbulence stress (Figure 13b) and TKE (Figure 13c); field measurements have been excluded from the TKE comparison for reasons discussed in Mirocha et al. (2018).

Frequency domain analysis provides additional insights into the preceding results. Spectra and co-spectra are computed from line samples in the x direction (aligned with

the geostrophic wind vector) and ensemble averaged over all points in the lateral y direction, at one-minute intervals over the two-hour analysis period. The additional small-scale turbulence resolution afforded by the central-differencing scheme (see Figure 12 panel b vs a) appears as a much wider frequency range in the power spectral densities (Figure 15). The low-order (even-ordered) scheme therefore captures more of the inertial sub-range, the portion of the spectrum with a -5/3 slope. The higher TKE predicted by the higher-order upwind scheme (Figure 13b) is therefore attributed to the higher energy content of the larger coherent turbulent structures, corresponding to the lower wavenumber portion of the spectra. While both simulations follow Kolmogorov's -5/3 law in the x-velocity spectra, albeit over different ranges, only the higher-order upwind result begins to capture the -7/3 power law associated with the x and z velocity spectra.

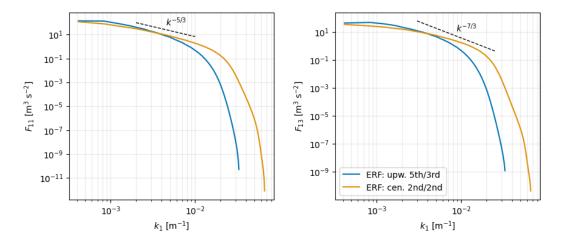



Figure 15: Spectra of the streamwise velocity (left) and cospectra of the $\langle u'w' \rangle$ component of turbulent stress (right) for the neutral ABL case, based on planar data from 80 m AGL, sampled over two hours

4.2.2 Stable Atmospheric Boundary Layer

The Global Energy and Water Cycle Experiment (GEWEX) Atmospheric Boundary Layer Study (GABLS) is a test case for validating numerical simulations of stratified atmospheric boundary layers with single-column and LES (Cuxart et al., 2006; Beare et al., 2006b; Holtslag et al., 2013). This benchmark has highlighted the challenges of simulating a moderately stable ABL, which is expected to have continuous—rather than intermittent—turbulence. This turbulence persists in the presence of weak to moderate surface cooling that causes buoyant destruction of turbulence and is coupled with, and offset by, a moderate to strong geostrophic wind that tends to produce more mechanical turbulence (Kosović & Curry, 2000). These physical mechanisms need to be properly resolved, which requires sufficient grid resolution and has considerable cost.

Our model configuration follows Beare et al. (2006a). The initial conditions are an idealized sounding described by: surface pressure of 1008 hPa; potential temperature of 265 K from the ground up to 100 m; a strongly stable layer aloft with lapse rate of 10 K/km; and a constant wind field, equal to the geostrophic wind $(U_g, V_g) = (8, 0)$ m/s. All cases use a WRF-like 5th (3rd)-order horizontal (vertical) advection scheme.

For LES cases, the Deardorff and Smagorinsky models are used for turbulence closure. The solution in the LES cases is advanced for roughly 9 hours with $\Delta t = 0.05$ s and 8 substeps per timestep. The SCM uses $\Delta t = 1$ s and 6 substeps per timestep. For the LES cases, this corresponds to acoustic and advective CFLs of over 5 and 0.13, re-



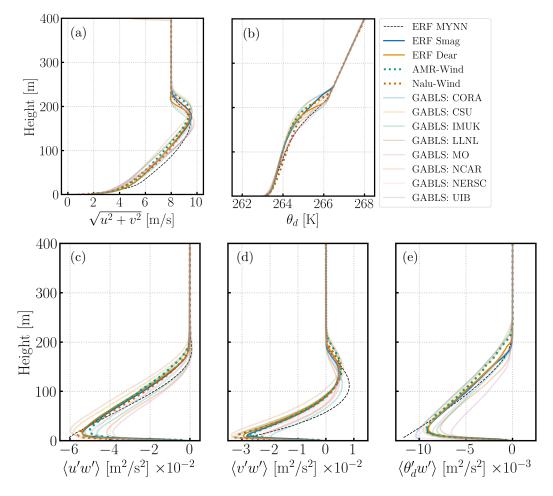


Figure 16: Planar-averaged profiles of (a) horizontal wind speed, (b) dry potential temperature, (c,d) kinematic momentum fluxes in x and y, and (e) kinematic heat flux for the GABLS1 stable ABL simulation.

Results from ERF show excellent agreement with previous LES simulations (Figure 16). The ERF SCM result uses the MYNN Level-2.5 PBL scheme and compares well with previous GABLS1 SCM simulations in Cuxart et al. (2006). Notable differences are the positive wind-speed bias (Figure 16a), attributed to excessive mixing (Figure 16c-e) typical of SCM simulations. All LES profiles lie within the range of previously simulated values. Furthermore, the ERF LES results tend to agree most closely with the recent Exawind simulations. Sensitivity to the choice of SGS model is most clearly seen in the mean velocity profile above the jet nose (around 175 m AGL, Figure 16a) and at the base of the temperature inversion (between 200–250 m AGL, Figure 16b). These differences in the ERF LES mean profiles can be attributed to differences in the exchange of heat at the top of the ABL (Figure 16e), for which the ABL with Smagorinsky closure shows excessive dissipation. In the future, this may be remedied with a stability correction to the eddy diffusivities based on Brunt–Väisälä frequency (Skamarock et al., 2021).

4.2.3 Shallow cumulus convection

Shallow cumulus clouds play a significant role in determining the thermodynamic structure of the atmosphere; they influence large-scale circulation in the tropics and midlatitudes through changes in the air-sea thermodynamic and momentum fluxes, lowertropospheric thermodynamic and wind profiles, capping inversion depth, and radiative transfer between the surface and free troposphere (Siebesma et al., 2003). The Barbados Oceanographic and Meteorological Experiment (BOMEX) was a 5-day experiment to determine the rate of transfer of water vapor, heat, and momentum from the tropical ocean to the atmosphere, during which trade wind shallow cumulus convection occurred without well-developed storms (Holland & Rasmusson, 1973; Nitta & Esbensen, 1974). The study has since become a crucial validation test case for atmospheric flow solvers and has been widely studied in the literature (Siebesma & Cuijpers, 1995; H. Jiang & Cotton, 2000; Siebesma et al., 2003; Sridhar et al., 2022; Muñoz-Esparza et al., 2022). Conditions for the BOMEX case are approximated by incorporating forcing terms that describe the interaction between small-scale cloud formation processes and the large-scale atmosphere (Siebesma et al., 2003).

The 3rd-order upwind scheme with a monotonicity preserving switch is used for the advection operator (Hundsdorfer et al., 1995) and the Smagorinsky model with $C_s = 0.17$ is employed.

The initial condition is under-saturated $(q_v < q_{vs})$ with no q_c present. As the simulation proceeds, moisture and thermal energy are introduced into the system through the air-sea interaction at the bottom boundary and prescribed large-scale tendencies, leading to the formation of a convective boundary layer. Vertical transport of moisture due to resolved turbulence yields patches of saturation at $z \approx 500$ m. The thermal energy released from water vapor condensing to form clouds creates further buoyant transport by which the clouds are lifted and advected by the flow-field. The trade inversion layer acts as a cap that limits the vertical growth of clouds and results in the formation of shallow cumulus clouds with a maximum cloud height of ≈ 2 km. To clearly illustrate the sparse cloud formation present in this case, we employ a larger domain than reported in Table C1 with extents $(L_x, L_y, L_z) = (30, 30, 4)$ km but the same grid resolution; see Figure 17. There is no significant precipitation (≈ 0.2 mm/day in the measurements by Holland & Rasmusson (1973)) as the air is not able to rise to levels where deep convection can occur, hence the use of a microphysics model without precipitation is justified.

Figure 18 shows the spatially (xy plane) and temporally (last 1 hr) averaged profiles of the prognostic variables as a function of the vertical height and the comparison with results from several other codes. Comparison of these profiles with the initial profiles illustrates the changes in the atmosphere due to shallow cumulus convection dynamics. The potential temperature profile shows an increase of ≈ 0.3 K near the air-sea surface, which is indicative of the heating due to the sensible heat flux. Since saturation only occurs for z > 500 m, q_c only has non-zero values above this height. Changes in the velocity fields near the surface are due to the turbulent boundary layer evolution. While evaporation of sea water does introduce moisture into the atmosphere, the changes are minor and not visible in the mean profile. Turbulent statistics in Figure 19 are also spatially (xy plane) and temporally (last 3 hrs) averaged and compared to other codes.

Temporal evolution of the total cloud cover, domain-integrated liquid water path (LWP), and domain-integrated TKE are also of interest (Siebesma et al., 2003; Sridhar et al., 2022); see Figure 20. The total cloud cover plot shows that there is no cloud formation for the first $\sim 1/2$ hr of spin-up, and after ~ 2 hrs, a statistical steady-state for the the total cloud cover is observed, with a mean of ≈ 0.08 , which is typical for shallow cumulus clouds. The integrated TKE increases steadily with time, and is attributed to mesoscale fluctuations in the horizontal velocities, which increase with time until these fluctuations have the same spatial size as the horizontal domain (Siebesma et al., 2003).

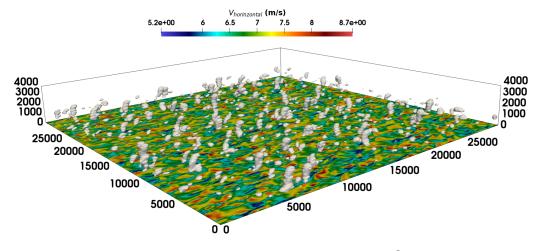


Figure 17: Isocontour of cloud water mixing ratio ($q_c = 6 \times 10^{-6} \text{ kg/kg}$) and the turbulent velocity field for the BOMEX simulation on a 30 km \times 30 km \times 3.6 km domain with a resolution of ($\Delta x, \Delta y, \Delta z$) = (100, 100, 40) m, at t = 1.6 hrs.

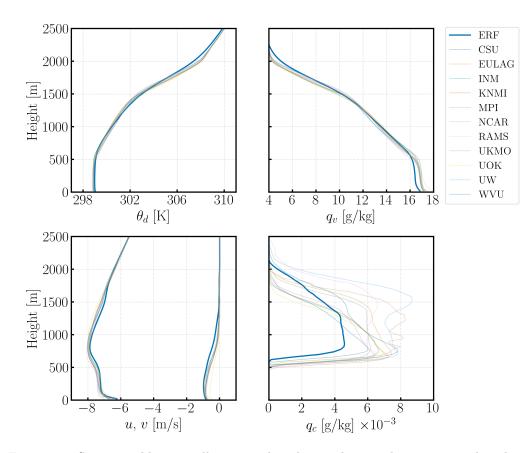


Figure 18: State variables spatially-averaged in the xy-plane, and time-averaged in the last hour for the BOMEX case: (Row wise) Potential temperature, vapor mixing ratio, horizontal wind velocities, and cloud water mixing ratio.

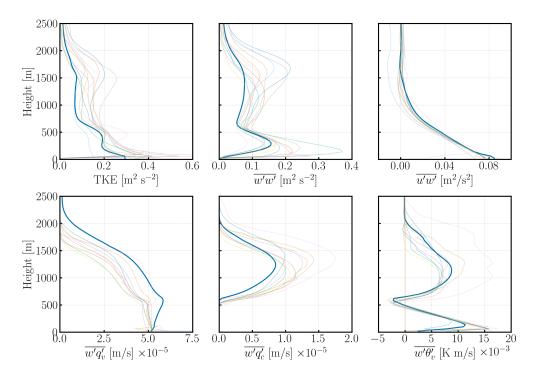


Figure 19: Turbulence quantities spatially-averaged in the xy-plane, and time-averaged in the last 3 hours for the BOMEX case: (Row wise) turbulent kinetic energy, turbulent fluxes: $\overline{w'w'}$, $\overline{w'w'}$, $\overline{w'q'_v}$, $\overline{w'q$

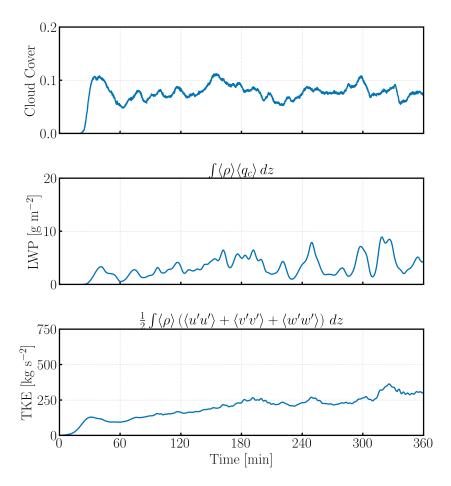


Figure 20: Temporal evolution of the total cloud cover (top), liquid water path (middle), and integrated turbulent kinetic energy (bottom) for the BOMEX case.

4.3 Flow Over Terrain

Until this point, test cases considered herein have employed the standard Cartesian coordinate system without terrain-following or stretched grids. In realistic atmospheric systems, the role of complex terrain cannot be ignored and it is often highly beneficial to use finer resolution near the bottom surface than higher up. To exercise these capabilities, we consider flow over a two-dimensional hill, also known as the *Witch of Agnesi* (WOA) profile.

4.3.1 Flow over terrain

The WOA hill has been widely studied in literature (Zängl, 2003; Giraldo & Restelli, 2008; Sridhar et al., 2022) and is known to trigger vertically propagating gravity waves. Terrain height is specified as

$$z(x) = \frac{h_m a^2}{\left(x - x_c\right)^2 + a^2},\tag{31}$$

where $h_m = 1$ m and a = 1000 m. The flow is treated as inviscid and dry.

The vertical velocity field is shown in Figure 21. The inflow velocity is horizontal, but the presence of the hill forces the air up and over, generating a vertical velocity component. Gravity waves are triggered and their vertical structure agrees with results presented in Giraldo & Restelli (2008); Sridhar et al. (2022); in particular compare Figure 21 here to Figure 6b in Sridhar et al. (2022).

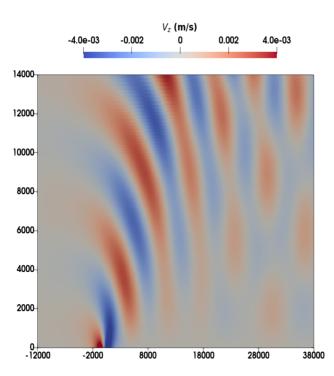


Figure 21: Vertical velocity over the Witch of Agnesi hill at t=5 hr; note that only a small subset of the domain is shown in order to focus on the gravity wave propagation. The terrain-fitted mesh used for this simulation is shown in Figure 1.

4.4 Wind Energy Applications

Accurate predictions of power output are critical to the successful deployment of wind technology. To this end, the efficacy of a single turbine is heavily impacted by the momentum deficit and wake induced by neighboring turbines. At the scales considered here, boundary layers around a turbine blade are not directly resolved. Rather, a coarsegrained approach is taken where source terms are introduced for the momentum and TKE, which physically correspond to the drag exerted by the turbine blade on the fluid. In this manner, the large-scale wakes induced by a turbine and the reduced power output due to turbine–turbine shielding is approximately accounted for. The following section demonstrates these effects with mesoscale and LES simulations of a wind farm.

4.4.1 Wind turbine modeling

As noted in Section 3.7, ERF supports four wind farm modeling approaches that may be broadly grouped into mesoscale wind farm parameterizations (WFPs), Fitch (Fitch et al., 2012b) and the Explicit Wake Parameterization (EWP, Volker et al., 2015b); and microscale actuator disk models (ADMs), the Simple Actuator Disk (SAD) (Burton et al., 2011a) and Generalized Actuator Disk (GAD) (Mirocha et al., 2014; Wood, 2011)). Microscale models employ grid spacings of \mathcal{O} (10) m in all directions, whereas mesoscale models utilize \mathcal{O} (10²) m in the horizontal direction and \mathcal{O} (10) m in the vertical. Consequently, mesoscale WFPs are more appropriate for capturing farm–farm interactions, since they have potentially multiple turbines per cell, while microscale ADMs capture turbine–turbine interactions. Mesoscale models generally assume the flow to be perpen-

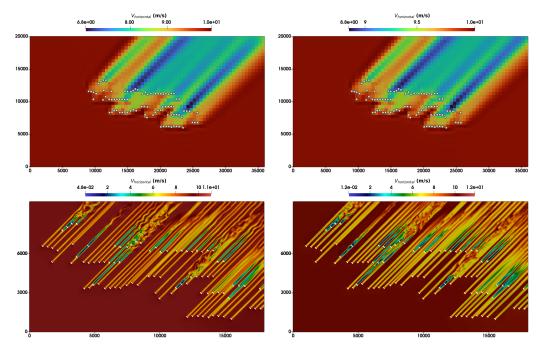


Figure 22: Instantaneous horizontal velocity magnitude at the hub-height of 89 m and t = 1 hr for: (row wise) Fitch model, EWP model, simple actuator disk model, and generalized actuator disk model.

dicular to the turbine disk and the rotor area swept out by the turbine blade is only resolved in the vertical direction. By contrast, the increased resolution offered by microscale models allows them to resolve the rotor swept area. The SAD model uses horizontal momentum sources that are based on one-dimensional momentum theory, whereas the GAD model computes momentum sources for all coordinate directions and is based on blade element theory and accounts for the blade cross-sectional geometry. A detailed discussion of all the models and source terms is beyond the scope of this paper and we refer the interested reader to the cited work in Section 3.7.

To evaluate ERF's wind turbine parameterizations, simulations of the King Plains wind farm, from the AWAKEN benchmark (Bodini, Abraham, et al., 2024; The AWAKEN benchmarks, 2024), are run under idealized conditions, i.e. dry, inviscid flow over flat terrain without Coriolis forcing. A southwesterly inflow of 10 m/s, is specified with all turbine disks perpendicular to the flow. Contours of instantaneous horizontal velocity magnitude, at the hub-height of 89 m, are illustrated for each wind farm model in Figure 22. Due to the larger mesh spacing (500 m in the horizontal), Fitch and EWP models do not resolve individual wakes generated by a turbine. At microscale mesh spacing (20 m in all directions), the ADMs are able to resolve the wake deficits from individual turbines and turbine–turbine interactions.

5 Software, Parallelism and Performance

5.1 AMReX

ERF is built on AMReX (Zhang et al., 2021; Myers et al., 2024), a C++-based software framework that supports the development of structured mesh algorithms for solving systems of partial differential equations, with options for adaptive mesh refinement, on machines from laptops to exascale architectures. AMReX was developed in the U.S. Department of Energy's Exascale Computing Project and is now a member project of the High Performance Software Foundation under the umbrella of the Linux Foundation.

AMReX uses an MPI+X model of hierarchical parallelism where blocks of data are distributed across MPI ranks (typically across multiple nodes). Fine-grained parallelism at the node level (X) is achieved using OpenMP with tiling for CPU-only machines, or CUDA, HIP or SYCL for NVIDIA, AMD or Intel GPUs, respectively. AMReX enables the use of GPU-aware MPI when available and provides extensive support for kernel launching on GPU accelerators (using ParallelFor looping constructs and C++ lambda functions) and the effective use of various memory types, including managed, device, and pinned. Common operations, such as parallel communication and reduction operations, as well as interpolation and averaging operators between levels of refinement, are provided by the AMReX framework. The default load-balancing strategy uses the space-filling curve approach; knapsack and round-robin are also available through AMReX. Architecturespecific aspects of the software for GPUs are highly localized within the code, and essentially hidden from the application developer or user. We note that ERF supports both a cmake and a gmake build system.

In addition to portability across architectures, AMReX provides data structures and iterators that define, allocate and efficiently operate on distributed multi-dimensional arrays. Data at each level are defined on disjoint logically rectangular regions of the domain known as patches (or grids or boxes); we note that unlike WRF, AMReX (and therefore ERF) does not require one patch per MPI rank, thus allowing much more general domain decomposition. While domain decomposition that assigns a single patch to each MPI rank is often optimal, especially for single-level calculations, there are multilevel cases where we can more efficiently achieve the desired resolution in specific regions by decomposing the region needing refinement into more patches than processors. The optimal decomposition is problem-specific and ERF provides flexibility in finding the computational "sweet spot."

5.1.1 I/O, Checkpoint/Restart and Visualization

Currently, ERF simulations can be initialized with metgrid or wrfinput and wrfbdy files, which are written in NetCDF format. Output plotfiles can be written in NetCDF format; however, AMReX's native format is more efficient and supported by many thirdparty visualization tools—e.g., Paraview, VisIt, yt and other python tools. For efficiency all checkpoint/restart files are written in AMReX native format.

AMReX has implemented multiple output methodologies to provide efficient I/O across a variety of applications and simulations. First, a static output pattern prints in a pre-determined pattern that eliminates unnecessary overhead and is useful for well-balanced or small simulations. Second, a dynamic output pattern improves write efficiency for complex cases by assigning ranks to coordinate the I/O in a task-like fashion. Finally, asynchronous output utilizes a background thread and data copy for writing, thereby allowing computation to continue uninterrupted. The cost associated with I/O was explored by requiring ERF to write AMReX-native plotfiles every time step; even with this frequency, the percentage of total run time spent writing plotfiles is less than 2% of the total run time. In realistic workflows we would never write plotfiles this often so the I/O cost becomes negligible in such cases.

5.2 Performance

To assess the performance of the ERF code on CPUs and GPUs, strong and weak scaling studies were completed. The ABL simulation was chosen for the scaling studies since it is representative of a typical atmospheric flow simulation. The scaling was performed on the CPU and GPU nodes on Perlmutter, a supercomputer hosted at the National Energy Research Scientific Computing Center (NERSC), which is located at Lawrence Berkeley National Laboratory (Berkeley Lab). A single CPU node consists of 128 AMD EPYC 7763 (Milan) cores while a GPU node has 64 AMD EPYC 7763 (Milan) cores and 4 NVIDIA A100 (Ampere) GPUs. In all simulations the domain has lengths (L_x, L_y, L_z) = (2048, 2048, 1024) m.

For the strong scaling study, a fixed mesh size of $(N_x, N_y, N_z) = (512, 512, 256)$ is employed and a 128 core simulation is taken as the reference. Subsequent simulations were completed by doubling the number of cores until 4096. For CPU-only simulations, the observed strong scaling timings are illustrated in Figure 23a while the parallelization efficiency, defined as

$$E = \left(\frac{T}{T_{128}}\right) \left(\frac{128}{N}\right) \times 100\%,$$

is shown in Figure 23b. In the above, N is the number of cores and T is the time taken per time step. At 2048 cores, and $\sim 32^3$ cells per rank, the parallel efficiency is 69%.

On GPU nodes, the number of CPU ranks and GPUs are the same for each run (ie. when running with 8 GPU nodes ie., 32 GPUs, the number of CPU ranks is 32 as well—i.e., each rank offloads its work to a single GPU. This GPU run with 8 GPU nodes ie., 32 GPUs, is compared to a CPU run with 8 CPU nodes ie. 1024 CPU ranks). Therefore, the speed-up presented here between GPU and CPU is per node. Speed-ups of $5-15\times$ are achieved up to 16 GPU nodes; see Figure 23d.

A weak scaling test was performed on CPUs with a mesh size of $512 \times 512 \times 256 = 67.1$ million, on 1 node (128 MPI ranks), and the number of cells was progressively scaled to $4096 \times 2048 \times 256 = 2.1$ billion, on 32 nodes (4096 MPI ranks). Excellent weak scaling is shown by the nearly constant timings, for 10 timesteps, in Figure 23c.


A weak scaling test was also performed on GPUs with a mesh size of $256 \times 256 \times 512$ on 1 GPU node, and the number of cells was progressively scaled to $2048 \times 1024 \times 512$ on 32 nodes. The total elapsed time for 100 iterations with and without GPU-aware-MPI is shown in Figure 23e. The nearly constant timings show excellent weak scaling and the benefits of GPU-aware-MPI are clearly observed with the 25-35% speed-up.

6 Conclusions and Future Work


Since the introduction of ERF (Almgren et al., 2023), significant development has occurred that includes core modeling capabilities, Lagrangian particles, and adaptive mesh refinement. These features are, by design, highly modular and allow users to dynamically select between compressible and anelastic formulations and to choose the relevant physics models (e.g., LES vs. PBL, or dry vs. moist) for a given problem of interest. Thus ERF is well-suited for both exploratory studies and production runs of regional atmospheric flows. ERF's use of the state-of-the-art and well-supported AMReX framework ensures it will continue to run efficiently as architectures and operating systems evolve; AMReX shields ERF developers and users from most of the nuanced code changes necessary for new architectures.

This paper provides a detailed overview of the ERF software and its current capabilities. A variety of test cases relevant to atmospheric dynamics and to wind energy technology were presented to compare ERF with benchmark data. For each problem considered here, ERF demonstrated the ability to replicate established results. These findings represent the first steps towards establishing ERF as a modern regional weather modeling tool and an attractive multi-GPU-capable replacement for WRF (or similar atmospheric simulation codes with limited GPU applicability).

101




(a) Strong scaling on CPUs. The number of mesh cells per rank is shown in blue.




5.24x10⁵ cells per CPU rank


CPUGPU



.62x10⁵ clock time per time step (s) x 14.14 .32x10 x 11.80 5x10 100 x 9.99 3.2x10⁴ x 6.24 1.6x10 GDU x 5.13 Wall o x 3.65 10-1 10² 10³ Number of CPU ranks

(c) Weak scaling on CPUs. The total number of mesh cells is shown in blue.





(e) Weak scaling on GPUs with and without GPU-aware MPI.

Figure 23: Scaling results on the Perlmutter supercomputer.

Future work includes continued development and validation of ERF. Over the next year, validation studies will focus on real-world cases with available observational data, including but not limited to simulation of flow over steep complex terrain as well as simulation of extreme events such as recent hurricanes. New capability development will include the generalization of meshing strategies to allow an embedded boundary ("cut cell") representation of terrain and/or urban structures as well as use of the particle data structures to develop and test Lagrangian microphysics models.

Looking forward, the plan for ERF is to leverage existing modules built on years of experience by practitioners who are experts in their domains. Rather than re-implementing existing column physics modules such as SHOC, P3, and RRTMGP, which exist in the E3SM GitHub repository (*E3SM Github Repository*, 2024), we plan to provide interfaces in ERF to call the versions of these routines that have already been ported to C++ and can run on GPUs through the use of Kokkos (Trott et al., 2022). Similarly, we will also leverage the existing Noah-MP (He et al., 2023) and SLM (Lee & Khairoutdinov, 2015) land models.

Creating interfaces to existing physics models serves two purposes. First, it clearly increases the fidelity of ERF to model atmospheric phenomena and wind energy applications. Second, it enables ERF to serve as a testbed to facilitate the rapid development and testing of new features in the column physics modules themselves. Currently, for development purposes, these models are often used either in single-column mode or deployed in E3SM itself, with no intermediate options. ERF can provide an easy-to-use intermediate testing framework that will allow fast development and testing of column physics models in a limited-area testbed that fills the gap between single-column and global.

In addition to calling additional physics models as described above, we are establishing strategies for run-time coupling with WW3 (Tolman, 1997), a wave model framework that solves the random phase spectral action density balance equation for wavenumberdirection spectra, and with REMORA (*REMORA GitHub*, 2024), a new AMReX-based ocean model built to reproduce the ROMS (Shchepetkin & McWilliams, 2005) regional ocean modeling capability on modern architectures. This three-way coupling will be analogous to COAWST (Warner et al., 2010) in which WRF, ROMS and SWAN or WW3 are three-way coupled. There is also ongoing work to couple ERF to AMR-Wind.

Finally, efficiently exploiting modern and future architectures and using performant implementations of high-fidelity models is not in itself sufficient to address the large problems spanning multiple length and time scales that we target. Development of surrogate models for various components of the overall model require extensive training data and ways to integrate the simulation code, written in C++, with AI training approaches which are typically written in Python. The Python language bindings of pyAMReX (Myers et al., 2024) could enable ERF to fit easily into AI/ML workflows.

7 Data Availability Statement

The ERF model is completely open-source and is released under a modified BSD license. It is available at https://github.com/erf-model/ERF. Documentation of the ERF code can be found at https://erf.readthedocs.io. The github hash and inputs files for all of the results presented here are available at https://github.com/erf-model/validation/JAMES_Paper.

Acknowledgments

Funding for this work was provided by the U.S. Department of Energy Office of Energy Efficiency and Renewable Energy Wind Energy Technologies Office. We acknowledge as well as the help of the AMReX team in developing and supporting new AMReX features needed by ERF. The work at LBNL was supported by the U.S. Department of Energy

under contract No. DE-AC02-05CH11231. The work at LLNL was supported by the U.S. Department of Energy under contract No. DE-AC52-07NA27344. The constribution of Weiqun Zhang was supported in part by the U.S. Department of Energy, Office of Science, Office of Advanced Scientific Computing Research, Scientific Discovery through Advanced Computing (SciDAC) Program through the FASTMath Institute under Contract No. DE-AC02-05CH11231 at Lawrence Berkeley National Laboratory. Funding for the implementation of actuator disk models came from the FLOWMAS project funded by the U.S. Department of Energy, Office of Science Energy Earthshot Initiative. The contribution of Branko Kosovic was supported by the National Center for Atmospheric Research, which is a major facility sponsored by the National Science Foundation under Cooperative Agreement No. 1852977. This work was authored in part by the National Renewable Energy Laboratory, operated by Alliance for Sustainable Energy, LLC, for the U.S. Department of Energy (DOE) under Contract No. DE-AC36-08GO28308.

In addition, our thanks to Emily Bercos-Hickey, Matthew Churchfield, Harish Goplan, Soonpil Kang and Kyle Pressel for their constructive feedback on earlier drafts of this manuscript.

A portion of this code development was performed using computational resources sponsored by the U.S. Department of Energy's Office of Energy Efficiency and Renewable Energy and located at the National Renewable Energy Laboratory. This development also used resources of the National Energy Research Scientific Computing Center (NERSC), a U.S. Department of Energy Office of Science User Facility located at Lawrence Berkeley National Laboratory.

Appendix A Acoustic Substepping

ERF uses acoustic substepping in the presence of both moisture and complex terrain. However, for clarity of exposition, we neglect both here in order to emphasize the particulars of the time discretization.

We first define $(\rho_d \mathbf{u})^t$, $(\rho_d \theta)^t$, and ρ^t as the solution at the most recent RK stage; these are held fixed during the acoustic substepping. We then define solution variables $(U'', V'', W'') = (\rho_d \mathbf{u}) - (\rho_d \mathbf{u})^t$, $\Theta'' = (\rho_d \theta) - (\rho_d \mathbf{u})^t$, and $\rho'' = \rho - \rho^t$.

In each substep, to evolve the solution by $\delta \tau$, where $\delta \tau$ is the substepping timestep, we solve

$$U^{\prime\prime,\tau+\delta\tau} - U^{\prime\prime,\tau} = \delta\tau \left(-\gamma R_d \pi^t \frac{\partial \Theta^{\prime\prime,\tau}}{\partial x} + R_U^t\right)$$

$$V^{\prime\prime,\tau+\delta\tau} - V^{\prime\prime,\tau} = \delta\tau \left(-\gamma R_d \pi^t \frac{\partial \Theta^{\prime\prime,\tau}}{\partial y} + R_V^t\right)$$

$$W^{\prime\prime,\tau+\delta\tau} - W^{\prime\prime,\tau} = \delta\tau \left(-\gamma R_d \pi^t \frac{\partial \overline{\Theta^{\prime\prime}}}{\partial z} + g\overline{\rho} \frac{R_d}{c_v} \frac{\pi^t}{\overline{\pi}} \frac{\overline{\Theta^{\prime\prime}}}{\Theta^t} - g\overline{\rho^{\prime\prime}}^\tau + R_W^t\right)$$

$$\Theta^{\prime\prime,\tau+\delta\tau} - \Theta^{\prime\prime,\tau} = \delta\tau \left(-\frac{\partial (U^{\prime\prime,\tau+\delta\tau}\theta^t)}{\partial x} - \frac{\partial (V^{\prime\prime,\tau+\delta\tau}\theta^t)}{\partial y} - \frac{\partial (\overline{W^{\prime\prime}}^\tau\theta^t)}{\partial z} + R_\Theta^t\right)$$

$$\rho^{\prime\prime,\tau+\delta\tau} - \rho^{\prime\prime,\tau} = \delta\tau \left(-\frac{\partial U^{\prime\prime,\tau+\delta\tau}}{\partial x} - \frac{\partial V^{\prime\prime,\tau+\delta\tau}}{\partial y} - \frac{\partial \overline{W^{\prime\prime}}^\tau}{\partial z} + R_\Theta^t\right)$$

where g is the positive value of the gravitational acceleration and π is the Exner function. R_U, R_V, R_W, R_Θ and R_ρ hold the right-hand-sides of Equations 1–3.

Following Equation (17) in Klemp et al. (2007), $\beta_1 = (1-\beta_s)/2$, $\beta_2 = (1+\beta_s)/2$. The overbar notation, again following the notation in Klemp et al. (2007), can be expressed for any variable ϕ as $\overline{\phi}^{\tau} = \beta_2 \phi^{\tau + \Delta \tau} + \beta_1 \phi^{\tau}$. Thus, the β_s controls the degree of implicitness; as in Klemp et al. (2007) we set $\beta_s = 0.1$.

Once the acoustic substepping is completed for a particular RK stage, the perturbational solution is added to the solution at the most recent RK stage.

Appendix B Map scale factors

To write the fully compressible equations with map factors we first define \mathbf{u}_H to be the lateral velocity components only, and the gradient operator $\nabla_H = (\partial/\partial x, \partial/\partial y)$ to include the lateral gradients only. For isotropic projections the map factor m below is independent of direction but can vary spatially across a region.

$$\frac{\partial \rho_d}{\partial t} = -m^2 \nabla_H \cdot (\rho_d \mathbf{u}_H m^{-1}) - m \frac{\partial (\rho_d w m^{-1})}{\partial z}, \tag{B1}$$
$$\frac{\partial (\rho_d u)}{\partial t} = -m^2 \nabla_H \cdot (\rho_d \mathbf{u}_H u m^{-1}) - m \frac{\partial (\rho_d w u m^{-1})}{\partial z} - \frac{m}{1 + q_v + q_c} \frac{\partial p'}{\partial x} - (\nabla \cdot \boldsymbol{\tau})_u + F_u, \tag{B2}$$

$$\frac{\partial(\rho_d v)}{\partial t} = -m^2 \nabla_H \cdot (\rho_d \mathbf{u}_H v m^{-1}) - m \frac{\partial(\rho_d w v m^{-1})}{\partial z} - \frac{m}{1 + q_v + q_c} \frac{\partial p'}{\partial y} - (\nabla \cdot \boldsymbol{\tau})_v + F_v,$$
(B3)

$$\frac{\partial(\rho_d w)}{\partial t} = -m^2 \nabla_H \cdot (\rho_d \mathbf{u}_H w m^{-1}) - m \frac{\partial(\rho_d w w m^{-1})}{\partial z} - \frac{m}{1 + q_v + q_c} (\frac{\partial p'}{\partial z} - B) - (\nabla \cdot \boldsymbol{\tau})_w + F_w,$$
(B4)

$$\frac{\partial(\rho_d \theta_d)}{\partial t} = -m^2 \nabla_H \cdot (\rho_d \mathbf{u}_H \theta_d m^{-1}) - m \frac{\partial(\rho_d w \theta_d m^{-1})}{\partial z} + \nabla \cdot (\rho_d \alpha_\theta \ m \nabla \theta_d) + F_\theta + H_n + H_p,$$
(B5)

$$\frac{\partial(\rho_d \boldsymbol{\phi})}{\partial t} = -m^2 \nabla_H \cdot (\rho_d \mathbf{u}_H \boldsymbol{\phi} m^{-1}) - m \frac{\partial(\rho_d w \boldsymbol{\phi} m^{-1})}{\partial z} + \nabla \cdot (\rho_d \alpha_{\boldsymbol{\phi}} \ m \nabla \boldsymbol{\phi}) + F_{\boldsymbol{\phi}}, \tag{B6}$$

$$\frac{\partial(\rho_d \mathbf{q_p})}{\partial t} = -m^2 \nabla_H \cdot (\rho_d \mathbf{u}_H \mathbf{q_n} m^{-1}) - m \frac{\partial(\rho_d w \mathbf{q_n} m^{-1})}{\partial z} + \mathbf{F_n} + \mathbf{G_n}$$
(B7)

$$\frac{\partial(\rho_d \mathbf{q}_{\mathbf{p}})}{\partial t} = -m^2 \nabla_H \cdot (\rho_d \mathbf{u}_H \mathbf{q}_{\mathbf{p}} m^{-1}) - m \frac{\partial(\rho_d w \mathbf{q}_{\mathbf{p}} m^{-1})}{\partial z} + \mathbf{F}_{\mathbf{p}}$$
(B8)

The computation of the τ terms include map factor modifications as well.

Appendix C Simulation Conditions

Table C1 summarizes the simulation configurations for the cases presented in Section 4. Furthermore, for the sake of readability, we reiterate the table description below.

The domain extents describe the height of the domain in the 1-D single-column model (SCM) case; the length and height of the domain for the 2-D cases; and the streamwise, lateral, and vertical extents of the domain for the 3-D cases. Parenthetical quantities are derived from other inputs and have been included for completeness. Initial fields are either uniform or vary with height based on an input sounding. A perturbation field is superimposed on the initial fields to model the specific mesoscale problem of interest or to help initiate turbulence in the microscale. For the canonical, non-neutral ABL simulations, MOST specifies the surface kinematic heat flux for the BOMEX case and the surface temperature for the GABLS cases. Both Smagorinsky and Deardorff 1.5 order TKE turbulence closures have been utilized; with Deardorff, the model coefficients follow (Moeng, 1984). Several cases used Rayleigh damping to attenuate waves in the free atmosphere. The damping strength, an inverse timescale, was ramped using a sine-squared function from 0 at the bottom of the damping layer to the specified value at the top.

	manuscript s	submitted	to J.	AMES
--	--------------	-----------	-------	------

		Domain			Initia	Initial Conditions	Bot	Boundary Conditions						
Case	Domain Extent(s) [km]	Number of Grid Cells	Grid Spacing [m]	Time Step [s]	Type	Perturbations	Lateral	Bottom	Top	Turbulence Closure	Micro- physics	Geostrophic Wind [m/s]	Coriolis Frequency [s ⁻¹], Latitude [°]	Rayleigh Damping Layer Depth, Strength: Applied Field(s)
Density Current	25.6, 6.4	256, 64	(100, 100)	1.0	Uniform	Cold bubble	Symmetry, Outflow	Slip Wall	Slip Wall					
Bubble Rise	20., 10.	200, 100	(100., 100.)	0.5	Uniform	Warm bubble	Slip Wall	Slip Wall	Slip Wall		None / Kessler (no precip.)			
Squall Line	150., 24.	1500, 240	(100., 100.)	0.25	Uniform	Warm bubble, wind shear	Open	Slip Wall	Outflow	Smagorinsky $(C_s = 0.25)$	Kessler			
Supercell	150., 100., 24.	600, 400, 96	(250., 250., 250.)	0.5	Uniform	Warm bubble, wind shear	Periodic, Open	Slip Wall	Outflow	Smagorinsky $(C_s = 0.25)$	Kessler			
Neutral ABL LES, grid aspect ratio=4	2.4, 2.4, 2.4	160, 160, 210	(15., 15., 5.)	0.2	Sounding	Divergence-free $\Delta u, \Delta v = \pm 0.65 \text{ m s}^{-1}$	Periodic	MOST: $z_0 = 0.05 \text{ m}$	Slip Wall	Deardorff		[6.5, 0.]	$(0.803 \times 10^{-4}),$ 33.5°	400 m, 0.003 s ⁻¹ : u, v, w, θ
Neutral ABL LES, isotropic grid	2.4, 2.4, 2.4	320, 320, 140	(7.5, 7.5, 7.5)	0.1	Sounding	Divergence-free $\Delta u, \Delta v = \pm 0.65 \text{ m/s}$	Periodic	MOST: $z_0 = 0.05 \text{ m}$	Slip Wall	Deardorff		[6.5, 0.]	$(0.803 \times 10^{-4}),$ 33.5°	$400 \text{ m}, 0.003 \text{ s}^{-1}$: u, v, w, θ
GABLS SCM	0.4	19	(6.25)	1.0	Sounding		Periodic	$\begin{array}{l} \mathrm{MOST}\colon z_0=0.1 \ \mathrm{m}, 0.25 \\ \mathrm{K} \ \mathrm{hr}^{-1} \ \mathrm{cooling} \end{array}$	Slip Wall	Slip Wall MYNN Level 2.5		[8., 0.]	$1.39 \times 10^{-4}, 73.^{\circ}$	
GABLS LES	0.4, 0.4, 0.4	$0.4, 0.4, 0.4 \left 128, 128, 128 \right $	(3.125, 3.125, 3.125)	0.05	Sounding	Random $\Delta \rho \theta = \pm 0.1 \text{ K}$	Periodic	$\begin{array}{l} \mathrm{MOST:} \ z_0 = 0.1 \ \mathrm{m,} \ 0.25 \\ \mathrm{K} \ \mathrm{hr}^{-1} \ \mathrm{cooling} \end{array}$	Slip Wall	Smagorinsky $(C_s = 0.17) /$ Deardorff		[8., 0.]	$1.39 \times 10^{-4}, 73.^{\circ}$	$100 \text{ m}, 0.2 \text{ s}^{-1}; w$
BOMEX	6.4, 6.4, 4.0	64, 64, 100	(100., 100., 40.)	0.3	Sounding	$\begin{array}{l} {\rm Random} \\ \Delta\rho\theta=\pm 0.1~{\rm K}, \\ \delta q_{\nu}=\pm 0.025~{\rm g~kg^{-1}} \end{array}$	Periodic	$\begin{array}{l} {\rm MOST:} \ z_0 = 0.1 \ {\rm m}, \\ u_* = 0.28 \ {\rm m} \ {\rm s}^{-1}, \\ \langle w'\theta' \rangle = 8 \times 10^{-3} \ {\rm K} \ {\rm m} \ {\rm s}^{-1}, \\ \langle w'q' \rangle = 5.2 \times 10^{-5} \ {\rm m} \ {\rm s}^{-1} \end{array}$	Slip Wall	Smagorinsky $(C_s = 0.17)$	Kessler (no precip.)	Time-varying profile	$0.376 \times 10^{-4},$ (15.°)	
Flow Over Terrain	144., 30.	288, 600	500., initial $\Delta z = 0.1$ w/ stretching ratio=1.05	0.06	Uniform		Inflow, Outflow	Slip Wall	Slip Wall					5 km, 0.2 s ⁻¹ : w
Wind Farm Paremeterization	36., 20., 1.	72, 40, 200	(500., 500., 5.)	0.6	Uniform		Inflow, Outflow	Slip Wall	Outflow					
Actuator Disk Model	18., 10., 1.	900, 500, 50	(20., 20., 20.)	0.125	Uniform		Inflow, Outflow	Slip Wall	Outflow					

Table C1: Simulation configurations for the verification and validation cases presented in Section 4.

References

- Abdi, D., & Jankov, I. (2024, July). Accelerating atmospheric physics parameterizations using graphics processing units. The International Journal of High Performance Computing Applications, 38(4), 282–296. Retrieved from https://doi .org/10.1177/10943420241238711 doi: 10.1177/10943420241238711
- Alam, J. M., & Lin, J. C. (2008, December). Toward a fully lagrangian atmospheric modeling system. *Monthly Weather Review*, 136(12), 4653-4667. Retrieved from http://dx.doi.org/10.1175/2008mwr2515.1 doi: 10.1175/2008mwr2515.1
- Allaerts, D., & Meyers, J. (2018, February). Gravity Waves and Wind-Farm Efficiency in Neutral and Stable Conditions. Boundary-Layer Meteorology, 166(2), 269–299. doi: 10.1007/s10546-017-0307-5
- Almgren, A., Lattanzi, A., Haque, R., Jha, P., Kosovic, B., Mirocha, J., ... Zhang,
 W. (2023, July). ERF: Energy Research and Forecasting. *Journal of Open Source Software*, 8(87), 5202. doi: 10.21105/joss.05202
- Andren, A., Brown, A. R., Mason, P. J., Graf, J., Schumann, U., Moeng, C.-H.,
 & Nieuwstadt, F. T. M. (1994). Large-eddy simulation of a neutrally stratified boundary layer: A comparison of four computer codes. *Quarterly Journal of the Royal Meteorological Society*, 120(520), 1457–1484. doi: 10.1002/qj.49712052003
- Barthelmie, R. J., Murray, F., & Pryor, S. C. (2008, May). The economic benefit of short-term forecasting for wind energy in the UK electricity market. *Energy Policy*, 36(5), 1687–1696. doi: 10.1016/j.enpol.2008.01.027
- Barthelmie, R. J., Shepherd, T. J., Aird, J. A., & Pryor, S. C. (2020, January).
 Power and Wind Shear Implications of Large Wind Turbine Scenarios in the US Central Plains. *Energies*, 13(16), 4269. doi: 10.3390/en13164269
- Basu, S., & Porté-Agel, F. (2006, August). Large-Eddy Simulation of Stably Stratified Atmospheric Boundary Layer Turbulence: A Scale-Dependent Dynamic Modeling Approach.

doi: 10.1175/JAS3734.1

- Beare, R. J., Macvean, M. K., Holtslag, A. A. M., Cuxart, J., Esau, I., Golaz, J.-C., ... Sullivan, P. (2006a, February). An Intercomparison of Large-Eddy Simulations of the Stable Boundary Layer. *Boundary-Layer Meteorology*, 118(2), 247–272. doi: 10.1007/s10546-004-2820-6
- Beare, R. J., Macvean, M. K., Holtslag, A. A. M., Cuxart, J., Esau, I., Golaz, J.-C., ... Sullivan, P. (2006b, February). An Intercomparison of Large-Eddy Simulations of the Stable Boundary Layer. *Boundary-Layer Meteorology*, 118(2), 247–272. doi: 10.1007/s10546-004-2820-6
- Bleeg, J., Purcell, M., Ruisi, R., & Traiger, E. (2018, June). Wind Farm Blockage and the Consequences of Neglecting Its Impact on Energy Production. *Energies*, 11(6), 1609. doi: 10.3390/en11061609
- Bodini, N., Abraham, A., Doubrawa, P., Letizia, S., Thedin, R., Agarwal, N., ...
 Wharton, S. (2024, June). An international benchmark for wind plant wakes from the american wake experiment (awaken). Journal of Physics: Conference Series, 2767(9), 092034. Retrieved from http://dx.doi.org/10.1088/1742-6596/2767/9/092034
- Bodini, N., Optis, M., Redfern, S., Rosencrans, D., Rybchuk, A., Lundquist,
 J. K., ... Musial, W. (2024, April). The 2023 National Offshore Wind data set (NOW-23). Earth System Science Data, 16(4), 1965–2006. doi: 10.5194/essd-16-1965-2024
- Borges, R., Carmona, M., Costa, B., & Don, W. S. (2008, March). An improved weighted essentially non-oscillatory scheme for hyperbolic conservation laws. *Journal of Computational Physics*, 227(6), 3191-3211. Retrieved from https://www .sciencedirect.com/science/article/pii/S0021999107005232 doi: 10.1016/ j.jcp.2007.11.038

- Brasseur, J. G., & Wei, T. (2010, February). Designing large-eddy simulation of the turbulent boundary layer to capture law-of-the-wall scaling. *Physics of Fluids*, 22(2), 021303. doi: 10.1063/1.3319073
- Bryan, G. H., & Fritsch, J. M. (2002). A benchmark simulation for moist nonhydrostatic numerical models. *Monthly Weather Review*, 130(12), 2917–2928.
- Burstedde, C., Wilcox, L., & Ghattas, O. (2011). p4est: Scalable algorithms for parallel adaptive mesh refinement on forests of octrees. SIAM J. Sci. Comput., 33(3).
- Burton, T., Jenkins, N., Sharpe, D., & Bossanyi, E. (2011a). Wind energy handbook. Wiley. Retrieved from http://dx.doi.org/10.1002/9781119992714 doi: 10.1002/9781119992714
- Burton, T., Jenkins, N., Sharpe, D., & Bossanyi, E. (2011b). Wind energy handbook, 2nd edition, section 3.2. Wiley. Retrieved from https://www.wiley.com/en-us/ Wind+Energy+Handbook%2C+2nd+Edition-p-9781119993926
- Calaf, M., Meneveau, C., & Meyers, J. (2010, January). Large eddy simulation study of fully developed wind-turbine array boundary layers. *Physics of Fluids*, 22(1), 015110. Retrieved from https://doi.org/10.1063/1.3291077 doi: 10.1063/1.3291077
- Charnock, H. (1955). Wind stress on a water surface. Quarterly Journal of the Royal Meteorological Society, 81(350), 639-640. Retrieved from https://onlinelibrary.wiley.com/doi/abs/10.1002/qj.49708135027 doi: 10.1002/qj.49708135027
- Chow, F. K., Street, R. L., Xue, M., & Ferziger, J. H. (2005, July). Explicit Filtering and Reconstruction Turbulence Modeling for Large-Eddy Simulation of Neutral Boundary Layer Flow. *Journal of the Atmospheric Sciences*. doi: 10.1175/JAS3456.1
- Churchfield, M. J., Lee, S., Michalakes, J., & Moriarty, P. J. (2012, January). A numerical study of the effects of atmospheric and wake turbulence on wind turbine dynamics. *Journal of Turbulence*, 13, 1–32. doi: 10.1080/14685248.2012.668191
- Community, B. O. (2018). Blender a 3d modelling and rendering package [Computer software manual]. Stichting Blender Foundation, Amsterdam. Retrieved from http://www.blender.org
- Cuxart, J., Holtslag, A. A. M., Beare, R. J., Bazile, E., Beljaars, A., Cheng, A., ...
 Xu, K.-M. (2006, February). Single-Column Model Intercomparison for a Stably
 Stratified Atmospheric Boundary Layer. Boundary-Layer Meteorology, 118(2),
 273–303. doi: 10.1007/s10546-005-3780-1
- Deardorff, J. W.(1980).Stratocumulus-capped mixed layers derived from
Boundary-Layer Meteorol, 18, 495-527.10.1007/BF00119502Boundary-Layer Meteorol, 18, 495-527.
- Donahue, A. S., Caldwell, P. M., Bertagna, L., Beydoun, H., Bogenschutz, P. A., Bradley, A. M., ... Zhang, Y. (2024). To Exascale and Beyond—The Simple Cloud-Resolving E3SM Atmosphere Model (SCREAM), a Performance Portable Global Atmosphere Model for Cloud-Resolving Scales. *Journal of Advances in Modeling Earth Systems*, 16(7), e2024MS004314. doi: 10.1029/2024MS004314
- Draxl, C., Clifton, A., Hodge, B.-M., & McCaa, J. (2015, August). The Wind Integration National Dataset (WIND) Toolkit. Applied Energy, 151, 355–366. doi: 10 .1016/j.apenergy.2015.03.121
- Droegemeier, K. K., & Wilhelmson, R. B. (1987, April). Numerical simulation of thunderstorm outflow dynamics. part i: Outflow sensitivity experiments and turbulence dynamics. Journal of the Atmospheric Sciences, 44(8), 1180–1210. Retrieved from http://dx.doi.org/10.1175/1520-0469(1987)044<1180: nsotod>2.0.co;2 doi: 10.1175/1520-0469(1987)044<1180:nsotod>2.0.co;2
- Duarte, M., Almgren, A. S., Balakrishnan, K., Bell, J. B., & Romps, D. M. (2014, October). A numerical study of methods for moist atmospheric flows: Compress-

ible equations. *Monthly Weather Review*, 142(11), 4269–4283. Retrieved from http://dx.doi.org/10.1175/mwr-d-13-00368.1 doi: 10.1175/mwr-d-13-00368 .1

Dubovik, O., & et al. (2014). GRASP: a versatile algorithm for characterizing the atmosphere. SPIE Newsroom. doi: 10.1117/2.1201408.005558

- Durran, D. R. (1989). Improving the anelastic approximation. Journal of Atmospheric Sciences, 46(11), 1453 - 1461. Retrieved from https://journals .ametsoc.org/view/journals/atsc/46/11/1520-0469_1989_046_1453_itaa_2_0 _co_2.xml doi: 10.1175/1520-0469(1989)046(1453:ITAA)2.0.CO;2
- E3SM Github Repository. (2024). Retrieved from https://github.com/ E3SM-Project/scream
- Fitch, A. C., Olson, J. B., Lundquist, J. K., Dudhia, J., Gupta, A. K., Michalakes, J., & Barstad, I. (2012a). Local and mesoscale impacts of wind farms as parameterized in a mesoscale nwp model. *Monthly Weather Review*, 140(9), 3017 - 3038. Retrieved from https://journals.ametsoc.org/view/journals/mwre/140/9/ mwr-d-11-00352.1.xml doi: 10.1175/MWR-D-11-00352.1
- Fitch, A. C., Olson, J. B., Lundquist, J. K., Dudhia, J., Gupta, A. K., Michalakes, J., & Barstad, I. (2012b, September). Local and mesoscale impacts of wind farms as parameterized in a mesoscale nwp model. *Monthly Weather Review*, 140(9), 3017–3038. Retrieved from http://dx.doi.org/10.1175/mwr-d-11-00352.1 doi: 10.1175/mwr-d-11-00352.1
- Fuhrer, O., Chadha, T., Hoefler, T., Kwasniewski, G., Lapillonne, X., Leutwyler, D., ... Vogt, H. (2018, May). Near-global climate simulation at 1 km resolution: establishing a performance baseline on 4888 GPUs with COSMO 5.0. Geoscientific Model Development, 11(4), 1665–1681. Retrieved from https://gmd.copernicus.org/articles/11/1665/2018/ doi: 10.5194/gmd-11-1665-2018
- Gabersek, S., Giraldo, F. X., & Doyle, J. D. (2011). Dry and moist idealized experiments with a two-dimensional spectral element model. Retrieved from http://dx .doi.org/10.21236/ada547220 doi: 10.21236/ada547220
- Giraldo, F., Kelly, J., & Constantinescu, E. (2013). Implicit-explicit formulations of a three-dimensional nonhydrostatic unified model of the atmosphere. SIAM J. Sci. Comput., 35. doi: 10.1137/120876034
- Giraldo, F., & Restelli, M. (2008, April). A study of spectral element and discontinuous galerkin methods for the navier-stokes equations in nonhydrostatic mesoscale atmospheric modeling: Equation sets and test cases. Journal of Computational Physics, 227(8), 3849–3877. Retrieved from http://dx.doi.org/10.1016/j.jcp.2007.12.009 doi: 10.1016/j.jcp.2007.12.009
- Gottlieb, S., & Shu, C.-W. (1998). Total variation diminishing Runge-Kutta schemes. *Mathematics of Computation*, 67(221), 73-85. Retrieved 2024-08-27, from https://www.ams.org/mcom/1998-67-221/S0025-5718-98-00913-2/ doi: 10.1090/S0025-5718-98-00913-2
- Hahmann, A. N., Sile, T., Witha, B., Davis, N. N., Dörenkämper, M., Ezber, Y., ...
 Söderberg, S. (2020, October). The making of the New European Wind Atlas –
 Part 1: Model sensitivity. *Geoscientific Model Development*, 13(10), 5053–5078.
 doi: 10.5194/gmd-13-5053-2020
- Haupt, S. E., Berg, L., Decastro, A., Gagne, D., Jimenez, P., Juliano, T., ...
 Rai, R. (2020, December). Outcomes of the DOE Workshop on Atmospheric Challenges for the Wind Energy Industry (Tech. Rep. No. PNNL-30828). doi: 10.2172/1762812
- Haupt, S. E., Kosović, B., Berg, L. K., Kaul, C. M., Churchfield, M., Mirocha, J.,
 ... Thedin, R. (2023, August). Lessons learned in coupling atmospheric models across scales for onshore and offshore wind energy. Wind Energy Science, 8(8), 1251–1275. doi: 10.5194/wes-8-1251-2023

- He, C., Valayamkunnath, P., Barlage, M., Chen, F., Gochis, D., Cabell, R., ... Ek,
 M. (2023). The Community Noah-MP Land Surface Modeling System Technical Description Version 5.0 (Tech. Rep.). NCAR/UCAR. Retrieved 2024-12-04, from https://opensky.ucar.edu/islandora/object/technotes:599 doi: 10.5065/EW8G-YR95
- Heus, T., van Heerwaarden, C. C., Jonker, H. J. J., Pier Siebesma, A., Axelsen, S., van den Dries, K., ... Vilà-Guerau de Arellano, J. (2010, September). Formulation of the Dutch Atmospheric Large-Eddy Simulation (DALES) and overview of its applications. *Geoscientific Model Development*, 3(2), 415–444. Retrieved from https://gmd.copernicus.org/articles/3/415/2010/gmd-3-415-2010.html (Publisher: Copernicus GmbH) doi: 10.5194/gmd-3-415-2010
- Hodge, B.-M., Brancucci Martinez-Anido, C., Wang, Q., Chartan, E., Florita, A., & Kiviluoma, J. (2018, March). The combined value of wind and solar power forecasting improvements and electricity storage. *Applied Energy*, 214, 1–15. doi: 10.1016/j.apenergy.2017.12.120
- Holland, J. Z., & Rasmusson, E. M. (1973, January). Measurements of the atmospheric mass, energy, and momentum budgets over a 500-kilometer square of tropical ocean. Monthly Weather Review, 101(1), 44–55. Retrieved from http://dx.doi.org/10.1175/1520-0493(1973)101<0044:motame>2.3.co;2 doi: 10.1175/1520-0493(1973)101<0044:motame>2.3.co;2
- Holtslag, A. a. M., Svensson, G., Baas, P., Basu, S., Beare, B., Beljaars, A. C. M., ... Wiel, B. J. H. V. D. (2013, November). Stable Atmospheric Boundary Layers and Diurnal Cycles: Challenges for Weather and Climate Models. *Bulletin of the American Meteorological Society*. doi: 10.1175/BAMS-D-11-00187.1
- Hundsdorfer, W., Koren, B., vanLoon, M., & Verwer, J. G. (1995, March). A Positive Finite-Difference Advection Scheme. Journal of Computational Physics, 117(1), 35-46. Retrieved from https://www.sciencedirect.com/science/ article/pii/S002199918571042X doi: 10.1006/jcph.1995.1042
- Isaac, T., Stadler, G., & Ghattas, O. (2015). Solution of nonlienear stokes equations discretized by high-order finite elements on nonconforming and anisotropic meshes with application to ice sheet dynamics. SIAM J. Sci. Comput., 37(6).
- Jiang, G.-S., & Shu, C.-W. (1996, June). Efficient Implementation of Weighted ENO Schemes. Journal of Computational Physics, 126(1), 202-228. Retrieved from https://www.sciencedirect.com/science/article/pii/S0021999196901308 doi: 10.1006/jcph.1996.0130
- Jiang, H., & Cotton, W. R. (2000, February). Large eddy simulation of shallow cumulus convection during bomex: Sensitivity to microphysics and radiation. Journal of the Atmospheric Sciences, 57(4), 582–594. Retrieved from http://dx.doi .org/10.1175/1520-0469(2000)057<0582:lesosc>2.0.co;2 doi: 10.1175/1520 -0469(2000)057(0582:lesosc>2.0.co;2
- Jiménez, P. A., & Dudhia, J. (2018, May). On the Need to Modify the Sea Surface Roughness Formulation over Shallow Waters. Journal of Applied Meteorology and Climatology, 57(350), 1101–1110. Retrieved from https:// journals.ametsoc.org/view/journals/apme/57/5/jamc-d-17-0137.1.xml doi: 10.1175/JAMC-D-17-0137.1
- Kang, S., Kelly, J. F., Austin, A. P., & Giraldo, F. X. (2024). Multiscale modeling framework using element-based galerkin methods for moist atmospheric limitedarea simulations. Retrieved from https://arxiv.org/abs/2407.05927
- Kessler, E. (1969). On the Distribution and Continuity of Water Substance in Atmospheric Circulations. In E. Kessler (Ed.), On the Distribution and Continuity of Water Substance in Atmospheric Circulations (pp. 1–84). Boston, MA: American Meteorological Society. Retrieved from https://doi.org/10.1007/978-1-935704 -36-2_1 doi: 10.1007/978-1-935704-36-2_1

- Khairoutdinov, M. F., & Randall, D. A. (2003, February). Cloud Resolving Modeling of the ARM Summer 1997 IOP: Model Formulation, Results, Uncertainties, and Sensitivities. *Journal of the Atmospheric Sciences*, 60(4), 607–625. Retrieved from https://journals.ametsoc.org/view/journals/atsc/60/4/1520-0469_2003_060_0607_crmota_2.0.co_2.xml
- Kirkil, G., Mirocha, J., Bou-Zeid, E., Chow, F. K., & Kosović, B. (2012, January). Implementation and Evaluation of Dynamic Subfilter-Scale Stress Models for Large-Eddy Simulation Using WRF. Monthly Weather Review, 140(1), 266–284. doi: 10.1175/MWR-D-11-00037.1
- Klemp, J. B., Skamarock, W. C., & Dudhia, J. (2007, August). Conservative Split-Explicit Time Integration Methods for the Compressible Nonhydrostatic Equations. *Monthly Weather Review*, 135(8), 2897-2913. Retrieved from https://journals.ametsoc.org/view/journals/mwre/135/8/mwr3440.1.xml doi: 10.1175/MWR3440.1
- Klemp, J. B., & Wilhelmson, R. B. (1978a, June). The Simulation of Three-Dimensional Convective Storm Dynamics. Journal of the Atmospheric Sciences, 35(6), 1070–1096. Retrieved from https://journals.ametsoc.org/ view/journals/atsc/35/6/1520-0469_1978_035_1070_tsotdc_2_0_co_2.xml
- Klemp, J. B., & Wilhelmson, R. B. (1978b, June). The simulation of threedimensional convective storm dynamics. Journal of the Atmospheric Sciences, 35(6), 1070–1096. Retrieved from http://dx.doi.org/10.1175/1520 -0469(1978)035<1070:tsotdc>2.0.co;2 doi: 10.1175/1520-0469(1978)035(1070: tsotdc>2.0.co;2
- Kosović, B. (1997, April). Subgrid-scale modelling for the large-eddy simulation of high-Reynolds-number boundary layers. *Journal of Fluid Mechanics*, 336, 151– 182. doi: 10.1017/S0022112096004697
- Kosović, B., & Curry, J. A. (2000, April). A Large Eddy Simulation Study of a Quasi-Steady, Stably Stratified Atmospheric Boundary Layer. Journal of the Atmospheric Sciences, 57(8), 1052–1068. doi: 10.1175/1520-0469(2000)057(1052: ALESSO)2.0.CO;2
- Kumar, A., Kaur, B., & Tripathi, N. K. (2023, June). A new type of improved third order WENO scheme with finite difference framework. *Chinese Journal of Physics*, 83, 14–27. Retrieved from https://www.sciencedirect.com/science/ article/pii/S0577907322002994 doi: 10.1016/j.cjph.2022.12.006
- Lee, J., & Khairoutdinov, M. (2015). A Simplified Land Model (SLM) for use in cloud-resolving models: Formulation and evaluation. *Journal of Advances in Modeling Earth Systems*, 7(3), 1368–1392. Retrieved from https://onlinelibrary .wiley.com/doi/abs/10.1002/2014MS000419 doi: 10.1002/2014MS000419
- Lee, J. C. Y., & Fields, M. J. (2021, March). An overview of wind-energy-production prediction bias, losses, and uncertainties. Wind Energy Science, 6(2), 311–365. doi: 10.5194/wes-6-311-2021
- Lilly, D. (1967). The representation of small-scale turbulence in numerical simulation experiments. *IBM Form*, 195-210.
- Lin, J. (2013, March). Lagrangian modeling of the atmosphre: An introduction. In Lagrangian modeling of the atmosphere (p. 1–11). American Geophysical Union. Retrieved from http://dx.doi.org/10.1029/2012gm001376 doi: 10.1029/2012gm001376
- Lin, Y.-L., Farley, R. D., & Orville, H. D. (1983, June). Bulk Parameterization of the Snow Field in a Cloud Model. Journal of Applied Meteorology and Climatology, 22(6), 1065-1092. Retrieved from https://journals.ametsoc.org/view/ journals/apme/22/6/1520-0450_1983_022_1065_bpotsf_2_0_co_2.xml
- Lu, H., & Porté-Agel, F. (2014, June). On the Development of a Dynamic Nonlinear Closure for Large-Eddy Simulation of the Atmospheric Boundary Layer. Boundary-Layer Meteorology, 151(3), 429–451. doi: 10.1007/s10546-013-9906-y

- Ma, T., Sun, C., & Miller, P. (2024, July). Large eddy simulation of non-stationary highly turbulent hurricane boundary layer winds. *Physics of Fluids*, 36(7), 075158. doi: 10.1063/5.0214627
- Maas, O., & Raasch, S. (2022, March). Wake properties and power output of very large wind farms for different meteorological conditions and turbine spacings: A large-eddy simulation case study for the German Bight. Wind Energy Science, 7(2), 715–739. doi: 10.5194/wes-7-715-2022
- Mellor, G., & Yamada, T. (1982). Development of a turbulence closure model for geophysical fluid problems. *Rev. Geophys.*, 20, 851-875. Retrieved from https:// doi.org/10.1029/RG020i004p00851 doi: 10.1029/RG020i004p00851
- Mirocha, J., Kosović, B., & Kirkil, G. (2014). Resolved Turbulence Characteristics in Large-Eddy Simulations Nested within Mesoscale Simulations Using the Weather Research and Forecasting Model. Monthly Weather Review, 142(2), 806–831. doi: 10.1175/MWR-D-13-00064.1
- Mirocha, J., Kosović, B., Aitken, M., & Lundquist, J. (2014). Implementation of a generalized actuator disk wind turbine model into the weather research and forecasting model for large-eddy simulation applications. *Journal of Renewable and Sustainable Energy*, 6. doi: 10.1063/1.4861061
- Mirocha, J., Lundquist, J., & Kosović, B. (2010, November). Implementation of a Nonlinear Subfilter Turbulence Stress Model for Large-Eddy Simulation in the Advanced Research WRF Model. *Monthly Weather Review*, 138(11), 4212–4228. doi: 10.1175/2010MWR3286.1
- Mirocha, J. D., Churchfield, M. J., Muñoz-Esparza, D., Rai, R. K., Feng, Y., Kosović, B., ... Ananthan, S. (2018, September). Large-eddy simulation sensitivities to variations of configuration and forcing parameters in canonical boundarylayer flows for wind energy applications. Wind Energy Science, 3(2), 589–613. doi: 10.5194/wes-3-589-2018
- Mirocha, J. D., Kosovic, B., Aitken, M. L., & Lundquist, J. K. (2014, January). Implementation of a generalized actuator disk wind turbine model into the weather research and forecasting model for large-eddy simulation applications. Journal of Renewable and Sustainable Energy, 6(1). Retrieved from http://dx.doi.org/10.1063/1.4861061 doi: 10.1063/1.4861061
- Mishnaevsky, L., Hasager, C. B., Bak, C., Tilg, A.-M., Bech, J. I., Doagou Rad,
 S., & Fæster, S. (2021, May). Leading edge erosion of wind turbine blades: Understanding, prevention and protection. *Renewable Energy*, 169, 953–969. Retrieved from http://dx.doi.org/10.1016/j.renene.2021.01.044 doi: 10.1016/j.renene.2021.01.044
- Moeng, C.-H. (1984, July). A Large-Eddy-Simulation Model for the Study of Planetary Boundary-Layer Turbulence. *Journal of the Atmospheric Sciences*, 41(13), 2052–2062. doi: 10.1175/1520-0469(1984)041(2052:ALESMF)2.0.CO;2
- Moeng, C.-H., Dudhia, J., Klemp, J., & Sullivan, P. (2007, June). Examining Two-Way Grid Nesting for Large Eddy Simulation of the PBL Using the WRF Model. *Monthly Weather Review*, 135(6), 2295–2311. doi: 10.1175/MWR3406.1
- Monin, A. S., & Obukhov, A. M. (1954). Basic laws of turbulent mixing in the surface layer of the atmosphere. *Contrib. Geophys. Inst. Acad. Sci. USSR*, 151(163), e187.
- Morrison, H., van Lier-Walqui, M., Fridlind, A. M., Grabowski, W. W., Harrington, J. Y., Hoose, C., ... Xue, L. (2020, July). Confronting the challenge of modeling cloud and precipitation microphysics. *Journal of Advances in Modeling Earth Sys*tems, 12(8). Retrieved from http://dx.doi.org/10.1029/2019ms001689 doi: 10.1029/2019ms001689
- Muñoz-Esparza, D., Sauer, J. A., Jensen, A. A., Xue, L., & Grabowski, W. W. (2022). The FastEddy® Resident-GPU Accelerated Large-Eddy Simulation Framework: Moist Dynamics Extension, Validation and Sensitivities of Modeling

Non-Precipitating Shallow Cumulus Clouds. Journal of Advances in Modeling Earth Systems, 14(4), e2021MS002904. doi: 10.1029/2021MS002904

- Myers, A., Zhang, W., Almgren, A., Thierry Antoun, A. H., John Bell, & Sinn, A. (2024). Amrex and pyamrex: Looking beyond ecp. The International Journal of High Performance Computing Applications. doi: 10.1177/10943420241271017
- Nakanishi, M., & Niino, H. (2009). Development of an improved turbulence closure model for the atmospheric boundary layer. J. Meteorol. Soc. Jpn. Ser II., 87, 895-912. Retrieved from https://doi.org/10.2151/jmsj.87.895 doi: 10.2151/jmsj.87.895
- Nitta, T., & Esbensen, S. (1974, January). Heat and moisture budget analyses using bomex data. *Monthly Weather Review*, 102(1), 17–28. Retrieved from http://dx .doi.org/10.1175/1520-0493(1974)102<0017:hambau>2.0.co;2 doi: 10.1175/1520-0493(1974)102<0017:hambau>2.0.co;2
- Ouwersloot, A., H.G.and Moene, & Attema, J. e. a. (2017). Large-eddy simulation comparison of neutral flow over a canopy: Sensitivities to physical and numerical conditions, and similarity to other representations. *Boundary Layer Meteorology*, 162, 71-89.
- REMORA GitHub. (2024). Retrieved from https://github.com/seahorce -scidac/REMORA
- Ren, Y., Suganthan, P. N., & Srikanth, N. (2015, October). Ensemble methods for wind and solar power forecasting—A state-of-the-art review. *Renewable and Sus*tainable Energy Reviews, 50, 82–91. doi: 10.1016/j.rser.2015.04.081
- Rotunno, R., Klemp, J. B., & Weisman, M. L. (1988, February). A theory for strong, long-lived squall lines. *Journal of the Atmospheric Sciences*, 45(3), 463-485. Retrieved from http://dx.doi.org/10.1175/1520-0469(1988) 045<0463:atfsll>2.0.co;2 doi: 10.1175/1520-0469(1988)045(0463:atfsll>2.0 .co;2
- Rutledge, S. A., & Hobbs, P. V. (1984, October). The Mesoscale and Microscale Structure and Organization of Clouds and Precipitation in Midlatitude Cyclones. XII: A Diagnostic Modeling Study of Precipitation Development in Narrow Cold-Frontal Rainbands. Journal of the Atmospheric Sciences, 41 (20), 2949–2972. Retrieved from https://journals.ametsoc.org/view/journals/atsc/41/20/1520-0469_1984_041_2949_tmamsa_2_0_co_2.xml
- Sanchez Gomez, M., Lundquist, J. K., Deskos, G., Arwade, S. R., Myers, A. T., & Hajjar, J. F. (2023). Wind Fields in Category 1–3 Tropical Cyclones Are Not Fully Represented in Wind Turbine Design Standards. *Journal of Geophysical Research: Atmospheres*, 128(16), e2023JD039233. doi: 10.1029/2023JD039233
- Sanz Rodrigo, J., Chávez Arroyo, R. A., Moriarty, P., Churchfield, M., Kosović, B., Réthoré, P.-E., ... Rife, D. (2017, March). Mesoscale to microscale wind farm flow modeling and evaluation. WIREs Energy and Environment, 6(2). doi: 10.1002/wene.214
- Sanz Rodrigo, J., Santos, P., Chávez Arroyo, R., Avila, M., Cavar, D., Lehmkuhl, O., ... Tromeur, E. (2021, May). The ALEX17 diurnal cycles in complex terrain benchmark. *Journal of Physics: Conference Series*, 1934(1), 012002. doi: 10.1088/1742-6596/1934/1/012002
- Sauer, J. A., & Muñoz-Esparza, D. (2020). The FastEddy R Resident-GPU Accelerated Large-Eddy Simulation Framework: Model Formulation, Dynamical-Core Validation and Performance Benchmarks. *Journal of Advances in Modeling Earth Systems*, 12(11), e2020MS002100. doi: 10.1029/2020MS002100
- Sharma, A., Brazell, M. J., Vijayakumar, G., Ananthan, S., Cheung, L., deVelder, N., ... Sprague, M. (2024). ExaWind: Open-source CFD for hybrid-RANS/LES geometry-resolved wind turbine simulations in atmospheric flows. *Wind Energy*, 27(3), 225–257. doi: 10.1002/we.2886

- Shaw, W. J., Berg, L. K., Debnath, M., Deskos, G., Draxl, C., Ghate, V. P., ... Wilczak, J. M. (2022, November). Scientific challenges to characterizing the wind resource in the marine atmospheric boundary layer. Wind Energy Science, 7(6), 2307–2334. doi: 10.5194/wes-7-2307-2022
- Shchepetkin, A. F., & McWilliams, J. C. (2005). The regional oceanic modeling system (roms): a split-explicit, free-surface, topography-following-coordinate oceanic model. Ocean Modelling, 9(4), 347-404. Retrieved from https://www.sciencedirect.com/science/article/pii/S1463500304000484 doi: https://doi.org/10.1016/j.ocemod.2004.08.002
- Siebesma, A. P., Bretherton, C. S., Brown, A., Chlond, A., Cuxart, J., Duynkerke,
 P. G., ... Stevens, D. E. (2003, May). A large eddy simulation intercomparison study of shallow cumulus convection. Journal of the Atmospheric Sciences, 60(10), 1201–1219. Retrieved from http://dx.doi.org/10.1175/1520
 -0469(2003)60<1201:alesis>2.0.co;2 doi: 10.1175/1520-0469(2003)60<1201: alesis>2.0.co;2
- Siebesma, A. P., & Cuijpers, J. W. M. (1995, March). Evaluation of parametric assumptions for shallow cumulus convection. Journal of the Atmospheric Sciences, 52(6), 650-666. Retrieved from http://dx.doi.org/10.1175/1520-0469(1995) 052<0650:eopafs>2.0.co;2 doi: 10.1175/1520-0469(1995)052<0650:eopafs>2.0 .co;2
- Siedersleben, S. K., Lundquist, J. K., Platis, A., Bange, J., Bärfuss, K., Lampert, A., ... Emeis, S. (2018, November). Micrometeorological impacts of offshore wind farms as seen in observations and simulations. *Environmental Research Letters*, 13(12), 124012. doi: 10.1088/1748-9326/aaea0b
- Skamarock, W., Klemp, J., Dudhia, J., Gill, D., Liu, Z., Berner, J., ... Huang, X. (2021, 7). A description of the advanced research wrf model version 4.3 (no. ncar/tn-556+str) (Tech. Rep. Nos. NCAR/TN-556+STR). National Center for Atmospheric Research. Retrieved from https://dx.doi.org/10.5065/1dfh-6p97 doi: 10.5065/1dfh-6p97
- Skamarock, W. C., Klemp, J. B., Duda, M. G., Fowler, L. D., Park, S.-H., & Ringler, T. D. (2012, September). A multiscale nonhydrostatic atmospheric model using centroidal voronoi tesselations and c-grid staggering. *Monthly Weather Review*, 140(9), 3090–3105. Retrieved from http://dx.doi.org/10.1175/ mwr-d-11-00215.1 doi: 10.1175/mwr-d-11-00215.1
- Smagorinsky, J. (1963). General circulation experiments with the primitive equations. Monthly Weather Review, 91, 99-164. Retrieved from https://doi.org/10.1175/1520-0493(1963)091<0099:GCEWTP>2.3.CO;2 doi: 10.1175/1520-0493(1963)091(0099:GCEWTP)2.3.CO;2
- Sridhar, A., Tissaoui, Y., Marras, S., Shen, Z., Kawczynski, C., Byrne, S., ...
 Schneider, T. (2022, August). Large-eddy simulations with climatemachine v0.2.0: a new open-source code for atmospheric simulations on gpus and cpus. Geoscientific Model Development, 15(15), 6259–6284. Retrieved from http://dx.doi.org/10.5194/gmd-15-6259-2022 doi: 10.5194/gmd-15-6259-2022
- Stern, D. P., Bryan, G. H., Lee, C.-Y., & Doyle, J. D. (2021, December). Estimating the Risk of Extreme Wind Gusts in Tropical Cyclones Using Idealized Large-Eddy Simulations and a Statistical–Dynamical Model. *Monthly Weather Review*, 149(12), 4183–4204. doi: 10.1175/MWR-D-21-0059.1
- Storey, R., & Rauffus, R. (2024, June). Mesoscale-coupled Large Eddy Simulation for Wind Resource Assessment. Journal of Physics: Conference Series, 2767(5), 052040. doi: 10.1088/1742-6596/2767/5/052040
- Straka, J. M., Wilhelmson, R. B., Wicker, L. J., Anderson, J. R., & Droegemeier,
 K. K. (1993, July). Numerical solutions of a non-linear density current: A benchmark solution and comparisons. *International Journal for Numerical Methods in Fluids*, 17(1), 1–22. Retrieved from http://dx.doi.org/10.1002/

fld.1650170103 doi: 10.1002/fld.1650170103

- Sullivan, P. P., McWilliams, J. C., & Moeng, C.-H. (1994, November). A subgrid-scale model for large-eddy simulation of planetary boundary-layer flows. *Boundary-Layer Meteorology*, 71(3), 247–276. doi: 10.1007/BF00713741
- Sullivan, P. P., McWilliams, J. C., & Patton, E. G. (2014, November). Large-Eddy Simulation of Marine Atmospheric Boundary Layers above a Spectrum of Moving Waves. *Journal of the Atmospheric Sciences*, 71(11), 4001–4027. doi: 10.1175/JAS-D-14-0095.1
- The AWAKEN benchmarks. (2024). The AWAKEN benchmarks. Retrieved from https://awaken-benchmark.readthedocs.io/en/latest/ (Accessed: 2024-10-18)
- Tissaoui, Y., Marras, S., Quaini, A., De Braganca Alves, F., & Girahldo, F. X. (2022, July). A non-column based, fully unstructured implementation of kessler's microphysics with warm rain using continuous and discontinuous spectral elements. ESS Open Archive. Retrieved from http://dx.doi.org/10.1002/essoar.10511896.1 doi: 10.1002/essoar.10511896.1
- Tolman, H. L. (1997). User manual and system documentation of wavewatch-iii version 1.15. (WAVEWATCH-III version 1.15)
- Trott, C. R., Lebrun-Grandié, D., Arndt, D., Ciesko, J., Dang, V., Ellingwood, N., ... Wilke, J. (2022). Kokkos 3: Programming model extensions for the exascale era. *IEEE Transactions on Parallel and Distributed Systems*, 33(4), 805-817. doi: 10.1109/TPDS.2021.3097283
- van der Laan, M. P., Kelly, M. C., & Sørensen, N. N. (2017). A new k-epsilon model consistent with Monin–Obukhov similarity theory. Wind Energy, 20(3), 479–489. Retrieved from https://doi.org/10.1002/we.2017 doi: 10.1002/we.2017
- Vanderwende, B., Kosović, B., Lundquist, J. K., & Mirocha, J. D. (2016). Simulating effects of a wind-turbine array using LES and RANS. Journal of Advances in Modeling Earth Systems, 8(3), 1376–1390. Retrieved from https://onlinelibrary.wiley.com/doi/abs/10.1002/2016MS000652 doi: 10.1002/2016MS000652
- van Heerwaarden, C. C., van Stratum, B. J. H., Heus, T., Gibbs, J. A., Fedorovich, E., & Mellado, J. P. (2017). Microhh 1.0: a computational fluid dynamics code for direct numerical simulation and large-eddy simulation of atmospheric boundary layer flows. *Geoscientific Model Development*, 10(8), 3145–3165. Retrieved from https://gmd.copernicus.org/articles/10/3145/2017/ doi: 10.5194/gmd-10-3145-2017
- Veers, P., Dykes, K., Lantz, E., Barth, S., Bottasso, C. L., Carlson, O., ... Wiser,
 R. (2019, October). Grand challenges in the science of wind energy. *Science*, 366(6464), eaau2027. doi: 10.1126/science.aau2027
- Volker, P. J. H., Badger, J., Hahmann, A. N., & Ott, S. (2015a). The explicit wake parametrisation v1.0: a wind farm parametrisation in the mesoscale model wrf. *Geoscientific Model Development*, 8(11), 3715–3731. Retrieved from https://gmd.copernicus.org/articles/8/3715/2015/ doi: 10.5194/gmd-8-3715-2015
- Volker, P. J. H., Badger, J., Hahmann, A. N., & Ott, S. (2015b, November). The explicit wake parametrisation v1.0: a wind farm parametrisation in the mesoscale model wrf. *Geoscientific Model Development*, 8(11), 3715–3731. Retrieved from http://dx.doi.org/10.5194/gmd-8-3715-2015 doi: 10.5194/gmd-8-3715-2015
- Wang, J., Botterud, A., Bessa, R., Keko, H., Carvalho, L., Issicaba, D., ... Miranda,
 V. (2011, November). Wind power forecasting uncertainty and unit commitment.
 Applied Energy, 88(11), 4014–4023. doi: 10.1016/j.apenergy.2011.04.011
- Warner, J. C., Armstrong, B., He, R., & Zambon, J. B. (2010). Development of a coupled ocean-atmosphere-wave-sediment transport (coawst) modeling system. Ocean Modelling, 35(3), 230-244. Retrieved from https:// www.sciencedirect.com/science/article/pii/S1463500310001113 doi:

https://doi.org/10.1016/j.ocemod.2010.07.010

- Weisman, M. L., & Klemp, J. B. (1984, December). The structure and classification of numerically simulated convective storms directionally varying wind shears. Monthly Weather Review, 112(12), 2479–2498. Retrieved from http://dx.doi.org/10.1175/1520-0493(1984)112<2479:tsacon>2.0.co;2 doi: 10.1175/1520-0493(1984)112<2479:tsacon>2.0.co;2
- Wicker, L. J., & Skamarock, W. C. (2002, August). Time-Splitting Methods for Elastic Models Using Forward Time Schemes. Monthly Weather Review, 130(8), 2088-2097. Retrieved from https://journals.ametsoc.org/view/journals/ mwre/130/8/1520-0493_2002_130_2088_tsmfem_2.0.co_2.xml
- Wood, D. (2011). Small wind turbines: Analysis, design, and application. Springer London. Retrieved from http://dx.doi.org/10.1007/978-1-84996-175-2 doi: 10.1007/978-1-84996-175-2
- Wurps, H., Steinfeld, G., & Heinz, S. (2020, May). Grid-Resolution Requirements for Large-Eddy Simulations of the Atmospheric Boundary Layer. Boundary-Layer Meteorology, 175(2), 179–201. doi: 10.1007/s10546-020-00504-1
- Xue, M. (2000, August). High-Order Monotonic Numerical Diffusion and Smoothing. Monthly Weather Review, 128(8), 2853-2864. Retrieved from https://journals.ametsoc.org/view/journals/mwre/128/8/1520-0493_2000 _128_2853_homnda_2.0.co_2.xml
- Yan, J., Möhrlen, C., Göçmen, T., Kelly, M., Wessel, A., & Giebel, G. (2022, September). Uncovering wind power forecasting uncertainty sources and their propagation through the whole modelling chain. *Renewable and Sustainable Energy Reviews*, 165, 112519. doi: 10.1016/j.rser.2022.112519
- Zhang, W., Myers, A., Gott, K., Almgren, A., Bell, J., & et al. (2021). Amrex: Block-structured adaptive mesh refinement for multiphysics applications. The International Journal of High Performance Computing Applications, 35(6), 508-526. doi: 10.1177/10943420211022811
- Zhao, J., Yan, G., & Han, D. (2021, May). A review of approaches to simulate windborne debris dynamics in wind fields. *Journal of Wind Engineering and Industrial Aerodynamics*, 212, 104597. Retrieved from https://www.sciencedirect.com/ science/article/pii/S0167610521000830 doi: 10.1016/j.jweia.2021.104597
- Zhou, B., & Chow, F. K. (2011, September). Large-Eddy Simulation of the Stable Boundary Layer with Explicit Filtering and Reconstruction Turbulence Modeling. doi: 10.1175/2011JAS3693.1
- Zängl, G. (2003, September). Orographic gravity waves close to the nonhydrostatic limit of vertical propagation. Journal of the Atmospheric Sciences, 60(17), 2045–2063. Retrieved from http://dx.doi.org/10.1175/1520 -0469(2003)060<2045:ogwctt>2.0.co;2 doi: 10.1175/1520-0469(2003)060(2045: ogwctt)2.0.co;2