A fully conservative discrete velocity Boltzmann solver with parallel adaptive mesh refinement for compressible flows

R.M. Strässle, S.A. Hosseini, and I.V. Karlin

Computational Kinetics Group, Department of Mechanical and Process Engineering, ETH Zürich, 8092 Zurich, Switzerland (*rubenst@ethz.ch, shosseini@ethz.ch, ikarlin@ethz.ch)

(Dated: February 10, 2025)

Since the advent of the lattice Boltzmann method, discrete velocity Boltzmann models have provided a compelling alternative to classical Euler and Navier–Stokes–Fourier solvers in simulating fluid flows of various regimes by leveraging the kinetic theory of gases. Yet, significant challenges remain in efficiently and accurately simulating compressible high-speed flows while maintaining strict conservation of mass, momentum and energy. This paper presents a parallel and fully conservative adaptive mesh refinement (AMR) implementation of a finite-volume-based discrete kinetic model. The solver employs time-dependent H-type refinement combined with a two-population quasi-equilibrium Bhatnagar–Gross–Krook kinetic model. Results have shown that the targeted macroscopic moments as well as the dispersion and dissipation rates of all eigen-modes are accurately recovered while strictly preserving conservation laws. Furthermore, one- and two-dimensional benchmarks such as the Sod and Lax shock tubes, the Shu–Osher and several Riemann problems, as well as viscous shock-vortex interactions have demonstrated that the solver precisely captures reference solutions, whilst the AMR methodology efficiently reduces computational cost for the same accuracy and fidelity of the solution. The proposed solver marks an accurate, efficient and scalable framework for kinetic simulations of compressible high-speed flows with moderate discontinuities, offering a valuable tool for studying complex problems in fluid dynamics.

I. INTRODUCTION

Understanding compressible and high-speed fluid flows is of paramount importance for science and engineering. Development of reliable, accurate and efficient numerical methods for the simulation of compressible flows, especially on large-scale clusters, has been a topic of intense research over the past few decades [1, 2]. While different discrete approximations such as finite volumes (FV) and finite differences (FD) to the Navier–Stokes–Fourier (NSF) equations were the main drivers of research in that area, the advent of the lattice Boltzmann method (LBM) in the late 80's opened the door for a new class of numerical methods rooted in the kinetic theory of gases.

Discrete velocity Boltzmann methods (DVBMs), such as LBM [3, 4], solve a discrete velocity version of the Boltzmann equation obtained via a finite order expansion of the distribution function in terms of a set of orthonormal functions such as Hermite polynomials [5]. The dynamics of observable properties of a fluid described by the Euler or NSF equations are recovered in the hydrodynamic limit [6]. In addition to allowing for the possibility to include physics beyond NSF via higher-order expansions, its combination with collision models such as the Bhatnagar-Gross-Krook (BGK) approximation [7] has been shown to provide an efficient alternative to classical solvers [8, 9].

Simulation of compressible and high-speed flows with DVBMs has witnessed considerable advances in the past decades, illustrated most notably by formulations such as the family of Unified Gas Kinetic and Discrete Unified Gas Kinetic schemes (UGKS, DUGKS) [10], FD and FV-based models such as those discussed in [11, 12] and the LBM [13].

In the specific context of the LBM, while research was focused on the incompressible regime and stabilization of the isothermal solver through advanced collision models and entropy constrained equilibria construction [14–20] over the past decades, considerable advances are being reported in recent years for compressible flow simulations. These advances have been, in part, motivated by insights from kinetic theory allowing, for instance, for proper viscous heating in non-unity Prandtl number flows and variable specific heat ratios via models such as Shakhov [21] and Holway [22] or the quasiequilibrium approach [23, 24]. The introduction of double distribution function models, where a second distribution is carrying for example the total or internal non-rotational energy [25-27], had considerable impact on the development of efficient compressible LBM-based solvers. The class of double distribution function LBM solvers relying on standard lattices [28-32] and hybrid solvers, modeling the energy balance equation via a FD or FV solver [33] are practical illustrations of this impact. Models relying on higher-order lattices such as D2Q25 properly recovering the energy balance equation [34, 35] without needing correction terms were also developed in that context. While all these approaches relied on static quadratures and as a result were limited in terms of maximum achievable Mach number, the introduction of dvnamic quadratures starting with shifted lattices [36-38] and culminating with the particles on demand (PonD) method [39] opened the door for hyper-sonic flow simulations [40, 41].

Some comments are in order here; higher order velocity sets, e.g. the D2Q25, based on construction as the roots of Hermite polynomials [34], non-integer shifted velocity sets and PonD generally result in non-space-filling lattices, which combined with a Lagrangian discretization in space would require additional interpolation steps to reconstruct populations at lattice sites [42–44]. This entails a loss of the conservative properties of the scheme. Alternatively, strict conservation can be achieved by construction with a FV discretization [33, 45, 46] and formulations based on UGKS or DUGKS [47–51]. However, the larger number of variables and oper-

ations associated with higher order quadratures and adaptive velocity sets combined with double distribution models render the issue of efficiency and computational cost reduction quite critical for such schemes.

A commonly employed computational technique is adaptive mesh refinement (AMR), which is designed to enhance the ratio between efficiency and accuracy of simulations on a computational grid by dynamically adjusting the resolution based on some local indicators of the flow. By adaptively refining the computational grid in regions of interest, AMR can provide high resolution where it is most needed, while reducing computational effort and memory usage in regions where coarser resolution is sufficient, i.e. it ensures efficient usage of computational resources while maintaining or increasing fidelity in critical areas. In the context of this manuscript, AMR shall refer to the time-dependent H-type grid refinement, i.e. refinement by addition of more grid nodes, as opposed to the R-type, i.e. redistribution or distortion of the grid without changing the number of nodes and their connectivity. Note that a P-type refinement, generally described as increasing the order of interpolation or polynomial approximation of the solution on a grid point, was also shown to be a promising avenue that will be revisited in future publications; in the context of DVBMs, this corresponds to making the order of the quadrature adaptive, allowing for the use of lower-order quadratures in lower Mach number regions [52, 53]. AMR is beneficial for flows exhibiting distinct features, for example, (1) flows containing localized regions of high complexity such as boundary layers around objects, vortex dominated or turbulent flows, (2) sharp interfaces, as in multiphase flows, and it is especially powerful in (3) high-speed compressible flows, which contain sharp gradients, shocks and rarefaction waves. The effectiveness of AMR has been demonstrated for a variety of such problems and several refinement approaches in connection with DVBMs, e.g. LBM [54-58], FD-DVBM [59], and other related models [60]. However, adopting AMR introduces significant algorithmic changes and presents challenges such as loss of strict conservation properties in conservative schemes and leveraging the full potential of parallel processing on modern distributed memory machines.

The aim of this paper is to present a parallel AMR realization of an FVM-based kinetic solver, which is fully conservative and thus ideally suited for the simulation of compressible and high-speed flows. Throughout the manuscript, emphasis is placed on strict conservation and a correct recovery of the macroscopic moments and dissipation rates for Euler and NSF level dynamics. The kinetic model is presented in section II and discretized in section III, followed by an outline of the AMR methodology and AMR related implementations in section IV. The capabilities of the solver are validated in section V including several one and two-dimensional benchmarks of compressible high-speed flows. Finally, a summary and conclusions are provided in section VI.

II. KINETIC MODEL DESCRIPTION

This part focuses on the model construction, starting from the Boltzmann equation,

$$\partial_t f(t, \boldsymbol{r}, \boldsymbol{v}) + \boldsymbol{v} \cdot \nabla f(t, \boldsymbol{r}, \boldsymbol{v}) = \Omega_f,$$
 (1)

where Ω_f is the collision operator modeled with the BGK approximation [7] as $\Omega_f = [f^{\rm eq}(t,r,v)-f(t,r,v)]/\tau$. The distribution function and the local equilibrium distribution function are represented by f(t,r,v) and $f^{\rm eq}(t,r,v)$, respectively. The particle velocity is designated by v and r marks the position in space. A single parameter, τ , controls the relaxation rate of the distribution function towards the equilibrium state, known as the local Maxwellian distribution parameterized by the values of local density ρ , temperature T and flow velocity v as

$$f^{\text{eq}}(t, \boldsymbol{r}, \boldsymbol{v}) = \frac{\rho}{(2\pi RT)^{D/2}} \exp\left[-\frac{(\boldsymbol{v} - \boldsymbol{u})^2}{2RT}\right],$$
 (2)

where D is the dimension of the physical space and R designates the gas constant. For the sake of convenience, R=1 is used for the remainder of this manuscript without loss of generality. The fluid density and momentum are be obtained as

$$\rho = \int_{\mathbb{R}^D} f d\mathbf{v} = \int_{\mathbb{R}^D} f^{eq} d\mathbf{v}, \tag{3}$$

$$\rho u = \int_{\mathbb{R}^D} v f dv = \int_{\mathbb{R}^D} v f^{eq} dv. \tag{4}$$

Following Rykov's original work [25] to take the effect of internal degrees of freedom of a gas into account and allowing for variable specific heat ratios γ , Eq. (1) is supplemented with a balance equation for a second distribution function g carrying the excess internal energy stemming from nontranslational degrees of freedom, i.e.,

$$\partial_t g(t, r, v) + v \cdot \nabla g(t, r, v) = \Omega_g,$$
 (5)

with $\Omega_g = (g^{\text{eq}}(t, r, v) - g(t, r, v)) / \tau$. The local equilibrium state of the second distribution function, g^{eq} , is defined as

$$g^{\text{eq}} = 2\left(C_{\nu} - \frac{D}{2}\right)Tf^{\text{eq}},\tag{6}$$

where C_{ν} indicates the specific heat at constant volume. As a result, the total energy is obtained as

$$\rho E = \rho \left(C_{v}T + \frac{1}{2} \mid \boldsymbol{u} \mid^{2} \right) = \int_{\mathbb{R}^{D}} \frac{1}{2} \mid \boldsymbol{v} \mid^{2} f d\boldsymbol{v} + \int_{\mathbb{R}^{D}} \frac{1}{2} g d\boldsymbol{v}$$
$$= \int_{\mathbb{R}^{D}} \frac{1}{2} \mid \boldsymbol{v} \mid^{2} f^{eq} d\boldsymbol{v} + \int_{\mathbb{R}^{D}} \frac{1}{2} g^{eq} d\boldsymbol{v}. \quad (7)$$

While allowing for variable specific heat ratios, given that all moments relax at the same rate, the model still is limited to unity Prandtl number defined as

$$\Pr = \frac{C_p \mu}{\kappa},\tag{8}$$

where C_p is the specific heat under constant pressure, μ the dynamic viscosity and κ the thermal conductivity. The relaxation to the equilibrium is split into two steps to overcome this restriction via the introduction of an intermediary state called the quasi-equilibrium state [5, 23, 24, 35, 61]. The collision terms are rewritten as

$$\Omega_{f} = \frac{1}{\tau_{1}} \left[f^{\text{eq}}(t, \boldsymbol{r}, \boldsymbol{v}) - f(t, \boldsymbol{r}, \boldsymbol{v}) \right]
+ \left(\frac{1}{\tau_{1}} - \frac{1}{\tau_{2}} \right) \left[f^{*}(t, \boldsymbol{r}, \boldsymbol{v}) - f^{\text{eq}}(t, \boldsymbol{r}, \boldsymbol{v}) \right], \qquad (9)$$

$$\Omega_{g} = \frac{1}{\tau_{1}} \left[g^{\text{eq}}(t, \boldsymbol{r}, \boldsymbol{v}) - g(t, \boldsymbol{r}, \boldsymbol{v}) \right]
+ \left(\frac{1}{\tau_{1}} - \frac{1}{\tau_{2}} \right) \left[g^{*}(t, \boldsymbol{r}, \boldsymbol{v}) - g^{\text{eq}}(t, \boldsymbol{r}, \boldsymbol{v}) \right], \qquad (10)$$

where τ_1 and τ_2 are the two relaxation parameters related to the viscosity and thermal conductivity, and $f^*(t, r, v)$ and $g^*(t, r, v)$ are the quasi-equilibria. The quasi-equilibrium state is defined as the minimizer of the Boltzmann entropy function subject to a set of locally conserved fields and quasi-conserved slow fields. In order to recover the NSF equations with variable Prandtl number [24], the quasi-equilibrium distribution functions are required to satisfy the conservation of mass, momentum and total energy, as

$$\int_{\mathbb{R}^D} f^* d\mathbf{v} = \int_{\mathbb{R}^D} f^{\text{eq}} d\mathbf{v},\tag{11}$$

$$\int_{\mathbb{R}^D} \mathbf{v} f^* d\mathbf{v} = \int_{\mathbb{R}^D} \mathbf{v} f^{\text{eq}} d\mathbf{v},\tag{12}$$

$$\int_{\mathbb{R}^{D}} (|\mathbf{v}|^{2} f^{*} + g^{*}) d\mathbf{v} = \int_{\mathbb{R}^{D}} (|\mathbf{v}|^{2} f^{eq} + g^{eq}) d\mathbf{v}. \quad (13)$$

In addition, the quasi-equilibrium distribution functions are designed to conserve the third-order centered kinetic moments, i.e. the centered heat flux tensor $\bar{Q}^* = \bar{Q}$ as

$$\int_{\mathbb{R}^D} e \otimes e \otimes e f^* dv = \int_{\mathbb{R}^D} e \otimes e \otimes e f dv, \qquad (14)$$

and the centered energy flux of the internal degrees of freedom $ar{q}^* = ar{q}$ as

$$\int_{\mathbb{R}^D} eg^* dv = \int_{\mathbb{R}^D} eg dv, \tag{15}$$

where e = (v - u) and " \otimes " denotes the tensor product. This way, the Prandtl number can be controlled by adjusting τ_1 and τ_2 independently as

$$Pr = \frac{\tau_1}{\tau_2}. (16)$$

Using the rewritten collision terms (9) and (10), the kinetic equations (1) and (5) are partial differential equations in time, physical space and phase space (space of particles' velocities). The presented model recovers the hydrodynamic regimes, i.e. Euler and NSF; a multiscale analysis can be found in appendix A. From the Chapman–Enskog expansion, it follows that the kinematic shear viscosity v, bulk viscosity v_B , and the

and the thermal diffusivity α in the present model are related to the relaxation coefficient τ_1 and τ_2 as,

$$v = \frac{\mu}{\rho} = \tau_1 T,\tag{17}$$

$$v_B = \frac{\mu_B}{\rho} = \left(\frac{2}{D} - \frac{1}{C_v}\right) \tau_1 T,\tag{18}$$

$$\alpha = \frac{\kappa}{(C_{\nu} + 1)\rho} = \tau_2 T. \tag{19}$$

In the next section, the discretization of these equations is introduced while guaranteeing correct recovery of the hydrodynamic regimes and strictly retaining conservation properties.

III. MODEL DISCRETIZATION

A. Phase space discretization

The phase space is discretized with a set of Q particles with velocities v_i , where $i \in \{0, Q-1\}$. For simplicity, due to the main focus of this work being AMR, the static reference frame was applied as opposed to the adaptive co-moving reference frame used in PonD [39]. Moments of distribution functions are computed as numerical quadratures, e.g. the conserved density, momentum and energy as

$$\rho = \sum_{i=0}^{Q-1} f_i = \sum_{i=0}^{Q-1} f_i^{eq}, \tag{20}$$

$$\rho u = \sum_{i=0}^{Q-1} v_i f_i = \sum_{i=0}^{Q-1} v_i f_i^{eq},$$
(21)

$$\rho E = \sum_{i=0}^{Q-1} \frac{1}{2} |\mathbf{v}_i|^2 f_i + \sum_{i=0}^{Q-1} \frac{1}{2} g_i = \sum_{i=0}^{Q-1} \frac{1}{2} |\mathbf{v}_i|^2 f_i^{eq} + \sum_{i=0}^{Q-1} \frac{1}{2} g_i^{eq}.$$
(22)

All relevant moments of the presented distribution functions are listed in appendix B.

In order to capture the fundamental flow physical properties at Euler Level and the NSF level, a set of moments of f up to order three and four needs to be correctly recovered. More precisely, the diagonal components of the full third and fourth order tensors, i.e. the contracted third and fourth order tensors, are sufficient compared to the full ones, respectively. The discrete f-equilibria were reconstructed as a Grad expansion [62],

$$f_i^{eq} = w_i \sum_{n=0}^{N} \frac{1}{n!} a^{eq,(n)} : \mathcal{H}^{(n)},$$
 (23)

where the series is truncated at the expansion order N. The weights of the velocity set are given by w_i and ":" denotes the Frobenius inner product. $\mathcal{H}^{(n)}$ is the Hermite polynomial tensor of order n and $a^{eq,(n)}$ the corresponding coefficient tensor accounting for the required set of equilibrium moments and the reference temperature T_{ref} of the velocity set. To model

the equilibria for Euler level dynamics correctly, an expansion up to N=3 is required, whereas order N=4 is necessary for NSF. All relevant Hermite polynomials an the corresponding coefficients are given in appendix C. Moreover, forth and fifth-order quadratures in two spatial dimensions (D=2) are necessary to correctly match all moments with the Grad expansion, respectively. All specifics of the D2Q16 and D2Q25 discrete velocity sets are given in appendix D.

Following the discussion on the expansion orders of f, according to the non-translational internal energy split, a first-and second-order Grad expansion of the g-distribution would be sufficient for Euler and NSF dynamics, respectively. However, the g-equilibria are obtained via their relation to f^{eq} as

$$g_i^{\text{eq}} = 2\left(C_v - \frac{D}{2}\right)Tf_i^{\text{eq}}.$$
 (24)

The requirements on the order of $g_i^{\rm eq}$ are therefore always fulfilled in case the the requirements on $f_i^{\rm eq}$ are also sufficient. For simplicity, although second and third-order quadratures would be sufficient, respectively, the g-distributions are solved on the same numerical quadratures as the f-distributions.

Furthermore, the discrete f and g quasi-equilibria for $\Pr < 1$ are found as corrections to the third and first order expansion terms of the Grad expansion for the equilibrium populations, i.e. as

$$f_i^* = f_i^{eq} + w_i \frac{1}{3!} a^{*,(3)} : \mathcal{H}^{(3)},$$
 (25)

$$g_i^* = g_i^{eq} + w_i \frac{1}{1!} a^{*,(1)} : \mathcal{H}^{(1)},$$
 (26)

where $\mathcal{H}^{(3)}$ and $\mathcal{H}^{(1)}$ are the same full Hermite polynomial tensors as listed in appendix C. The coefficients $\boldsymbol{a}^{*,(3)}$ and $\boldsymbol{a}^{*,(1)}$ are given by $\bar{\boldsymbol{Q}}^{neq}/T_{ref}^3$ and $\bar{\boldsymbol{q}}^{neq}/T_{ref}$, respectively, where the centered non-equilibrium heat flux tensor and the centered non-equilibrium energy flux tensor of the internal degrees of freedom are computed with the centered particles'

velocities $e_i = (v_i - u)$, as

$$\bar{Q}^{neq} = \sum_{i=0}^{Q-1} e_i \otimes e_i \otimes e_i (f_i - f_i^{eq}), \tag{27}$$

$$\bar{q}^{neq} = \sum_{i=0}^{Q-1} e_i (g_i - g_i^{eq}). \tag{28}$$

B. Spatio-temporal discretization

1. Time-explicit finite-volume scheme

The finite-volume approach is used to discretize the physical space in the phase-space-discretized kinetic equations of (1) and (5). Integration over an infinitesimal control volume δV yields the form

$$\partial_t \{f_i, g_i\}(\mathbf{r}) + \frac{1}{\delta V} \sum_{\sigma \in \Theta} \{\mathscr{F}_i, \mathscr{G}_i\}(\sigma) = S_{\{f_i, g_i\}}(\mathbf{r}). \tag{29}$$

 $\mathscr{F}_i(\sigma)$ and $\mathscr{G}_i(\sigma)$ are the fluxes trough a discrete surface σ of the Hull Θ of the control volume. The populations have to be understood as volumetric averages of a cell, defined as

$$\{f_i, g_i\}(\mathbf{r}) = \frac{1}{\delta V} \int_{\delta V} \{f_i, g_i\}(\mathbf{r}) d\mathbf{r}, \tag{30}$$

and the source term $S_{\{f_i,g_i\}}$ corresponds to the volumetric average collision term

$$S_{\{f_i,g_i\}}(\boldsymbol{r}) = \frac{1}{\delta V} \int_{\delta V} \Omega_{\{f_i,g_i\}}(\boldsymbol{r}) d\boldsymbol{r}.$$
 (31)

Hence, also the derived moments are cell averaged values. For simplicity, time integration is carried out using a first-order accurate Euler-forward scheme

$$\partial_t \{f_i, g_i\} = \frac{\{f_i, g_i\}(t + \delta t) - \{f_i, g_i\}(t)}{\delta t} + \mathcal{O}(\delta t). \quad (32)$$

Finally, if the collision terms are applied, cf. (9) and (10), the fully discretized hyperbolic partial differential equations read

$$f_{i}(\mathbf{r},t+\delta t) = f_{i}(\mathbf{r},t) - \frac{\delta t}{\delta V} \sum_{\sigma \in S} \mathscr{F}_{i}(\sigma,t) + \frac{\delta t}{\tau_{1}} \left[f_{i}^{eq}(\mathbf{r},t) - f_{i}(\mathbf{r},t) \right] + \left(\frac{\delta t}{\tau_{1}} - \frac{\delta t}{\tau_{2}} \right) \left[f_{i}^{*}(\mathbf{r},t) - f_{i}^{eq}(\mathbf{r},t) \right], \tag{33}$$

$$g_{i}(\mathbf{r},t+\delta t) = g_{i}(\mathbf{r},t) - \frac{\delta t}{\delta V} \sum_{\sigma \in S} \mathscr{G}_{i}(\sigma,t) + \frac{\delta t}{\tau_{1}} \left[g_{i}^{eq}(\mathbf{r},t) - g_{i}(\mathbf{r},t) \right] + \left(\frac{\delta t}{\tau_{1}} - \frac{\delta t}{\tau_{2}} \right) \left[g_{i}^{*}(\mathbf{r},t) - g_{i}^{eq}(\mathbf{r},t) \right]. \tag{34}$$

2. Flux reconstruction

consequence of the static reference frame. The fluxes become

$$\{\mathscr{F}_i,\mathscr{G}_i\}(\sigma) = v_i \cdot n(\sigma)\{f_i,g_i\}(\sigma)\delta A(\sigma),$$
 (35)

The reconstruction of fluxes requires interpolation of the populations to the discrete interfaces of the finite volumes, whereas the particles' velocities remain global constants as a (NND) interpolation

where n is the surface normal vector and δA the infinitesimal area of the discrete surface σ . A nearest neighbor deformation (NND) interpolation scheme as proposed by Zhang et al. [63,

64] was employed in this manuscript as a trade off between robustness and accuracy. On a uniform Cartesian grid, the scheme reads

$$f_{i,x-\delta x/2} = \begin{cases} f_{i,x-\delta x} + \frac{1}{2}\phi \left(f_{i,x-\delta x} - f_{i,x-2\delta x}, f_{i,x} - f_{i,x-\delta x} \right) & \text{if } v_{i,x-\delta x/2} \ge 0, \\ f_{i,x} - \frac{1}{2}\phi \left(f_{i,x} - f_{i,x-\delta x}, f_{i,x+\delta x} - f_{i,x} \right) & \text{if } v_{i,x-\delta x/2} < 0, \end{cases}$$
(36)

here denoted for f_i on the discrete surface located at $\sigma = x - \delta x/2$. A simple minmod function was applied for $\phi(a,b)$ to limit the fluxes [65]. Depending on the values a,b of successive slopes, it can be written as

$$minmod(a,b) = \begin{cases} 0 & \text{if } ab \le 0, \\ \frac{a}{|a|}min(|a|,|b|) & \text{if } ab > 0. \end{cases}$$
(37)

The AMR methodology and AMR related implementations are outlined next.

IV. ADAPTIVE MESH REFINEMENT

A. Refinement overview and employed strategy

Adopting AMR introduces significant algorithmic changes and presents challenges for strict retainment of a scheme's conservative character as well as efficient parallel processing, the latter being vital in order to fully leverage the potential on modern-day distributed memory machines. With the restriction to logically rectangular grids, three main approaches can be distinguished based on the refinement algorithm, the grid hierarchy, or the data structure used for the bookkeeping of cell conductivities [66]:

- (1) The first of its kind dynamic grid refinement was the block-structured (SAMR) approach pioneered by Berger and Oliger [67]. The refinement is based on cells grouped into rectangular patches, hence this approach is sometimes also referred to as patch-based. The data is organized in levels, with each level containing multiple patches. Hierarchical relations between patches are stored in a graph. The numerical solution of a hyperbolic system of PDEs can be advanced independent of the level, patch, or position in the domain, with the same time-integration methodology as in the case of a single level uniform grid, and minimal algorithmic changes are needed in order to synchronize information between patches and levels [68].
- (2) In cell-based AMR [69], each cell is refined individually rather than as a cluster. A distinct feature is the bookkeeping of cell connectivity using a tree-based data structure, typically a quadtree in two and octree in three dimensions [70]. This approach allows for higher local refinement efficiencies, however, the data structure is associated with larger memory requirements and more irregular data referencing overhead as compared to SAMR.
- (3) Alternately, the block-based approach [71] can be seen as a subclass of the patch-based approach with elements

of the cell-based approach. The refinement is restricted to predefined, rectangular, equally-sized blocks. This a priori knowledge of possible refinement patches allows for an efficient implementation using a tree-based data structure, as in the cell-based approach, however, the connectivity information is much simpler and the quadtree/octree less expensive. This restriction on the size of blocks rather than individual cells, together with the knowledge of of the data tree in advance, naturally lead to the biggest potential for scalable high-performance AMR implementations [66]. On the other hand the refinement efficiency is lower than in both other approaches.

In this work, the block-structured AMR approach was employed. An AMR library can facilitate the deployment of AMR applications and ensure good parallel efficiency and scalability through optimized data structures and load balancing algorithms. For this reason, the code developed in this work was built with AMReX [72–74] in C++. The foundations of SAMR can be found in the original works of [67, 75–78]. The detailed theory is well summarized, e.g., in [79, 80]. A brief overview of the building blocks and the algorithmic changes associated to SAMR shall be given next together with highlighted implementations.

B. Components of the block-structured AMR implementation

In the following, without loss of generality, a twodimensional (2D) uniform Cartesian domain is considered where a scalar time-explicit hyperbolic PDE with first order in time discretization of the form,

$$Q_{i,j}^{t+\delta t} = Q_{i,j}^t - \frac{\delta t}{\delta V} \sum_{\sigma \in S} F_{i,j}^t(\sigma) + \delta t S_{i,j}^t,$$
(38)

is solved with the finite-volume method. We assume a static computational domain with multiple levels l, where the resolution is given by the level-wise refinement factor $r_l \ge 2$ with

$$\frac{\delta x_l}{\delta x_{l+1}} = \frac{\delta y_l}{\delta y_{l+1}} = r_l. \tag{39}$$

Each grid is denoted by $G_{l,p}$ with $l \in \{0,L\}$ and patches $p \in \{0,P\}$. Equation (38) is solved uniformly on every patch. An exemplary layout of patches on levels l, l+1 is depicted in Fig. 1. For simplicity, we denote the cell coordinates of the coarser level with (i, j) and the finer level with (v, w), respectively.

1. Level-wise boundary conditions

A halo around $G_{l,p}$ with $h \ge 1$ cells on each patch needs to be filled with boundary conditions (BCs) before eq. 38 can be updated. As depicted for patches $G_{l+1,0}$ and $G_{l+1,1}$ in Fig. 1, there are three types of BCs for level l+1. (1) Physical BCs: Ghost cells extending the physical domain need to be filled; periodic or von Neumann BCs were used in this work. (2) Synchronization: Ghost cells overlapping a cell of another

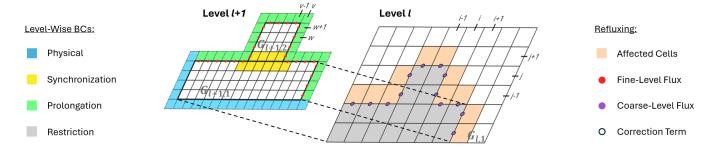


FIG. 1. Exemplary two-level grid layout with $r_l = 2$ for the illustration of level-wise boundary conditions (BCs) and conservative refluxing.

patch of the same level are populated with the corresponding values of the other patch. (3) Prolongation: Ghost cells for which the above does not apply are filled with interpolated values from underlying coarse cells. The prolongation scheme in this work consisted of a bilinear interpolation in space and time, which reads

$$Q_{v,w}^{l+1} = (1 - a_1)(1 - a_2)Q_{i-1,j-1}^l + a_1(1 - a_2)Q_{i,j-1}^l + (1 - a_1)a_2Q_{i-1,j}^l + a_1a_2Q_{i,j}^l,$$
(40)

with coefficients a_1 and a_2 , for the example of cell (v, w) in Fig. 1.

Additional BCs also have to be supplied to level l if a level l+1 exists. (1) Restriction: Coarse cells which are covered by a patch of fine cells (excluding the halo) need to be filled by an average value of the fine cells. This is done in order to populate the coarse cells with the most accurate values possible in case the fine-level patch is destroyed in the future, since the fundamental assumption in AMR tells that a fine-level cell contains a more precise solution than the next coarser level cell. For the exemplary case of cell (i-1, j-1) in Fig. 1, the conservative averaging scheme applied in this work reads

$$Q_{i-1,j-1}^{l} = \frac{1}{r_l^2} \sum_{\xi=0}^{r_l-1} \sum_{\xi=0}^{r_l-1} Q_{v-r_l+\xi,w+r_l+\zeta}^{l+1}.$$
 (41)

2. Conservative refluxing

Application of the above BCs alone can not strictly guarantee global conservation, as there might exist a flux mismatch on the borders of a fine-level patch and the underlying coarse cell interfaces. For example in Fig. 1, the sum of both fine-level fluxes at $(v-\frac{1}{2}, w)$ and $(v-\frac{1}{2}, w+1)$ indicated in red on level l+1 do not necessarily match the flux at $(i-\frac{1}{2}, j)$ indicated in purple on level l. The correct update for cell (i, j) reads

$$Q_{i,j}^{t+\delta t_l,l} = Q_{i,j}^{t,l} - \frac{\delta t_l}{\delta x_l} (F_{(x),i+\frac{1}{2},j}^{t,l} - \chi) - \frac{\delta t_l}{\delta y_l} (F_{(y),i,j+\frac{1}{2}}^{t,l} - F_{(y),i,j-\frac{1}{2}}^{t,l}) + \delta t_l S_{i,j}^{t,l}, \quad (42)$$

with

$$\chi = \frac{1}{r_l^2} \sum_{\kappa=0}^{r_l-1} \sum_{\xi=0}^{r_l-1} F_{(x),\nu-\frac{1}{2},w+\xi}^{t+\kappa \delta t_{l+1},l+1},\tag{43}$$

whereas χ would read differently, as

$$\chi = F_{(x),i-\frac{1}{2},j}^{t,l},\tag{44}$$

in case the update scheme in eq. 38 was uniformly applied to $G_{l,1}$. A conservative refluxing routine can correct this mismatch in the form of a correction pass, such that the original scheme (eq. 38) does not have to be modified locally but can still be applied uniformly. Algorithmically this is done by using flux registers which are initialized with coarse-level fluxes of opposite sign on level l, cf. negative eq. 44. The level l+1 fluxes are then aggregated over space and time, as in eq. 43, subtracted from the flux register, and the correction term is applied to level l.

3. Subcycling in time

A global time step over all levels is inefficient as the restriction on the Courant—Friedrichs—Lewy (CFL) number is determined by the smallest cell in the domain. For this reason, and to ensure a constant CFL number across all levels, the subcycling approach for time integration was applied in this work. This is done by binding the level time steps to the refinement ratio trough acoustic scaling as

$$\frac{\delta t_l}{\delta t_{l+1}} = r_l,\tag{45}$$

together with a recursive time integration routine. Note that acoustic scaling was adopted in this work due to the greater numerical efficiency compared to diffusive scaling where $\delta t \propto \delta x^2$. First, the time step size is computed from the most restrictive CFL condition over all cells on all levels in the entire domain and is then extrapolated to the level l=0 where the subcycling routine starts. The recursive routine, schematically depicted in Fig. 2 for a level l and l+1, is realized with the following steps:

• (1) The BCs of level l are filled and (2) level l is updated by a time step with δt_l .




FIG. 2. Illustration of the updates and level-wise information exchanges in the subcycling approach. BC refers to boundary conditions (physical, synchronization, prolongation), R to restriction, and CR to conservative refluxing. The horizontal axis marks time and the vertical axis displays the level l and l+1 with an exemplary refinement ratio of $r_l=2$. The order of operations is indicated with gray numbers, interpolations in space with gray arrows, and interpolation in space and time with gray dotted arrows, respectively. In case a next finer level l+2 exists, the same recursive scheme is applied to step number four and six.

- (3) The BCs of level l+1 are filled and (4) level l+1 is updated by a time step with $\delta t_{l+1} = \delta t_l/rl$.
- (5) The BCs of level l+1 are filled and (6) level l+1 is updated one more time for the case of $r_l = 2$ illustrated here, which marks a repetition of steps 3 and 4 until the simulation time t_{l+1} reaches t_l .
- (7) Restriction is done at $t_{l+1} = t_l$, followed by conservative refluxing, i.e. application of the flux correction term from the flux registers filled by steps 2, 4 and 6.

Note that this recursive scheme is also applied to all level l+1 steps, continuing as long as a next finer level exists. Also note for step 5 that the prolongation BCs on level l+1 are filled by linear interpolation in time additional to the bilinear interpolation in space, as no values are available on level l at this simulation time. This is a peculiarity of the formulation as a boundary value problem taken here, as opposed to an initial value problem where typically r_l times the amount of halo layers h would be required.

4. Adaptivity and grid generation

So far we considered a statically refined multilevel grid. The adaptive component is given by a regridding routine, which is applied every *n*-th level time step δt_l and is responsible for creating, recreating or deleting patches. It consists of a few steps. (1) First, refinement sensors are applied to determine cells which require refinement. In this work, macroscopic variables such as density ρ , velocity u, pressure p, Temperature T, as well as vorticity ω and Gradients thereof, computed as central differences, were used as refinement sensors. All cells for which refinement sensors exceed their thresholds are subsequently tagged. (2) A clustering algorithm groups the tagged cells and forms rectangular patches. Buffer layers around groups are applied with a size such that a local flow state is not advected out of the refined area until the next regridding time. A refinement efficiency η can be imposed which determines the result of more neatly fitted patches for increasing computational cost. Typical clustering algorithms are [77, 78]. (3) The adapted grid layout is integrated into the data hierarchy. (4) Cells in a newly created patch or in new region of a modified patch have to be filled with initial conditions (ICs). This is done by prolongation (e.g. eq. 40), as in the case for the filling of BCs.

5. Considerations for a parallel implementation

Some aspects have to be considered for a parallel SAMR implementation on distributed memory machines. On one hand a few changes have to be respected compared to the components discussed in the above paragraphs concerning communications between patches and levels. Filling of physical BCs and restriction are processor-local operations, whereas prolongation can be made local. Synchronization and refluxing can require data exchanges. Further, the outcome of the clustering algorithm generally differs when executed globally versus locally on each processor. On the other hand parallel processing efficiency becomes a central challenge, as the grid layout consists of a complex and time-dependent hierarchy, where patches can move, appear and be destroyed, which can require a lot of irregular memory referencing and redistribution of work load. Different parallelization strategies exist with considerations such as level-wise versus global domain decompositions and arguments such as minimization of patch splitting and communication overhead between patches and levels hold. Sophisticated load balancing algorithms control the distribution of patches between processors. Usually a Knapsack algorithm or space-filling curves (Morton, Hilbert) are employed to connect cells as optimization strategy. The parallel processing approach, e.g. MPI+OMP/GPU, clustering and load balancing strategy, can be found in the works of AMReX [72-74].

V. NUMERICAL APPLICATIONS

In the following, few aspects of the solver such as strict retainment of conservation properties or correct recovery of dispersion and dissipation rates are assessed both with and without AMR, before evaluating more one-dimensional (1D) and 2D Euler and NSF level benchmarks.

In all simulations, unless otherwise stated, the parameters for the presented results were set to $\mu=5\times 10^{-5}$, $\gamma=1.4$, Pr=1, the ideal gas law was used with the gas constant set to R=1. The D2Q16 velocity set and a third order Grad expansion was applied for Euler level problems, whereas the D2Q25 with a fourth order Grad expansion was used for full NSF flows. 1D tests were run as pseudo-1D with periodic BCs in the pseudo direction, otherwise von Neumann BCs were applied. Initial conditions were supplied by means of equilibrium populations. The time step was estimated as

$$\delta t = \frac{\min(\delta x, \delta y)}{\max(|\boldsymbol{u} \pm c_s|)} CFL, \tag{46}$$

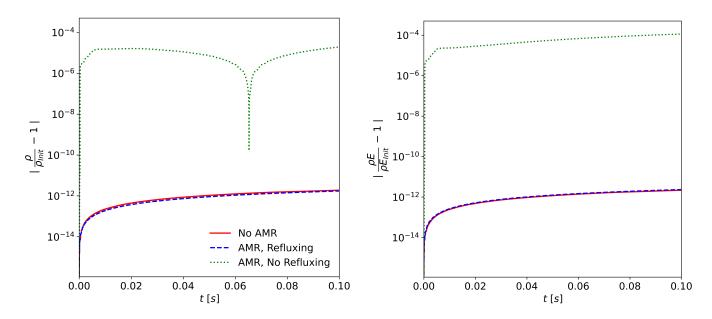


FIG. 3. Error in conservation of mass (left) and total energy (right) of the system over time.

where the CFL number was uniformly set to 0.01 in order to also stably simulate higher Ma numbers. For cases using AMR, 2 refinement levels with a constant refinement ratio of $r_l = 2$ across all levels were applied. Two buffer cells around each patch and a regridding time of 2 were used for all simulations, as well as a grid efficiency of $\eta = 0.7$ in 1D and $\eta = 0.98$ in 2D, respectively. The resolution of cases without

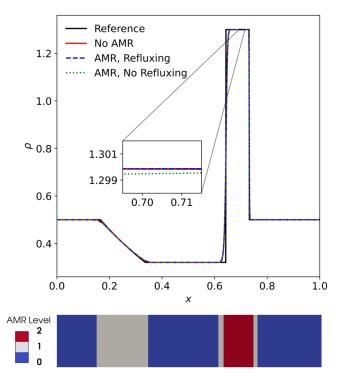


FIG. 4. Solution for the density of the shock tube at t = 0.1s. The AMR levels are indicated at the bottom.

AMR was either matched to the resolution of the base level l=0 or to the peak level l=2 of an AMR case, in order to make meaningful comparisons.

A. Conservation properties

First, the conservation properties of the numerical scheme and the AMR methodology are addressed. This was tested using a 1D shock tube with the initial conditions

$$(\rho, p, u_x) = \begin{cases} (0.5, 4, 0), & x \le 0.5, \\ (0.5, 0.5, 0), & x > 0.5, \end{cases}$$
(47)

in an extended fully periodic domain, $x \in [-0.5, 1.5]$. Three simulations were run: Without AMR on a single level (red line), with AMR and the application of conservative refluxing (dashed blue line), and with AMR, but without the application of conservative refluxing (green dotted line). Absolute density and the density gradient were used as refinement sensors for both AMR cases in order to target the discontinuities and the plateau with the highest density value. A base grid level l=0 resolution of $\delta x_0 = L_x/256$ was applied to the AMR cases such that the resolution on level l=2, i.e. $\delta x_2 = r_0 r_1 \delta x_0 = 4\delta x_0$, matches the "no AMR" case with $\delta x = L_x/1024$.

The results for the cropped region $x \in [0,1]$ at t=0.1s are depicted in Fig. 4, together with a snapshot of the refinement at the bottom. All simulations capture the reference solution with good agreement, however, a zoom into the plateau with highest density reveals that the AMR simulation without refluxing does not exactly recover the value of the reference solution, while the other two simulations match perfectly. This is a sign of lost mass and non-conservation of the AMR methodology without refluxing. The same observation can be made in Fig. 3, where the error in conserva-

tion of mass and total energy of the system over time is depicted. It can be seen that the AMR simulation without refluxing produces a significant error, as it is not strictly conservative. In contrast, AMR with proper conservative refluxing yields the same conservation error as the simulation without AMR, which is in the order of the rounding machine precision ($2^{-53}\approx 1.11\times 10^{-16}$ for double precision) on each cell interface. Therefore, it is apparent that a correct application of refluxing restores the strict conservation properties of the finite-volume scheme. Consequently, AMR with refluxing is employed for all results discussed in the remainder of this manuscript.

B. Dispersion and dissipation of hydrodynamic modes

Next, the ability of the numerical scheme and the AMR methodology to correctly recover the dispersion and dissipation rates of hydrodynamic eigen-modes, i.e. shear, normal and entropic, is addressed. For this, standard tests were used as, e.g., given in [27, 29, 30, 46]. Note that convergence studies were conducted beforehand, including the spectral analysis for the dissipation rates given in section V B 5, hence, all results reported here correspond to converged simulations in space and time. All setups were run in a fully periodic pseudo-1D domain $x \in [0,1]$ and the peak resolution of the AMR cases, i.e. δx_2 on level l=2, were set to match the resolution of the simulations without AMR.

1. Dispersion of the normal mode: Speed of sound

The temperature dependence of the speed of sound was investigated by means of a freely traveling pressure front. To that end, the domain with a stagnant fluid $\boldsymbol{u}_0=0$ was divided into two regions with

$$p = \begin{cases} 1 + 10^{-4}, & 0 \le x \le 0.5, \\ 1, & 0.5 < x \le 1, \end{cases}$$
 (48)

and a uniform temperature $T=T_0$ was applied in both regions. Three different specific heat ratios, namely $\gamma=5/3$ for monoatomic, $\gamma=7/5$ for diatomic, and $\gamma=8/6$ for triatomic gases were assessed for various temperatures. The speed of sound was computed by tracking the shock front over time and comparing it with the analytical value of $c_s=\sqrt{\gamma T}$. For the AMR cases, refinement was set to target the pressure discontinuities by applying the pressure gradient sensor. A snapshot of the pressure field and the resulting refinement levels in the case of the AMR simulations can be found in Fig. 5. A resolution of $\delta x = L_x/800$ was applied for the case without AMR and as the peak resolution in AMR (δx_2 on level l=2), i.e. $\delta x_0 = L_x/200$.

Fig. 6 demonstrates that the present model can correctly capture the speed of sound for different specific heat ratios and a wide temperature range spanning three orders of magnitude. Further, it can be seen that the AMR methodology does not distort the outcome.




FIG. 5. Refinement based on the gradient of pressure for the dispersion tests: Here, t = 0.3s, $T_0 = 1$, $\gamma = 1.4$.




FIG. 6. Normalized speed of sound $c_s^* = \sqrt{\gamma \theta}$ at various normalized temperatures $\theta = T/T_{ref}$.

2. Dissipation of the shear mode: Shear viscosity

The kinematic shear viscosity ν was investigated by simulating a plane shear wave with a small sinusoidal perturbation superimposed to the initial velocity field. The initial conditions read

$$\rho = \rho_0, T = T_0, u_x = u_0, u_y = A \sin(2\pi x/L_x), \tag{49}$$

where the initial density and temperature were set to $(\rho_0, T_0) = (1, 1)$. The perturbation amplitude was $A = 1 \times 10^{-3}$ and u_0 , which is derived from the Mach number as $u_0 = \text{Ma}\sqrt{\gamma T_0}$, was varied in subsequent simulations. The evolution of the maximum velocity u_{γ}^{max} in the domain was

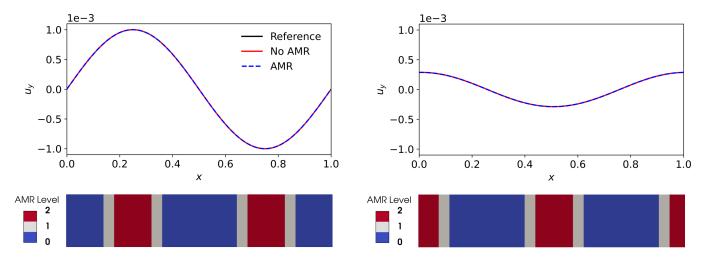


FIG. 7. Refinement relative to the global maximum for the dissipation test cases: Here, tagging of $|u_y|/|u_y^{max}|$ for the shear viscosity tests at Ma = 0.2, t = 0.0s (left) and t = 3.2s (right).

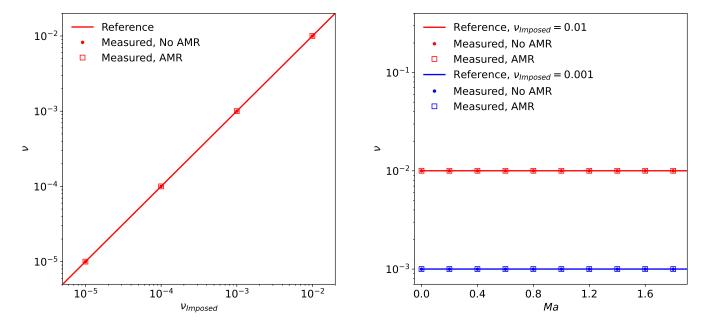


FIG. 8. Dissipation of the shear mode at Ma = 0 (left) and at various Ma numbers (right).


tracked over time and an exponential function was fitted to it. The decay rate, i.e. the shear viscosity ν , was then obtained via

$$u_y^{\text{max}}(t) \propto \exp\left(-\frac{4\pi^2 v}{L_x^2}t\right).$$
 (50)

The refinement criteria for the AMR cases were set to target the peak values of $|u_y|$ by applying this sensor relative the maximum value in the domain. This was done to ensure that $u_y^{\max}(t)$ is tagged independent of the actual dissipation rate and simulation time. A resolution of $\delta x = L_x/1600$ was applied for the case without AMR and as the peak resolution in AMR (δx_2 on level l=2), i.e. $\delta x_0 = L_x/400$. A snapshot of the u_y -velocity field and the applied tagging relative to the

maximum in the domain can be found in Fig. 7 for two different simulation times.

The obtained results are depicted in Fig. 8. The measured viscosities are in excellent agreement with the imposed values and recover the expression from the Chapman-Enskog analysis in eq. 17 for several Ma numbers. This holds both for the model on a uniform grid as well as with AMR. After Ma \approx 1.8, the model gradually starts to show deviations due to the expected Galilean invariance issues as a consequence of the static reference frame.

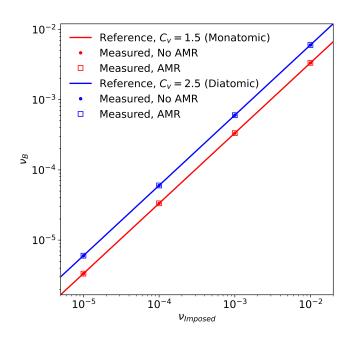




FIG. 9. Dissipation of the bulk mode for different specific heat capacities at Ma = 0 (left) and at various Ma numbers (right).

3. Dissipation of the bulk mode: Bulk viscosity

The Bulk viscosity v_B was investigated via the decay rate of sound waves in the linear regime. For this purpose, a small perturbation with initial amplitude $A = 1 \times 10^{-3}$ was superimposed to the density field. The flow was initialized as

$$\rho = \rho_0 + A\sin(2\pi x/L_x), T = T_0, u_x = u_0, u_y = 0, \quad (51)$$

with $(\rho_0, T_0) = (1, 1)$ and u_0 derived from the imposed Mach number. The perturbation energy $E'(t) = u_x^2 + u_y^2 - u_0^2 + c_s^2 \rho'^2$ of the whole domain, with $\rho' = \rho - \rho_0$, was tracked over time and the exponential function,

$$E'(t) \propto \exp\left(-\frac{4\pi^2 v_e}{L_x^2}t\right),$$
 (52)

as defined by [81], was fitted to it. The recovered decay rate is the effective viscosity v_e , i.e. the combination of shear and bulk viscosities as

$$v_e = -\frac{4}{3}v + v_B. {(53)}$$

The refinement sensor for the AMR cases consisted of monitoring $|\rho'|$ relative the maximum value $|\rho'^{max}|$ in the domain, similar to the setup for the shear viscosity tests, c.f. Fig. 7. Also the resolutions were the same as in section V B 2.

The obtained results are depicted in Fig. 9 for several imposed viscosities and specific heat capacities at various Ma numbers. It can be seen that the measured bulk viscosities accurately recover the expression from the Chapman-Enskog analysis in eq. 18, both for the model with and without AMR. The expected limits of Galilean invariance are gradually encountered after Ma $\approx 1.2.$

4. Dissipation of the entropic mode: Thermal diffusivity

A different type of perturbation was introduced in the ICs of the system to assess the thermal diffusivity α . These are

$$\rho = \rho_0 + A \sin(2\pi x/L_x), T = \rho_0 T_0/\rho, u_x = u_0, u_y = 0,$$
 (54)

with $(\rho_0, T_0) = (1, 1)$ and a perturbation amplitude of $A = 1 \times 10^{-3}$. The thermal diffusivity was measured by fitting the exponential function,


$$T'(t) \propto \exp\left(-\frac{4\pi^2\alpha}{L_x^2}t\right),$$
 (55)

to the temporal evolution of the maximum temperature difference $T' = T - T_0$ in the domain. The refinement sensor was set to monitor $|T'|/|T'^{max}|$ and the same resolutions as for both cases before were applied.

From Fig. 10 it becomes evident that the model also performs well in terms of thermal dissipation rates, including different Prandtl numbers, as the exact expression (eq. 19) is accurately recovered. Also here, the AMR methodology does not distort the outcome. Again, the expected limits of Galilean invariance are gradually encountered after Ma ≈ 1.2 .

5. Spectral dissipation analysis

Lastly, the results for the spectral dissipation of the solver on a uniformly resolved grid are presented for all three modes. For this purpose, the wavelength of the perturbation was altered with respect to the resolution in x-direction. The error of the measured value $\psi_{Measured}$ with respect to the exact expression $\psi_{Reference}$ was assessed, where ψ denotes the tested

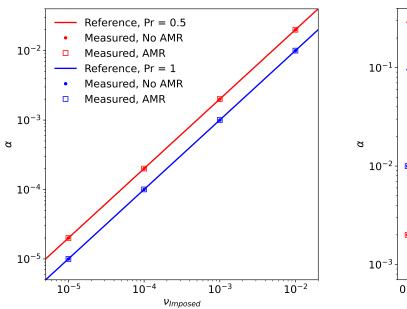




FIG. 10. Dissipation of the entropic mode for different Prandtl numbers at Ma = 0 (left) and at various Ma numbers (right).




FIG. 11. Spectral dissipation error of the hydrodynamic modes.

physical parameter, i.e. the shear viscosity v, bulk viscosity v_B , or thermal diffusivity α , respectively.

The results for an imposed viscosity of $v = 10^{-2}$ with $\gamma = 1.4$ and Pr = 1.0 are shown in Fig. 11 for all three modes at Ma = 0, as well as the shear mode at Ma = 1.0. It can be seen that the model recovers the correct dissipation rates in the limit of vanishing wavenumbers $k_x \delta x \rightarrow 0$. A significant amount of hyperviscosity is introduced at the other end of the spectrum. The hyperviscosity in these regimes is mostly attributed to the higher numerical dissipation introduced by the

flux limiters switching to a lower-order interpolation, as also observed in [46]. Fair convergence is achieved at approximately $k_x \delta x \lesssim \frac{\pi}{25}$. As a consequence, if a simulation is locally underresolved, AMR can potentially help mitigating hyperviscosities and recovering the correct dissipation rates, circumventing the alternative computational cost of a high uniform resolution to capture the accurate physics.

C. Numerical simulations: 1D cases

1. Sod shock tube

Next, the behavior of the model and AMR methodology is evaluated on a few 1D Euler level benchmarks. For the Sod shock tube [82], the flow is initialized as

$$(\rho, p, u_x) = \begin{cases} (1, 1, 0), & 0 \le x \le 0.5, \\ (0.125, 0.1, 0), & 0.5 < x \le 1, \end{cases}$$
 (56)

in a domain $x \in [0,1]$. The density gradient was used as refinement sensor to target the shock, contact discontinuity and rarefraction wave. A resolution of $\delta x = L_x/1024$ was applied for the case without AMR and as the peak resolution in AMR (δx_2 on level l=2), i.e. $\delta x_0 = L_x/256$.

From Fig. 12, it can be seen that the correct solution is obtained both with and without AMR, while computational effort is saved in the lower resolved regions of AMR and overall no accuracy is lost.


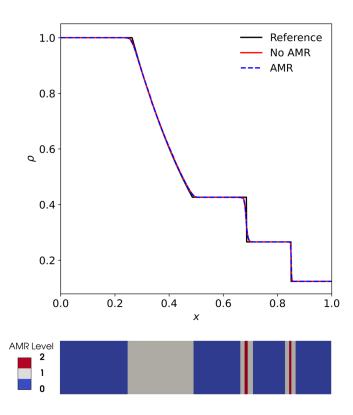


FIG. 12. Results of the Sod shock tube [82] at t = 0.2s for the density (top left), pressure (top right), and velocity (bottom right) compared to the reference solutions. The AMR levels are indicated at the bottom of the results for the density.



0.4

х

0.6

0.8

1.0

1.0

8.0

0.6 Q

0.4

0.2

0.0

0.2

2. Lax shock tube

The initial condition of the Lax shock tube [83] reads,

$$(\rho, p, u_x) = \begin{cases} (0.445, 3.528, 0.698), & 0 \le x \le 0.5, \\ (0.5, 0.571, 0), & 0.5 < x \le 1, \end{cases}$$
(57)

in a domain $x \in [0,1]$. The temperature gradient was used as refinement sensor. A resolution of $\delta x = L_x/1024$ was applied for the case without AMR and as the peak resolution in AMR $(\delta x_2 \text{ on level } l = 2)$, i.e. $\delta x_0 = L_x/256$.

The solution is accurately recovered for both cases, as can be seen in Fig. 13.

3. Shu–Osher problem

The Shu-Osher problem [84] consists of a shock-density wave interaction initialized as

$$(\rho, p, u_x) = \begin{cases} (3.857, 10.333, 2.629), & 0 \le x \le 1, \\ (1 + \frac{1}{5}\sin(5(x-5)), 1, 0), & 1 < x \le 10, \end{cases}$$
 (58)

in a domain $x \in [0, L_x]$ with $L_x = 10$. The density and pressure gradients were used as refinement sensors to target the shock as well as strong gradients and discontinuities that emerge during the simulation in the post-shock region from the interaction with the density waves. A resolution of $\delta x = L_x/2560$ was applied for the case without AMR and this time as the base resolution in AMR (δx_0 on level l = 0) in order to get an increased resolution of $\delta x_2 = L_x/10240$ and more accurate


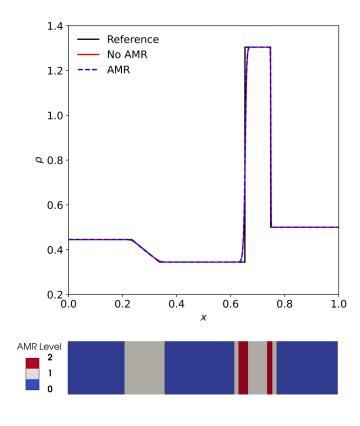


FIG. 13. Results of the Lax shock tube [83] at t=0.1s for the density (top left), pressure (top right), and velocity (bottom right) compared to the reference solutions. The AMR levels are indicated at the bottom of the results for the density.

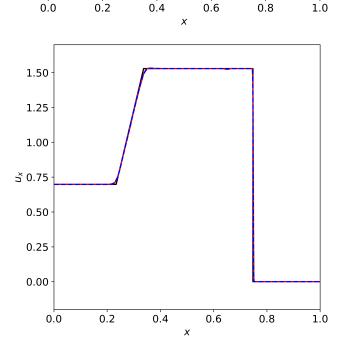

3.5

3.0

2.5

^Q 2.0

1.5

1.0

0.5


solution for the challenging density wave pattern in the high Ma number post-shock region of the problem.

Fig. 14 depicts the results. It can be seen that the correct solution is obtained both with and without AMR. A zoom into the most sensitive region of the density wave on the post-shock side reveals that the simulation employing AMR captures the reference solution more accurately whilst only a fraction of the total domain is covered with grids of higher resolution.

D. Numerical simulations: 2D cases

1. Riemann configurations

The Riemann configurations are further classical benchmarks to investigate the behavior of the solver for 2D Euler level solution fields involving complex interactions between shocks, contact discontinuities, rarefraction waves and vortexes. A total of 19 configurations have been thoroughly studied in the CFD and mathematics literature [85–92]. Here we look into more detailed behavior of the solver for three of these configurations. The fields were initialized with different values for ρ , p, u_x and u_y in a domain $x \in [0,1]$ and $y \in [0,1]$ separated into four quadrants, i.e. north-east (NE), north-west (NW), south-west (SW) and south-east (SE). Additionally a

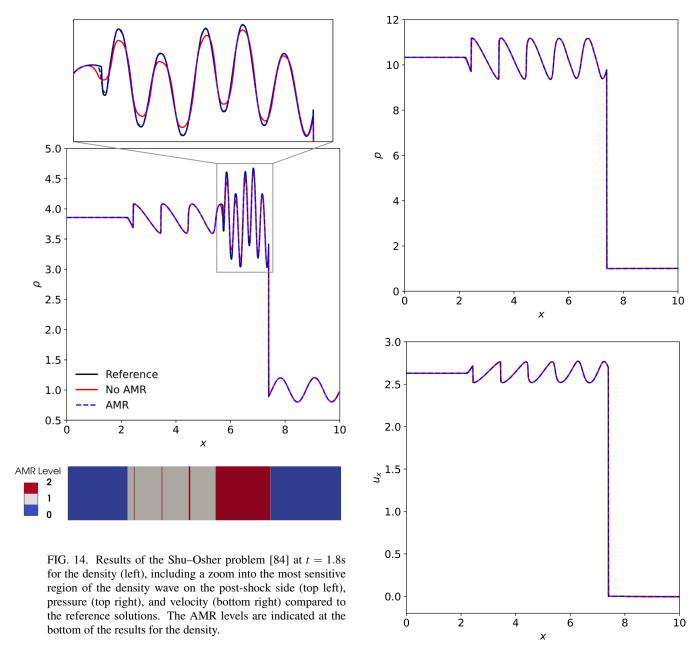

Configuration	Quadrant 1 (NE)	Quadrant 2 (NW)	Quadrant 3 (SW)	Quadrant 4 (SE)	Quadrant borders	t_{end}
[#]	(ρ, p, u_x, u_y)	(ρ, p, u_x, u_y)	(ρ, p, u_x, u_y)	(ρ, p, u_x, u_y)	(x, y)	[s]
7	(1, 1, 0.1, 0.1)	(0.5197, 0.4, -0.6259, 0.1)	(0.8, 0.4, 0.1, 0.1)	(0.5197, 0.4, 0.1, -0.6259)	(0.5, 0.5)	0.25
8	(0.5197, 0.4, 0.1, 0.1)	(1, 1, -0.6259, 0.1)	(0.8, 1, 0.1, 0.1)	(1, 1, 0.1, -0.6259)	(0.5, 0.5)	0.25
12	(0.5313, 0.4, 0, 0)	(1, 1, 0.7276, 0)	(0.8, 1, 0, 0)	(1, 1, 0, 0.7276)	(0.5, 0.5)	0.25
3*	(1.5, 1.5, 0, 0)	(0.5323, 0.3, 1.206, 0)	(0.138, 0.029, 1.206, 1.206)	(0.5323, 0.3, 0, 1.206)	(0.85, 0.85)	0.85

TABLE I. Setup for the 2D Riemann configurations.

modified configuration #3, here termed #3*, was initialized with the quadrant borders at (x, y) = (0.85, 0.85) instead of (x, y) = (0.5, 0.5), as done by many researchers, e.g. [93], in order to evaluate the capabilities of a numerical scheme in a long-term evolution of the solution field, generating more complex wave and vortex interactions. All setups are given in table I, including the simulation time t_{end} . The sensor for

mesh refinement consisted of a combination of vorticity as well as gradients of density and pressure. The refinement efficiency was elevated to $\eta=0.98$ in order to accommodate more neatly fitting meshes for these 2D cases. A resolution of $\delta x=\delta y=L_x/1024=L_y/1024$ was applied for the case without AMR and as the peak resolution with AMR ($\delta x_2=\delta y_2$ on level l=2), i.e. $\delta x_0=\delta y_0=L_x/256=L_y/256$.

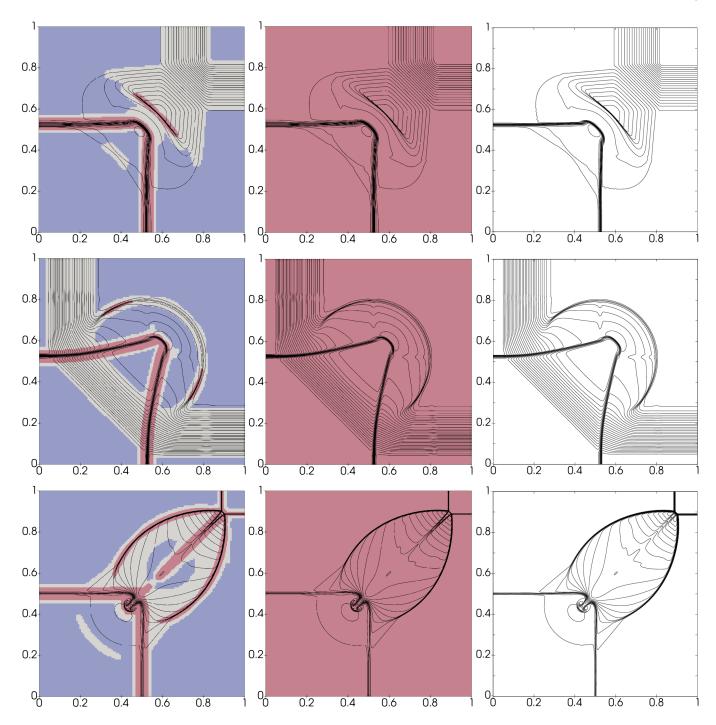


FIG. 15. Solution of the Riemann configurations #7, #8 and #12 at t=0.25s depicted in order from top to bottom with 30 equidistant density contours. The columns from left to right depict the solutions with AMR, without AMR, and the reference solutions from Lax & Liu [85], respectively. The spatial resolution of the present solver is indicated as colored background (blue: $\delta x = \delta y = L_x/256 = L_y/256$, gray: $\delta x = \delta y = L_x/512 = L_y/512$, red: $\delta x = \delta y = L_x/1024 = L_y/1024$).

The resulting density contours for configurations #7, #8 and #12 can be seen in Fig. 15, where the resolution is indicated by color in the background. A comparison between the column in the middle (no AMR results) and on the right (reference solutions) reveals that the model on a uniform mesh accurately captures the relevant features in the reference solutions. More precisely, in configuration #7, the contact discontinuities on

the interfaces of the SW quadrant result in negative slip lines at the correct positions. The rarefraction waves on the interfaces of the NE quadrant propagate towards the top right corner, while building up a small shock behind them. In configuration #8, the correct flow field is recovered with great detail as compared to the reference solution. This time, the rarefraction waves of the interfaces from the NE quadrant propagate

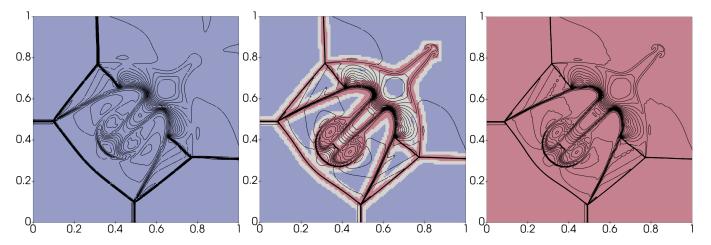


FIG. 16. Solutions of the Riemann configuration #3* at t = 0.85s depicted with 30 equidistant density contours. Left and right show the solutions on uniform grids, whereas the AMR solution is depicted in the middle. The spatial resolution is indicated as colored background (blue: $\delta x = \delta y = L_x/256 = L_y/256$, gray: $\delta x = \delta y = L_x/512 = L_y/512$, red: $\delta x = \delta y = L_x/1024 = L_y/1024$). The temporal evolution of the AMR case can be found in a video in the supplementary material.

away from the top right corner, forming a semi circular shock and curving the negative slip lines stemming from the contact discontinuities on the SW quadrant interfaces considerably. Also the ripples reported in the literature, e.g. [85, 86], are recovered where the initial interfaces of the NE quadrant were located. Similarly in configuration #12, the distinct interaction patterns in the NE quadrant, emerging from the shocks traveling to the top right corner, as well as the position of the vortexes formed in the SW quadrant, due to the interaction with the positive slip lines, are correctly captured. The solution fields are perfectly symmetric, which further validates the model. Consulting the left column in Fig. 15 (AMR results) proves that the AMR worked as intended by refining where it is most crucial for an accurate result, i.e. more resolution was provided in regions of moderate gradients and vorticity, e.g. rarefraction waves and various interaction patterns, and the most accurate resolution occurred near strong gradients and discontinuous solutions, e.g. shocks and contact discontinuities. Note that the AMR solution (left column) is only expected to match the solution in the middle column at the locations where the resolutions match, i.e. those with an underlying red color. As a consequence of the spectral dissipation, cf. section VB5, and the coarser resolutions (blue regions) in some parts of the AMR solutions, higher frequency features are damped more strongly than they would be in a case where higher resolution is present for the same feature. This expected behavior inherent to using AMR can also be observed in the presented AMR results in some lower resolved regions, for example in the more strongly damped ripples in configuration #8. However, the relevant parts of the solution which were targeted with the sensors are captured with great accuracy, both compared to the simulations with uniform high resolution and the reference solutions.

Fig. 16 depicts the solutions of the density for configuration #3*, for a single level simulation with coarse and fine resolution as well as an AMR simulation. In this configuration, triple shock structures, interactions patterns with slip lines and a central vortex pair within them is formed. The kinetic solver accurately recovers the solution fields reported in the literature for the high resolution simulation in terms of the density contours. However, the the solution in the case of a uniformly coarse resolution significantly differs. Predominantly noticeable is that there is a mismatch in the position of the inner vortex pair and the curvature of the shock in the SW quadrant, as well as the manifestation of the vortex pair in the NE quadrant. As expected, the AMR solution correctly depicts the mentioned flow features targeted with the refinement sensors. It provides a solution with an accuracy indifferent to the uniform high resolution case despite being covered with high resolution grids only on a relatively small fraction of the domain. Hence, these results demonstrate the potential of AMR for Euler level flows, where features requiring good resolution predominantly occupy a rather small part of the computational domain.

2. Shock-vortex interaction

Next, a NSF level flow, namely a shock–vortex interaction, is presented in which proper recovery of the dissipation rates together with high resolution is crucial. The setup of Inoue & Hattori [94] as adopted in [95] was followed here, where the main field is separated by a stationary shock with Mach number Ma_s and the left- and right-hand initial states satisfy the Rankine--Hugoniot jump conditions. For a pre-shock state of $(\rho, p, u_x = \text{Ma}_s c_s, u_y = 0)_l$ on the left-hand side, where the flow velocity is given from the imposed Ma number via $c_{s,l} = \sqrt{\gamma T_l} = \sqrt{\gamma p_l/\rho_l}$, the post-shock state $(\rho, p, u_x, u_y = 0)_r$

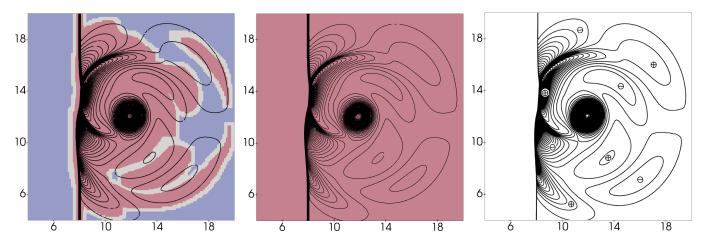


FIG. 17. Solutions of the shock-vortex interaction case C ($Ma_s = 1.2$ and $Ma_v = 0.25$) at $t^* = 6$ depicted with 140 equidistant contours of the sound pressure p_{Sound} . The solution with AMR is depicted on the left, while the solution on a uniform grid is shown in the middle and the reference solution from Inoue & Hattori [94] on the right (The signs \oplus and \ominus in the reference denote regions of positive and negative sound pressure, respectively). The spatial resolution of the present solver is indicated as colored background (blue: $\delta x = \delta y = L_x/420 = L_y/360$, gray: $\delta x = \delta y = L_x/820 = L_y/760$, red: $\delta x = \delta y = L_x/1680 = L_y/1440$).

is found as

$$\rho_r = \rho_l \frac{(\gamma + 1) Ma_s^2}{(\gamma - 1) Ma_s^2 + 2},$$
(59)

$$p_r = p_l \frac{2\gamma M a_s^2 - (\gamma - 1)}{(\gamma + 1)},$$
 (60)

$$u_{x,r} = u_{x,l} \frac{(\gamma - 1) Ma_s^2 + 2}{(\gamma + 1) Ma_s^2}.$$
 (61)

The resulting initial field $(\rho, p, u_x, u_y)_{\infty}$ is perturbed by an isentropic vortex which is advected through the shock. The maximum tangential velocity of the vortex defines the vortex Mach number as $Ma_v = u_{\varphi}^{max}/c_{s,l}$. In Cartesian coordinates, the initial conditions for the vortex read

$$u_x = u_{x,\infty} + c_{s,l} Ma_v \frac{y - y_v}{r_v} \cdot e^{(1 - r^2)/2},$$
 (62)

$$u_y = u_{y,\infty} - c_{s,l} Ma_v \frac{x - x_v}{r_v} \cdot e^{(1 - r^2)/2},$$
 (63)

$$\rho = \rho_{\infty} \left[1 - \frac{\gamma - 1}{2} Ma_{\nu}^2 \cdot e^{(1 - r^2)} \right]^{1/(\gamma - 1)}, \tag{64}$$

$$p = p_{\infty} \left[1 - \frac{\gamma - 1}{2} Ma_{\nu}^{2} \cdot e^{(1 - r^{2})} \right]^{\gamma/(\gamma - 1)}.$$
 (65)

Note that the field is perturbed on both sides of the shock to match the reference solution in the DNS setup [94], where the influenced region of the vortex in the IC overlaps the shock slightly. The reduced radius r is defined with the vortex center position (x_v, y_v) and the vortex radius r_v as $r = \sqrt{(x-x_v)^2 + (y-y_v)^2}/r_v$, where the vortex radius is connected to the dynamic viscosity of the fluid via the Reynolds number defined as $\text{Re}_v = \rho_l c_{s,l} r_v/\mu$.

The shock position was initialized at $x_s = 8$ with $\rho_l = 1$ and $p_l = 1$ in a domain $x \in [0,28]$ and $y \in [0,24]$. The vortex with $r_v = 1$, rotating in clock-wise direction, was centered at

 $(x_v, y_v) = (6, 12)$. The Reynolds number was set to $\text{Re}_v = 800$ and the Prandtl number to Pr = 0.75. As in the original setup, periodic BCs were used for the boundaries in y-direction. Cases C and G from [94] were run. For case C, $\text{Ma}_s = 1.2$ and $\text{Ma}_v = 0.25$ was imposed, whereas for case G, these numbers were set to $\text{Ma}_s = 1.29$ and $\text{Ma}_v = 0.39$. Vorticity as well as the gradients of pressure, density and vorticity were used as refinement sensors. A resolution of $\delta x = \delta y = L_x/1680 = L_y/1440$ was applied for the case without AMR and as the




FIG. 18. Comparison of the radial sound pressure distribution of case C ($Ma_s = 1.2$ and $Ma_v = 0.25$) at three different non-dimensional times $t^* = 6, 8, 10$, measured in the direction of $\varphi = 45^\circ$ degrees with origin in the vortex center.

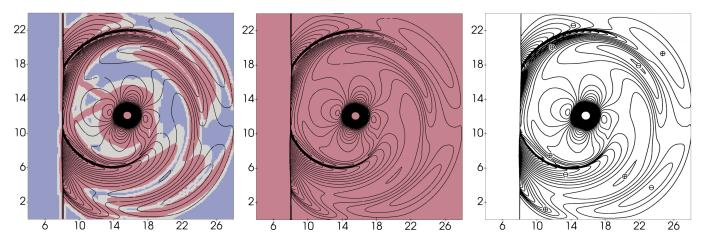


FIG. 19. Solutions of the shock-vortex interaction case G (Ma_s = 1.29 and Ma_v = 0.39) at t^* = 10.3 depicted with 90 equidistant contours of the sound pressure p_{Sound} . The solution with AMR is depicted on the left, while the solution on a uniform grid is shown in the middle and the reference solution from Inoue & Hattori [94] on the right (The signs \oplus and \ominus in the reference denote regions of positive and negative sound pressure, respectively). The spatial resolution of the present solver is indicated as colored background (blue: $\delta x = \delta y = L_x/420 = L_y/360$, gray: $\delta x = \delta y = L_x/820 = L_y/760$, red: $\delta x = \delta y = L_x/1680 = L_y/1440$). The temporal evolution of the AMR case can be found in a video in the supplementary material.

peak resolution in AMR, i.e. $\delta x_0 = \delta y_0 = L_x/420 = L_y/360$ on level l = 0.

Fig. 17 depicts the sound pressure contours at the nondimensional time $t^* = 6$ for case C with and without AMR, as compared to the reference solution. Thereby, the sound pressure is defined as $p_{Sound} = p/p_r - 1$, with p_r being the initial pressure in the post-shock region, and the non-dimensional time is given by $t^* = tc_{s,l}/r_v$. Note that the sound pressure usually amounts to a small perturbation in the order of $\lesssim 1\%$ of the hydrodynamic pressure on top of it and is therefore a rather sensitive quantity. A good agreement of the pressure contours with the reference DNS solution of [94] can be observed. The AMR solver perfectly replicates the solution of the uniform high-resolution grid, since the most important features of the flow, where the relevant dissipative physics occurs, are equally resolved. Importantly, the deformation of the shock, including the two shock reflections, is also well captured. For further quantitative comparison, the radial distribution of the sound pressure was measured in the direction of $\varphi = 45^{\circ}$ degrees with the origin at the vortex center. The results with and without AMR as compared to the reference simulations are depicted in Fig. 18 for three different nondimensional times t^* . It can clearly be seen that the reference solutions are perfectly matched. In particular, the temporal development of the position and magnitude of the peak sound pressure of the first sound (precursor) and the second sound emerging from the shock-vortex interaction are well captured.

The sound pressure contours of case G at non-dimensional time $t^* = 10.3$ are depicted in Fig. 19. Again, excellent agreement can be seen between the solver with or without AMR and the reference solution, despite operating in a flow regime in terms of the Ma number very close to the limits of Galilean invariance. This time, the sound pressure amplitude $p_{sound,amp}$ is quantitatively compared to inviscid and viscous DNS simulations, experimental results as well as theory. Thereby,

the sound pressure amplitude is computed as $p_{Sound,Amp} = (p_2 - p_1)/p_r$, i.e. the difference between the peak sound pressure of the precursor, denoted as $p_{Sound,1} = p_1/p_r - 1$, and the second sound, $p_{Sound,2} = p_2/p_r - 1$, where p_1 and p_2 are measured equivalently to [94] at $r/r_v = 10.8$ and $r/r_v = 8.8$ from the vortex center, respectively. The results for the cir-

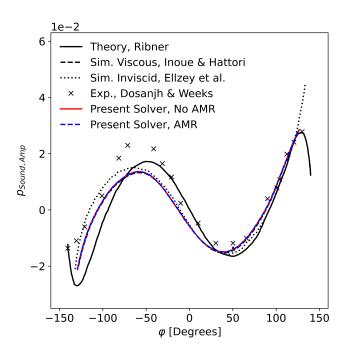


FIG. 20. Comparison of the circumferential distribution of the sound pressure amplitude of case G ($Ma_s = 1.29$ and $Ma_v = 0.39$) at non-dimensional time $t^* = 10.3$ with theoretical results of Ribner [96], viscous DNS simulations of Inoue & Hattori [94], inviscid simulations by Ellzey et al. [97], and experimental results by Dosanjh & Weeks [98].

cumferential distribution are depicted in Fig. 20. It can be seen that the reference solution of the viscous simulation [94] is perfectly matched, both with and without AMR. The results lie well within the knowledge band acquired by former simulations [94, 97], experimental measurements conducted at a much higher Reynolds number of $\text{Re} \approx 160'000$ [98], and theoretical results [96], which further validates the presented model and mesh refinement methodology. Therefore, these results demonstrate that the solver performs excellently in obtaining sensitive quantities for complex setups in compressible and moderately supersonic flows at the NSF level.

VI. SUMMARY AND CONCLUSIONS

In this paper, a discrete velocity Boltzmann solver with adaptive mesh refinement (AMR) is presented for the simulation of compressible Euler and Navier-Stokes-Fourier level flows. The kinetic model based on the single relaxation time Bhatnagar-Gross-Krook collision kernel makes use of doubledistribution functions as well as the quasi-equilibrium approach to capture various specific heat ratios and non-unity Prandtl number flows, respectively. The model employs a discrete set of designer particle velocities in phase space, where the equilibrium is discretized by a Gauss-Hermite quadrature. Strict conservation is ensured by space-time discretization with the finite-volume method. Furthermore, block-structured AMR is applied to locally refine the grid. Throughout the manuscript, emphasis is placed on the correct recovery of hydrodynamics as well as restoring strict conservation in the AMR methodology by employing refluxing operations.

Numerical applications showed that the correct hydrodynamics, including dispersion and dissipation rates of all eigenmodes, as well as strict conservation are recovered, both for the solver with and without AMR. Further one and two-dimensional benchmarks such as the Sod and Lax shock tubes, the Shu-Osher problem, several Riemann problems as well as viscous shock-vortex interactions demonstrated that the solver accurately captures the reference solutions. Excellent performance in obtaining sensitive quantities in the example of non-linear acoustics was proven, whilst the AMR methodology effectively reduced computational cost for the same accuracy and fidelity of the solution.

The presented discrete kinetic model has known limitations in the temperature and Mach number range dictated by the static reference frame. Therefore, future works will focus on efficient AMR implementations of locally shifted velocity sets for high Mach number applications and the particles on demand method for compressible flows with strong discontinuities.

ACKNOWLEDGMENTS

This work was supported by European Research Council (ERC) Advanced Grant No. 834763-PonD and by the Swiss National Science Foundation (SNSF) Grant 200021-228065. Computational resources at the Swiss National Su-

per Computing Center (CSCS) were provided under Grant No. s1286. R.M.S. acknowledges Nilesh Sawant and Abhimanyu Bhadauria for useful discussions regarding some implementations used for this manuscript.

AUTHOR DECLARATIONS

Conflict of Interest

The authors have no conflicts to disclose.

Ethical approval

The work presented here by the authors did not require ethics approval or consent to participate.

Author contributions

R.M.S.: Conceptualization of the study, derivation and implementation of the solver, evaluation of the solver, data analysis, writing- initial manuscript and revised versions. S.A.H.: Conceptualization of the study, writing- initial manuscript and revised versions. I.V.K.: Conceptualization of the study, writing- initial manuscript and revised versions. All authors approved the final manuscript.

Data availability statement

The data that support the findings of this study are available within the article or from the corresponding author(s) upon reasonable request.

APPENDIX

Appendix A: Multi-scale analysis

Let us consider the following system of equations,

$$\mathcal{D}_{t}\{f,g\} = \frac{1}{\tau_{1}} \left(\{f^{\text{eq}}, g^{\text{eq}}\} - \{f,g\} \right) + \left(\frac{1}{\tau_{1}} - \frac{1}{\tau_{2}} \right) \left(\{f^{*}, g^{*}\} - \{f^{\text{eq}}, g^{\text{eq}}\} \right), \quad (A1)$$

where, $\mathcal{D}_t = \partial_t + v \cdot \nabla$. For the multi-scale analysis let us introduce the following parameters: characteristic flow velocity \mathcal{U} , characteristic flow scale \mathcal{L} , characteristic flow time $\mathcal{T} = \mathcal{L}/\mathcal{U}$, characteristic density $\bar{\rho}$, speed of sound of ideal gas $c_s = \sqrt{\gamma RT}$. With these, the variables are reduced as follows (primes denote non-dimensional variables): time $t = \mathcal{T}t'$, space $x = \mathcal{L}x'$, flow velocity $u = \mathcal{U}u'$, particle velocity $v = c_s v'$, density $\rho = \bar{\rho}\rho'$, distribution function $f = \bar{\rho}c_s^{-3}f'$. Furthermore, the following non-dimensional groups are introduced: Knudsen number $Kn = \tau c_s/\mathcal{L}$ and Mach number $Ma = \mathcal{U}/c_s$. With this, the equations are rescaled as follows:

$$\operatorname{Kn} \mathscr{D}'_{t}\{f', g'\} = \frac{1}{\tau'_{1}} \left(\{f^{\operatorname{eq'}}, g^{\operatorname{eq'}}\} - \{f', g'\} \right) + \left(\frac{1}{\tau'_{1}} - \frac{1}{\tau'_{2}} \right) \left(\{f^{*'}, g^{*'}\} - \{f^{\operatorname{eq'}}, g^{\operatorname{eq'}}\} \right), \quad (A2)$$

Assuming $Kn \sim \varepsilon$ and dropping the primes for the sake of readability,

$$\mathcal{E}\mathcal{D}_{t}\{f,g\} = \frac{1}{\tau_{1}} \left(\{f^{\text{eq}}, g^{\text{eq}}\} - \{f,g\} \right) + \left(\frac{1}{\tau_{1}} - \frac{1}{\tau_{2}} \right) \left(\{f^{*}, g^{*}\} - \{f^{\text{eq}}, g^{\text{eq}}\} \right).$$
 (A3)

Then introducing multi-scale expansions:

$$\{f,g\} = \{f^{(0)},g^{(0)}\} + \varepsilon \{f^{(1)},g^{(1)}\} + \varepsilon^2 \{f^{(2)},g^{(2)}\} + O(\varepsilon^3), \quad (A4)$$

and.

$$\begin{split} \{f^*,g^*\} &= \{f^{*(0)},g^{*(0)}\} + \varepsilon \{f^{*(1)},g^{*(1)}\} + \varepsilon^2 \{f^{*(2)},g^{*(2)}\} \\ &\quad + O(\varepsilon^3), \quad \text{(A5)} \end{split}$$

the following equations are recovered at scales ε and ε^2 :

$$\begin{split} \varepsilon &: \mathscr{D}_{t}^{(1)}\{f^{(0)}, g^{(0)}\} = \\ &- \frac{1}{\tau_{1}}\{f^{(1)}, g^{(1)}\} + \left(\frac{1}{\tau_{1}} - \frac{1}{\tau_{2}}\right)\{f^{*(1)}, g^{*(1)}\}, \qquad \text{(A6a)} \\ \varepsilon^{2} &: \partial_{t}^{(2)}\{f^{(0)}, g^{(0)}\} + \mathscr{D}_{t}^{(1)}\{f^{(1)}, g^{(1)}\} = \\ &- \frac{1}{\tau}\{f^{(2)}, g^{(2)} + \left(\frac{1}{\tau_{1}} - \frac{1}{\tau_{2}}\right)\{f^{*(2)}, g^{*(2)}\}, \qquad \text{(A6b)} \end{split}$$

with $\{f^{(0)}, g^{(0)}\} = \{f^{eq}, g^{eq}\}$. Note that for this system, the solvability conditions are:

$$\forall k > 0, \int_{\mathbb{R}^{D}} f^{(k)} d\mathbf{v} = \int_{\mathbb{R}^{D}} f^{*(k)} d\mathbf{v} = 0,$$

$$\forall k > 0, \int_{\mathbb{R}^{D}} \mathbf{v} f^{(k)} d\mathbf{v} = \int_{\mathbb{R}^{D}} \mathbf{v} f^{*(k)} d\mathbf{v} = 0,$$

$$\forall k > 0, \int_{\mathbb{R}^{D}} \left(g^{(k)} + \frac{\mathbf{v}^{2}}{2} f^{(k)} \right) d\mathbf{v} =$$

$$\int_{\mathbb{R}^{D}} \left(g^{*(k)} + \frac{\mathbf{v}^{2}}{2} f^{*(k)} \right) d\mathbf{v} = 0.$$
(A7c)

Taking the moments, $\int \{f, vf\} dv$, of the Chapman–Enskog-expanded equations at order ε :

$$\partial_t^{(1)} \boldsymbol{\rho} + \boldsymbol{\nabla} \cdot \boldsymbol{\rho} \boldsymbol{u} = 0,$$
 (A8)

$$\partial_t^{(1)} \rho \boldsymbol{u} + \boldsymbol{\nabla} \cdot \rho \boldsymbol{u} \otimes \boldsymbol{u} + \boldsymbol{\nabla} \cdot p \boldsymbol{I} = 0.$$
 (A9)

For the energy balance equation, taking the moment $\int_{\mathbb{R}^D} \left(g + \frac{v^2}{2}f\right) dv$,

$$\partial_t^{(1)} E + \nabla \cdot E \boldsymbol{u} + \nabla \cdot p \boldsymbol{u} = 0.$$
 (A10)

Using the Euler level momentum balance and continuity equations, a balance equation for kinetic energy can be derived as,

$$\partial_t^{(1)} K + \nabla \cdot K u + u \cdot \nabla p = 0,$$
 (A11)

which in turn can be used to derive a balance equation for internal energy,

$$\partial_t^{(1)} U + \nabla \cdot U \boldsymbol{u} + p \nabla \cdot \boldsymbol{u} = 0,$$
 (A12)

and pressure,

$$\partial_t^{(1)} p + \boldsymbol{\nabla} \cdot p \boldsymbol{u} + \frac{R}{c_V} p \boldsymbol{\nabla} \cdot \boldsymbol{u} = 0,$$
 (A13)

where

$$\frac{\partial U}{\partial T} = \rho c_V. \tag{A14}$$

Going up one order in ε , at order ε^2 the continuity equation is:

$$\partial_t^{(2)} \rho = 0, \tag{A15}$$

while for the momentum balance equation one has:

$$\partial_t^{(2)} \rho \boldsymbol{u} + \boldsymbol{\nabla} \left(\int_{\mathbb{R}^D} \boldsymbol{v} \otimes \boldsymbol{v} f^{(1)} \right) = 0.$$
 (A16)

The second term can be further expanded using the first-order-in- ε equation as:

$$\int_{\mathbb{R}^{D}} \boldsymbol{v} \otimes \boldsymbol{v} f^{(1)} d\boldsymbol{v} =$$

$$- \tau_{1} \left[\partial_{t}^{(1)} \left(\int_{\mathbb{R}^{D}} \boldsymbol{v} \otimes \boldsymbol{v} f^{(0)} d\boldsymbol{v} \right) + \boldsymbol{\nabla} \cdot \left(\int_{\mathbb{R}^{D}} \boldsymbol{v} \otimes \boldsymbol{v} \otimes \boldsymbol{v} f^{(0)} d\boldsymbol{v} \right) \right.$$

$$+ - \left(\frac{1}{\tau_{1}} - \frac{1}{\tau_{2}} \right) \left(\int_{\mathbb{R}^{D}} \boldsymbol{v} \otimes \boldsymbol{v} f^{*(1)} d\boldsymbol{v} \right) \right]. \quad (A17)$$

The remainder of the expansion, depends on the construction of the quasi-equilibria attractors. In the case of a quasi-equilibrium state constructed using minimization under constraint on the following moments $\{\rho, \rho u_{\alpha}, E, P_{\alpha\beta}\}$ where the latter are the pressure tensor components,

$$\int_{\mathbb{R}^D} \boldsymbol{v} \otimes \boldsymbol{v} f^{*(1)} d\boldsymbol{v} = 0, \tag{A18}$$

one gets,

$$\int_{\mathbb{R}^{D}} \boldsymbol{v} \otimes \boldsymbol{v} f^{(1)} d\boldsymbol{v} =
- \tau_{1} \left[\partial_{t}^{(1)} \left(\boldsymbol{\rho} \boldsymbol{u} \otimes \boldsymbol{u} + p \boldsymbol{I} \right) + \boldsymbol{\nabla} \cdot \boldsymbol{\rho} \boldsymbol{u} \otimes \boldsymbol{u} \otimes \boldsymbol{u} \right.
\left. + \boldsymbol{\nabla} p \boldsymbol{u} + \boldsymbol{\nabla} p \boldsymbol{u}^{\dagger} + \boldsymbol{I} \boldsymbol{\nabla} \cdot p \boldsymbol{u} \right]. \quad (A19)$$

Note that different from a mono-atomic system, in 3-D this leads to constraints on 11 moments. In the case of constraints on the following moments $\{\rho, \rho u_{\alpha}, E, q_{\alpha}\}$ where the latter are contracted third-order moments,

$$\int_{\mathbb{R}^D} \boldsymbol{v} \otimes \boldsymbol{v} f^* d\boldsymbol{v} = \int_{\mathbb{R}^D} \boldsymbol{v} \otimes \boldsymbol{v} f d\boldsymbol{v}, \tag{A20}$$

one gets,

$$\int_{\mathbb{R}^{D}} \boldsymbol{v} \otimes \boldsymbol{v} f^{(1)} d\boldsymbol{v} =
- \tau_{2} \left[\partial_{t}^{(1)} \left(\rho \boldsymbol{u} \otimes \boldsymbol{u} + p \boldsymbol{I} \right) + \boldsymbol{\nabla} \cdot \rho \boldsymbol{u} \otimes \boldsymbol{u} \otimes \boldsymbol{u} \right.
\left. + \boldsymbol{\nabla} p \boldsymbol{u} + \boldsymbol{\nabla} p \boldsymbol{u}^{\dagger} + \boldsymbol{I} \boldsymbol{\nabla} \cdot p \boldsymbol{u} \right]. \quad (A21)$$

Next expanding,

$$\partial_{t}^{(1)}(\rho \boldsymbol{u} \otimes \boldsymbol{u} + p\boldsymbol{I}) = \boldsymbol{u} \otimes \partial_{t}^{(1)}\rho \boldsymbol{u} + \boldsymbol{u} \otimes \partial_{t}^{(1)}\rho \boldsymbol{u}^{\dagger} - \boldsymbol{u} \otimes \boldsymbol{u} \partial_{t}^{(1)}\rho + \partial_{t}^{(1)}p\boldsymbol{I}, \quad (A22)$$

where we use.

$$u \otimes \partial_t^{(1)} \rho u = -u \otimes [\nabla \cdot \rho u \otimes u + \nabla p],$$
 (A23)

and,

$$u \otimes u \partial_t^{(1)} \rho = -u \otimes u \nabla \cdot \rho u,$$
 (A24)

to arrive at

$$\partial_t^{(1)}(\rho \boldsymbol{u} \otimes \boldsymbol{u} + p\boldsymbol{I}) = -\boldsymbol{\nabla} \cdot \rho \boldsymbol{u} \otimes \boldsymbol{u} \otimes \boldsymbol{u} - \boldsymbol{u} \otimes \boldsymbol{\nabla} p$$
$$-(\boldsymbol{u} \otimes \boldsymbol{\nabla} p)^{\dagger} + \partial_t^{(1)} p \boldsymbol{I}, \quad (A25)$$

where one can use Eq. (A13) to get to,

$$\int \boldsymbol{v} \otimes \boldsymbol{v} f^{(1)} d\boldsymbol{v} =$$

$$- p\{\tau_1, \tau_2\} \left[\left(\nabla \boldsymbol{u} + \nabla \boldsymbol{u}^{\dagger} \right) - \frac{R}{c_V} \nabla \cdot \boldsymbol{u} \boldsymbol{I} \right]. \quad (A26)$$

Plugging this final expression into the momentum balance equation at order ε^2 ,

$$\partial_t^{(2)} \boldsymbol{\rho} \boldsymbol{u} + \boldsymbol{\nabla} \cdot \boldsymbol{T}_{\text{NS}} = 0,$$
 (A27)

where

$$T_{\text{NS}} = \{\tau_1, \tau_2\} p \left[\nabla \boldsymbol{u} + \nabla \boldsymbol{u}^{\dagger} - \frac{2}{D} \nabla \cdot \boldsymbol{u} \boldsymbol{I} \right]$$

$$+ \{\tau_1, \tau_2\} p \left(\frac{2}{D} - \frac{R}{c_V} \right) \nabla \cdot \boldsymbol{u} \boldsymbol{I}. \quad (A28)$$

Note that here,

$$\mu = p\{\tau_1, \tau_2\}. \tag{A29}$$

Moving on to the energy balance equation at order ε^2 ,

$$\partial_t^{(2)} E + \boldsymbol{\nabla} \cdot \left(\int_{\mathbb{R}^D} \boldsymbol{v} g^{(1)} d\boldsymbol{v} \right) = 0,$$
 (A30)

where

$$\int_{\mathbb{R}^{D}} \boldsymbol{v} g^{(1)} d\boldsymbol{v} = -\{\tau_{2}, \tau_{1}\} \left[\partial_{t}^{(1)} (p+E) \boldsymbol{u} + \boldsymbol{\nabla} \cdot \left(\frac{p}{\rho} (E+p) + p \boldsymbol{u} \otimes \boldsymbol{u} + (p+E) \boldsymbol{u} \otimes \boldsymbol{u} \right) \right].$$
(A31)

To expand this equation, we multiply the pressure balance equation at Euler level by \boldsymbol{u} and obtain the following balance equation using momentum and continuity balance,

$$\partial_t^{(1)} p \boldsymbol{u} + \boldsymbol{\nabla} \cdot p \boldsymbol{u} \otimes \boldsymbol{u} + \frac{p}{\rho} \boldsymbol{\nabla} p + \frac{R}{c_V} p \boldsymbol{u} \boldsymbol{\nabla} \cdot \boldsymbol{u} = 0.$$
 (A32)

Using the same approach we can also derive the following additional balance equation,

$$\partial_t^{(1)} E \boldsymbol{u} + \boldsymbol{\nabla} \cdot (E+p) \boldsymbol{u} \otimes \boldsymbol{u} + \frac{E}{\rho} \boldsymbol{\nabla} p - p \boldsymbol{u} \cdot \boldsymbol{\nabla} \boldsymbol{u} = 0.$$
 (A33)

Plugging these equations into Eq. (A31) and after some algebra,

$$\int_{\mathbb{R}^D} v g^{(1)} dv = -\{\tau_2, \tau_1\} p(c_V + R) \nabla T - \boldsymbol{u} \cdot \boldsymbol{T}_{NS}, \quad (A34)$$

which leads to:

$$\partial_t^{(2)} E - \nabla \cdot \left[\left\{ \tau_2, \tau_1 \right\} p \left(c_V + R \right) \nabla T \right] + \nabla \cdot \left(\boldsymbol{u} \cdot \boldsymbol{T}_{\text{NS}} \right) = 0. \tag{A35}$$

Here,

$$\lambda = \{\tau_2, \tau_1\} p \left(c_V + R\right). \tag{A36}$$

The Prandtl number is readily shown to be,

$$\Pr = \frac{\{\tau_1, \tau_2\}}{\{\tau_2, \tau_1\}}.$$
 (A37)

In the limit of a BGK collision operator, $\tau_1 = \tau_2$,

$$Pr = 1. (A38)$$

Appendix B: Moments of the distribution functions

The moments of the distribution functions f_i and g_i are

$$\sum_{i} f_i^{\text{eq}} = \sum_{i} f_i = \rho \tag{B1}$$

$$\sum_{i} f_{i}^{\text{eq}} v_{i\alpha} = \sum_{i} f_{i} v_{i\alpha} = \rho u_{\alpha}$$
 (B2)

$$\sum f_i^{\text{eq}} v_{i\alpha} v_{i\beta} = \rho u_{\alpha} u_{\beta} + \rho T \delta_{\alpha\beta}$$
 (B3)

$$\sum_{i} f_{i}^{\text{eq}} v_{i\alpha} v_{i\beta} v_{i\gamma} = \rho u_{\alpha} u_{\beta} u_{\gamma} + \rho T [u_{\alpha} \delta_{\beta \gamma}]_{cyc}$$
 (B4)

$$\sum_{i} f_{i}^{\text{eq}} v_{i\alpha} v_{i\beta} v_{i\gamma} v_{i\delta} = \rho u_{\alpha} u_{\beta} u_{\gamma} u_{\delta} + \rho T [u_{\alpha} u_{\beta} \delta_{\gamma \delta}]_{cyc}$$
(B5)

$$+\rho T^{2}[\delta_{\alpha\beta}\delta_{\gamma\delta}]_{cyc}$$

$$\sum_{i}g_{i}^{eq} + \sum_{i}f_{i}^{eq}v_{i\gamma}v_{i\gamma} = \sum_{i}g_{i} + \sum_{i}f_{i}v_{i\gamma}v_{i\gamma}$$

$$= 2\rho\left(C_{v}T + \frac{u_{\gamma}u_{\gamma}}{2}\right) = 2\rho E$$
(B6)

$$\sum g_i^{\text{eq}} v_{i\alpha} + \sum f_i^{\text{eq}} v_{i\gamma} v_{i\gamma} v_{i\alpha} = 2\rho u_{\alpha}(E+T)$$
 (B7)

$$\begin{split} \sum_{i} g_{i}^{\text{eq}} v_{i\alpha} v_{i\beta} + \sum_{i} f_{i}^{\text{eq}} v_{i\gamma} v_{i\gamma} v_{i\alpha} v_{i\beta} \\ &= 2\rho T u_{\alpha} u_{\beta} + 2\rho (u_{\alpha} u_{\beta} + T \delta_{\alpha\beta}) (E+T), \end{split} \tag{B8}$$

where " $||_{cyc}$ " denotes cyclic non-repetitive permutation over the indices.

Appendix C: Hermite polynomials and coefficients of the Grad expansion

Populations can be approximated with a Grad expansion,

$$f_i = w_i \sum_{n=0}^{N} \frac{1}{n!} \boldsymbol{a}^{(n)}(\boldsymbol{M}, T_{ref}) : \mathcal{H}^{(n)}(\boldsymbol{v}_i),$$
 (C1)

here shown for a set of moments M up to the fourth order and a truncation at N = 4, using the Hermite polynomials

$$\mathcal{H}^{(0)}(\boldsymbol{v}_i) = 1,\tag{C2}$$

$$\mathscr{H}_{\alpha}^{(1)}(v_i) = v_{i\alpha},\tag{C3}$$

$$\mathscr{H}_{\alpha\beta}^{(2)}(v_i) = v_{i\alpha}v_{i\beta} - T_{ref}\delta_{\alpha\beta},$$
 (C4)

$$\mathscr{H}_{\alpha\beta\gamma}^{(3)}(v_i) = v_{i\alpha}v_{i\beta}v_{i\gamma} - T_{ref}[v_{i\alpha}\delta_{\beta\gamma}]_{cyc}, \tag{C5}$$

$$\mathcal{H}_{\alpha\beta\gamma\delta}^{(4)}(v_i) = v_{i\alpha}v_{i\beta}v_{i\gamma}v_{i\delta} - T_{ref}[v_{i\alpha}v_{i\beta}\delta_{\gamma\delta}]_{cyc} + T_{ref}^2[\delta_{\alpha\beta}\delta_{\gamma\delta}]_{cyc}.$$
 (C6)

For the computation of equilibrium populations f_i^{eq} , the corresponding coefficients $a^{eq,(n)}$ are found as a function of the set of equilibrium moments M^{eq} , as

$$a^{eq,(0)} = M^{eq,(0)} = \rho,$$
 (C7)

$$a_{\alpha}^{eq,(1)} = \frac{1}{T_{ref}} \left[M_{\alpha}^{eq,(1)} \right] = \frac{1}{T_{ref}} \left[\rho u_{\alpha} \right], \tag{C8}$$

$$a_{\alpha\beta}^{eq,(2)} = \frac{1}{T_{ref}^2} \left[M_{\alpha\beta}^{eq,(2)} - T_{ref} M^{eq,(0)} \delta_{\alpha\beta} \right]$$
$$= \frac{1}{T_{ref}^2} \left[\rho u_{\alpha} u_{\beta} + T_{ref} (\theta - 1) \rho \delta_{\alpha\beta} \right], \tag{C9}$$

$$\begin{split} a^{eq,(3)}_{\alpha\beta\gamma} &= \frac{1}{T_{ref}^3} \left[M^{eq,(3)}_{\alpha\beta\gamma} - T_{ref} [M^{eq,(1)}_{\alpha} \delta_{\beta\gamma}]_{cyc} \right] \\ &= \frac{1}{T_{ref}^3} \left[\rho u_{\alpha} u_{\beta} u_{\gamma} + T_{ref} (\theta - 1) [\rho u_{\alpha} \delta_{\beta\gamma}]_{cyc} \right], \quad \text{(C10)} \end{split}$$

$$\begin{split} a_{\alpha\beta\gamma\delta}^{eq,(4)} &= \frac{1}{T_{ref}^4} \left[M_{\alpha\beta\gamma\delta}^{eq,(4)} - T_{ref} [M_{\alpha\beta}^{eq,(2)} \delta_{\alpha\beta}]_{cyc} \right. \\ &+ T_{ref}^2 [M^{eq,(0)} \delta_{\alpha\beta} \delta_{\gamma\delta}]_{cyc} \right] \\ &= \frac{1}{T_{ref}^4} \left[\rho u_{\alpha} u_{\beta} u_{\gamma} u_{\delta} + T_{ref} (\theta - 1) [\rho u_{\alpha} u_{\beta} \delta_{\gamma\delta}]_{cyc} \right. \\ &+ T_{ref}^2 (\theta - 1)^2 [\rho \delta_{\alpha\beta} \delta_{\gamma\delta}]_{cyc} \right], \end{split}$$
(C11)

where " $[]_{cyc}$ " denotes cyclic non-repetitive permutation over the indices. D denotes the physical dimension and θ is the normalized temperature defined as $\theta = T/T_{ref}$, with T_{ref} given as a consequence of the velocity set. Note that the contracted Hermite polynomials and equilibrium coefficients of order three and four, i.e.

$$\mathcal{H}_{\alpha}^{(3)}(v_{i}) = v_{i\alpha} \left(v_{i}^{2} - T_{ref}(D+2)\right), \tag{C12}$$

$$\mathcal{H}_{\alpha\beta}^{(4)}(v_{i}) = v_{i\alpha}v_{i\beta} \left(v_{i}^{2} - T_{ref}(D+4)\right)$$

$$- T_{ref}\delta_{\alpha\beta} \left(v_{i}^{2} - T_{ref}(D+2)\right), \tag{C13}$$

$$a_{\alpha}^{eq,(3)} = \frac{1}{T_{ref}^{3}} \left[\rho u_{\alpha} \left(u^{2} + T_{ref}(\theta-1)(D+2)\right)\right], \tag{C14}$$

$$a_{\alpha\beta}^{eq,(4)} = \frac{1}{T_{ref}^{4}} \left[\rho u_{\alpha} u_{\beta} \left(u^{2} + T_{ref} \left(\theta - 1 \right) \left(D + 4 \right) \right) + T_{ref} \left(\theta - 1 \right) \delta_{\alpha\beta} \left(u^{2} + T_{ref} \left(\theta - 1 \right) \left(D + 2 \right) \right) \right],$$
(C15)

are sufficient for Euler and NSF level flows compared to the full third and fourth order expansion, respectively.

Appendix D: Specifications of the velocity set

The D2Q16 and D2Q25 velocity sets, weights and reference temperatures are listed in table II and III, respectively.

REFERENCES

^[1] S. Pirozzoli, Annual review of fluid mechanics 43, 163 (2011).

^[2] H. C. Yee and B. Sjögreen, computers & Fluids 169, 331 (2018).

^[3] T. Krüger, H. Kusumaatmaja, A. Kuzmin, O. Shardt, G. Silva, and E. M. Viggen, Springer International Publishing 10, 4 (2017).

^[4] S. Succi, *The lattice Boltzmann equation: for fluid dynamics and beyond* (Oxford university press, 2001).

^[5] S. A. Hosseini and I. V. Karlin, Physics Reports 1030, 1 (2023).

^[6] S. Chapman and T. G. Cowling, The mathematical theory of non-uniform gases. an account of the kinetic theory of viscosity, thermal conduction and diffusion in gases (1970).

D2Q16, $T_{ref} = 1$					
i	(v_{ix}, v_{iy})	$ w_i $			
0 - 3	$(\pm\sqrt{3-\sqrt{6}},\pm\sqrt{3-\sqrt{6}})$	$\frac{3+\sqrt{6}}{12} \times \frac{3+\sqrt{6}}{12}$			
4 - 7	$(\pm\sqrt{3-\sqrt{6}},\pm\sqrt{3+\sqrt{6}})$	$\frac{3+\sqrt{6}}{12} \times \frac{3-\sqrt{6}}{12}$			
8 - 11	$(\pm\sqrt{3+\sqrt{6}},\pm\sqrt{3-\sqrt{6}})$	$\frac{3-\sqrt{6}}{12} \times \frac{3+\sqrt{6}}{12}$			
12 - 15	$(\pm\sqrt{3+\sqrt{6}},\pm\sqrt{3+\sqrt{6}})$	$\frac{3-\sqrt{6}}{12} \times \frac{3-\sqrt{6}}{12}$			

TABLE II. Forth-order quadrature in two dimensions (D2Q16).

$D2Q25, T_{ref} = 1$					
i	(v_{ix}, v_{iy})	w_i			
0	(0, 0)	$\frac{8}{15}$			
1,3	$(\pm\sqrt{5-\sqrt{10}},0)$	$\frac{8}{15} \times (7 + 2\sqrt{10})$			
2,4	$(0, \pm \sqrt{5 - \sqrt{10}})$	$(7+2\sqrt{10})\times \frac{8}{15}$			
5,6,7,8	$(\pm\sqrt{5}-\sqrt{10},\pm\sqrt{5}-\sqrt{10})$	$(7+2\sqrt{10})\times(7+2\sqrt{10})$			
9,11	$(\pm\sqrt{5+\sqrt{10}},0)$	$(7-2\sqrt{10})\times \frac{8}{15}$			
10,12	$(0, \pm \sqrt{5 + \sqrt{10}})$	$\frac{8}{15} \times (7 - 2\sqrt{10})$			
13, 16, 17, 20	$(\pm\sqrt{5}+\sqrt{10},\pm\sqrt{5}-\sqrt{10})$	$(7-2\sqrt{10})\times(7+2\sqrt{10})$			
14, 15, 18, 19	$(\pm\sqrt{5-\sqrt{10}},\pm\sqrt{5+\sqrt{10}})$	$(7+2\sqrt{10})\times(7-2\sqrt{10})$			
21, 22, 23, 24	$(\pm\sqrt{5+\sqrt{10}},\pm\sqrt{5+\sqrt{10}})$	$(7-2\sqrt{10})\times(7-2\sqrt{10})$			

TABLE III. Fifth-order quadrature in two dimensions (D2Q25).

- [7] P. L. Bhatnagar, E. P. Gross, and M. Krook, Physical review 94, 511 (1954).
- [8] Y. H. Qian, D. D'Humières, and P. Lallemand, Europhysics Letters 17, 479 (1992).
- [9] H. Chen, S. Chen, and W. H. Matthaeus, Phys. Rev. A 45, R5339 (1992).
- [10] Z. Guo and K. Xu, Advances in Aerodynamics 3, 1 (2021).
- [11] A. Xu, G. Zhang, and Y. Zhang, Kinetic theory, 450 (2018).
- [12] L. Mieussens, Journal of Computational Physics 162, 429 (2000).
- [13] S. A. Hosseini, P. Boivin, D. Thévenin, and I. Karlin, Progress in Energy and Combustion Science 102, 101140 (2024).
- [14] P. V. Coveney, S. Succi, D. d'Humières, I. Ginzburg, M. Krafczyk, P. Lallemand, and L.-S. Luo, Philosophical Transactions of the Royal Society of London. Series A: Mathematical, Physical and Engineering Sciences 360, 437 (2002).
- [15] M. Geier, A. Greiner, and J. G. Korvink, Phys. Rev. E 73, 066705 (2006).
- [16] M. Geier, M. Schönherr, A. Pasquali, and M. Krafczyk, computers & Mathematics with Applications 70, 507 (2015).
- [17] O. Malaspinas, "Increasing stability and accuracy of the lattice boltzmann scheme: recursivity and regularization," (2015).
- [18] I. V. Karlin and S. Succi, Phys. Rev. E 58, R4053 (1998).
- [19] I. V. Karlin, F. Bösch, and S. S. Chikatamarla, Phys. Rev. E 90, 031302 (2014).
- [20] S. A. Hosseini, M. Atif, S. Ansumali, and I. V. Karlin, computers & Fluids 259, 105884 (2023).
- [21] E. M. Shakhov, Fluid Dynamics 3, 95 (1968).
- [22] J. Holway Lowell H., The Physics of Fluids 9, 1658 (1966).
- [23] A. N. Gorban and I. V. Karlin, Physica A: Statistical Mechanics and its Applications 206, 401 (1994).
- [24] S. Ansumali, S. Arcidiacono, S. S. Chikatamarla, N. I. Prasianakis, A. N. Gorban, and I. V. Karlin, The European Physical Journal B 56, 135 (2007).
- [25] V. A. Rykov, Fluid Dynamics 10, 959 (1976).
- [26] I. V. Karlin, D. Sichau, and S. S. Chikatamarla, Phys. Rev. E 88, 063310 (2013).

- [27] S. A. Hosseini, A. Bhadauria, and I. V. Karlin, Phys. Rev. E 110, 045313 (2024).
- [28] N. I. Prasianakis and I. V. Karlin, Phys. Rev. E 76, 016702 (2007).
- [29] M. H. Saadat, F. Bösch, and I. V. Karlin, Phys. Rev. E 99, 013306 (2019).
- [30] S. A. Hosseini, N. Darabiha, and D. Thévenin, Philosophical Transactions of the Royal Society A 378, 20190399 (2020).
- [31] Y. Feng, P. Sagaut, and W. Tao, Journal of Computational Physics 303, 514 (2015).
- [32] Q. Li, K. H. Luo, Y. L. He, Y. J. Gao, and W. Q. Tao, Physical Review E—Statistical, Nonlinear, and Soft Matter Physics 85, 016710 (2012).
- [33] Y. Feng, P. Sagaut, and W.-Q. Tao, computers & Fluids 131, 45 (2016).
- [34] S. S. Chikatamarla and I. V. Karlin, Phys. Rev. Lett. 97, 190601 (2006)
- [35] N. Frapolli, S. Chikatamarla, and I. Karlin, Physical review. E, Statistical physics, plasmas, fluids, and related interdisciplinary topics 90 (2014).
- [36] N. Frapolli, S. S. Chikatamarla, and I. V. Karlin, Phys. Rev. Lett. 117, 010604 (2016).
- [37] S. A. Hosseini, C. Coreixas, N. Darabiha, and D. Thévenin, Phys. Rev. E 100, 063301 (2019).
- [38] C. Coreixas and J. Latt, Physics of Fluids 32 (2020).
- [39] B. Dorschner, F. Bösch, and I. V. Karlin, Phys. Rev. Lett. 121, 130602 (2018).
- [40] N. Sawant, B. Dorschner, and I. V. Karlin, AIP advances 12, 075107 (2022).
- [41] A. Bhadauria and I. Karlin, computers & Fluids 271, 106152 (2024).
- [42] A. Bardow, I. V. Karlin, and A. A. Gusev, Phys. Rev. E 77, 025701 (2008).
- [43] D. Wilde, A. Krämer, D. Reith, and H. Foysi, Phys. Rev. E 101, 053306 (2020).
- [44] D. Wilde, A. Krämer, M. Bedrunka, D. Reith, and H. Foysi, Journal of Computational Science 51, 101355 (2021).
- [45] L. Xu, R. Chen, and X.-C. Cai, Phys. Rev. E 103, 023306 (2021).
- [46] Y. Ji, S. A. Hosseini, B. Dorschner, K. H. Luo, and I. V. Karlin, Journal of Fluid Mechanics 983, A11 (2024).
- [47] S. Liu, P. Yu, K. Xu, and C. Zhong, Journal of Computational Physics 259, 96 (2014).
- [48] Z. Guo, R. Wang, and K. Xu, Phys. Rev. E 91, 033313 (2015).
- [49] Z. Guo, L.-P. Wang, and Y. Qi, Phys. Rev. E 107, 025304 (2023).
- [50] N. G. Kallikounis, B. Dorschner, and I. V. Karlin, Phys. Rev. E 106, 015301 (2022).
- [51] N. G. Kallikounis and I. V. Karlin, Phys. Rev. E 109, 015304 (2024).
- [52] N. G. Kallikounis, B. Dorschner, and I. V. Karlin, Phys. Rev. E 103, 063305 (2021).
- [53] N. Kallikounis, *Multiscale Kineitc Modeling of High Speed Gas Dynamics*, Ph.D. thesis, ETH Zürich (2023).
- [54] B. Dorschner, N. Frapolli, S. S. Chikatamarla, and I. V. Karlin, Phys. Rev. E 94, 053311 (2016).
- [55] S. Guzik, X. Gao, T. Weisgraber, B. Alder, and P. Colella (2013).
- [56] G. Eitel-Amor, M. Meinke, and W. Schröder, computers & Fluids 75, 127 (2013).
- [57] Q. He, W. Huang, Y. Yin, Y. Hu, and D. Li, Physics of Fluids 34, 093321 (2022).
- [58] A. Schukmann, A. Schneider, V. Haas, and M. Böhle, Fluids 8 (2023).

- [59] A. Fakhari and T. Lee, Phys. Rev. E 89, 033310 (2014).
- [60] X. Huang, J. Chen, J. Zhang, L. Wang, and Y. Wang, Symmetry 15, 1909 (2023).
- [61] N. Frapolli, S. S. Chikatamarla, and I. V. Karlin, Physical Review E 93, 063302 (2016).
- [62] H. Grad, Communications on pure and applied mathematics 2, 331 (1949).
- [63] H. X. Zhang, Acta Aerodynamica Sinica 6, 143 (1988).
- [64] H. Zhang and F. Zhuang, Journal of Computational Physics 415, 109491 (2020).
- [65] P. L. Roe, Annual Review of Fluid Mechanics 18, 337 (1986).
- [66] J. Z. X. Zheng and C. P. T. Groth, (2012).
- [67] M. J. Berger and J. Oliger, Journal of Computational Physics 53, 484 (1984).
- [68] D. Beckingsale, Towards Scalable Adaptive Mesh Refinement on Future Parallel Architectures, Ph.D. thesis (2015).
- [69] A. M. Khokhlov, Journal of Computational Physics 143, 519 (1998).
- [70] I. Gargantini, Computer Graphics and Image Processing 20, 365 (1982).
- [71] P. MacNeice, K. M. Olson, C. Mobarry, R. de Fainchtein, and C. Packer, Computer Physics Communications 126, 330 (2000).
- [72] W. Zhang, A. Almgren, V. Beckner, J. Bell, J. Blaschke, C. Chan, M. Day, B. Friesen, K. Gott, D. Graves, *et al.*, The Journal of Open Source Software 4, 1370 (2019).
- [73] W. Zhang, A. Myers, K. Gott, A. Almgren, and J. Bell, The International Journal of High Performance Computing Applications 35, 508 (2021).
- [74] A. Myers, W. Zhang, A. Almgren, T. Antoun, J. Bell, A. Huebl, and A. Sinn, ArXiv abs/2403.12179 (2024).
- [75] M. J. Berger, SIAM Journal on Scientific and Statistical Computing 7, 904 (1986).
- [76] M. J. Berger and P. Colella, Journal of Computational Physics 82, 64 (1989).
- [77] J. Bell, M. Berger, J. Saltzman, and M. Welcome, SIAM Journal on Scientific Computing 15, 127 (1994).
- [78] M. Berger and I. Rigoutsos, IEEE Transactions on Systems, Man and Cybernetics **21**, 1278 (1991).
- [79] R. Deiterding, ESAIM: Proc. 34, 97 (2011).
- [80] R. Deiterding, Parallel adaptive simulation of multidimensional detonation structures, Ph.D. thesis, Branden-

- burgische Technische Universitat Cottbus (2003).
- [81] P. J. Dellar, Physical Review E 64, 031203 (2001).
- [82] G. A. Sod, Journal of Computational Physics 27, 1 (1978).
- [83] P. D. Lax, Communications on Pure and Applied Mathematics 7, 159 (1954).
- [84] C.-W. Shu and S. Osher, Journal of Computational Physics 77, 439 (1988).
- [85] P. D. Lax and X.-D. Liu, SIAM Journal on Scientific Computing 19, 319 (1998).
- [86] A. Kurganov and E. Tadmor, Numerical Methods for Partial Differential Equations 18, 584 (2002).
- [87] C. W. Schulz-Rinne, J. P. Collins, and H. M. Glaz, SIAM Journal on Scientific Computing 14, 1394 (1993).
- [88] T. Zhang and Y. Zheng, SIAM Journal of Mathematical Analysis 21, 593 (1990).
- [89] T. Chang, G.-Q. Chen, and S. Yang, "On the 2-d riemann problem for the compressible euler equations i. interaction of shocks and rarefaction waves," (1995).
- [90] T. Chang, G.-Q. Chen, and S. Yang, "On the 2-d riemann problem for the compressible euler equations ii. interaction of contact discontinuities," (2000).
- [91] Y. Zheng, Systems of conservation laws: two-dimensional Riemann problems, Vol. 38 (Springer Science and Business Media, 2012).
- [92] W. Sheng and T. Zhang, The Riemann problem for the transportation equations in gas dynamics, Vol. 654 (American Mathematical Soc., 1999).
- [93] L. Pan, J. Li, and K. Xu, "A few benchmark test cases for higher-order euler solvers," (2016).
- [94] O. Inoue and Y. Hattori, Journal of Fluid Mechanics 380, 81 (1999).
- [95] M. H. Saadat, S. A. Hosseini, B. Dorschner, and I. V. Karlin, Physics of Fluids 33, 046104 (2021).
- [96] H. S. Ribner, AIAA Journal 23, 1708 (1985).
- [97] J. L. Ellzey, M. R. Henneke, J. M. Picone, and E. S. Oran, Physics of Fluids 7, 172 (1995).
- [98] D. S. Dosanj and T. M. Weeks, AIAA Journal 3, 216 (1965).