

Banner appropriate to article type will appear here in typeset article

Transient growth and nonlinear breakdown of wavelet-based resolvent modes in turbulent channel flow

Eric Ballouz¹ †, Scott T. M. Dawson², and H. Jane Bae³

¹Mechanical and Civil Engineering, California Institute of Technology, Pasadena, CA 91125, USA

²Mechanical, Materials, and Aerospace Engineering, Illinois Institute of Technology, Chicago, IL 60616, USA

³Graduate Aerospace Laboratories, California Institute of Technology, Pasadena, CA 91125, USA

(Received xx; revised xx; accepted xx)

In this work, we study the effectiveness of the time-localised principal resolvent forcing mode at actuating the near wall cycle of turbulence. This mode is restricted to a wavelet pulse and computed from a singular value decomposition of the windowed wavelet-based resolvent operator (Ballouz *et al.* 2024b) such that it produces the largest amplification via the linearised Navier-Stokes equations. We then inject this time-localised mode into the turbulent minimal flow unit at different intensities, and measure the deviation of the system's response from the optimal resolvent response mode. Using the most energetic spatial wave numbers for the minimal flow unit – *i.e.* constant in the streamwise direction and once-periodic in the spanwise direction – the forcing mode takes the shape of streamwise rolls and produces a response mode in the form of streamwise streaks that transiently grow and decay. Though other works such as Bae *et al.* (2021) demonstrate the importance of principal resolvent forcing modes to buffer layer turbulence, none instantaneously track their time-dependent interaction with the turbulence, which is made possible by their formulation in a wavelet basis. For initial times and close to the wall, the turbulent minimal flow unit matches the principal response mode well, but due to nonlinear effects, the response across all forcing intensities decays prematurely with a higher forcing intensity leading to faster energy decay. Nevertheless, the principal resolvent forcing mode does lead to significant energy amplification and is more effective than a randomly-generated forcing structure and the second suboptimal resolvent forcing mode at amplifying the near-wall streaks. We compute the nonlinear energy transfer to secondary modes and observe that the breakdown of the actuated mode proceeds similarly across all forcing intensities: in the near-wall region, the induced streak forks into a structure twice-periodic in the spanwise direction; in the outer region, the streak breaks up into a structure that is once-periodic in the streamwise direction. In both regions, spanwise oscillations account for the dominant share of nonlinear energy transfer.

Key words:

† Email address for correspondence: eballouz@caltech.edu

1. Introduction

Near-wall turbulence is organised into streamwise rolls, and alternating low- and high-speed streamwise streaks (Klebanoff *et al.* 1962; Kline *et al.* 1967; Blackwelder & Eckelmann 1979; Smith & Metzler 1983; Johansson *et al.* 1987). These coherent structures are well-documented and their characterization is the subject of multiple works (Bakewell Jr. & Lumley 1967; Landahl 1980; Butler & Farrell 1993; Chernyshenko & Baig 2005; Del Alamo & Jiménez 2006). Additionally, many studies point to a quasi-periodic cycle, wherein the streamwise streaks are amplified by streamwise vortices, meander, then break down, which subsequently regenerates new quasi-streamwise vortices (Kim *et al.* 1971; Robinson 1991; Hamilton *et al.* 1995; Panton 2001; Adrian 2007; Smits *et al.* 2011; Jiménez 2018). The cycle, also known as the self-sustaining process, can be more clearly observed in a minimal flow unit (Jiménez & Moin 1991), where the domain is artificially restricted in the streamwise and spanwise directions in order to exclude the dynamics of the outer region of the channel. Recent methods based on graph-theoretic approaches (Elnahas *et al.* 2024) have provided new evidence of the self-sustaining process and revealed consistent patterns of energy exchange between rolls and streaks in both the minimal flow unit and larger channels.

Although nonlinear mechanisms play a role in the self-sustaining process, a lot of attention has been given to linear mechanisms and instabilities as the drivers of this process (Panton 2001; Jiménez 2013; Lozano-Durán *et al.* 2021). One example is the Orr mechanism (Orr 1907; Jiménez 2013), in which the mean shear near the wall tilts velocity perturbations forward in the streamwise direction and stretches vertical scales, intensifying the wall-normal velocity perturbations. Another example is lift-up (Hwang & Cossu 2010), which occurs when wall-normal velocity perturbations transport slow-moving fluid near the wall away into the faster flow field farther away from the wall. Works such as Del Alamo & Jiménez (2006) and Pujals *et al.* (2009) show that, even after removing the nonlinear term from the perturbation equations, linear transient growth via the mean shear generates the dominant (streaky) structures in wall-bounded turbulence. The linearised system additionally accounts for much of the energy spectra and reproduces the self-similar profile in the logarithmic region. Similarly, Lozano-Durán *et al.* (2021) show through numerical experiments that the minimal flow unit can sustain turbulence without the nonlinear feedback between the velocity fluctuations and the mean velocity profile, except when the Orr-mechanism or push-over (momentum transfer from the spanwise mean shear into the streamwise velocity perturbation) are suppressed. The authors thus argue for linear transient growth as a prominent mechanism for transferring energy from the mean flow to turbulent fluctuations. In addition to the traditional near-wall streaks, smaller scales in the minimal channel are also capable of significant transient growth via purely linear mechanisms (Markeviciute & Kerswell 2024). This is shown using a linearisation of the Navier-Stokes equations about a base flow composed of the mean turbulent channel flow profile with an added near-wall streak. The transient growth of the small scales is found to be especially driven by spanwise gradients, further underlining the ability of the linear push-over mechanism to amplify perturbations. In this work, using methods from Cho *et al.* (2018); Symon *et al.* (2021); Ding *et al.* (2025), we lend special attention to the role of the spanwise self-advection term in transferring energy across scales.

The linear amplification process linking streamwise vortices and streamwise streaks has also been fruitfully studied through the lens of resolvent analysis (McKeon & Sharma 2010; Moarref *et al.* 2013; McKeon 2017). In resolvent analysis, the Navier-Stokes equations are reframed as a linear dynamical system for the velocity fluctuations, and the nonlinear term as external forcing acting on this system. The goal is then to solve for the spatial structure of the (nonlinear) forcing that generates the response (velocity) with the largest linear energy

amplification. Resolvent analysis is traditionally applied to systems exhibiting spatial and temporal homogeneity. The linearised Navier-Stokes are first Fourier transformed in time and the homogeneous spatial directions prior to resolvent analysis which thus reveals the linear amplification properties of individual wave numbers and frequencies. In the context of wall-bounded turbulent flows, the equations are Fourier-transformed in the streamwise and spanwise directions, and time, and the targeted length scales are the traditional streamwise and spanwise streak spacings in the buffer layer (McKeon & Sharma 2010; McKeon 2017; Moarref *et al.* 2013; Bae *et al.* 2021). Despite using a linearisation of the equations of motion, traditional resolvent analysis is successful at identifying streamwise rolls as the most perturbing structures, and streamwise streaks as the most amplified structures.

Beyond simply using resolvent analysis as a way to study the self-sustaining process, resolvent modes have been used as a tractable way of tackling the control of turbulent flows. The resolvent response modes are often used as models for the fully turbulent flow. These modes can be cheaply computed for a variety of wave numbers and frequencies to identify the structures that undergo the largest kinetic energy amplification under the linearised dynamics and are thus expected to figure prominently in the turbulent flow. In Toedtli *et al.* (2019), resolvent modes were used to model the response of turbulent channel flow to a varying-phase opposition control. Though the Reynolds stresses of the model did not accurately capture the profile from direct numerical simulations, the change in the profiles and drag were well represented by the resolvent model. This suggests that the cheap computation of resolvent modes can be used in lieu of direct numerical simulations to identify forcing frequencies and length scales that can enact desirable changes in the turbulent flow. Liu *et al.* (2021) have also applied this framework to reduce pressure fluctuations along a cavity in supersonic flow. In Yeh & Taira (2019), resolvent analysis of a flow over an airfoil is also used to identify a forcing frequency and length scale that enhance momentum mixing and reduce flow separation. A similar framework is used in Lin *et al.* (2023) for a plunging cylinder to reduce lift fluctuations. The assumption underpinning the above approach is that resolvent forcing modes, though only optimal for the linearised equations, are nevertheless efficient at actuating the fully coupled system.

In Bae *et al.* (2021), linearly identified resolvent modes were indeed found to play a role in the transfer of energy to coherent near-wall turbulent perturbations, even within a fully nonlinear turbulent flow, lending credibility to the assumption underpinning the works of Yeh & Taira (2019); Liu *et al.* (2021); Lin *et al.* (2023). Via a modified simulation in which the contribution of the leading resolvent forcing mode is subtracted from the nonlinear term at every time step, the streak-regeneration process is interrupted and buffer layer turbulence in the minimal flow unit is greatly suppressed.

Resolvent forcing and response modes have shown promise in emulating the behaviour of turbulent flows under forcing, and this is linked to the role the forcing modes themselves play in amplifying near-wall turbulence in simulated flows. In a more physical scenario, however, the flow would only be forced intermittently, either by spontaneous events arising in the unforced flow or by externally imposed actuation. It would be valuable to study how a turbulent flow instantaneously reacts to such forcing, but since the flow in Bae *et al.* (2021) is altered at each time step, its time-dependent reaction is difficult to measure. We thus emphasise the importance of computing optimal time-localised forcing modes and transient response mode. Traditional formulations of resolvent analysis are incapable of representing such scenarios. The resolvent operator is traditionally constructed once the linearised Navier-Stokes equations are Fourier-transformed in time, and the resulting resolvent modes are Fourier modes in time that lack transient growth information. In this work, we use a version of resolvent analysis formulated in a wavelet basis (Ballouz *et al.* 2023, 2024a,b). The individual wavelets can capture information localised in a particular

time interval. Wavelet-based resolvent analysis thus allows one to compute optimal pulse-like forcing modes and their corresponding transient response trajectories.

We note that maximally growing transient trajectories for the linearised Navier-Stokes equations have long been computed under the optimal transient growth framework, and used to study turbulent flows (Butler & Farrell 1993; Schmid *et al.* 2002; Pujals *et al.* 2009; Jiménez 2013; Encinar & Jiménez 2020). This framework finds the optimal initial condition that leads to a maximally energetic state at a chosen final time. While optimal transient growth has also been successful at producing rolls and streaks as the optimal perturbation and response structures, respectively, important differences exist between this method and wavelet-based resolvent analysis. Optimal transient growth is sensitive to the choice of final time. More importantly, as is expounded in §2.2, optimal transient growth and wavelet-based resolvent analysis use different measures of optimality: the former maximises the kinetic energy ratio between the initial condition and the solution at the chosen terminal time, while the latter maximises the integrated kinetic energy of the response over the entire time domain. Maximising the integrated kinetic energy may better capture structures that tend to persist in time, rather than spike and decay rapidly. Moreover, wavelet-based resolvent analysis can identify optimal forcing terms arising at various points of the time domain, and not just its origin. For example, when applied to turbulent oscillating Stokes flows (Ballouz *et al.* 2024a), the computed forcing and response modes coincide with the times in the cycle when the streamwise root-mean-square velocity peaks. The forcing modes usually precede the response modes. Another version of this spatio-temporal resolvent analysis computes time-sparse modes and similarly yields time-localised optimal forcing modes that precede their transiently varying responses (López-Doriga *et al.* 2023, 2024). Both of these results suggest that time-localised resolvent analysis correctly extracts cause-and-effect relations between the computed modes.

The transient growth of any structure within a fully turbulent flow is modulated by the myriad nonlinear interactions not considered when using methods that rely on the linearised equations of motion. Therefore, with the objective of controlling near-wall turbulence in mind, we wish to determine whether significant transient growth can be achieved in a turbulent flow via the injection of a resolvent forcing mode into the simulation of a turbulent flow. The transient resolvent response mode corresponding to the injected forcing will allow us to measure the instantaneous discrepancy between the actuated turbulent and linearised flows, and probe the efficacy of the resolvent forcing modes at actuating nonlinear flows. We aim to identify the time scales during which the turbulent system responds similarly to the optimal linear response mode and beyond which nonlinear effects distort the effect of the resolvent forcing mode. We study the mechanisms that erode the effects of the injected mode, especially the nonlinear interactions that transfer energy from the actuated scale to secondary ones and force the turbulent flow to deviate from the optimal linear response. The system we use is the minimal flow unit at a moderate Reynolds number.

This paper is organised as follows. In §2.1, we compute the base flow for the minimal flow unit at $Re_\tau = 186$, which we use in §2.2 to formulate the resolvent operator in a time-localised wavelet basis. We compute resolvent modes as in Ballouz *et al.* (2024b), making sure to constrain the forcing to a wavelet-shaped pulse. This yields a forcing mode in the shape of streamwise rolls that is compactly supported in time, in addition to an optimal streak-like response that grows transiently before decaying. The justification for the choice of spatial wavenumbers and wavelets is given in §2.3. We then solve the fully nonlinear forced Navier-Stokes equations for the minimal flow unit at $Re_\tau = 186$, using the time-localised wavelet-based resolvent forcing mode as our forcing term. This step is detailed in §2.4. We track the evolution of this resolvent forcing mode as it generates and amplifies streamwise streaks, and compute relevant turbulent statistics, which we present in §3. In §4, we focus

on the nonlinear energy transfer from the induced streak to secondary modes. Concluding remarks are given in §5.

2. Methods

In this work, we consider the flow in the minimal flow unit of size $L_1 \times L_2 \times L_3 = 1.72\delta \times 2\delta \times 0.86\delta$, where δ is the channel half-height, and x_1 , x_2 and x_3 are the streamwise, wall-normal and spanwise directions, respectively. We denote the velocity fluctuation field by $\mathbf{u} = [u_1, u_2, u_3]^T$, where u_1 , u_2 and u_3 are the streamwise, wall-normal, and spanwise components respectively. The system is characterised by the friction Reynolds number $Re_\tau = \delta u_\tau / \nu \approx 186$, where u_τ is the friction velocity, and ν is the kinematic viscosity. The flow is periodic in the streamwise and spanwise directions, and the no-slip and no-penetration conditions hold at the walls of the channel.

2.1. Base flow

For the direct numerical simulations (DNS) in this work, we discretise the streamwise and spanwise directions uniformly using $N_1 = N_3 = 32$ grid points, which results in streamwise and spanwise grid spacings of $\Delta x_1^+ \approx 10$ and $\Delta x_3^+ \approx 5$. In the wall-normal direction, the grid is of size $N_2 = 128$ and stretched according to a hyperbolic tangent distribution, which results in a wall-normal spacing of $\min(\Delta x_2^+) \approx 0.17$ near the wall and $\max(\Delta x_2^+) \approx 7.6$ at the centreline. Here, the superscript + denotes wall units normalised with u_τ and ν . We discretise the incompressible Navier-Stokes equations with a staggered, second-order accurate, central finite difference method in space (Orlandi 2000), and a fractional step method is used to compute pressure (Kim & Moin 1985). Time-advancement is performed with an explicit third-order-accurate Runge-Kutta method (Wray 1990). The DNS code has been validated in previous studies of turbulent channel flows (Lozano-Durán & Bae 2016; Bae *et al.* 2018, 2019). Using this discretisation, we obtain a mean streamwise velocity profile $U_1(x_2)$ by averaging DNS results of the unforced system in the homogeneous directions and time. This mean profile is used in the subsequent sections.

2.2. Spatio-temporal resolvent modes

In this section, we describe how we compute the time-localised resolvent forcing modes and their corresponding transient responses for the minimal flow unit (Ballouz *et al.* 2024a,b). We first formulate the incompressible Navier-Stokes equations for the velocity fluctuations about a mean turbulent flow field $\mathbf{U} = (U_1, U_2, U_3)$:

$$\frac{\partial u_i}{\partial t} + U_j \frac{\partial u_i}{\partial x_j} + u_j \frac{\partial U_i}{\partial x_j} = -\frac{\partial p}{\partial x_i} + \frac{1}{Re} \frac{\partial^2 u_i}{\partial x_j \partial x_j} + f_i, \quad \frac{\partial u_i}{\partial x_i} = 0. \quad (2.1)$$

Here p represents the pressure fluctuation, and f_i the nonlinear term in the x_i -momentum equation. The base flow is obtained from §2.1, and satisfies $U_2 = U_3 = 0$ while the mean streamwise component U_1 is constant in time. Equations (2.1) are Fourier-transformed in the x_1 - and x_3 -directions and discretised in x_2 and time. The time domain $[0, T]$ is periodic and we choose $T = 22 \delta / u_\tau$, which is long enough to allow the resolvent modes to decay to zero. The discretisation in time is uniform, with a grid size of $N_t = 128$ corresponding to a spacing of $\Delta t \approx 0.17 \delta / u_\tau$. The wall-normal discretisation is the same as in the DNS (§2.1).

The discretised equations are further wavelet-transformed in time by premultiplying them by a discrete wavelet transform operator \mathbf{W} . For an arbitrary square-integrable function $g(t)$,

the wavelet expansion on a dyadic time grid is defined as:

$$g(t) = \sum_{\ell=1}^L \sum_{m=0}^{N_t/2^\ell-1} \frac{1}{\sqrt{2^\ell}} \tilde{g}^{(w)} \eta\left(\frac{t}{2^\ell} - m\right) + \sum_{m=0}^{N_t/2^L-1} \frac{1}{\sqrt{2^L}} \tilde{g}^{(s)} \zeta\left(\frac{t}{2^L} - m\right), \quad (2.2)$$

where $\eta(t)$ and $\zeta(t)$ denote the wavelet and scaling functions, respectively (Mallat 1999; Najmi 2012), and L satisfies $2^L \leq N_t$ and represents the largest scale captured by the wavelet expansion. The matrix \mathbf{W} approximates this wavelet expansion: given \mathbf{g} – the discretisation of $g(t)$ in time – its wavelet transform $\tilde{\mathbf{g}}$ is computed as

$$\tilde{\mathbf{g}} := \begin{bmatrix} \tilde{\mathbf{g}}^{(s)} \\ \tilde{\mathbf{g}}^{(w)} \end{bmatrix} = \mathbf{W} \mathbf{g}, \quad (2.3)$$

where the elements of $\tilde{\mathbf{g}}^{(s)}$ and $\tilde{\mathbf{g}}^{(w)}$ are respectively $\tilde{g}^{(s)}(\ell, m)$ and $\tilde{g}^{(w)}(\ell, m)$ for all ℓ and m . The matrix \mathbf{W} is of size $N_t \times N_t$, and the transform $\tilde{\mathbf{g}}$ is of size N_t . The projection onto $\eta(t/2^\ell - m)$ or $\zeta(t/2^L - m)$ roughly captures a portion of the frequency content of g determined by ℓ , centred in a time interval determined by m . Larger ℓ corresponds to a narrower band of frequencies closer to zero, while larger m corresponds to later times. Each of η and ζ capture difference portions of the frequency spectrum.

The choice of wavelet-scaling-function pair is not unique and determines the properties of the transform operator \mathbf{W} . In this work, we use a single-level Daubechies-8 wavelet transform (Daubechies 1992). The Daubechies wavelets and their corresponding scaling functions are compactly supported in time and form an orthonormal basis, resulting in a sparse banded and unitary operator \mathbf{W} (Mallat 1999; Najmi 2012; Ballouz *et al.* 2024b).

For a given streamwise and spanwise wavenumber pair $(2\pi k_1/L_1, 2\pi k_3/L_3)$, where $k_1, k_3 \in \mathbb{Z}$, we obtain the following discretised and transformed equations

$$\widetilde{\mathbf{D}}_1 \widetilde{\mathbf{u}}_i + \widetilde{\mathbf{U}}_j \widetilde{\mathbf{D}}_j \widetilde{\mathbf{u}}_i + \widetilde{\mathbf{dU}}_{ij} \widetilde{\mathbf{u}}_j = -\widetilde{\mathbf{D}}_i \widetilde{\mathbf{p}} + \frac{1}{Re} \widetilde{\mathbf{D}}_{jj}^2 \widetilde{\mathbf{u}}_i + \widetilde{\mathbf{f}}_i, \quad \widetilde{\mathbf{D}}_i \widetilde{\mathbf{u}}_i = 0. \quad (2.4)$$

Here, $\widetilde{\mathbf{u}}_i$, $\widetilde{\mathbf{p}}_i$ and $\widetilde{\mathbf{f}}_i$ denote the discretised and transformed velocity, pressure and forcing, respectively. These transformed quantities are functions of wall-normal position x_2 , and the wavelet scale and shift parameters ℓ and m , which respectively represent the time interval and frequency support of the wavelet mode (Ballouz *et al.* 2024b). The transformed spatial derivative operators are defined as follows: $\widetilde{\mathbf{D}}_1 = i\check{k}_1 \mathbf{I}$, where \mathbf{I} is the identity matrix of size $(N_2 N_t) \times (N_2 N_t)$, $\widetilde{\mathbf{D}}_2 = \mathbf{D}_2$, which denotes a block diagonal second-order-accurate central finite difference operator on the staggered x_2 -grid, $\widetilde{\mathbf{D}}_3 = i\check{k}_3 \mathbf{I}$ and $\widetilde{\mathbf{D}}_{jj}^2 = -\check{k}_1^2 \mathbf{I} + \mathbf{D}_2^2 - \check{k}_3^2 \mathbf{I}$, where \mathbf{D}_2^2 denotes a second-order accurate second-order finite difference operator on the staggered x_2 -grid. The wavenumbers \check{k}_i are the modified wavenumbers for the discretisation scheme used in the DNS, and are defined as $\check{k}_1 := 2\delta \sin(\delta \Delta x_1 \pi k_1 / L_1) / \Delta x_1$ and $\check{k}_3 := 2\delta \sin(\delta \Delta x_3 \pi k_3 / L_3) / \Delta x_3$.

The modified time derivative operator is defined as $\widetilde{\mathbf{D}}_t = \mathbf{W} \mathbf{D}_t \mathbf{W}^{-1}$, where \mathbf{D}_t is a second-order-accurate central finite difference matrix in time and \mathbf{W} is a discrete wavelet transform. Though not shown, using a fourth-order accurate finite difference operator does not strongly affect the resolvent modes. We also define the mean flow term $\widetilde{\mathbf{U}}_j := \mathbf{W} \mathbf{U}_j \mathbf{W}^{-1}$ and the mean shear term $\widetilde{\mathbf{dU}}_{ij} := \mathbf{W} \mathbf{dU}_{ij} \mathbf{W}^{-1}$, where \mathbf{U}_j and \mathbf{dU}_{ij} are diagonal matrices with diagonal terms corresponding to U_j and dU_i/dx_j at each x_2 and time grid point, respectively.

We can rearrange equation (2.4) as

$$\begin{bmatrix} \tilde{\mathbf{u}}_1(x_2, \ell, m) \\ \tilde{\mathbf{u}}_2(x_2, \ell, m) \\ \tilde{\mathbf{u}}_3(x_2, \ell, m) \\ \tilde{\mathbf{p}}(x_2, \ell, m) \end{bmatrix} = \tilde{\mathbf{H}}^{(k_1, k_3)} \begin{bmatrix} \tilde{\mathbf{f}}_1(x_2, \ell, m) \\ \tilde{\mathbf{f}}_2(x_2, \ell, m) \\ \tilde{\mathbf{f}}_3(x_2, \ell, m) \\ 0 \end{bmatrix}, \quad (2.5)$$

where the linear operator $\tilde{\mathbf{H}}^{(k_1, k_3)}$ is the resolvent operator in this formulation. The superscript (k_1, k_3) indicates the choice of Fourier parameters for the transformation of equation (2.1), and the functional dependence on x_2 , ℓ and m denotes the discretisation of (2.1) over these quantities. Since we use the same x_2 -grid as the DNS that produced the mean flow and shear profiles, and taking N_t as the temporal resolution, we note that $\tilde{\mathbf{H}}^{(k_1, k_3)}$ is a $(4N_2N_t) \times (4N_2N_t)$ matrix. This formulation of the resolvent operator targets all temporal basis functions, rather than one as in traditional resolvent analysis.

We introduce the additional step of constraining the forcing along a wavelet-shaped pulse of any desired scale ℓ and shift m using a temporal windowing matrix \mathbf{B} (Jeun *et al.* 2016; Kojima *et al.* 2020; Ballouz *et al.* 2023, 2024a). Typically, the unconstrained resolvent modes for channel flow are Fourier modes in time centred at a chosen critical layer (McKeon & Sharma 2010; Bae *et al.* 2021; Ballouz *et al.* 2024b). In order to compute an optimal transiently growing response trajectory, we must constrain the forcing in time. The windowing matrix \mathbf{B} takes the form

$$\mathbf{B} = \text{diag}(\mathbb{1}(\ell = \ell_d) \mathbb{1}(m = m_d)), \quad (2.6)$$

so that we are restricting the forcing to a wavelet or scaling function, centred at a desired time and frequency determined by ℓ_d and m_d , respectively. For a discussion on the choice of ℓ_d and m_d , see §2.3. We then take the singular value decomposition (SVD) of the combined operator

$$\tilde{\mathbf{H}}^{(k_1, k_3)} \mathbf{B} = \sum_j \sigma_j \tilde{\psi}_j(x_2, \ell, m) \tilde{\phi}_j^H(x_2, \ell, m), \quad (2.7)$$

where $(\cdot)^H$ denotes the conjugate transpose. We index the singular values $\{\sigma_i\}_{i=1}^\infty$ such that $\sigma_1 \geq \sigma_2 \geq \dots \geq 0$. The right and left singular vectors $\{\tilde{\phi}_j\}_{j=1}^\infty$ and $\{\tilde{\psi}_j\}_{j=1}^\infty$ respectively define orthonormal bases for the spaces containing the nonlinear term (forcing) and the velocity and pressure fluctuations (response). For the SVD, we choose the inner product to be the seminorm representing action, which we define for an arbitrary vector $\tilde{\mathbf{b}} = [\tilde{b}_1, \tilde{b}_2, \tilde{b}_3, \tilde{b}_p]^T$ to be

$$\|\tilde{\mathbf{b}}\|^2 = \frac{u_\tau}{\delta} \frac{1}{L_1(2\delta)L_3} \int_0^{L_1} \int_0^{2\delta} \int_0^{L_3} \int_0^T (|b_1|^2 + |b_2|^2 + |b_3|^2) dt dx_3 dx_2 dx_1, \quad (2.8)$$

where $\mathbf{b} = [b_1, b_2, b_3, b_p]^T$ is the inverse transform of $\tilde{\mathbf{b}}$. The kinetic energy amplification factor is given by the square of the singular values. The forcing modes are therefore ordered decreasingly according to the integrated kinetic energy amplification they undergo when acted on by $\tilde{\mathbf{H}}^{(k_1, k_3)} \mathbf{B}$, and the response modes are the corresponding amplified coherent structures arising from this action. Thus, $\tilde{\phi}_1 = [\tilde{\phi}_{1,1}, \tilde{\phi}_{1,2}, \tilde{\phi}_{1,3}, 0]^T$ generates the largest linear energy amplification via the windowed resolvent operator, and $\sigma_1 \tilde{\psi}_1 = \sigma_1 [\tilde{\psi}_{1,1}, \tilde{\psi}_{1,2}, \tilde{\psi}_{1,3}, \tilde{\psi}_{1,p}]^T$ is the resulting optimally-amplified transient velocity and pressure fluctuation. Here, $\psi_{j,i}$ and $\phi_{j,i}$ correspond to the i^{th} velocity component, and $\psi_{j,p}$ and $\phi_{j,p}$ refer to the pressure component. For all j , $\tilde{\phi}_j$, the inverse transform of $\tilde{\phi}_j$, is shaped in time according to the

wavelet or scaling function chosen by \mathbf{B} . As described in Moarref *et al.* (2013), the resolvent modes for certain Fourier parameters occur in equivalent pairs of equal singular values due to the symmetry of the channel geometry. The pairs of singular modes each form a singular plane, and for the numerical experiments in §2.4, we linearly combine the two equivalent forcing modes (e.g. $\tilde{\phi}_1$ and $\tilde{\phi}_2$) to form a forcing vector in the singular plane that acts primarily on the bottom half of the channel. Thus, upon injecting this mode into the DNS of the forced Navier-Stokes equations, only the bottom of half of the channel is subject to the forcing, allowing us to use the top half as a control system (Bae *et al.* 2021). Henceforth, $\tilde{\phi}_1$ will refer to the linear combination of the first two equivalent forcing modes that concentrates the forcing in the bottom-half of the channel, renormalised to satisfy $\|\tilde{\phi}_1\| = 1$. $\tilde{\phi}_3$ is defined similarly with regards to the third and fourth forcing modes.

2.3. Choice of spatial and temporal scales

The minimal flow unit allows us to isolate one buffer layer streak. This streak appears to stretch the entire streamwise length of the unit, which is only large enough to contain one low- and high-speed streak pair in the spanwise direction. We thus choose to target the Fourier mode given by the streamwise and spanwise wavenumbers of $k_1 = 0$ and $k_3 = 1$, respectively. These length scales also correspond to a peak in the spectral energy content for the minimal flow unit (Bae *et al.* 2021).

Traditional resolvent analysis in which the Navier-Stokes equations are Fourier-transformed in time reveals that a temporal frequency of $\omega = 0$ produces the modes with the largest kinetic energy amplification (Bae *et al.* 2021). To target this frequency, we constrain the forcing term to a Daubechies-8 scaling function of arbitrary shift m by using \mathbf{B} to select the corresponding elements of $\tilde{\mathbf{f}}$. The scaling function is shown in figure 1(a), and its Fourier spectrum, shown in figure 1(b), indeed encompasses the target frequency. Since the scaling function is compactly-supported in time, wavelet-based resolvent analysis will not be able to target $\omega = 0$ uniquely but will capture a wide range of frequencies: a trade-off exists between time and frequency localisation, and the more precision we require in one domain, the less we preserve in the other (Mallat 1999; Najmi 2012). We note that the simulations detailed in §2.4 resolve temporal wavenumbers up to $\omega\delta/u_\tau \approx 55,000$. The scaling function satisfies $\left(\int_{-\infty}^{+\infty} |\zeta(t)|^2 dt\right) u_\tau/\delta = 1$.

The obtained resolvent modes are shown in figure 2. Notably, the response modes exhibit transient energy growth and decay as seen in figure 2(a,b). The inverse transforms of the modes are shown in figure 2(c,d). The modes share many similarities with the Fourier-based modes computed for $\omega = 0$ in Bae *et al.* (2021): the optimal transient nonlinear forcing mode appears in the shape of streamwise rolls, and the optimal velocity fluctuation response appears as predominantly streamwise streaks with alternating signs of the same magnitude. This supports the extensively examined claim that streamwise streaks can be linearly generated by a linear lift-up mechanism, whereby slower moving fluid close to the wall is swept upwards into the faster moving mean flow farther away from the wall. The streak-shaped response mode grows in intensity before fading, showcasing the transient growth that is characteristic of non-normal systems.

2.4. Forced direct numerical simulations

The time-localised resolvent forcing mode obtained in the previous section maximises the action for the minimal flow unit under the linearised Navier-Stokes equations. The aim of the work is to study the effect of the forcing mode on the fully nonlinear minimal flow unit. To that end, we aim to inject the time-localised resolvent forcing mode into a DNS of the minimal flow unit. The forcing mode will be introduced into an already turbulent state of the minimal

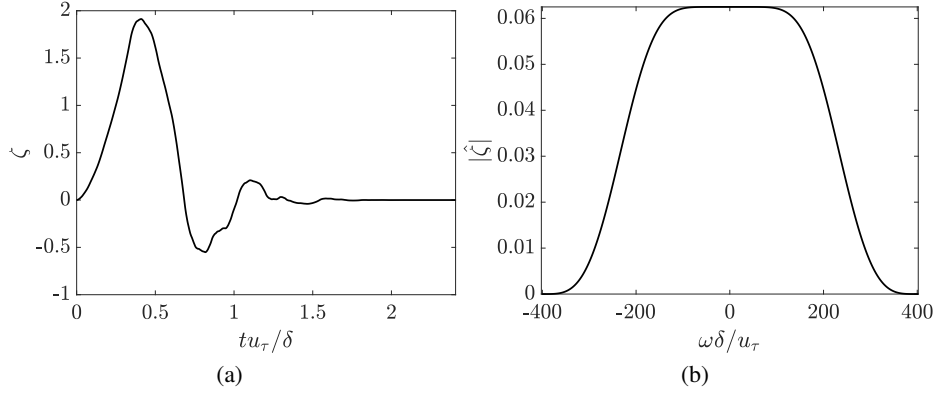
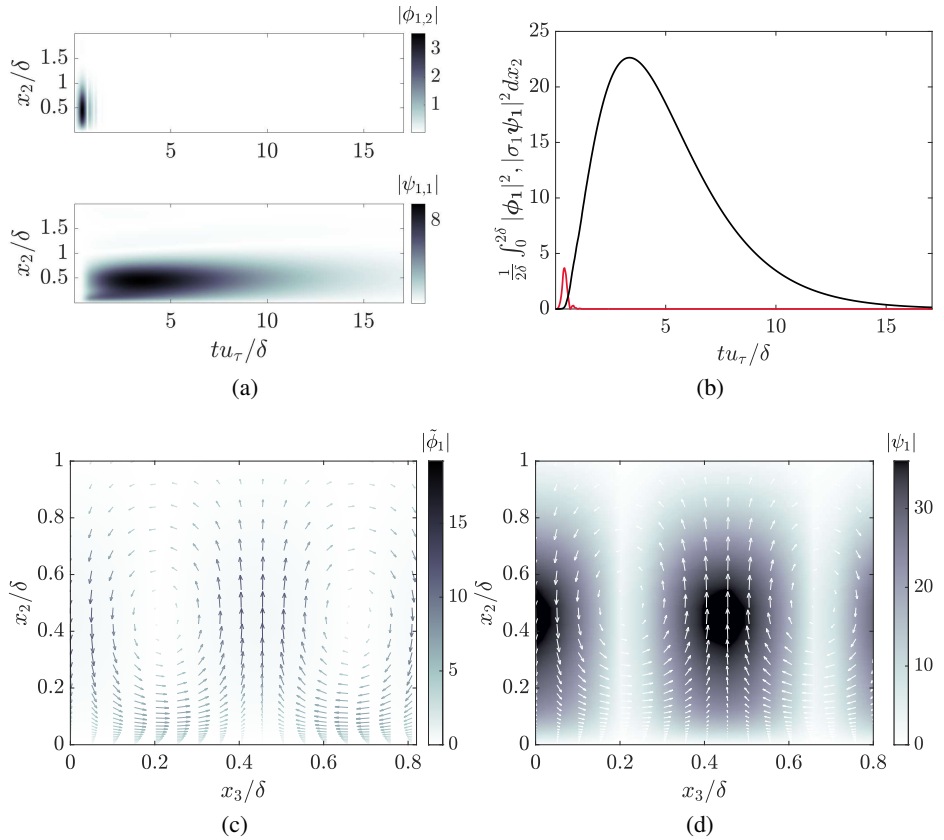
Figure 1: Daubechies-8 scaling function ζ in time (a) and frequency (b) domain.

Figure 2: (a) Magnitudes of the wall-normal component of the principal forcing mode (top) and the streamwise component of the principal response mode (bottom). (b) Integrated energy of the principal forcing (red) and response (black) modes. (c) Principal forcing mode shown at peak amplitude ($tu_\tau/\delta \approx 0.40$). (d) Principal response modes at peak amplitude ($tu_\tau/\delta \approx 2.41$). In (c,d), the contours represent the streamwise magnitude; the arrows, which show the direction of the cross flow components, are coloured according to their magnitudes $\sqrt{|\phi_{1,2}|^2 + |\phi_{1,3}|^2}$ in (c), or $\sqrt{|\psi_{1,2}|^2 + |\psi_{1,3}|^2}$ in (d).

flow unit. The turbulent initial condition will contain energy at varying scales, triggering cross-scale interactions that will interfere with the linearly driven transient growth of the injected mode. We inject the forcing at different magnitudes, all small relative to the energy of the initial condition. We expect the produced energy amplification to vary nonlinearly across the different cases. To characterise how the turbulent system reacts to actuation of varying strength, we aim to track the ensemble-averaged transient response, and measure the energy growth of the targeted mode along with the nonlinear energy transfer to secondary scales. The optimal resolvent response mode will serve as a benchmark for the achievable energy amplification caused by the injected mode. Below we present the numerical details of the DNS.

To initialise the ensemble of the forced simulations, we first perform a DNS of the non-actuated minimal flow unit, fixing the mean profile to be $\mathbf{U} = (U_1(x_2), 0, 0)$ (§2.1), which is used to calculate the resolvent modes. Snapshots from this simulation will serve as the initial conditions to the forced simulations. Freezing the mean profile ensures that the DNS mean profile matches the one used to compute the resolvent modes for all time. We do this by initializing the flow to have the desired mean streamwise profile of U_1 , then by removing the steady-state contribution of the right-hand side of the Navier-Stokes equations. The initial snapshots from the fixed-mean simulation are separated by $3.8 \leq \Delta t u_\tau / \delta \leq 19.2$, and amount to ensemble sizes ranging from 1000 to 4000, in order to ensure statistically convergence. For each initial condition, we also obtain a corresponding unforced fixed-mean time series. We denote the velocity fluctuations for the unforced simulations by $\mathbf{u}_0(x_1, x_2, x_3, t)$.

Before injecting the forcing mode into the DNS of the minimal flow unit, the mode is normalised so that $\|\hat{\phi}_1\|^2 = 1$ and scaled by a complex constant κ with magnitude

$$|\kappa| := \gamma \left(\frac{\delta}{u_\tau^3} \frac{1}{L_1(2\delta)L_3} \int_{-\infty}^{+\infty} \int_0^{L_1} \int_0^{2\delta} \int_0^{L_3} \left| \frac{\partial \mathbf{u}_0}{\partial t} \right|_{t=0}^2 \zeta(t)^2 dx_3 dx_2 dx_1 dt \right)^{1/2}, \quad (2.9)$$

where $\gamma \in \{1\%, 2\%, 5\%, 10\%\}$ such that the resolvent forcing mode is increasing the initial energy of the right-hand side by $\gamma\%$. Thus, $|\kappa|^2$ determines the integrated energy injected into the system by the forcing. We choose $\angle \kappa = \angle \langle \partial_t \hat{\mathbf{u}}_0^{(0,1)}, \hat{\phi}_1 \rangle$, so the forcing mode is in phase with the right-hand side of the unforced flow field. In the limiting case where the nonlinear interactions are negligible, this provision ensures that the added forcing maximally increases the energy of the target $(0, 1)$ -mode.

The forced DNS is the solution to the full incompressible Navier-Stokes equations with the additional right-hand side forcing terms shown below:

$$\frac{\partial u_i}{\partial t} + U_j \frac{\partial u_i}{\partial x_j} + u_j \frac{\partial U_i}{\partial x_j} = -\frac{\partial p}{\partial x_i} + \frac{1}{Re} \frac{\partial^2 u_i}{\partial x_j \partial x_j} + 2\text{Re} \left(\kappa \phi_{1,i}(x_2, t) e^{i \frac{2\pi x_3}{L_3}} \right) + \mathcal{F}_i, \quad (2.10)$$

$$\frac{\partial u_i}{\partial x_i} = 0. \quad (2.11)$$

The term $\mathcal{F} = (\mathcal{F}_1, 0, 0)$ enforces the condition that the mean streamwise profile of the forced simulation stay fixed and equal to U_1 (§2.1) as in the unforced simulation. We remind the reader that $\mathbf{u}(x_1, x_2, x_3, 0) = \mathbf{u}_0(x_1, x_2, x_3, 0)$ for each ensemble member, where \mathbf{u}_0 is obtained from the unforced DNS. We run the forced DNS for a total time of $T = 5.69 \delta / u_\tau$. To test the optimality of $\hat{\phi}_1$ at forcing the turbulent channel, we repeat the case for $\gamma = 5\%$ using $\hat{\phi}_3$ and a forcing term with a randomly-generated spatial component $\hat{\phi}_{\text{rand}} = \hat{\phi}_{\text{rand}}(x_2) \zeta(t)$, which we normalise and scale the same way.

3. Results and discussion

In this section, the notation $\widehat{(\cdot)}^{(k_1, k_3)}$ denotes the Fourier transform in the streamwise and spanwise directions corresponding to the streamwise and spanwise wave numbers $2\pi k_1/L_1$ and $2\pi k_3/L_3$, respectively. We define the deviation operator Δ as the difference between the forced and unforced simulations, e.g., $\Delta \hat{u}_1^{(0,1)} = \hat{u}_1^{(0,1)} - \hat{u}_{1,0}^{(0,1)}$. We denote the ensemble average by $\overline{(\cdot)}$.

3.1. Transient energy growth and decay of streaks in the forced DNS

We define the instantaneous streak energy as

$$\hat{E}_1^{(0,1)}(t) = \left[\frac{|\hat{u}_1^{(0,1)}|^2}{2} \right], \quad (3.1)$$

where $[\cdot] := \int_0^{2\delta} (\cdot) dx_2 / (2\delta)$ denotes the wall-normal average. Figure 3(a) shows the streak energy contained in the $(0, 1)$ -mode as a function of time, for different resolvent-forcing amplitudes. For all cases, the energies grow and peak before decaying and reverting back to non-forced levels. We observe that the peak energy deviation $\Delta \hat{E}_1^{(0,1)}$ scales sub-quadratically with the forcing amplitudes and is proportional to $|\gamma|^{1.44}$ (figure 3b). For a linear system, the energy peaks would scale quadratically, which indicates that the nonlinearities lead to the premature peaking of streak energy. The stronger the forcing, the faster the streak energy's growth rate, and the faster its decay. The peak times, t_{peak} , defined as the times at which the energies reach their maxima, decrease slightly with forcing amplitude, but are relatively constant compared to the decay times, Δt_{decay} , which we define as the time it takes for the energy to reduce from the peak to 10% of its peak (figures 3c, 3d). Indeed, the differences in decay rate are more dramatic across the different forcing amplitude cases, and scale as $\Delta t_{\text{decay}} \sim |\gamma|^{-0.65}$. We note that all fully-coupled simulations decay significantly faster ($\Delta t_{\text{decay}} \approx 1\delta/u_\tau$) than the linear response ($\Delta t_{\text{decay}} \approx 15\delta/u_\tau$).

To measure the proportion of the linearly-amplified energy captured by the forced simulations, we compute an ensemble-averaged forcing efficiency, or effective amplification, which we define to be

$$\sigma_{\text{eff}} = \left(\frac{1}{u_\tau \delta} \int_0^T \overline{\frac{\Delta \hat{E}_1^{(0,1)}}{|\kappa|^2/2}} dt \right)^{1/2}. \quad (3.2)$$

This is analogous to $\sigma_1 = \max_{\tilde{\mathbf{f}}} \|\tilde{\mathbf{H}}^{(0,1)} \mathbf{B} \tilde{\mathbf{f}}\|_2 / \|\tilde{\mathbf{f}}\|_2$, where the numerator reflects the energy contained in the velocity perturbation field, and the denominator corresponds to the forcing amplitude. The computed σ_{eff} is shown in figure 4. The forcing efficiencies decrease with the intensity of the forcing, and all effective amplifications are lower than $\sigma_1 = 11.54$. This indicates that, for smaller resolvent forcing amplitudes, more of the forcing energy is linearly converted into streak energy. For higher values of γ , nonlinear interactions that scale superlinearly curtail the growth of the response mode – the integrated action of which scales linearly with γ in the linearised setting – and hinder the effectiveness of the resolvent forcing mode.

3.2. Comparison of velocity deviations with linear response

To visualise the alignment of the velocity fluctuation fields with the linear response mode across all wall normal heights, we plot the contours of $|\Delta \hat{u}_1^{(0,1)}|/\kappa / u_\tau$, i.e. the magnitude of the $\hat{u}_1^{(0,1)}$ deviations normalised by the forcing coefficient κ , along with the contours of the

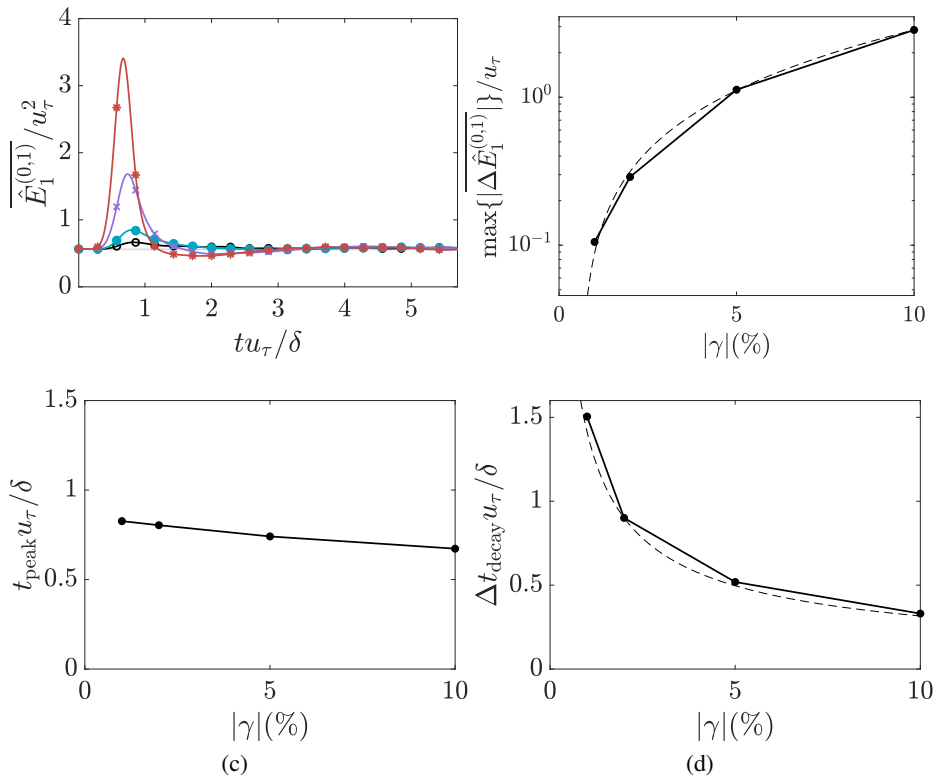


Figure 3: (a) Average streak energy as a function of time; the cases plotted are $\gamma = 1\%$ (black \circ), $\gamma = 2\%$ (cyan \bullet), $\gamma = 5\%$ (purple \times), and $\gamma = 10\%$ (red $*$). (b) Streak energy peaks, (c) peak times, and (d) decay times as a function of γ . The dashed line represent the trends (b) $80.48|\gamma|^{1.44}$, and (d) $|\gamma|^{-0.65}$

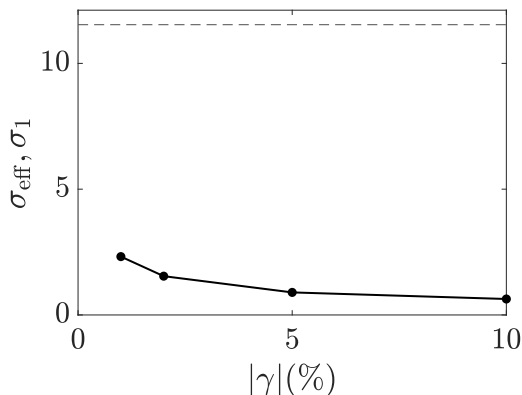


Figure 4: Effective amplification σ_{eff} (solid) and σ_1 (dashed).

linear resolvent response modes (figure 5). We note that $\Delta\hat{u}^{(0,1)}$ is divided by the complex value of κ prior to ensemble averaging so as to align the phases of the forcing (§2.4) across the ensemble members. At earlier times ($t < 0.7\delta/u_\tau$), the responses for both the $\gamma = 1\%$ and $\gamma = 10\%$ cases are very similar to the linear mode. The strongly-forced case, however, quickly reverts to the unforced channel flow statistics beyond an eddy turnover time unit.

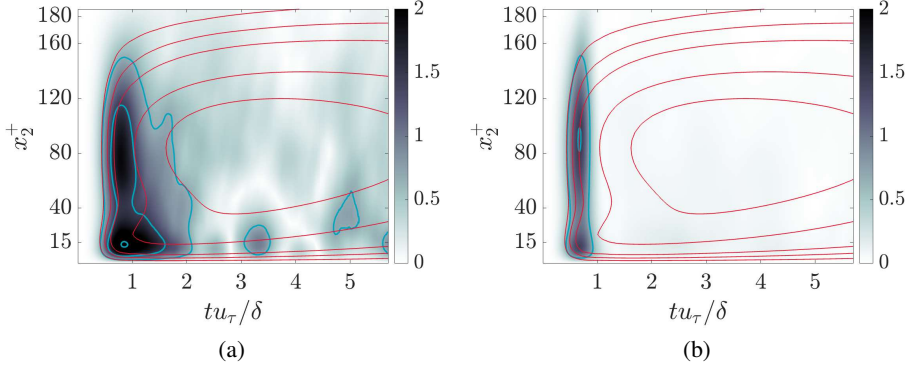


Figure 5: Average deviation in the streamwise velocity of the (0, 1)-Fourier mode, $|\Delta\hat{u}^{(0,1)}/\kappa|/u_\tau$, for the (a) $\gamma = 1\%$ and (b) $\gamma = 10\%$ cases. The contours correspond to 7%, 15%, 25%, 75% and 90% of the maximum value of $\sigma_1\psi_1$. The lines represent the forced DNS case (blue), and the resolvent response (red).

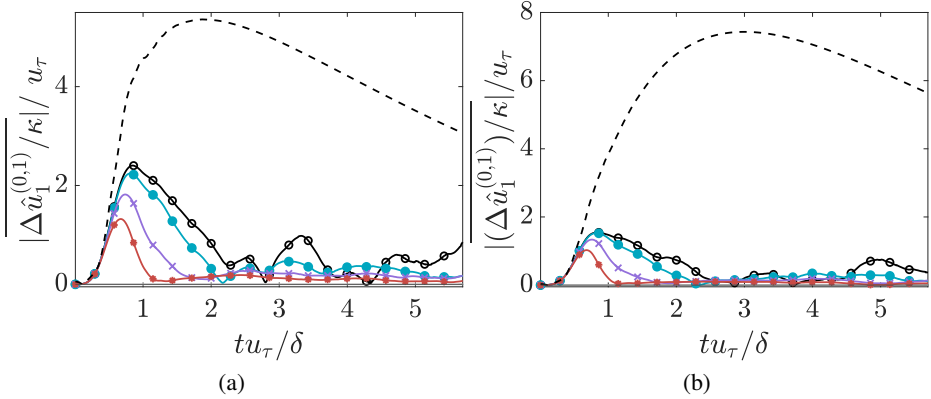


Figure 6: Average deviation in the streamwise velocity of the (0, 1)-Fourier mode at $x_2^+ \approx 16$ (a) and $x_2^+ \approx 39$ (b). The cases plotted are $\gamma = 1\%$ (black \circ), $\gamma = 2\%$ (cyan \bullet), $\gamma = 5\%$ (purple \times), $\gamma = 10\%$ (red $*$), and the linear response mode $\sigma_1\psi_1$ (black, dashed).

In contrast, the lightly forced case of $\gamma = 1\%$ exhibits a longer-lasting velocity deviation, especially in the near wall region ($x_2^+ < 15$). To more closely investigate how the agreement of the forced simulations and the optimal linear response varies with x_2^+ , we show $\Delta\hat{u}_1^{(0,1)}$ at two wall-normal heights, along with the linear response at those heights (figure 6). At both wall-normal locations, the initial growth rates are similar to the linear case for all γ , and we obtain good collapse prior to $t \approx 0.7\delta/u_\tau$. However, the streak velocities peak earlier and decay more quickly for larger forcing amplitudes. For a fixed forcing amplitude, we note that $\Delta\hat{u}^{(0,1)}$ diverges from the optimal linear response around the same time at both wall-normal locations plotted in figure 6, but the agreement between the forced simulations and the optimal linear response turns out better in the near-wall region. As x_2^+ moves closer to the wall, the growth rate due to linear mechanisms increases, and $\Delta\hat{u}_1^{(0,1)}$ manages to recover more of the linearly-amplified energy before decaying due to nonlinear effects.

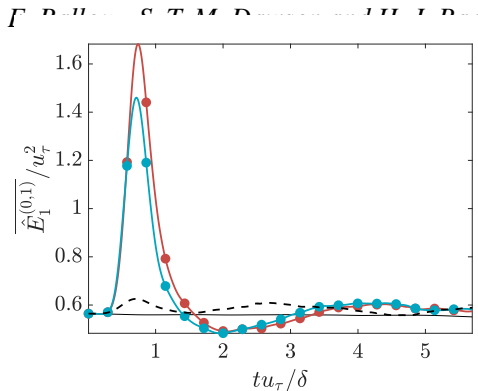


Figure 7: Average streak energy for cases forced by ϕ_1 (red *), ϕ_3 (cyan •), and ϕ_{rand} (dashed black). The unforced case is shown in black.

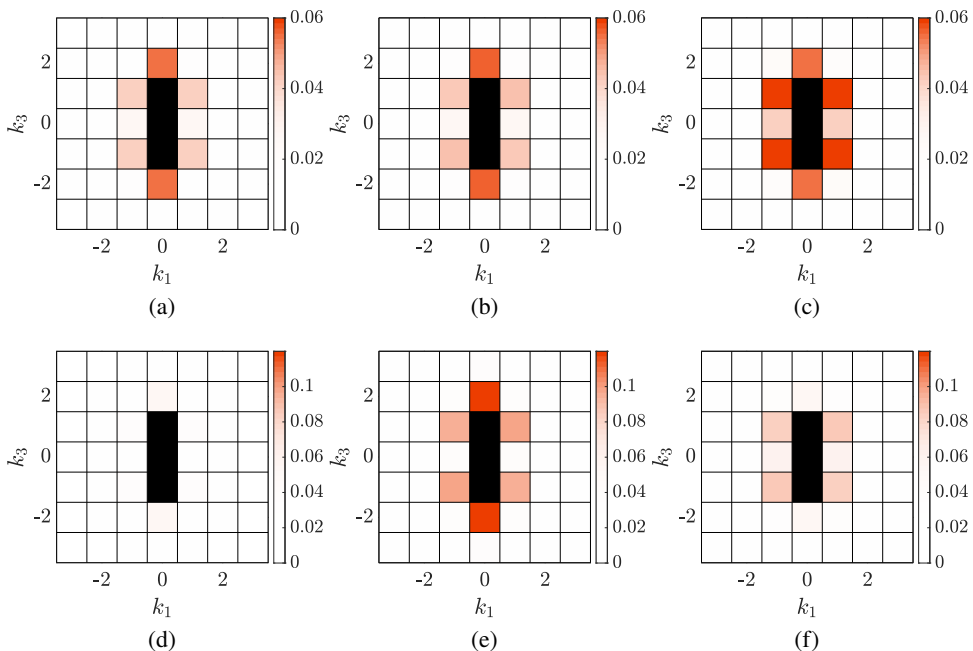


Figure 8: Integrated streamwise spectral energy content $[[\bar{u}_1^{(0,1)}]^2]/(2u_\tau^2)$ for $\gamma = 2\%$ (top) and $\gamma = 10\%$ (bottom). The spectra shown are at times $t = 0$ (left), $t = 0.6\delta/u_\tau$ (middle) and $t = 1.2\delta/u_\tau$ (right). The energy contained in the $(0, 0)$, $(0, 1)$ and $(0, -1)$ -modes (black) are excluded for clarity.

3.3. Optimality of resolvent forcing

We compare the results of forcing using the principal resolvent forcing mode ϕ_1 , the first suboptimal mode ϕ_3 , and the random mode ϕ_{rand} . We see that the streak energy grows to higher peak when the minimal flow unit is forced by ϕ_1 than when forced by ϕ_3 (figure 7). In both cases, the minimal flow unit is much more responsive compared to the case with random forcing. This suggests that resolvent analysis identifies a forcing structure to which the minimal flow unit is indeed sensitive, even when governed by the fully nonlinear Navier-Stokes equations. The advantage of the optimal forcing mode, however, is significantly

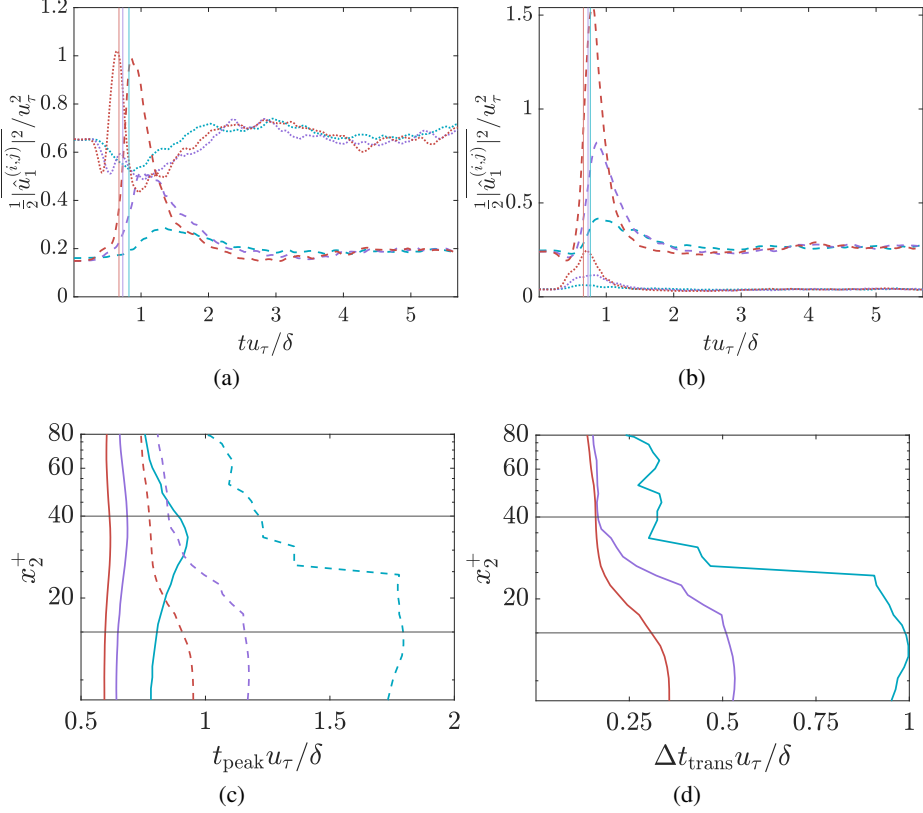


Figure 9: Streamwise spectral energy content at (a) $x_2^+ \approx 16$ and (b) $x_2^+ \approx 39$ for the $(0, \pm 2)$ -Fourier mode (dotted lines) and the $(\pm 1, \pm 1)$ -Fourier mode (dashed lines). (c) Energy peak times for the $(0, \pm 1)$ -mode (solid) and the smaller scales (dashed) cases. (d) Timescale for the cross-scale energy transport. Colors indicate $\gamma = 2\%$ (blue), $\gamma = 5\%$ (purple), and $\gamma = 10\%$ (red). The vertical lines in (a) and (b) represent the local peaks of $|\hat{u}_1^{(0,1)}|$. The horizontal black lines in (c) and (d) represent $x_2^+ = 15$ and $x_2^+ = 40$, which delineate the buffer layer.

reduced. The effective amplifications, σ_{eff} in DNS forced by ϕ_1 and ϕ_3 differ only by a factor of 1.03, whereas $\sigma_1/\sigma_3 = 2.16$. Though the initial growth of the streak energy is faster for the case forced by ϕ_1 , the induced streak in both resolvent-forced cases triggers nonlinear effects at roughly the same time. These quickly clip the transient growth of the induced streaks and drain energy from the actuated mode before the differences between the responses to ϕ_1 and ϕ_3 can deepen.

We remind the reader that the mean profile is fixed by an additional forcing \mathcal{F} which removes the $(0, 0)$ contribution to $\partial \mathbf{u} / \partial t$ at every time step. Freezing the mean replenishes the energy in the $(k_1, k_3) = (0, 0)$ mode and preserves the energy transfer mechanism to the resolvent response mode. In other words, allowing the mean profile to vary may reduce the effectiveness of the forcing mode, since the mode is only optimal for the mean profile without forcing. This is observed in Bae *et al.* (2021): subtracting the contribution of the resolvent forcing mode from the nonlinear term succeeds at reducing the turbulent kinetic energy initially, but this effect fades after $tu_\tau/\delta \approx 12$ as the mean flow is modified. However, our injected forcing has a short extent in time ($tu_\tau/\delta \approx 1.5$), and we do not expect the initial

linearly driven growth of the induced response mode to change much whether we fix the mean profile or not. Though not shown, the streak energy profile obtained for $\gamma = 5\%$ and an unfixed mean velocity is indeed very close to the what is shown in figure 3(a).

3.4. Spectra

We compute the x_2 -integrated streamwise and spanwise spectra for $\gamma = 2\%$ and $\gamma = 10\%$, at the initial time, right before the peak in streak energy ($t = 0.6\delta/u_\tau$), and during the streak energy decay ($t = 1.2\delta/u_\tau$). The results are shown figure 8. Though not plotted, we note that the $(0, \pm 1)$ -mode is the most dominant one across all times, accounting for 30% – 70% of the total turbulent energy over the entire simulated time horizon. For all forcing amplitudes – though only the $\gamma = 2\%$ and $\gamma = 10\%$ cases are shown, the behaviour of the non-actuated modes is similar for all γ : the energy of the non-actuated modes grows during the decay of the $(0, 1)$ -mode, with the $(0, \pm 2)$ and $(\pm 1, \pm 1)$ -modes growing most significantly, which highlights their key role in exchanging energy with the actuated $(0, 1)$ -mode. The share of total turbulent energy accounted for by the $(0, \pm 2)$ and $(\pm 1, \pm 1)$ -modes is roughly constant across all forcing amplitudes, amounting to approximately 9 – 10% and 7 – 8% at their peaks, respectively. Some differences do exist across forcing amplitudes: the transient behaviour of the $(0, \pm 2)$ -mode appears more sensitive to the value γ . For the lightly forced case, the energy of the $(0, \pm 2)$ -mode continues to grow beyond t_{peak} , while for the strongly forced case, the energy of the mode peaks soon after the peak in streak energy before decaying rapidly and ceding to the $(\pm 1, \pm 1)$ -mode. This suggests that the $(0, \pm 2)$ -mode tends to grow faster and peak earlier as the forcing amplitude increases. The particular sensitivity of the integrated energy of the $(0, \pm 2)$ -mode to forcing amplitude can be partially explained by the fact that it is fed by the dyadic interaction involving the self-interaction of the actuated $(0, \pm 1)$ -mode. The nonlinear energy transfer from the $(0, \pm 1)$ -mode to secondary scales is discussed in more detail in the next section.

The instantaneous growth and decay of the two preferred secondary modes, the $(0, \pm 2)$ - and $(\pm 1, \pm 1)$ -modes, at different wall-normal locations can be seen in figures 9(a, b). Closer to the wall, the energy of the $(0, \pm 2)$ -mode first decreases during the growth of the $(0, \pm 1)$ -mode, then exhibits two peaks for the larger amplitude cases, one coinciding with the peak of the $(0, \pm 1)$ -mode, and one much later at around $tu_\tau/\delta \approx 3$, as the energy of the mode reverts back to its initial state. The first peak, which is only visible for the higher amplitude cases, occurs earlier as γ increases, while the later peak occurs roughly at the same time across forcing amplitudes. The behaviour of the $(\pm 1, \pm 1)$ -mode is simpler and its energy peaks earlier as the forcing amplitude increases. Farther away from the wall, the energy peaks of both the $(0, \pm 2)$ - and $(\pm 1, \pm 1)$ -modes depend little on γ and occur roughly at the same time for all forcing amplitudes, at $tu_\tau/\delta \approx 0.8$ and $tu_\tau/\delta \approx 1$, respectively. Thus, the energy of the $(0, \pm 2)$ - and $(\pm 1, \pm 1)$ -modes is similarly influenced by x_2 and γ : while the forcing magnitude γ affects the growth time scale of the secondary modes, causing their energy to peak earlier as it increases, the wall-normal location modulates the sensitivity of these modes to γ .

To better visualise the cross-scale energy transport time scales, we plot the streamwise energy peak times for the $(0, \pm 1)$ -mode and the smaller scales as a function of x_2^+ and for different forcing amplitudes (figure 9c). Across all wall-normal heights, increasing the forcing amplitude causes the energy of both the $(0, \pm 1)$ -mode and the smaller scales to peak earlier. For all forcing amplitudes, the peak times for the $(0, \pm 1)$ -mode and the smaller scales vary inversely with x_2^+ . For the $(0, \pm 1)$ -mode, they are roughly constant with x_2^+ in the near-wall region, increase slightly in the buffer layer as we move farther away from the wall, and plateau in the outer region of the flow. For the non-actuated modes, the peak times are also constant in the near-wall region, but decrease dramatically within the buffer layer

as x_2^+ increases, before levelling off in the outer region. The growth of the smaller scales is thus more sensitive to both forcing amplitude and distance to the wall than the actuated $(0, \pm 1)$ -mode.

We define the timescale for cross-scale energy transport, Δt_{trans} , as the time delay between the energy peaks of the $(0, \pm 1)$ -modes and the smaller scales; its dependence on x_2^+ is mostly determined by the energy peak time for the smaller scales (figure 9d). Interestingly, though a larger forcing amplitudes accelerates the energy transport from the $(0, \pm 1)$ -mode to smaller scales for all wall normal heights, the sensitivity of Δt_{trans} to forcing amplitude decreases as we move farther away from the wall. Indeed, in the outer regions of the flow, Δt_{trans} converges to a value of approximately $0.18 \delta / u_\tau$ for high forcing amplitude. The plots in figures 9(c, d) indicate two cross-scale energy transfer mechanisms: one for the near-wall region ($x_2^+ \leq 25$) which is highly dependent on γ , and one for the outer ($x_2^+ \geq 25$) region which is less dependent on γ . The outer region is already highly nonlinear, which allows for a rapid energy cascade from the actuated mode to smaller scales. Perturbing this region seems to have little effect on the time scale of this cross-scale energy transfer. Near the wall, linear mechanisms dominate; the $(0, \pm 1)$ -mode, growing significantly under the action of the resolvent forcing term, greatly enhances the nonlinear interactions involving the mode and markedly changes the underlying energy transfer to secondary scales, which may explain the heightened sensitivity of Δt_{trans} to γ in the near-wall region.

4. Nonlinear energy transfer

The energy content of the secondary modes (figures 8, 9) are the result of nonlinear interactions amongst all length scales. We wish to disentangle these interactions and focus on the nonlinear energy transfer that specifically drain energy from the actuated $(0, 1)$ -mode. As in Symon *et al.* (2021) and Ding *et al.* (2025), we represent the nonlinear energy transfer from a mode (k_1, k_3) using the following term:

$$\hat{N}(k_1, k_3) = -\hat{u}_i^{(-k_1, -k_3)} \frac{\widehat{\partial u_i u_j}^{(k_1, k_3)}}{\partial x_j}. \quad (4.1)$$

We note that $(\cdot)^{(-k_1, -k_3)}$ refers to the complex conjugate of $(\cdot)^{(k_1, k_3)}$. The term $\hat{N}(k_1, k_3)$ satisfies

$$\begin{aligned} \int_0^{2\delta} \sum_{k_1} \sum_{k_3} \hat{N}(k_1, k_3) dy &= - \int_0^{2\delta} u_i \frac{\widehat{\partial u_i u_j}^{(0,0)}}{\partial x_j} \\ &= \frac{1}{L_1 L_3} \int_0^{2\delta} \int_0^{L_3} \int_0^{L_1} u_i \frac{\partial u_i u_j}{\partial x_j} dx_1 dx_3 dx_2 \\ &= 0, \end{aligned} \quad (4.2)$$

due to continuity and the no-penetration boundary conditions at the walls. This indicates that the nonlinear transfer does not contribute to adding or removing energy from the system and simply redistributes energy between scales (Ding *et al.* 2025). We can express $\hat{N}(k_1, k_3)$ as a sum of contributions from interacting scales:

$$\hat{N}(k_1, k_3) = - \sum_{s_1} \sum_{s_3} \hat{u}_i^{(-k_1, -k_3)} \frac{\widehat{\partial u_i}^{(s_1, s_3)}}{\partial x_j} \hat{u}_j^{(k_1 - s_1, k_3 - s_3)} \quad (4.3)$$

We refer to an individual contribution to the sum as $\hat{M}^{(k_1, k_3)}(s_1, s_3)$, defined below

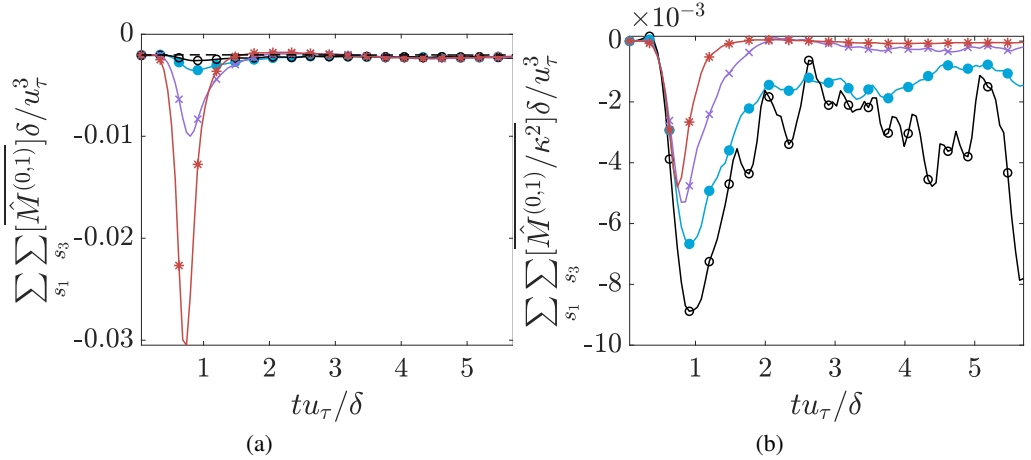


Figure 10: (a) Integrated nonlinear energy transfer from the (0, 1)-mode to the non-forced modes; (b) integrated nonlinear energy transport from the (0, 1)-mode normalised by the forcing magnitude $|\kappa|^2$. The cases plotted are $\gamma = 1\%$ (black \circ), 2% (cyan \bullet), 5% (purple \times) and 10% (red $*$).

$$\hat{M}^{(k_1, k_3)}(s_1, s_3) = -2\text{Re} \left\{ \hat{u}_i^{(-k_1, -k_3)} \frac{\widehat{\partial u_i}}{\partial x_j}^{(s_1, s_3)} \hat{u}_j^{(k_1 - s_1, k_3 - s_3)} \right\}. \quad (4.4)$$

The term $\hat{M}^{(k_1, k_3)}(s_1, s_3)$ represents the energy transfer from the (k_1, k_3) -mode to the (s_1, s_3) -mode and satisfies the following properties:

$$\int_0^{2\delta} \hat{M}^{(k_1, k_3)}(s_1, s_3) dx_2 = - \int_0^{2\delta} \hat{M}^{(s_1, s_3)}(k_1, k_3) dx_2, \quad (4.5)$$

$$\int_0^{2\delta} \hat{M}^{(k_1, k_3)}(k_1, k_3) dx_2 = 0. \quad (4.6)$$

Equation (4.5) implies that the scale-to-scale energy transfer is conservative; equation (4.6) implies that it purely captures the energy transferred from one scale to a different scale and excludes self-interactions. We finally define $\Delta \hat{M}^{(k_1, k_3)}$ as $\hat{M}^{(k_1, k_3)} - \hat{M}_0^{(k_1, k_3)}$, where $\hat{M}_0^{(k_1, k_3)}$ is defined as equation (4.4) using the unforced velocity field \mathbf{u}_0 .

4.1. Interacting modes

Figure 10 shows the total nonlinear transfer from the $(k_1, k_3) = (0, 1)$ mode integrated over the wall-normal direction. The integrated transfer is negative and confirms that nonlinear effects are indeed draining energy from the actuated scale. The trends in the plot echo the results in figure 3a: the larger the forcing term, the larger the integrated transfer to unforced scales. The total energy transfer tends to peak during the decay of the streak, approximately $0.06 - 0.09 \delta / u_\tau$ later than the streak energy. Considering the total energy transfer normalised by forcing magnitude $|\kappa|^2$, we see that the plots collapse for all values of γ , for $tu_\tau/\delta < 0.8$. The initial growth rate is the same across all forcing intensities and its magnitude scales with $|\gamma|^2$. The energy transfer mechanism at early times thus seems to be similar for all cases, regardless of forcing magnitude. The larger the forcing, however, the earlier the energy

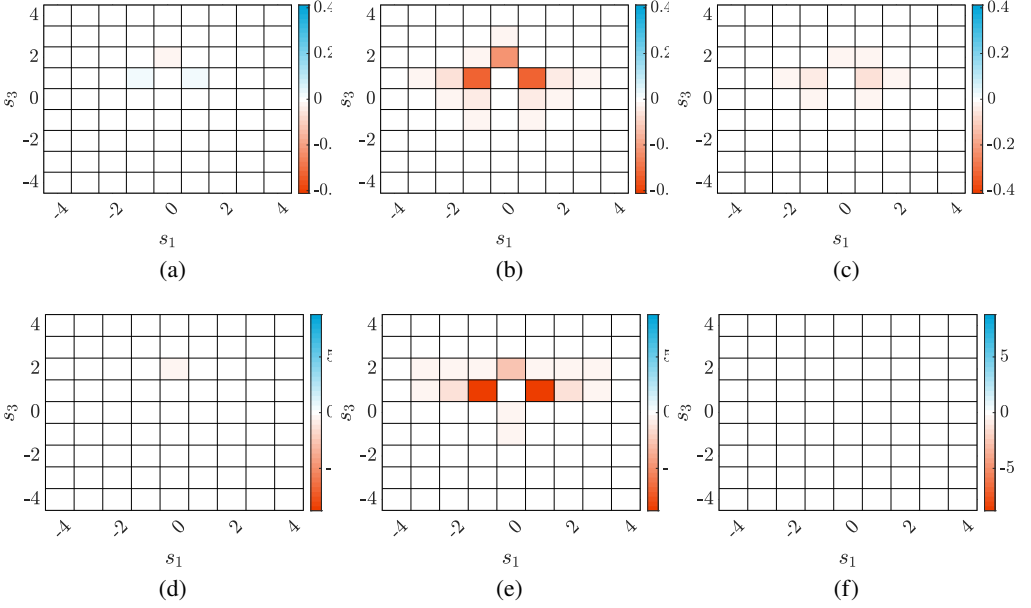


Figure 11: Nonlinear energy transfer $\Delta\hat{M}^{(0,1)}(s_1, s_3)$ for $\gamma = 2\%$ (a-c) and $\gamma = 10\%$ (d-f), at $tu_\tau/\delta = 0.35$ (a, d), 0.74 (b, e), 2 (c, f).

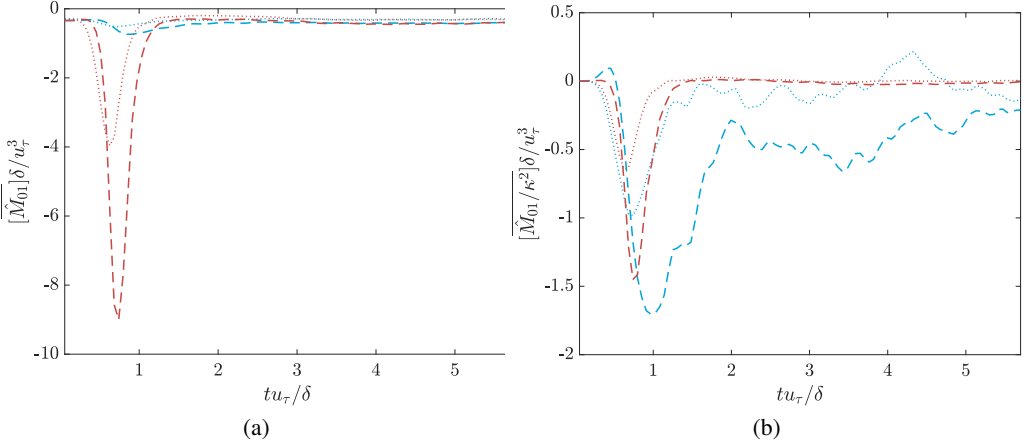


Figure 12: (a) Integrated nonlinear energy transfer from the $(0, 1)$ -mode to the $(0, 2)$ -mode (...) and the $(1, 1)$ -mode (---); (b) integrated nonlinear energy transfer from the $(0, 1)$ -mode normalised by the forcing magnitude $|\kappa|^2$. The cases plotted are 2% (cyan) and 10% (red).

transfer reaches its maximum and starts its decay. At later times, additional multiscale effects, more prominent for the strongly forced cases, likely take over and help drain energy more efficiently from the $(0, 1)$ -mode.

In figure 11, we plot the streamwise-spanwise spectra for $\hat{M}^{(0,1)}(s_1, s_3)$ at different times. Only wavenumbers corresponding to $s_1, s_3 \in [-4, 4]$ are shown for clarity; the remaining wavenumbers interact negligibly with the $(0, 1)$ -mode. We observe that $\hat{M}^{(0,1)}(s_1, s_3) \approx$

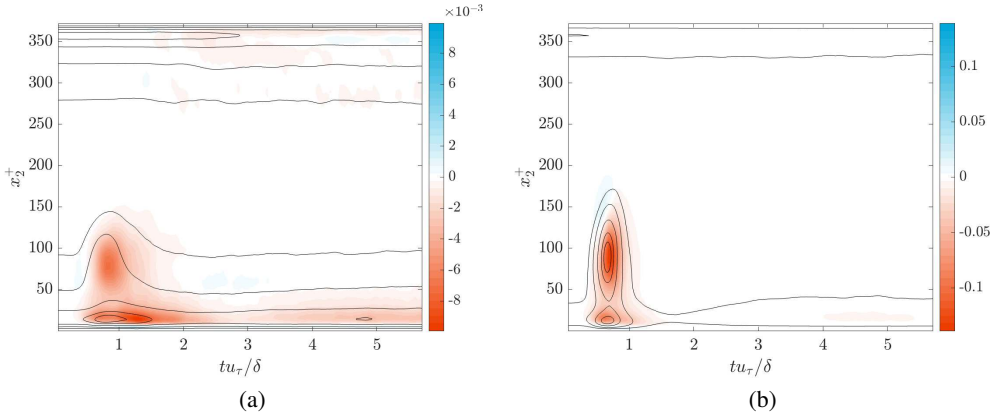


Figure 13: (a) Total nonlinear energy transfer from the $(0, 1)$ -mode, *i.e.* $\sum_{s_1} \sum_{s_3} \Delta \hat{M}^{(0,1)}(s_1, s_3) \delta / u_\tau^3$. The cases plotted are for (a) $\gamma = 2\%$ and (b) $\gamma = 10\%$. The black lines are contours of $|\hat{u}_1^{(0,1)}|^2/2$ and represent 10%, 25%, 50%, 75% and 90% of the maximum value across x_2 and t .

$\hat{M}^{(0,1)}(-s_1, s_3)$. Since the target mode extends the entire length of the channel, the streamwise phase of the interacting modes matters little once the results are averaged over the ensemble of simulations. The figure reveals that the nonlinear energy transfer is dominated by energy transfer to the $(0, 2)$ and $(1, 1)$ -modes. This pattern is consistent across forcing intensities, though only the cases for $\gamma = 2\%$ and $\gamma = 10\%$ are shown. The qualitatively similar results across forcing magnitudes highlight the privileged role of the $(0, 2)$ - and $(1, 1)$ -modes at exchanging energy with the actuated mode. Since the transfer to the $(0, 2)$ -mode results from the self-interaction of the actuated mode, the importance of this particular scale is not surprising. Figure 12 shows the x_2 -integrated energy transferred to the $(1, 1)$ and $(0, 2)$ modes only. As in figure 10b, the initial growth rate of the magnitude-normalised quantities across forcing amplitudes, with the plot for $\gamma = 10\%$ peaking and starting its decay earlier than for $\gamma = 2\%$. Another notable observation is that, across forcing amplitudes, the energy transfer to the $(0, 2)$ -mode occurs at a faster time-scale than the transfer to the $(1, 1)$ -mode.

In figure 13, we study the spatial distribution of the nonlinear energy transfer term $\hat{M}^{(0,1)}$. We observe that, for $\gamma = 2\%$ and $\gamma = 10\%$, the additional nonlinear transfer to other scales due to the induced streak is centred on two wall-normal locations, $x_2^+ \approx 16$ located in the buffer layer, and $x_2^+ \approx 75$ located in the outer region. This is consistent across all forcing magnitudes. The presence of two hubs of energy transfer echo the results in figure 9d, which similarly shows two distinct regions each characterised by a time scale of energy transfer from the $(0, 1)$ -mode to smaller scales.

In figure 14, we plot the nonlinear energy transfer to the $(0, 2)$ - and $(1, 1)$ -modes, for $\gamma = 2\%$, 10% . The figure reveals that the transfer to the $(0, 2)$ -mode accounts for the transfer at $x_2^+ \leq 25$, while the transfer to the $(1, 1)$ -mode accounts for the transfer at $x_2^+ > 25$. In the buffer layer, the forced $(0, 1)$ -mode thus tends to transfer its energy to a mode that is twice periodic in the spanwise direction; the induced streak splits into two branches, which can be seen in figure 15(a, b). In the outer region, the nonlinear energy transfer favours the $(1, 1)$ -mode, suggesting that the induced streak breaks up along the streamwise direction. This is seen in figures 15(c, d), which show the streak meandering but not splitting into two branches as for $x_2^+ = 16$. We note that the transfer from the $(0, 1)$ -mode to the $(0, 2)$ -mode

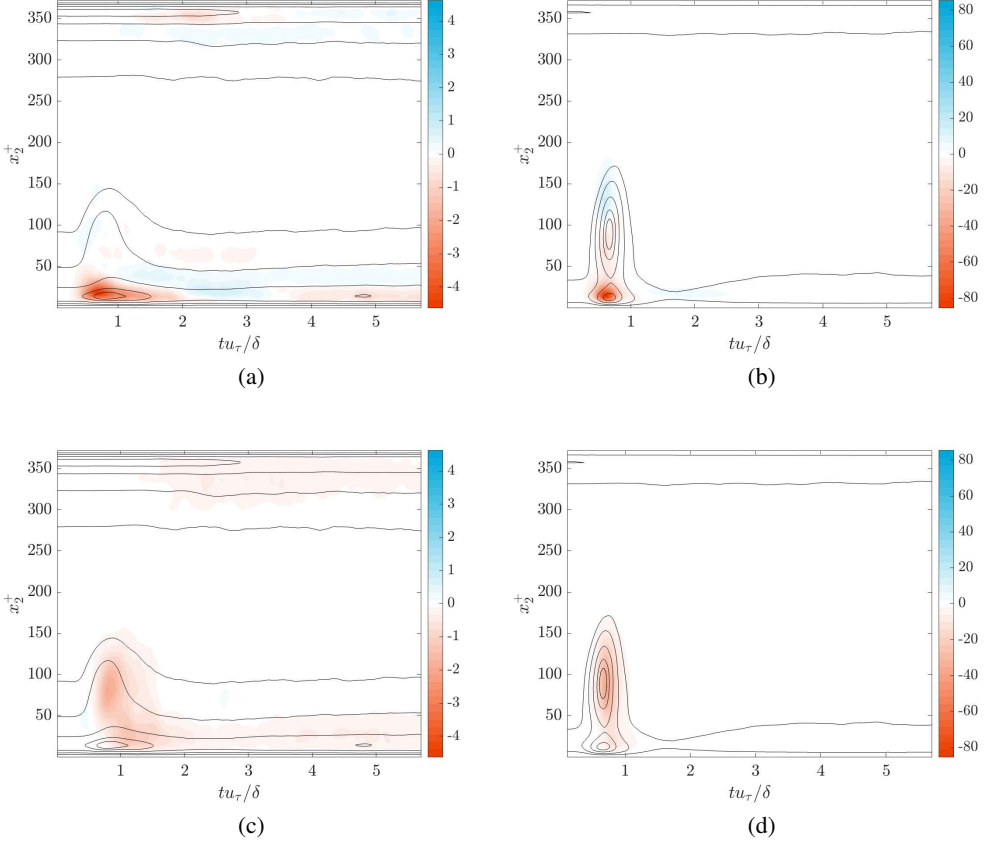


Figure 14: (a, b) $\overline{\Delta \hat{M}^{(0,1)}(0, 2) \delta / u_\tau^3}$ and (c, d) $\overline{\Delta \hat{M}^{(0,1)}(1, 1) \delta / u_\tau^3}$ in the $t - x_2$ plane. The cases plotted are for (a,c) $\gamma = 2\%$ and (b,d) $\gamma = 10\%$. The black lines are contours of $|\hat{u}_1^{(0,1)}|^2 / 2$ and represent 10%, 25%, 50%, 75% and 90% of the maximum value across x_2 and t .

is due to the self-interaction of the actuated mode, and the term $\hat{u}^{(0,-1)}$ is squared in the expression for $\hat{M}^{(0,1)}(0, 2)$ (equation 4.4). This along with the fact that the energy transfer to the $(0, 2)$ -mode is predominant in the near-wall region explains the increased sensitivity of the energy transfer time scale Δt_{trans} to γ for $x_2^+ \leq 25$ (figure 9d). More specifically, a higher of γ disproportionately intensifies the transfer of energy to the $(0, 2)$ -mode, causing the nonlinear transfer of energy near the wall to occur earlier – closer to the focus of $\hat{M}^{(0,1)}(0, 2)$ – and decreasing Δt_{trans} .

4.2. Mechanism of nonlinear energy transfer

To shed light on the mechanism of this nonlinear energy transfer, we split the nonlinear transfer $\hat{M}^{(0,1)}(s_1, s_3)$ into the terms that, respectively, reflect the contributions of the streamwise, spanwise and wall-normal nonlinear advection. Specifically, in order to study the nonlinear energy transfer from a mode (k_1, k_3) due to streamwise nonlinear advection – henceforth referred to as NLT₁ (“NonLinear Transfer, x_1 ”), we define $\hat{M}_1^{(k_1, k_3)}(s_1, s_3)$ as:

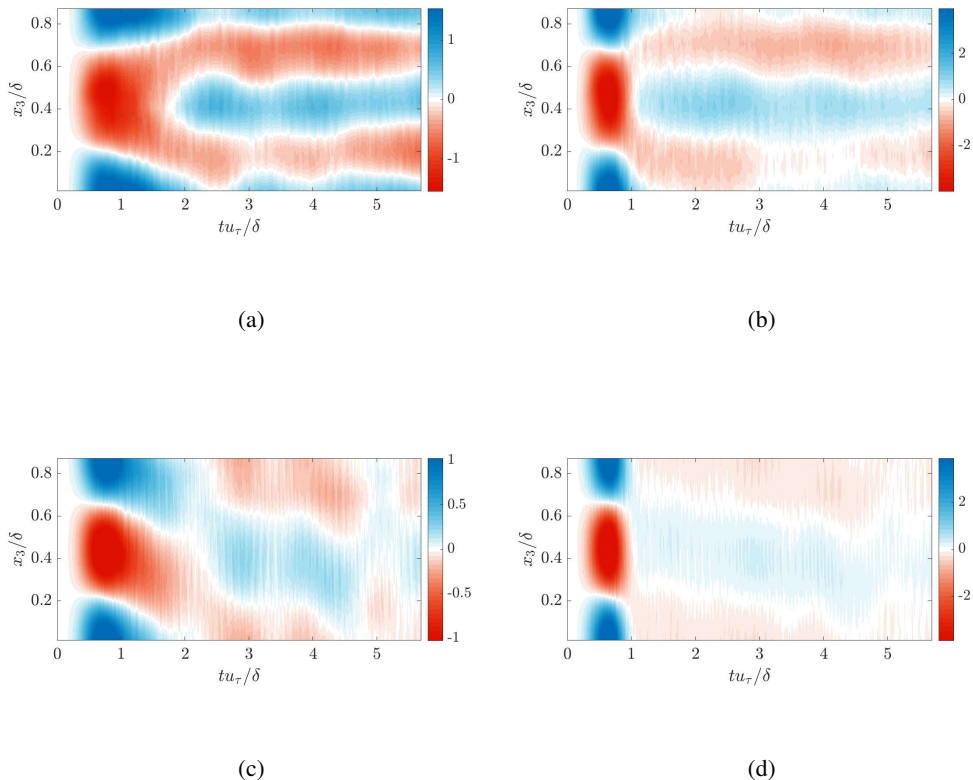


Figure 15: Ensemble-averaged streamwise velocity deviation $\overline{\Delta u_1}$ for (a, c) $\gamma = 2\%$ and (b, d) $\gamma = 10\%$. The results are for $x_1 = 0$ and two wall-normal heights: (a,b) $x_2^+ = 16$ and (c, d) $x_2^+ = 75$. Before ensemble averaging, the $(0, 1)$ -mode for each ensemble member is multiplied by $e^{-iL\kappa}$ to ensure their phase alignment.

$$\hat{M}_1^{(k_1, k_3)}(s_1, s_3) := -2\text{Re} \left\{ \hat{u}_i^{(-k_1, -k_3)} \frac{\widehat{\partial u_i}}{\partial x_1}^{(s_1, s_3)} \hat{u}_1^{(k_1 - s_1, k_3 - s_3)} \right\}. \quad (4.7)$$

We similarly define \hat{M}_2 and \hat{M}_3 to study NLT_2 and NLT_3 , the nonlinear energy transfer due to wall-normal and spanwise gradients self-advection, respectively.

Figure 16 shows that the energy transfer due to the coupling with the spanwise velocity component dominates the total energy transfer to other scales, even before the growth of the injected mode and after the mode completely decays for $tu_\tau/\delta > 2$. During the growth of the injected mode, the NLT_3 term grows significantly more than the transfer due to self-advection in the streamwise and wall-normal directions. This demonstrates the unique role of NLT_3 in transferring energy to secondary scales and restoring the system to its unforced state. This behaviour is consistent across forcing amplitudes, though only $\gamma = 2\%$ and $\gamma = 10\%$ are shown. The dominance of the NLT_3 contributions also holds for the $(0, 2)$ and $(1, 1)$ -modes individually (figures 16c, d). We do note that the NLT_2 is relatively important for the $(0, 2)$ -mode. The induced streak thus tends to shed its energy to secondary modes via spanwise

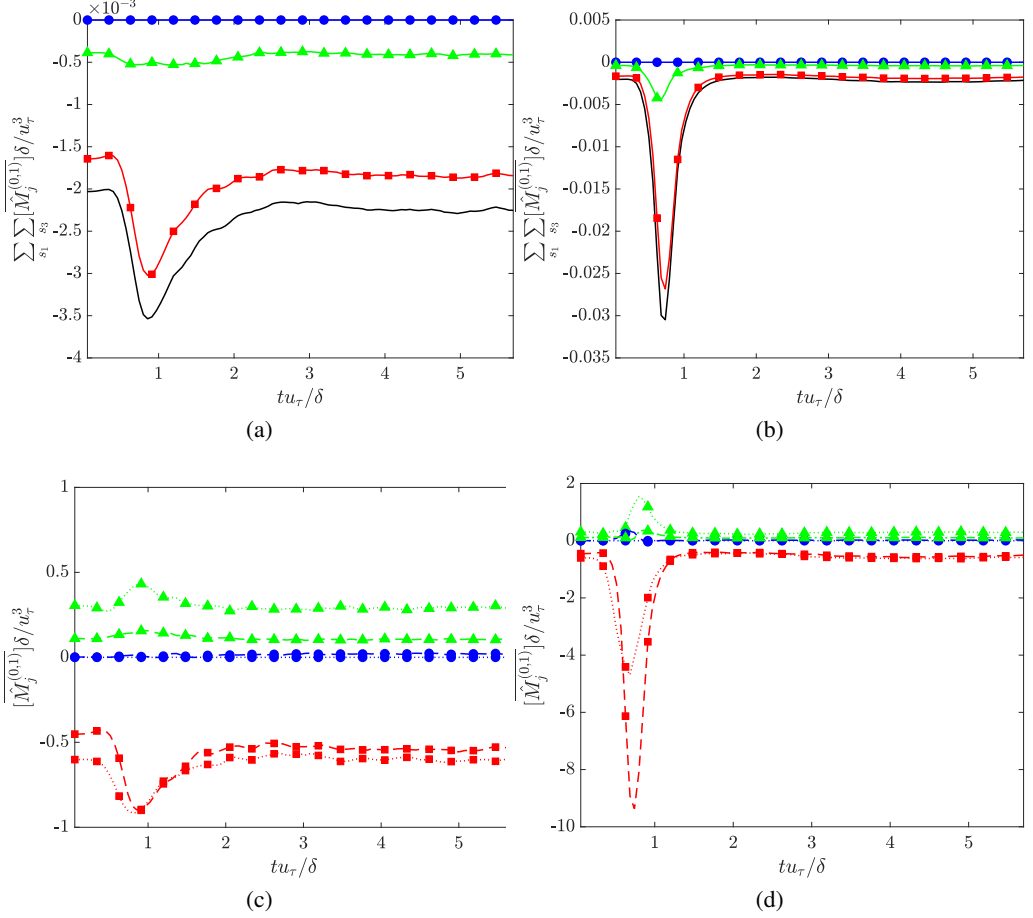


Figure 16: Nonlinear energy transfer from the $(0, 1)$ -mode to unforced modes, broken down by streamwise (blue \bullet), wall-normal (\blacktriangle) and spanwise (\blacksquare) contributions. The cases plotted are (a, c) $\gamma = 2\%$ and (b, d) $\gamma = 10\%$. Plots (a) and (b) represent the contributions to the total nonlinear energy transport from the $(0, 1)$ -mode, with the black line representing the sum of the contributions; plots (c, d) represent the transfer to the $(0, 2)$ - and $(1, 1)$ -modes, denoted by (\cdots) and $(--)$, respectively.

self-advection. We note that these results match those found in Markevičiute & Kerswell (2024), which computes a streak structure via optimal transient growth analysis then studies the growth of secondary instabilities added to the streak. Authors find that suppressing the growth of secondary instabilities, *i.e.* the spanwise advection of the secondary perturbation due to the streak, prevents the growth of these secondary instabilities. Thus, both this work and Markevičiute & Kerswell (2024) agree that coupling via spanwise gradients dominate the interaction between the streak and secondary modes.

Additionally, by considering the wall-normal variations (figure 17), we see that spanwise self-advection is the primary pathway across all wall-normal heights by which the forced $(0, 1)$ -mode sheds its energy. This is consistent across all forcing magnitudes, though only the cases for $\gamma = 2\%$ and $\gamma = 10\%$ are shown. For the lightly forced case $\gamma = 2\%$, we do note a significant NLT_2 contribution at $x_2^+ \approx 18$, (figure 17 a), but as γ increases, the NLT_2 contribution is quickly overtaken by the NLT_3 . We note that $x_2^+ \approx 18$ corresponds to the section of the wall-normal grid dominated by the transfer to the $(0, 2)$ -mode, *i.e.* the triadic

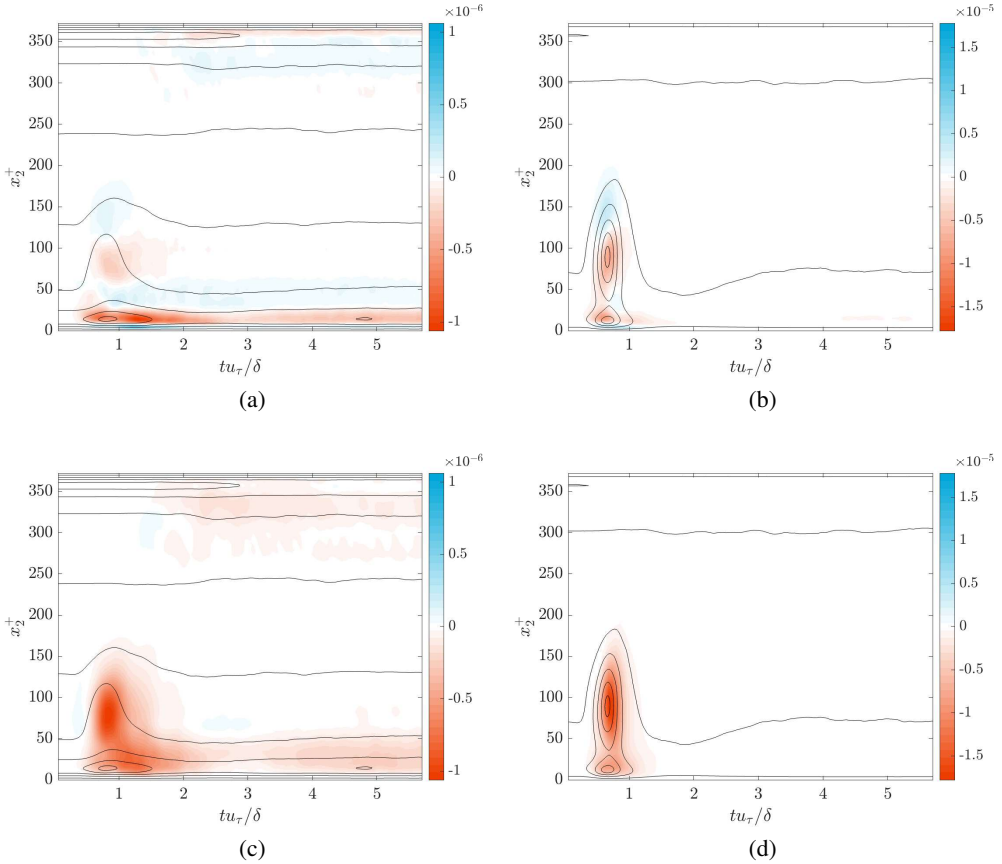


Figure 17: Nonlinear energy transfer from the $(0, 1)$ -mode split by NLT_2 and NLT_3 contributions: (a, b) $\Delta\hat{M}_2^{(0,1)}\delta/u_\tau^3$ and (c, d) $\Delta\hat{M}_3^{(0,1)}\delta/u_\tau^3$. The cases shown are for (a,c)

$\gamma = 2\%$ and (b,d) $\gamma = 10\%$. The black lines are contours of $|\hat{u}_1^{(0,1)}|^2/2$ and represent 10%, 25%, 50%, 75% and 90% of the maximum value across x_2 and t .

interaction most sensitive to γ due to the self-interaction of the actuated mode. The growth of secondary instabilities due to push-over occurs locally at both foci of nonlinear energy transfer, and both the $(1, 1)$ - and $(0, 2)$ -modes benefit from this energy transfer mechanism.

4.3. Quasi-linear approximation

In this section, we seek to determine whether the instantaneous behaviours of the nonlinear energy transfer can be simply modelled by the interactions of the principal response mode with the "background" turbulence – that is, the turbulence frozen in its state at $t = 0$. By neglecting subsequent nonlinear feedback, the velocity field after the injection of the mode can be represented as $\mathbf{u}_\psi := \mathbf{u}_0 + \kappa\sigma_1\psi_1\exp(i2\pi/L_3) + \kappa^*\sigma_1\psi_1^*\exp(-i2\pi/L_3)$. Using this field, we define the following nonlinear energy transfer term for the quasi-linear field analogously to equation (4.4):

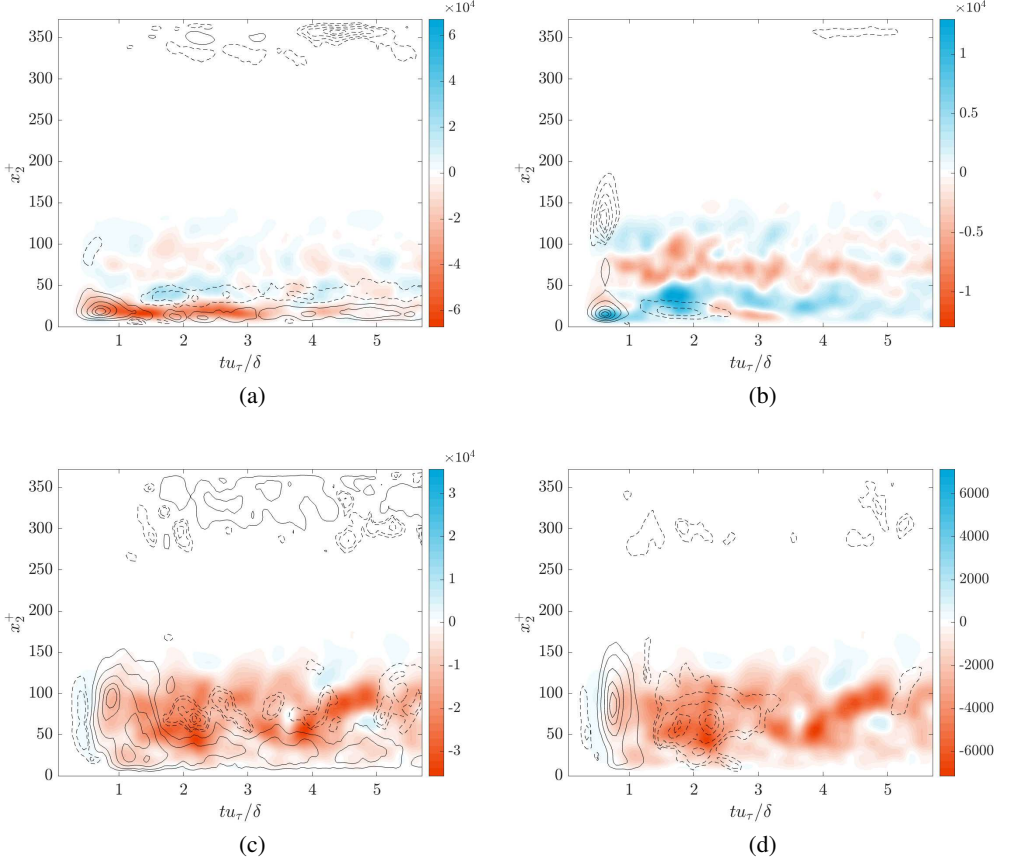


Figure 18: Quasi-linear approximation $\tilde{M}^{(0,1)}$ for the nonlinear energy transfer from the $(0, 1)$ -mode, normalised by the forcing magnitude $|\kappa|^2$. Figures (a) and (b) correspond to the transfer to the $(0, 2)$ -mode, and figures (c) and (d) correspond to the transfer to the $(1, 1)$ -mode. The cases plotted are for (a, c) $\gamma = 2\%$ and (b, d) $\gamma = 10\%$. The black lines represent contours of $\tilde{M}^{(0,1)}$ and correspond to 10%, 25%, 50%, 75% and 90% of the minimum (most negative) value (—), or 10%, 25%, 50%, 75% and 90% of the maximum (most positive) value (---).

$$\tilde{M}^{(k_1, k_3)}(s_1, s_3) := -2\text{Re} \left\{ \hat{u}_{\psi, i}^{(-k_1, -k_3)} \frac{\partial \widehat{u}_{\psi, i}^{(s_1, s_3)}}{\partial x_j} \hat{u}_{\psi, j}^{(k_1 - s_1, k_3 - s_3)} \right\} \quad (4.8)$$

where $u_{\psi, i}$ is the i^{th} component of \mathbf{u}_ψ . This term captures the nonlinear energy transfer from the (k_1, k_3) -mode to the (s_1, s_3) -mode due to interactions of the injected mode with the background turbulence and ignoring the self-interactions of \mathbf{u}_ψ at every time-step. We can thus view the term $\tilde{M}^{(k_1, k_3)}$ as a quasi-linear model of the nonlinear energy transfer. We define the quantities representing the NLT_1 , NLT_2 and NLT_3 contributions for the \mathbf{u}_ψ field

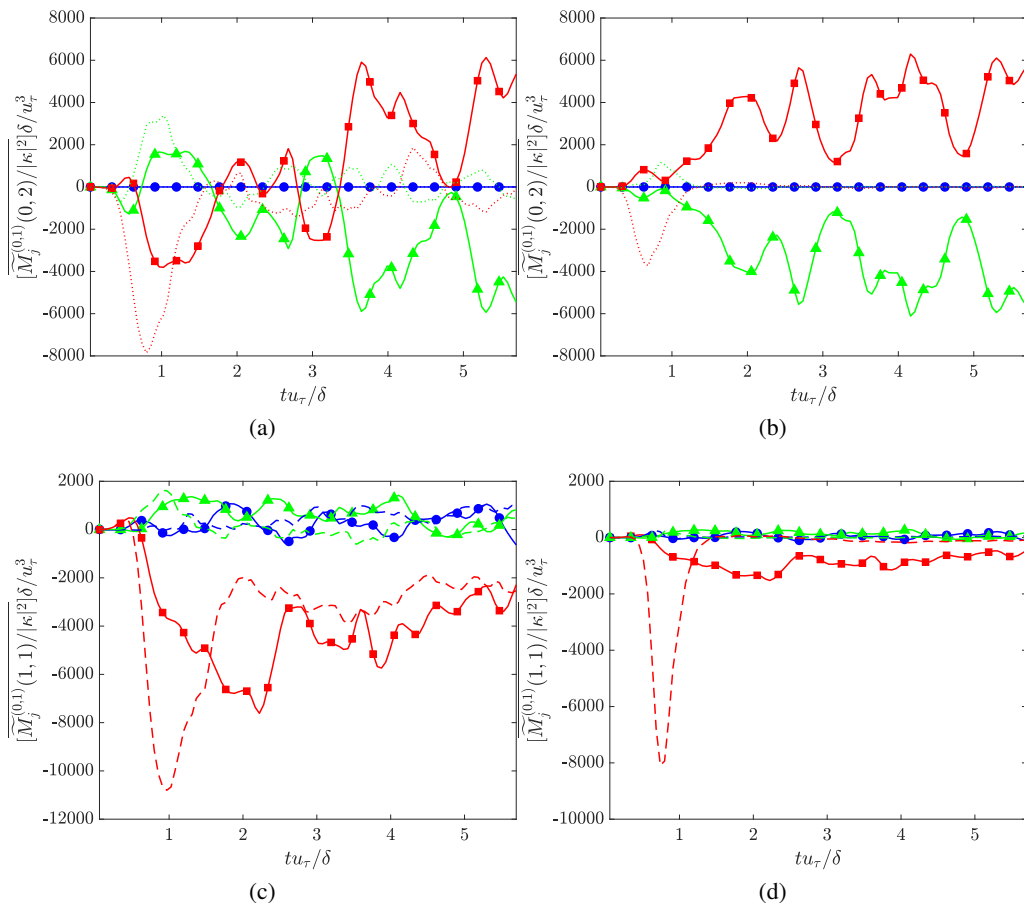


Figure 19: Nonlinear energy transport from the (0, 1)–mode to the (a, b) (0, 2)–mode and the (c, d) (1, 1)–mode, broken down by streamwise (blue \bullet), wall-normal (green \blacktriangle) and spanwise (red \blacksquare) contributions, and normalised by forcing magnitude. The solid lines correspond to the nonlinear energy transfer in the quasi-linear model $[\widetilde{M}_j^{(0,1)}]/|\kappa|^2$, while the dashed or dotted lines correspond to $[\widehat{M}_j^{(0,1)}]/|\kappa|^2$, the results from DNS (also shown in figure 16). The cases plotted are (a, c) $\gamma = 2\%$ and (b, d) $\gamma = 10\%$.

as:

$$\widetilde{M}_1^{(k_1, k_3)}(s_1, s_3) := -2\text{Re} \left\{ \widehat{u}_{\psi, i}^{(-k_1, -k_3)} \frac{\widehat{\partial u_{\psi, i}}^{(s_1, s_3)}}{\partial x_1} \widehat{u}_{\psi, 1}^{(k_1 - s_1, k_3 - s_3)} \right\}. \quad (4.9)$$

We respectively dub these terms QLT₁, QLT₂ and QLT₃ (“QuasiLinear Transfer, x_i ”) to distinguish them from NLT₁, NLT₂ and NLT₃. Figure 18 shows the quasi-linear estimates for the nonlinear energy transfer to the (0, 2)– and (1, 1)–modes, normalised by forcing amplitude. For the lightly forced case of $\gamma = 2\%$ (figures 18(a, c)), the quasi-linear predictions for both the (0, 2)– and (1, 1)– modes initially match the DNS results, especially for $t < 1\delta/u_\tau$. For $\gamma = 10\%$, the quasi-linear interactions do not match the DNS. Nevertheless, the region of energy loss to the (1, 1)–mode is well predicted by $\widetilde{M}^{(0,1)}$ across all forcing amplitudes.

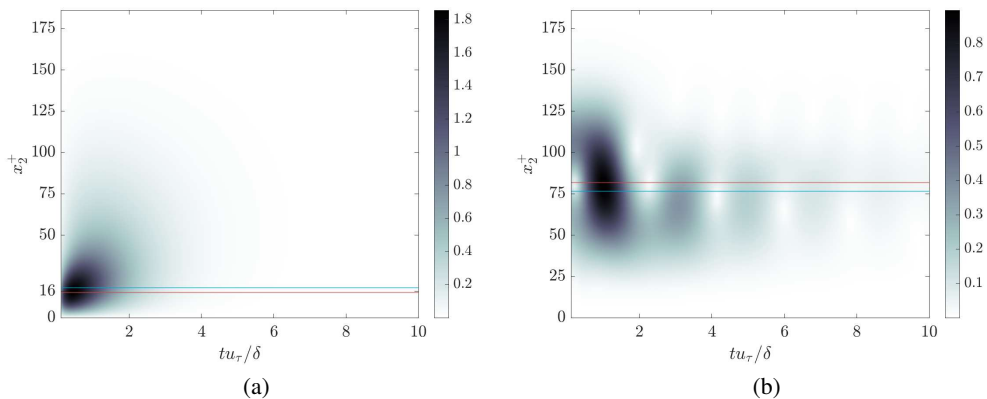


Figure 20: Magnitude of the streamwise component of the principal resolvent response modes for (a) $(k_1, k_3) = (0, 2)$ and (b) $(k_1, k_3) = (1, 1)$. The modes are normalised so that their action pseudo-norm is 1. The horizontal lines represent the peak location of (a) $\hat{M}^{(0,1)}(0, 2)$ and (b) $\hat{M}^{(0,1)}(1, 1)$ for $\gamma = 2\%$ (blue) and $\gamma = 10\%$ (red).

In figure 19, we observe the quasi-linear estimates of the QLT_1 , QLT_2 and QLT_3 contributions. We see that the quasi-linear estimates for the transfer to mode $(0, 2)$ can roughly predict a strongly negative QLT_3 component for the lightly forced system at early times, but fail to do so for later times. For large forcing amplitudes, the quasi-linear mode performs poorly for all times, and even reverses the observed trends for the QLT_2 and QLT_3 components of the nonlinear transfer. This suggests that the growth of the $(0, 2)$ -mode cannot be explained by the instantaneous nonlinear interaction of the streak with the background turbulence. In the near-wall region where streak splitting occurs, we suspect that other transient mechanisms dominate the energy growth of mode $(0, 2)$, such as linearly driven transient algebraic growth, which is responsible for amplifying the injected resolvent mode at early times. In contrast, the quasi-linear estimates for the transfer to mode $(1, 1)$ qualitatively match the behaviour of the DNS and reveal a strongly negative QLT_3 contribution and a weakly positive QLT_2 contribution. Outside the buffer layer, the instantaneous nonlinear interactions between the target $(0, 1)$ -mode and the background turbulence can qualitatively explain the streak break-up. For better quantitative accuracy, we suspect that transient growth effects are also important in the outer region.

In addition to studying the interaction of the transiently growing $(0, 1)$ -mode with the background turbulence, we consider the linear optimal growth of the $(0, 2)$ - and $(1, 1)$ -modes. We repeat the wavelet-based resolvent analysis described in §2.2 but with spatial parameters $(k_1, k_3) = (0, 2)$ and $(k_1, k_3) = (1, 1)$. We use the same spatial grid and choose $T = 44\delta/u_\tau$ to allow the modes ample time to decay to zero, which occurs at $tu_\tau/\delta \approx 20$. The size of the temporal grid is chosen to be $N_t = 880$. Despite the fact that resolvent analysis captures a purely linear process, the x_2 -location preferred by the principal resolvent response for $(k_1, k_3) = (0, 2)$ and $(k_1, k_3) = (1, 1)$ coincide with the foci of nonlinear interaction between the $(0, 1)$ -mode, and the $(0, 2)$ - and $(1, 1)$ -modes, respectively (figure 20). The resolvent modes, which capture the maximal linear growth of the two scales considered, accurately predicts the locations of energy exchange with the actuated mode, and thus, transient growth via linear mechanisms can dictate the spatial structure of the nonlinear energy cascade. Moreover, we observe that the principal resolvent response mode for $(k_1, k_3) =$

$(0, 2)$ grows faster than the mode for $(k_1, k_3) = (1, 1)$, peaking earlier, which may explain the earlier peaks of $\hat{M}^{(0,1)}(0, 2)$ compared to $\hat{M}^{(0,1)}(1, 1)$ (figure 12).

The results in figure 20 support works like Huang *et al.* (2023), which studies the efficacy of individual dyadic interactions at exciting an energetic scale in the channel. The influence of individual dyadic contributions to the nonlinear term of the Navier-Stokes equations is measured via the projection of the contributions onto the principal resolvent forcing mode for the scale of interest, and dyadic interactions highly aligned with the forcing mode are deemed important contributors to turbulence. The underpinning assumption is that the response mode corresponding to the forcing mode indeed capture the behaviour of turbulence in the channel, which figure 20 suggests is true, even for secondary scales like the $(0, 2)$ - and $(1, 1)$ -modes. Figure 20 also helps explain the success of restricted nonlinear (RNL) models at replicating turbulent statistics (Thomas *et al.* 2014; Farrell *et al.* 2017; Gayme & Minnick 2019). In RNL models, the mean profile is governed by a modified version of the fully nonlinear Navier-Stokes equations where only a reduced subset of fluctuation scales contribute to the nonlinear advection terms, while the fluctuations obey the linearised Navier-Stokes equations about the mean profile. The location of the modes in figure 20 indeed suggest that linear mechanisms are enough to at least predict the correct spatial distribution of the nonlinear energy transfer to the two most important secondary modes involved in the energy cascade in this experiment.

5. Conclusions

In this work, we study the growth of time-localised resolvent modes in the minimal flow unit at $Re_\tau \approx 186$. We formulated resolvent analysis in a wavelet-basis in time that endows the resolvent modes with transient information, and obtained a linearly optimal time-localised forcing mode and its corresponding transient response mode.

Resolvent analysis ignores the feedback between the velocity fluctuations and the nonlinear terms; we thus tested the optimality of the resolvent forcing within a DNS of a minimal flow unit by numerically injecting the principal resolvent forcing mode into the flow at varying amplitudes. This allowed us to investigate the interactions between the transiently growing linear response mode and the nonlinear effects of the turbulent flow. We compared the resulting flow to one forced by the first suboptimal forcing mode and another forced by a spatially-random forcing. The principal resolvent forcing produces a larger transient energy growth than the suboptimal mode, but the energy amplification is notably lower in both cases compared to the linearised case. Both systems were significantly more amplified than the random forcing case. In all cases, despite the fact that the injected forcing term is small compared to the initial nonlinearities, the amplification of the velocity perturbation due to linear mechanisms is significant enough that the simulated fields tracks the optimal linear response for a short time.

The nonlinearities of turbulence interrupt the initial algebraic energy growth driven by the linear dynamics of the flow. This is seen in all cases forced by the principal resolvent mode, and the amplitude of the resolvent forcing affects how closely the turbulent trajectory behaves like the optimal resolvent response mode. Across all forcing amplitudes, the initial growth phase is similar, and the systems peak at roughly the same time, but, the higher the forcing amplitude, the faster the decay of the system back to the unforced turbulent system. The more intense turbulence in the high-amplitude-forcing cases are more effective at damping the effects of the initial forcing. We observe that the forced DNS flow fields are closer to the resolvent response mode in the near-wall region, where viscous effects are more prominent. During the decay of the streak decays, the spectral energy content of the simulations becomes increasingly multi-scale due to a transfer of energy to the non-forced

spatial scales. This cross-scale energy transfer is more prominent and occurs faster for the high-amplitude-forcing cases.

Nonlinear effects lead to streak breakdown, and by considering the nonlinear energy transfer from the induced streak to the non-actuated modes, two secondary modes are found to play a dominant role in draining the streak of its energy and curtailing its growth. The first mode, constant in the streamwise direction and twice periodic in the spanwise direction, corresponds to a splitting of the streak into two branches and dominates the energy transfer in the near-wall region, including the buffer layer. The second, once periodic in the streamwise and spanwise directions, corresponds to a streamwise break-up of the streak and dominates the energy transfer in the outer region. The branching mode receives energy from the actuated mode via the self-interaction of the injected streak, which explains the particular sensitivity of the near-wall region to forcing amplitude. Though a larger forcing amplitude accelerates the energy transfer from the actuated mode to smaller scales across all wall-normal heights, this effect is indeed more prominent in near the wall than in the outer region.

The streak interacts with these secondary modes mostly through an NLT_3 type energy transfer, *i.e.* via the spanwise nonlinear self-advection term. We model the predicted nonlinear energy transfer by computing the interaction of the injected streak with the background turbulence of the initial conditions used, and find that these one-way interactions generally predict the trends for the streak breakup that dominates in the outer region. This crude model cannot, however, predict the dominance of the NLT_3 contribution that occurs during the streak splitting near the wall. We postulate that in the near-wall region and the buffer layer, transient growth phenomena are necessary to explain the behaviour of the $(0, 2)$ -mode. We compute the transiently growing principal resolvent modes for the two preferred secondary scales, and find that they are located exactly at the foci of nonlinear energy exchange with the actuated scale. The structures found using resolvent analysis predict the x_2 -distribution of the nonlinear energy transfer to the $(0, 2)$ - and $(1, 1)$ -modes in the nonlinear DNS, further proving that resolvent modes can be informative of turbulent flows despite using the linearised equations of motion.

Testing the effectiveness of the principal resolvent forcing mode reveals valuable insights on the stability of the streak, the mechanism by which it sheds energy, and the sensitivity of this nonlinear energy transfer mechanism to forcing amplitude. To find structures more effective than the resolvent forcing mode at actuating the minimal flow unit, one could use nonlinear optimisation techniques (Kerswell 2018; Heide & Hemati 2023). These broadly aim to maximise the growth of kinetic energy within a user-defined time window, and enforce the satisfaction of the (nonlinear) Navier-Stokes equations as an optimisation constraint. Nevertheless, an important advantage of wavelet-based resolvent analysis is its computational efficiency and tractability.

6. Acknowledgments

This work is supported in part by the European Research Council under the Caust grant ERC-AdG-101018287 and AFOSR grant FA9550-22-1-0109.

REFERENCES

- ADRIAN, R. J. 2007 Hairpin vortex organization in wall turbulence. *Phys. Fluids* **19** (4).
- BAE, H. J., LOZANO-DURÁN, A., BOSE, S. T. & MOIN, P. 2019 Dynamic slip wall model for large-eddy simulation. *J. Fluid Mech.* **859**, 400–432.
- BAE, H. J., LOZANO-DURÁN, A., BOSE, S. T. & MOIN, P. 2018 Turbulence intensities in large-eddy simulation of wall-bounded flows. *Phys. Rev. Fluids* **3** (1), 014610.

- BAE, H. J., LOZANO-DURÁN, A. & McKEON, B. J. 2021 Nonlinear mechanism of the self-sustaining process in the buffer and logarithmic layer of wall-bounded flows. *J. Fluid Mech.* **914**, A3.
- BAKEWELL JR., H. P. & LUMLEY, J. L. 1967 Viscous sublayer and adjacent wall region in turbulent pipe flow. *Phys. Fluids* **10** (9), 1880–1889.
- BALLOUZ, E., DAWSON, S. T. M. & BAE, H. J. 2024a Transient growth of wavelet-based resolvent modes in the buffer layer of wall-bounded turbulence. In *J. Phys.: Conference Series*, , vol. 2753, p. 012002. IOP Publishing.
- BALLOUZ, E., LOPEZ-DORIGA, B., DAWSON, S. T. & BAE, H. J. 2023 Wavelet-based resolvent analysis for statistically-stationary and temporally-evolving flows. In *AIAA SCITECH 2023 Forum*, p. 0676.
- BALLOUZ, E., LOPEZ-DORIGA, B., DAWSON, S. T. M. & BAE, H. J. 2024b Wavelet-based resolvent analysis of non-stationary flows. *J. Fluid Mech.* **999**, A53.
- BLACKWELDER, R. F. & ECKELMANN, H. 1979 Streamwise vortices associated with the bursting phenomenon. *J. Fluid Mech.* **94** (3), 577–594.
- BUTLER, K. M. & FARRELL, B. F. 1993 Optimal perturbations and streak spacing in wall-bounded turbulent shear flow. *Phys. Fluids A* **5** (3), 774–777.
- CHERNYSHENKO, S. I. & BAIG, M. F. 2005 The mechanism of streak formation in near-wall turbulence. *J. Fluid Mech.* **544**, 99–131.
- CHO, M., HWANG, Y. & CHOI, H. 2018 Scale interactions and spectral energy transfer in turbulent channel flow. *J. Fluid Mech.* **854**, 474–504.
- DAUBECHIES, I. 1992 *Ten lectures on wavelets*. SIAM.
- DEL ALAMO, J. C. & JIMÉNEZ, J. 2006 Linear energy amplification in turbulent channels. *J. Fluid Mech.* **559**, 205–213.
- DING, JITONG, CHUNG, DANIEL & ILLINGWORTH, SIMON J 2025 Mode-to-mode nonlinear energy transfer in turbulent channel flows. *Journal of Fluid Mechanics* **1002**, A42.
- ELNAHHAS, A., LENZ, E., MOIN, P., LOZANO-DURÁN, A. & BAE, H. J. 2024 Are the dynamics of wall turbulence in minimal channels and larger domain channels equivalent? A graph-theoretic approach. *J. Phys.: Conf. Ser.* **2753**, 012004.
- ENCINAR, M. P. & JIMÉNEZ, J. 2020 Momentum transfer by linearised eddies in turbulent channel flows. *J. Fluid Mech.* **895**, A23.
- FARRELL, B. F., GAYME, D. F. & IOANNOU, P. J. 2017 A statistical state dynamics approach to wall turbulence. *Phil. Trans. R. Soc. A* **375** (2089), 20160081.
- GAYME, D. F. & MINNICK, B. A. 2019 Coherent structure-based approach to modeling wall turbulence. *Phys. Rev. Fluids* **4** (11), 110505.
- HAMILTON, J. M., KIM, J. & WALEFFE, F. 1995 Regeneration mechanisms of near-wall turbulence structures. *J. Fluid Mech.* **287**, 317–348.
- HEIDE, A. L. & HEMATI, M. S. 2023 An optimization framework for analyzing nonlinear stability due to sparse finite-amplitude perturbations. In *AIAA AVIATION 2023 Forum*, p. 4258.
- HUANG, Y., TOEDTL, S. S., CHINI, G. P. & McKEON, B. J. 2023 Spatio-temporal characterization of non-linear forcing in turbulence. *arXiv preprint arXiv:2305.00095* .
- HWANG, Y. & COSSU, C. 2010 Self-sustained process at large scales in turbulent channel flow. *Phys. Rev. Lett.* **105** (4), 044505.
- JEUN, J., NICHOLS, J. W. & JOVANOVIĆ, M. R. 2016 Input-output analysis of high-speed axisymmetric isothermal jet noise. *Phys. Fluids* **28** (4), 047101.
- JIMÉNEZ, J. 2013 How linear is wall-bounded turbulence? *Phys. Fluids* **25** (11).
- JIMÉNEZ, J. 2018 Coherent structures in wall-bounded turbulence. *J. Fluid Mech.* **842**, P1.
- JIMÉNEZ, J. & MOIN, P. 1991 The minimal flow unit in near-wall turbulence. *J. Fluid Mech.* **225**, 213–240.
- JOHANSSON, A. V., HER, J.-Y. & HARITONIDIS, J. H 1987 On the generation of high-amplitude wall-pressure peaks in turbulent boundary layers and spots. *J. Fluid Mech.* **175**, 119–142.
- KERSWELL, R. R. 2018 Nonlinear nonmodal stability theory. *Ann. Rev. Fluid Mech.* **50** (1), 319–345.
- KIM, H. T., KLINE, S. J. & REYNOLDS, W. C. 1971 The production of turbulence near a smooth wall in a turbulent boundary layer. *J. Fluid Mech.* **50** (1), 133–160.
- KIM, J. & MOIN, P. 1985 Application of a fractional-step method to incompressible Navier-Stokes equations. *J. Comput. Phys.* **59** (2), 308–323.
- KLEBANOFF, P. S., TIDSTROM, K. D. & SARGENT, L. M. 1962 The three-dimensional nature of boundary-layer instability. *J. Fluid Mech.* **12** (1), 1–34.

- KLINE, S. J., REYNOLDS, W. C., SCHRAUB, F. A. & RUNSTADLER, P. W. 1967 The structure of turbulent boundary layers. *J. Fluid Mech.* **30** (4), 741–773.
- KOJIMA, Y., YEH, C., TAIRA, K. & KAMEDA, M. 2020 Resolvent analysis on the origin of two-dimensional transonic buffet. *J. Fluid Mech.* **885**, R1.
- LANDAHL, M. T. 1980 A note on an algebraic instability of inviscid parallel shear flows. *J. Fluid Mech.* **98** (2), 243–251.
- LIN, C.-T., TSAI, M.-L. & TSAI, H.-C. 2023 Flow control of a plunging cylinder based on resolvent analysis. *J. of Fluid Mech.* **967**, A41.
- LIU, Q., SUN, Y., YEH, C.-A., UKEILEY, L. S., CATTAFESTA III, L. N. & TAIRA, K. 2021 Unsteady control of supersonic turbulent cavity flow based on resolvent analysis. *J. Fluid Mech.* **925**, A5.
- LÓPEZ-DORIGA, B., BALLOUZ, E., BAE, H. J. & DAWSON, S. T. M. 2023 A sparsity-promoting resolvent analysis for the identification of spatiotemporally-localized amplification mechanisms. In *AIAA SCITECH 2023 Forum*, p. 0677.
- LÓPEZ-DORIGA, B., BALLOUZ, E., BAE, H. J. & DAWSON, S. T. M. 2024 Sparse space–time resolvent analysis for statistically stationary and time-varying flows. *J. Fluid Mech.* **999**, A87.
- LOZANO-DURÁN, A. & BAE, H. J. 2016 Turbulent channel with slip boundaries as a benchmark for subgrid-scale models in les. *Annual Research Briefs. Center for Turbulence Research* **2016**, 97–103.
- LOZANO-DURÁN, A., CONSTANTINOU, N. C., NIKOLAIDIS, M.-A. & KARP, M. 2021 Cause-and-effect of linear mechanisms sustaining wall turbulence. *J. Fluid Mech.* **914**, A8.
- MALLAT, S. 1999 *A wavelet tour of signal processing*. Elsevier.
- MARKEVICIUTE, V. K. & KERSWELL, R. R. 2024 Threshold transient growth as a criterion for turbulent mean profiles. *J. Fluid Mech.* **996**, A32.
- McKEON, B. J. 2017 The engine behind (wall) turbulence: perspectives on scale interactions. *J. Fluid Mech.* **817**, P1.
- McKEON, B. J. & SHARMA, A. S. 2010 A critical-layer framework for turbulent pipe flow. *J. Fluid Mech.* **658**, 336–382.
- MOARREF, R., SHARMA, A. S., TROPP, J. A. & McKEON, B. J. 2013 Model-based scaling of the streamwise energy density in high-Reynolds-number turbulent channels. *J. Fluid Mech.* **734**, 275–316.
- NAJMI, A.-H. 2012 *Wavelets: A concise guide*. JHU Press.
- ORLANDI, P. 2000 Fluid flow phenomena: a numerical toolkit **55**.
- ORR, W. M. F. 1907 The stability or instability of the steady motions of a perfect liquid and of a viscous liquid. Part II: A viscous liquid **27**, 69–138.
- PANTON, R. L. 2001 Overview of the self-sustaining mechanisms of wall turbulence. *Prog. Aerosp. Sci.* **37** (4), 341–383.
- PUJALS, G., GARCÍA-VILLALBA, M., COSSU, C. & DEPARDON, S. 2009 A note on optimal transient growth in turbulent channel flows. *Phys. Fluids* **21** (1), 015109.
- ROBINSON, S. K. 1991 Coherent motions in the turbulent boundary layer. *Annu. Rev. Fluid Mech.* **23** (1), 601–639.
- SCHMID, P. J., HENNINGSON, D. S. & JANKOWSKI, D. F. 2002 Stability and transition in shear flows. applied mathematical sciences, vol. 142. *Appl. Mech. Rev.* **55** (3), B57–B59.
- SMITH, C. R. & METZLER, S. P. 1983 The characteristics of low-speed streaks in the near-wall region of a turbulent boundary layer. *J. Fluid Mech.* **129**, 27–54.
- SMITS, A. J., McKEON, B. J. & MARUSIC, I. 2011 High-Reynolds number wall turbulence. *Annu. Rev. Fluid Mech.* **43**, 353–375.
- SYMON, S., ILLINGWORTH, S. J. & MARUSIC, I. 2021 Energy transfer in turbulent channel flows and implications for resolvent modelling. *J. Fluid Mech.* **911**, A3.
- THOMAS, V. L., LIEU, B. K., JOVANOVIĆ, M. R., FARRELL, B. F., IOANNOU, P. J. & GAYME, D. F. 2014 Self-sustaining turbulence in a restricted nonlinear model of plane Couette flow. *Phys. Fluids* **26** (10).
- TOEDTLI, S. S., LUHAR, M. & McKEON, B. J. 2019 Predicting the response of turbulent channel flow to varying-phase opposition control: resolvent analysis as a tool for flow control design. *Phys. Rev. Fluids* **4** (7), 073905.
- WRAY, A. A. 1990 Minimal storage time advancement schemes for spectral methods. *NASA Ames Research Center, California, Report No. MS 202*.
- YEH, C.-A. & TAIRA, K. 2019 Resolvent-analysis-based design of airfoil separation control. *J. Fluid Mech.* **867**, 572–610.