

# Exploring Textual Semantics Diversity for Image Transmission in Semantic Communication Systems using Visual Language Model

Peishan Huang, Dong Li, *Senior Member, IEEE*

**Abstract**—In recent years, the rapid development of machine learning has brought reforms and challenges to traditional communication systems. Semantic communication has appeared as an effective strategy to effectively extract relevant semantic signals semantic segmentation labels and image features for image transmission. However, the insufficient number of extracted semantic features of images will potentially result in a low reconstruction accuracy, which hinders the practical applications and still remains challenging for solving. In order to fill this gap, this letter proposes a multi-text transmission semantic communication (Multi-SC) system, which uses the visual language model (VLM) to assist in the transmission of image semantic signals. Unlike previous image transmission semantic communication systems, the proposed system divides the image into multiple blocks and extracts multiple text information from the image using a modified large language and visual assistant (LLaVA), and combines semantic segmentation tags with semantic text for image recovery. Simulation results show that the proposed text semantics diversity scheme can significantly improve the reconstruction accuracy compared with related works.

**Index Terms**—Image transmission, semantic communication, Visual Language Models (VLM), Large Language and Vision Assistant (LLaVA), image segmentation.

## I. INTRODUCTION

WITH the rapid development of communication technology at an ever increasing data rate, traditional syntactic information compression and propagation have approached the limitations of Shannon Capacity [1]. However, the emergence of semantic communication has brought the communication system beyond the boundaries of traditional communication, which focus more on the restoration of semantic information from the transmitter to the receiver. For instance, when propagating high-quality images, traditional methods will require a large amount of resource consumption to convey the entire image. However, using natural language processing and computer vision algorithms to extract semantic features for image transmission will reduce the resource consumption to a certain extent and realize the image transmission process.

For semantic communication with image transmission, there have been a large number of works that have been paid attention to the joint source and channel encoding design, and there is an increasing interest in the generative image recovery. In particular, the language model has received a lot of attention, which can extract the textual semantic information of images

and thus reduce the amount of information for transmission. Current research on textual semantic information for image recovery can be divided into two categories, one is utilized for image recovery [2]–[4], and the other one supervises the image recovery [5]. In [2], large language models was introduced into semantic communication systems to extract textual information and selectively transmit portrait segments of images. Although this approach can reduce the transmission of information to some extent, the system still faces a significant data burden when dealing with multiple portraits or large objects. In [3], a new method was introduced to extract text information from images using a text-image model. The image was then reconstructed using this information, and a transformer-based text encoding and decoding model was designed to improve the robustness of text transmission over a noisy channel. In [4], a new cross-modal semantic communication system based on a visual language model was proposed. This system utilized the Bootstrapping Language-Image Pretraining (BLIP) model to extract text semantics at the transmitter and reconstructed the image using the SD model at the receiver end. Although the text information can effectively reduce the amount of transmitted data, relying solely on the plain text will reduce the accuracy of reconstructed images. On the other hand, in [5], a new method was proposed to extract both textual and image semantics at the transmitter, and the image semantics were used for image recovery and the textual semantics supervised and selected the most accurate generative image based on the generation and selection mechanism proposed in [6].

In this letter, we focus on using the textual semantic information to recover the image. Note that, the reconstruction accuracy of images is affected by the inherent randomness of the image generation model, and reducing the randomness is the focus of the previous works, which, however, is constrained by the limited textual semantic information. Thus, a nature question arises on how to explore more textual semantics for more accurate image recovery. In this regard, we propose a new scheme by exploring textual semantics diversity from multiple segmented parts of the image. Specifically, the contributions of this letter is summarized as

- We propose a multi-text transmission semantic communication (Multi-SC) system, where we adopt the Large Language and Vision Assistant (LLaVA) model [7] to extract the text information from the image and transmit both text and image embeddings to complete the image transmission process.

The authors are with the School of Computer Science and Engineering, Macau University of Science and Technology, Macau, China. (e-mails: 3220006969@student.must.edu.mo; dli@must.edu.mo). (*Corresponding author: Dong Li.*)

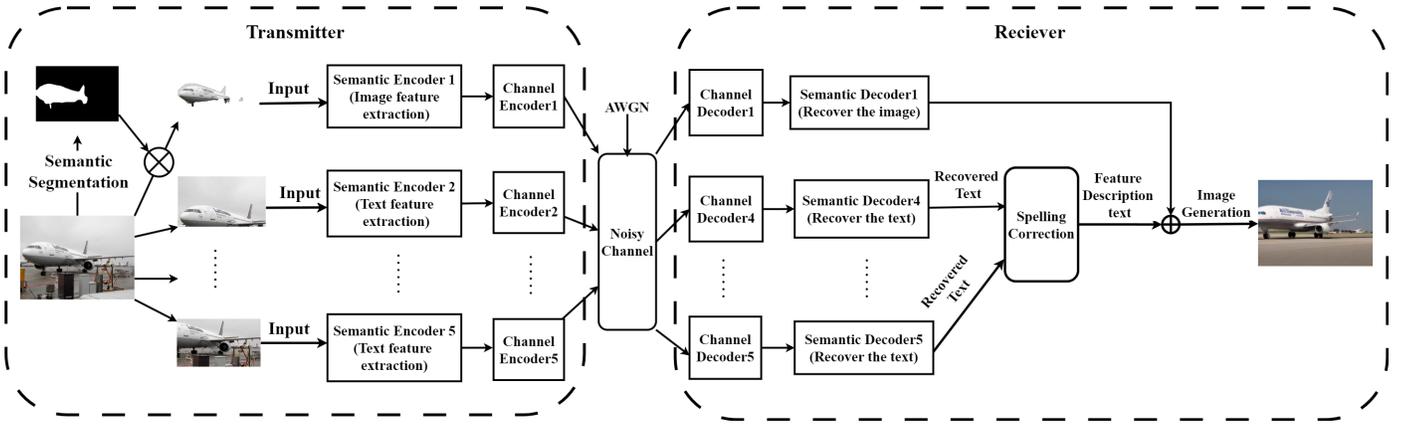


Fig. 1. The framework of multi-text enabled image transmission semantic communication system.

- We introduce a semantic segmentation module at the transmitter, which segments the main body of the image and performs embedding encoding. The receiver includes a text processing module to purify the text embedding contaminated by the channel noise (e.g., correcting spelling errors), thereby reconstructing the image more accurately.
- We evaluate the system performance using Bilingual Evaluation Understudy (BLEU) [8], Learned Perceptual Image Patch Similarity (LPIPS) [9], and cosine similarity, with the datasets VOC2012 [10] and Kodak24 from Kaggle. The results demonstrate significant improvements in image transmission compared to existing semantic communication systems.

The rest of the letter is organized as follows. Section II introduces the system framework, Section III describes the relevant models, Section IV outlines the experimental setup and results, and Section V summarizes the letter.

## II. SYSTEM MODEL

In this letter, we consider an image transmission semantic communication system assisted by visual language model, and the system framework is shown in Fig.1, where the transmitter mainly realizes the process of extracting text and image features, and the receiver realizes the process of recovering the features affected by the noise and reconstructing the image by using the features. The specific steps are described in details as follows.

### A. Transmitter

At the transmitter, the first step is to cut out the main part of the image to be transmitted through the Fully Convolutional Networks (FCN) [11]  $N_{FCN}$ , and the expression of the process is

$$i_m = N_{FCN}(i), \quad (1)$$

where  $i$  is the image to be transmitted, and  $i_m$  is a slice of the main part of the image, and the slice will be transmitted. Meanwhile, the image to be transmitted will be divided into multiple sub-images  $i_n, n = \{1, 2, 3, \dots\}$ . For example, in this letter, we divide the image into four sub-images, which will

be delivered to different devices and the LLaVA [7]  $F_{I2T}$  to extract text features for the second step. The process is shown as follows

$$e_n = F_{I2T}(q, i_n), \quad (2)$$

where  $q$  is a fixed query, and  $e_n$  is the text embedding of the description text. The device will then transmit the parameters associated with the text feature to the receiver via the orthogonal noisy channels. Feature extraction of text information and a small amount of image information can reduce a large amount of redundant data transmission and the possibility of misrepresentation of the subject information.

### B. Receiver

For simplicity of analysis, we consider the additive white Gaussian noise (AWGN) channel, and the signal-to-noise ratio (SNR) is given by

$$SNR = 10 \log \frac{P_{signal}}{P_{noise}}, \quad (3)$$

where  $P_{signal}$  is the signal power and  $P_{noise}$  is the noise power.

At the receiver, the receiver will decode the received information using an image decoder and a text decoder, respectively, and the decoding process is given by

$$t'_n = F_{I2T}(e'_n), \quad (4)$$

where  $t'_n$  is the noisy text,  $e'_n$  is the noisy text embedding.

The receiver will fuse all the received text to form a complete text feature. For the text features, the channel noise will cause the text to be misspelled differently compared with the source text. To this end, Bidirectional and Auto-Regressive Transformers (BART) [12]  $N_{BART}$  is used to correct the spelling of the text. The spelling correction process is given by

$$t_n = N_{BART}(t'_n), \quad (5)$$

where  $t_n$  is the description text of the image  $i_n$  with spelling correction.

The processed text will be input into Image Prompt Adapter (IP-Adapter) [13]  $F_{T2I}$  together with the decoded image for

image generation to complete the reconstruction of the complete image, and the reconstruction process given by

$$i_{recon} = F_{T2I}(t_1, t_2, \dots, t_n, i'_m), \quad (6)$$

where  $i_{recon}$  is the reconstruction image, and  $i'_m$  is the slice of the main part of the image with noise. The whole process is summarized in Algorithm 1.

---

**Algorithm 1** Proposed Multi-Text Semantic Communication (Multi-SC)

---

**Require:**

A image  $i$  from dataset  $I$ , pretrained LLaVA model  $F_{I2T}$ , pretrained IP-Adapter  $F_{T2I}$ , BART  $N_{BART}$  with pretrained parameters  $\theta_B$ , FCN  $N_{FCN}$  with initialized parameters  $\theta_{FCN}$ .

**Transmitter:**

1. Compute a main object  $i_m$  with  $N_{FCN}$  and segregate  $i_m$  from  $i$  with (1).
2. Divide  $i$  into 4 parts  $i_a, i_b, i_c, i_d$  and extract text embedding  $e_a, e_b, e_c, e_d$  with  $F_{I2T}$  using (2).
3. Transmit  $i_m, e_a, e_b, e_c, e_d$  through physical channels with AWGN.

**Receiver:**

1. Receive  $i'_m, e'_a, e'_b, e'_c, e'_d$ .
  2. Recover text  $t'_a, t'_b, t'_c, t'_d$  with  $F_{I2T}$  according to (4) and use  $N_{BART}$  to correct the spelling  $t_a, t_b, t_c, t_d$  with (5).
  3. Reconstruct image  $i_{recon}$  using  $F_{T2I}$  according to 6 with  $i'_m, t_a, t_b, t_c, t_d$ .
- 

### III. TRANSCIEVER ARCHITECTURE DESIGN

In this section, we will present the details of transceiver architecture design as shown in the previous section.

#### A. Semantic segmentation

The FCN is introduced to crop the main object in the image, which is a deep learning architecture for image recognition and segmentation. The main contribution of FCN is to apply CNN to full-image segmentation tasks and to be able to output segmentation maps with the same resolution as the input image. The structure of the FCN is to replace the fully connected layer in the traditional Convolutional Neural Networks (CNN) with a convolutional layer, which allows the model to process images of any size and maintain the spatial dimension of the output. The FCN increases the size of the feature map by upsampling so that the output has the same resolution as the input image. In this letter, the FCN model will be used for image segmentation, that is, the main object in the transmitted image will be identified and segmented as a part of the transmitted information. The Negative Log-Likelihood Loss (NLL) loss function is as follows:

$$NLL(p(y|x), y) = -\log p(y|x), \quad (7)$$

where  $x$  is an input sequence,  $y$  is a true label, the  $p(y|x)$  is the predicted label distribution of the model.

#### B. Text extraction

In the semantic encoder, we consider the LLaVA model for text extraction as shown in Fig. 2. LLaVA is a large multimodal visual language model trained end-to-end, which connects visual encoding and large language models to achieve general visual and language understanding. In Fig. 2, the LLaVA model uses a vision encoder to get the features  $Z_v = g(X_v)$  from images. Then, we apply a trainable projection matrix  $W$  to convert features  $Z_v$  into language embedding tokens  $H_v$  as  $H_v = W \cdot Z_v$ . The language model embeds text. The text processed by language model is "<image>\nRelay a brief, clear account of the picture shown." Then, LLaVA uses a simple linear layer to align the two embeddings, that is, the image embedding will be placed in the embedding position corresponding to "<image>" in the text.

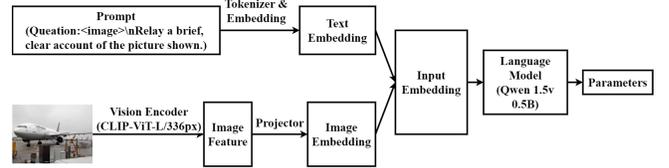


Fig. 2. The framework of semantic encoder with LLaVA.

#### C. Spelling correction

At the receiver, BART is introduced as a spelling correction model, which is a pre-trained model that combines the characteristics of BART [12]. BART uses an encoder-decoder structure based on the standard Transformer architecture, in which the encoder inherits the bidirectional encoder of Bidirectional Encoder Representations from Transformers (BERT) and the decoder inherits the autoregressive decoder of Generative Pre-trained Transformer (GPT), which enables the algorithm to understand the text context and the generated coherent text. BART is trained by destroying the text (such as adding noise, masking, etc.) and then learning to reconstruct the original text. Meanwhile, BART is trained using a variety of different noise methods to reduce the model's dependence on the structured information, enhance the model's understanding of text semantics, and be more conducive to the restoring damaged text. The Gaussian Error Linear Units (GeLU) activation function is used in the BART model instead of the default Rectified Linear Unit (ReLU) in the Transformer.

#### D. Image Renconstruction

The image reconstruction model, IP-Adapter, is an adapter specifically designed for pre-trained text-to-image diffusion models, which allows the model to generate images using image prompts. IP-Adapter can receive text prompts and image prompts simultaneously to generate corresponding images, and the model has a higher degree of freedom and flexibility. The core design of the IP-Adapter includes an image encoder and a decoupled cross-attention mechanism, which enables it to embed image features into a pre-trained text-to-image diffusion model, thereby enabling the generation of image

prompts. In IP-Adapter, text features are input into the pre-trained model through the cross-attention. The output of text cross-attention is given by

$$Z_{text} = Attention(Q, K, V) = Softmax \frac{QK^T}{\sqrt{d}} V, \quad (8)$$

where  $Q = ZW_q$ ,  $K = c_t W_k$ ,  $V = c_t W_v$ ,  $Z$  is a query of latent space noise feature map,  $c_t$  is the text feature and  $W_q$ ,  $W_k$ ,  $W_v$  is the projection matrix of query, key, value respectively. The output of image cross-attention is given by

$$Z_{img} = Attention(Q, K, V) = Softmax \frac{QK^T}{\sqrt{d}} V, \quad (9)$$

where  $Q = ZW_q$ ,  $K = c_i W_k$ ,  $V = c_i W_v$ ,  $Z$  is a query of latent space noise feature map,  $c_i$  is the image feature and  $W_q$ ,  $W_k$ ,  $W_v$  is the projection matrix of query, key, value respectively.

Finally, we combine the output of the image cross-attention with the output of the text cross-attention as  $Z_{new} = Z_{text} + Z_{img}$ . Since the cross attention of image and text is decoupled, the weight coefficient can be used to adjust the weight of each on the final output as follows

$$Z_{new} = Z_{text} + \lambda Z_{img}, \quad (10)$$

where  $\lambda$  is weight. Note that when  $\lambda$  is equal to 0, IP-Adapter becomes a normal text-to-image model. The loss function of IP-Adapter model is given by

$$L_{simple} = E_{x_0, \epsilon, c_t, c_i, t} \|\epsilon - \epsilon_\theta(x_t, c_t, c_i, t)\|^2, \quad (11)$$

where  $x_0$  is the real data,  $t$  is the step,  $x_t = \alpha_t x_0 + \sigma_t \epsilon$  is the noisy data of  $t$ -th steps.  $\alpha_t$  and  $\sigma_t$  are calculated in advance based on hyperparameters.

#### IV. SIMULATION

In this section, we will evaluate the proposed multi-text transmission semantic communication system. The simulation environment is Tesla V100-SXM2-32GB, and the model is built with 2.1.2 PyTorch and 3.10 Python on Ubuntu 22.04.

##### A. Simulation Settings

The datasets used in the simulation are VOC2012 and Kodak24. Due to the limited computing resources in the simulation environment, we make the LLaVA model lightweight and replace the language model with a smaller model, Qwen1.5-0.5B. In this simulation, we select some samples for prediction comparison in Table I. The accuracy of lightweight is not much different from the original model, and the text generated by the lightweight model is reduced by 4 times, which is more suitable for our scenario. In addition, lightweight runtime is more appropriate for our current resource conditions, which saves 2 times the computing resources and speeds up by nearly 4 times on the training time.

Regarding the training of the BART model, we reconstruct a new training set based on the scenario in this letter. We

TABLE I  
MODEL LIGHTWEIGHT COMPARISON

Model	BLEU	Text length	training time
Qwen1.5-0.5B	0.1485	42	5 hours (with 4 V100)
Vicuna1.5-7B	0.1451	190	20 hours (with 8 V100)

put all the images in the image dataset into the pretrained LLaVA model to generate the corresponding text, since the text generated by Vicuna is longer, which is more conducive to the training of the BART model. However, due to the limited number of images and the small amount of text, we split the image into multiple pieces to generate the corresponding text. Finally, these text data are combined and randomly sampled to generate a training set.

##### B. Performance Analysis

In the simulation, we compare the proposed model Multi-SC with several methods: BPG-LDPC, deep Joint Source-Channel Coding (deep JSCC) [14], and Vision-Language Model-based Cross-modal Semantic Communication (VLM-CSC) [4] with stable diffusion. In addition, we include a single-text framework for comparison. BPG-LDPC is a method that combines the classic image compression using Better Portable Graphics (BPG) [15] with Low-Density Parity-Check (LDPC) codes [16].

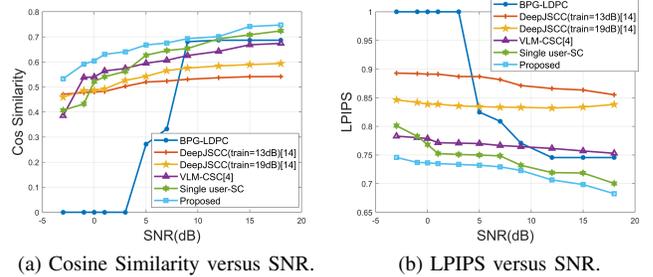


Fig. 3. The results of cosine similarity and LPIPS compared with BPG-LDPC, deep JSCC, VLM-CSC, single text-SC and Multi-SC on Kodak24 under AWGN.

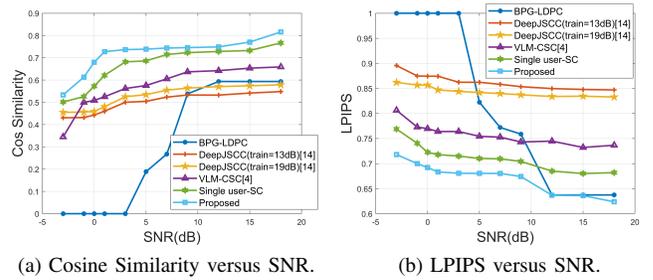


Fig. 4. The results of cosine similarity and LPIPS compared with BPG-LDPC, deep JSCC, VLM-CSC, single text-SC and Multi-SC on VOC2012 under AWGN.

The proposed Multi-SC achieves a much better performance regarding the cosine similarity, which indicates that the reconstructed image has a better match with the source image. When

there is no correlation between the two images, the cosine similarity score is 0. As shown in Fig. 3(a) and Fig. 4(a), BPG-LDPC is essentially unable to complete the image transmission when the SNR is below 3 dB, resulting in severely damaged received images. In Fig. 3(a), when the SNR reaches 9 dB, the traditional image transmission system can transmit images with less damage. At this point, the cosine similarity scores of Multi-SC and BPG-LDPC are similar, indicating that our model can effectively transmit semantic information and reconstruct the source images. Since the test images contain fewer extracted text details, the VLM-CSC model, which relies solely on the text transmission, exhibits significant randomness in the image reconstruction, leading to a poor performance, with the cosine similarity maintained between 0.6 and 0.7. The results of cosine similarity demonstrate that extracting the main subject from the image can effectively reduce the randomness of the generated image, thereby enhancing the robustness of the model.

The lower the LPIPS score, the better the performance. When there is no similarity between the features of the two images, the LPIPS score is 1. For example, in Fig. 3(b), the LPIPS score of the BPG-LDPC model with less than SNR = 3 dB is very close to 1, indicating that the image quality transmitted by the traditional image transmission model is poor in a noisy environment. As shown in Fig. 3(b), our method achieves significant improvement compared to other methods: under training SNR = 19 dB, an 18% improvement over deep JSCC, an 8% improvement over VLM-CSC, a 7% improvement over BPG-LDPC, and a 2% improvement over single-text SC, respectively. In Fig. 4(b), when the SNR is 12 dB, the LPIPS score of BPG coincides with that of our method. However, overall, our method still shows a 2% improvement, demonstrating that the image reconstructed by our method is very similar to the source image. This indicates that our method can achieve a better performance.

## V. CONCLUSION

In this letter, we propose a VLM assisted multi-text semantic communication system by exploring multiple textual semantics, which greatly reduces the transmission amount of semantic features and realizes image transmission under low SNR conditions. We extract the text and image features by VLM and FCN, respectively, and then use BART to correct spelling errors for reducing the impact of noise on the text. Finally, the image is reconstructed by combining the image features and texts to finish a complete image transmission process. Simulation results show that text features plus a small number of image features can complete the image transmission robustly, and a small number of image features can effectively limit the randomness of the generated images.

## REFERENCES

- [1] R. Li, Z. Zhao, X. Zhou, G. Ding, Y. Chen, Z. Wang, and H. Zhang, "Intelligent 5G: When cellular networks meet artificial intelligence," *IEEE Wirel. Commun.*, vol. 24, no. 5, pp. 175–183, 2017.
- [2] W. Chen, W. Xu, H. Chen, X. Zhang, Z. Qin, Y. Zhang, and Z. Han, "Semantic communication based on large language model for underwater image transmission," 2024. [Online]. Available: <https://arxiv.org/abs/2408.12616>

- [3] X. Wei, H. Tong, N. Yang, and C. Yin, "Language-oriented semantic communication for image transmission with fine-tuned diffusion model," in *2024 16th International Conference on Wireless Communications and Signal Processing (WCSP)*, 2024, pp. 1456–1461.
- [4] F. Jiang, C. Tang, L. Dong, K. Wang, K. Yang, and C. Pan, "Visual language model based cross-modal semantic communication systems," *IEEE Trans. Wirel. Commun.*, pp. 1–1, 2025.
- [5] C. Liang and D. Li, "Image generation with multimodule semantic feature-aided selection for semantic communications," 2024. [Online]. Available: <https://arxiv.org/abs/2411.17428>
- [6] C. Liang, D. Li, Z. Lin, and H. Cao, "Selection-based image generation for semantic communication systems," *IEEE Commun. Lett.*, vol. 28, no. 1, pp. 34–38, 2024.
- [7] H. Liu, C. Li, Q. Wu, and Y. J. Lee, "Visual instruction tuning," *Advances in neural information processing systems*, vol. 36, pp. 34 892–34 916, 2023.
- [8] K. Papineni, S. Roukos, T. Ward, and W.-J. Zhu, "Bleu: a method for automatic evaluation of machine translation," in *Proceedings of the 40th annual meeting of the Association for Computational Linguistics*, 2002, pp. 311–318.
- [9] R. Zhang, P. Isola, A. A. Efros, E. Shechtman, and O. Wang, "The unreasonable effectiveness of deep features as a perceptual metric," in *2018 IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2018, pp. 586–595.
- [10] M. Everingham, L. Van Gool, C. K. I. Williams, J. Winn, and A. Zisserman, "The PASCAL Visual Object Classes Challenge 2012 (VOC2012) Results," <http://www.pascal-network.org/challenges/VOC/voc2012/workshop/index.html>.
- [11] J. Long, E. Shelhamer, and T. Darrell, "Fully convolutional networks for semantic segmentation," in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2015, pp. 3431–3440.
- [12] M. Lewis, "Bart: Denoising sequence-to-sequence pre-training for natural language generation, translation, and comprehension," *arXiv preprint arXiv:1910.13461*, 2019.
- [13] H. Ye, J. Zhang, S. Liu, X. Han, and W. Yang, "Ip-adapter: Text compatible image prompt adapter for text-to-image diffusion models," *arXiv preprint arXiv:2308.06721*, 2023.
- [14] E. Bourtsoulatze, D. B. Kurka, and D. Gündüz, "Deep joint source-channel coding for wireless image transmission," in *ICASSP 2019 - 2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2019, pp. 4774–4778.
- [15] F. Li, S. Krivenko, and V. Lukin, "An approach to better portable graphics (bpg) compression with providing a desired quality," in *2020 IEEE 2nd International Conference on Advanced Trends in Information Theory (ATIT)*, 2020, pp. 13–17.
- [16] R. Gallager, "Low-density parity-check codes," *IRE Transactions on Information Theory*, vol. 8, no. 1, pp. 21–28, 1962.