

Multi-Agent Deep Reinforcement Learning for Optimized Multi-UAV Coverage and Power-Efficient UE Connectivity

Xuli Cai, Poonam Lohan, and Burak Kantarci
University of Ottawa, Ottawa, ON, Canada
{xcai049, ppoonam, burak.kantarci}@uottawa.ca

Abstract—In critical situations such as natural disasters, network outages, battlefield communication, or large-scale public events, Unmanned Aerial Vehicles (UAVs) offer a promising approach to maximize wireless coverage for affected users in the shortest possible time. In this paper, we propose a novel framework where multiple UAVs are deployed with the objective to maximize the number of served user equipment (UEs) while ensuring a predefined data rate threshold. UEs are initially clustered using a K-means algorithm, and UAVs are optimally positioned based on the UEs’ spatial distribution. To optimize power allocation and mitigate inter-cluster interference, we employ the Multi-Agent Deep Deterministic Policy Gradient (MADDPG) algorithm, considering both LOS and NLOS fading. Simulation results demonstrate that our method significantly enhances UEs coverage and outperforms Deep Q-Network (DQN) and equal power distribution methods, improving their UE coverage by up to 2.07 times and 8.84 times, respectively.

Index Terms—UAV-assisted communication, deep reinforcement learning, MADDPG, k-means clustering, power allocation.

I. INTRODUCTION

Wireless communication networks are evolving to support the increasing demand for high data rates and low-latency services [1]. Traditional terrestrial infrastructure faces challenges in providing seamless coverage, particularly in remote, disaster-struck, or high-density urban environments. As a result, UAV-assisted communication has emerged as a viable solution to complement existing networks and provide on-demand connectivity. UAVs, functioning as aerial base stations, offer flexibility in deployment, mobility for coverage optimization, and the ability to adapt to dynamic network conditions [2]–[4]. However, effective UAV placement and power allocation remain critical challenges due to interference and fading conditions [5]. To address these challenges, we introduce a novel framework for UAV deployment and resource management to maximize the number of UE served at a predefined data rate threshold. Much previous work has applied DRL approaches [6]–[8], such as DQN [9], DDPG [10], [11], SAC [12], and PPO [13]. We believe that adopting a multi-agent DRL framework could provide a highly effective solution for multi-UAV scenarios.

Our approach begins with the uniform distribution of UE on a grid, followed by K-means clustering to form UE groups. Each cluster is assigned a UAV, which is optimally positioned

based on spatial distribution of UEs. To manage power allocation efficiently and mitigate interference, we employ the MADDPG algorithm, a reinforcement learning (RL)-based technique that enables cooperative decision-making among multiple UAVs. Furthermore, our model incorporates both LOS and NLOS fading effects to ensure realistic channel modeling. The contributions of this work are as follows:

- Propose a K-means clustering-based approach for UEs grouping, UAVs’ allocation, and determine the optimal UAV positions.
- Integrate MADDPG with dynamic power allocation, improving multi-UAVs coverage efficiency and interference management.

Compared to centralized DQN and equal power allocation, the proposed decentralized MADDPG strategy improves UE service efficiency by up to 2.07 times and 8.84 times, respectively.

The rest of the paper is organized as follows: Section II discusses related works. Section III presents the system model and problem formulation. Section IV details the proposed solution methodology, and Section V provides simulation results and performance analysis. Finally, Section VI concludes the paper and outlines future research directions.

II. RELATED WORK

The optimization of power allocation and deployment strategies in UAV-assisted systems has garnered significant attention, particularly in mobile edge computing (MEC) scenarios and energy-efficient UAV operations. Several studies have employed RL techniques to address these challenges, focusing on trajectory design, task offloading, and energy management. [1] proposed various MEC frameworks utilizing MADDPG algorithms to optimize task scheduling, trajectory planning, and resource allocation. These studies demonstrated significant improvements in energy efficiency, reduced task processing delays, and fairness in resource distribution across UAVs. Additionally, [14] extended these approaches to ensure geographical and load fairness while optimizing energy consumption for UAV-assisted MEC networks. For energy-efficient UAV path planning, [5], [15] introduced MADDPG-based algorithms that minimized energy usage through techniques like pruning and optimization of neuron layers, as well as by addressing eavesdropping threats in MEC systems with

ground-based jamming. Similarly, [16] developed a decentralized trajectory and power control algorithm for UAV base stations (ABSs), achieving high UE satisfaction and operational scalability using centralized training with decentralized execution paradigms. In air-ground collaborative networks, [17] proposed multi-UAV systems leveraging Lyapunov optimization and MADDPG for adaptive task offloading, service instance management, and resource allocation. These approaches minimized energy consumption and economic expenditure, demonstrating fast convergence and superior cost efficiency compared to baseline methods. Dynamic and adaptive UAV operations were further explored in [4], [18], where advanced algorithms like MADDPG-LC, Multi-Agent Proximal Policy Optimization (MAPPO), and PPO2-based DRL were employed for dynamic trajectory control, cooperative UAV swarm management, and 3-D trajectory design. These studies highlighted improved energy efficiency, faster convergence, and robustness in addressing flight dynamics and disaster recovery scenarios. [6] employs DQN and DDPG to address bandwidth and power allocation for a single UAV operating in a static, interference-free environment. However, cooperation among multiple UAVs is essential for more complex scenarios.

In contrast to previous works that primarily focus on energy efficiency, task offloading, and trajectory planning using RL techniques such as MADDPG, MAPPO, and DDPG, our contributions differentiate our work from the related literature by addressing the challenges of optimal spatial UAV deployment and dynamic interference management by optimally allocating power to UEs in multi-UAV-assisted networks. While the existing literature provides a robust foundation for UAV-assisted wireless communication, several key areas remain for further investigation, such as extending current approaches to address dense urban environments and large-scale UAV deployments and enhanced coverage efficiency by optimizing power usage without compromising network performance.

III. SYSTEM MODEL AND PROBLEM FORMULATION

A. System Model

UAVs enhance wireless coverage by providing flexible deployment and connectivity in challenging environments. We consider a multi-UAV-assisted communication system, where N UEs are uniformly distributed across a two-dimensional square field Ψ with sides of L meters. The square field consists of 100×100 grids with each grid cell being a square of side $l = L/100$ meters. In this setup, illustrated in Fig. 1, these users are grouped in different clusters and communicate with a dedicated UAV for each cluster. The number of UAVs deployed are equal to the number of UEs' clusters. Note that the user clustering and UAVs deployment approach is discussed in the next section. Each UE UE_i is identified by $i \in I \triangleq 1, 2, \dots, N$, and their respective positions are defined by coordinates $(x_i, y_i, 0)$ relative to the left lower vertex of Ψ , $(0, 0, 0)$. The location of each UAV UAV_j is represented by coordinates (x_j, y_j, h) in three-dimensional space, where h represents the hovering height of all UAVs.

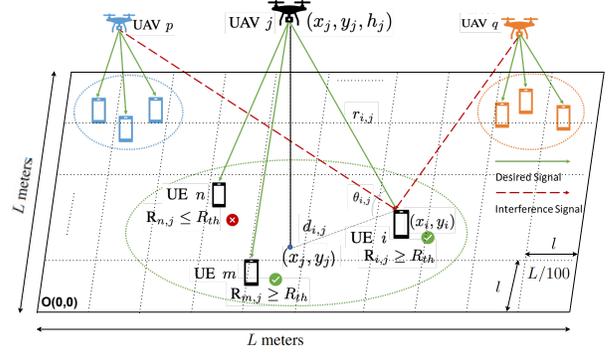


Fig. 1. System Model

Consider a designated UE UE_i depicted in Fig. 1, situated at a horizontal distance $d_{i,j} \triangleq \sqrt{(x_j - x_i)^2 + (y_j - y_i)^2}$ from the associated UAV UAV_j , and the elevation angle of the UAV UAV_j to that user is $\theta_{i,j}$ rad. For simplicity, we utilize Euclidean distance metrics in our analysis. Given that UAVs maintain an altitude of h meters above the field Ψ , the distance between UE UE_i and the UAV UAV_j can be calculated as $r_{i,j} \triangleq \sqrt{d_{i,j}^2 + h^2} = \frac{h}{\sin(\theta_{i,j})}$. All the UAVs and users are assumed to be equipped with a single antenna.

One common approach for air-to-ground channel modeling between the UAV and users is to consider the LoS and NLoS links separately along with their different occurrence probabilities [19]. Note that for NLoS link, the path loss exponent factor α_{NLoS} is higher than that in the LoS link α_{LoS} due to the shadowing effect and reflection from obstacles. Also, to incorporate the effect of small-scale fading, we are considering Rician fading in LoS links and Rayleigh fading in NLoS links. Consequently, the random channel power gains, g_i , for LoS link are noncentral- χ^2 distributed with mean μ and rice factor \mathcal{K} [20], and the random channel power gains, k_i , for NLoS link are exponentially distributed with mean μ . Here, μ is the average channel power gain parameter that depends on antenna characteristics and average channel attenuation. With this consideration, the received power for LoS and NLoS links at UE_i associated with UAV_j can be written as:

$$P_{LoS_{i,j}}^r = P_{i,j} g_{i,j} r_{i,j}^{-\alpha_{LoS}}, \quad \forall i \in I, \quad (1)$$

$$P_{NLoS_{i,j}}^r = P_{i,j} k_{i,j} r_{i,j}^{-\alpha_{NLoS}}, \quad \forall i \in I. \quad (2)$$

where $P_{i,j}$ is the transmission power allocated to UE_i by UAV_j . The probability of LoS link between UE_i and UAV_j depends upon the elevation angle $\theta_{i,j} = \sin^{-1}(\frac{h}{r_{i,j}})$, density and height of buildings, and environment. The LoS probability $P_{LoS_{i,j}}$ is written as [19]:

$$P_{LoS_{i,j}} = 1 / (1 + c \exp(-b[(180/\pi)\theta_{i,j} - c])), \quad (3)$$

where C and B are constants that depend on the environment (rural, urban, dense urban). The probability of NLoS link is

$P_{NLoS} = 1 - P_{LoS}$. Thus the effective SINR received by UE_i associated with UAV_j is expressed as:

$$P_{\text{eff},i,j}^r = P_{LoS,i,j} \cdot P_{LoS,i,j}^r + P_{NLoS,i,j} \cdot P_{NLoS,i,j}^r \quad (4)$$

Since we are considering the multi-UAV scenario, inter-cluster interference arises from adjacent UAVs transmitting on overlapping frequency bands. Using Shannon's capacity formula, the data rate, $\eta_{i,j}$ bits per sec (bps) for UE_i through UAV_j communication link can be expressed as:

$$R_{i,j} \triangleq (B/N_j) \log_2 \left(1 + \frac{P_{\text{eff},i,j}^r}{I_{i,j} + N_o} \right) \quad \forall i \in I. \quad (5)$$

Here N_o denotes AWGN (additive white Gaussian noise) power, and the inter-cluster interference experienced by UE_i is defined as $I_{i,j} = \sum_{s \neq j} P_{s,avg} k_{i,s} r_{i,s}^{-\alpha_{NLoS}}$. In this expression, only NLoS links are considered for interference calculation, as the probability of a LoS link from interfering UAVs is very low. Since each UAV distributes its entire bandwidth among its associated users, the average transmit power is used as the interfering power. Note that a user $UE_i, \forall i \in I$, is considered under coverage or served by the UAV, if its data rate meets or exceeds the desired rate threshold R_{th} , i.e., $R_{i,j} \geq R_{th}$.

B. Problem Formulation

Following the system model, our objective is to maximize coverage by serving the maximum possible number of users with a given set of multiple UAVs. This objective can be achieved by optimally positioning the multiple UAVs and optimally allocating power resources to their associated users while considering the limited power budget P_t constraints of each UAV and reducing the inter-cluster interference. Let I be the set of UEs and \mathcal{J} be the set of UAVs. Define the binary variable in (6).

$$a_{i,j} = \begin{cases} 1, & \text{if UE } i \text{ is served by UAV } j, \\ 0, & \text{otherwise,} \end{cases} \quad (6)$$

and let $N_j = \sum_{i \in I} a_{i,j}$ denote the number of UEs served by UAV j . The optimization problem is formulated as follows:

$$(P) : \max_{(a_{i,j}, P_j, \mathbf{p}_j)} \sum_{j \in \mathcal{J}} \sum_{i \in I} a_{i,j}, \quad (7)$$

$$\text{s.t.} : (C1) : R_{i,j} \mathbb{1}(a_{i,j} = 1) \geq R_{th}, \quad \forall i \in I, \forall j \in \mathcal{J};$$

$$(C2) : \sum_{j \in \mathcal{J}} a_{i,j} \leq 1, \quad \forall i \in I;$$

$$(C3) : a_{i,j} \in \{0, 1\}, \quad \forall i \in I, \forall j \in \mathcal{J};$$

$$(C4) : \sum_{l=1}^{N_{s,j}} P_{lj} \leq P_t; \quad \forall j \in \mathcal{J};$$

$$(C5) : \mathbf{p}_j = (x_j, y_j) \in \Psi, \quad \forall j \in \mathcal{J}.$$

Constraint (C1) ensures that for UE i to be considered as a served user, its achieved data rate $R_{i,j}$ should be at least the minimum required rate threshold R_{th} . Constraint (C2) guarantees that each UE is served by at most one UAV. Constraint (C3) enforces the binary nature of the variable $a_{i,j}$,

meaning a UE is either served by a UAV or not. Constraint (C4) restricts the total transmit power of each UAV to not exceed its maximum allowable power P_t . Constraint (C5) ensures that the horizontal position of each UAV, given by $\mathbf{p}_j = (x_j, y_j)$, lies within the feasible region Ψ . To solve this combinatorial and non-convex problem, we present a novel MADDPG-based solution in the next section.

IV. PROPOSED METHODOLOGY

The proposed methodology comprises two main parts: 1) clustering UEs' locations and determining UAVs' positions using K-Means and 2) power allocation using MADDPG.

A. Clustering

We have a set of UE positions, where each UE $i \in \{1, 2, \dots, N\}$ is observed once. The UE position for UE i is denoted as $\mathbf{u}_i = [x_i, y_i] \in \Psi$. Thus, the set of all UEs' positions is given by $\mathcal{U} = \{\mathbf{u}_1, \mathbf{u}_2, \dots, \mathbf{u}_N\}$.

For a given number of clusters $K \in \{1, 2, \dots, K_{\max}\}$, the K-Means clustering problem is formulated as:

$$\min_{\{c_j\}_{j=1}^K, \{s(i)\}_{i=1}^N} \sum_{i=1}^N \|\mathbf{u}_i - c_{s(i)}\|^2, \quad (8)$$

where $c_j \in \Psi$ denotes the centroid of cluster j , representing a candidate UAV horizontal position and $s(i) \in \{1, 2, \dots, K\}$ is the cluster assignment for UE i . The solution to the above problem provides the set of centroids $\{c_1, c_2, \dots, c_K\}$, which serve as the positions for UAVs and the corresponding UE clusters $\mathcal{C}_j = \{\mathbf{u}_i \mid s(i) = j\}$ for $j = 1, \dots, K$.

B. MADDPG For Power Allocation

The UAV power allocation problem is modeled as a multi-agent system, where each UAV is an independent agent interacting with the environment. The objective of each UAV is to maximize the number of served UE within its cluster while minimizing penalties due to data rate oversupply and excessive power usage. The MADDPG algorithm is employed for solving this problem by leveraging a centralized training and decentralized execution framework.

1) *Reinforcement Learning Problem Formulation:* The problem is defined as a Markov Decision Process (MDP) for K UAV agents, with the following components:

a) *State Space (s):* The state space for each agent j at timestep t is defined in (9) where $\mathbf{P}_j = \{P_{1j}, P_{2j}, \dots, P_{N_{s,j}j}\}$ stands for the power allocation to UE within the cluster of UAV j , $\mathbf{R}_j = \{R_{1j}, R_{2j}, \dots, R_{N_{s,j}j}\}$ denotes the achieved data rates for UE associated with UAV j , and $N_{s,j}$ represents the number of UEs in cluster \mathcal{C}_j associated with UAV j .

$$\mathbf{s}_j^t = \{\mathbf{P}_j, \mathbf{R}_j, N_{s,j}\} \quad (9)$$

b) *Action Space (a_j):* The action space for each agent j corresponds to the adjustment of power allocated to the UE in its cluster as formulated in (10).

$$\mathbf{a}_j^t = \{\Delta P_{j1}, \Delta P_{j2}, \dots, \Delta P_{jN_{s,j}}\}, \quad (10)$$

where ΔP_{ji} represents the change in power allocated to UE i by UAV j .

c) *Reward Function (r)*: The reward in (11) is computed as the sum of two components: the total number of served UEs and the effective total data rate (i.e., the aggregate data rate across all UEs after subtracting the wasted data rate). Let total served users be defined as the sum of the number of served UEs (U_{C_j}) in each cluster C_j ; $\forall j = 1, \dots, k$ (i.e., those all UEs whose effective data rate R_{ij} meets or exceeds the threshold R_{th}) as formulated in the first component of the reward function. The total data rate is formulated in the second summation component in the reward function where W_d denotes the unutilized data rate (i.e., the excess data rate above the required threshold that is not effectively utilized).

$$r = \sum_{j=1}^K U_{C_j} + \left(\sum_{j=1}^K \sum_{i=1}^{U_{C_j}} R_{ij} - W_d \right) \quad (11)$$

d) *Transition Dynamics*: The environment transitions from state \mathbf{s}_j^t to \mathbf{s}_j^{t+1} based on the UAV's action \mathbf{a}_j^t . The updated power allocation affects the SINR, data rate, and the resulting reward.

2) *Centralized Training and Decentralized Execution*: In the MADDPG framework, centralized training is employed using a global critic network, while execution is decentralized using individual actor networks.

a) *Critic Network (Q_j)*: The centralized critic evaluates the joint action-value function in (12) where \mathbf{s} is the global state, $\mathbf{a} = \{\mathbf{a}_1, \mathbf{a}_2, \dots, \mathbf{a}_K\}$ is the joint action of all agents, and γ is the discount factor.

$$Q_j(\mathbf{s}, \mathbf{a}) = \mathbb{E} \left[\sum_{t=0}^T \gamma^t r_j^t \mid \mathbf{s}, \mathbf{a} \right], \quad (12)$$

b) *Actor Network (μ_j)*: Each agent j uses an actor network to determine its action as shown in (13) where θ_{μ_j} are the parameters of the actor network for agent j .

$$\mathbf{a}_j^t = \mu_j(\mathbf{s}_j^t \mid \theta_{\mu_j}), \quad (13)$$

3) *MADDPG Algorithm*: This proposed MADDPG solution outlined as Algorithm 1, enables UAVs to learn cooperative policies that maximize the number of served UEs while minimizing penalties for inefficient resource utilization.

V. NUMERICAL RESULTS

A. Environment and MADDPG Training Parameters

Unless otherwise stated all the environmental parameters used in the simulation setup are provided in Table I. The hyperparameters in MADDPG training are selected to ensure stable and efficient learning. A replay buffer of 100,000 experiences supports off-policy learning, while a batch size of 64 stabilizes updates. A learning rate of 0.0001 is chosen to prevent drastic weight updates and enhance convergence stability, and a discount factor $\gamma = 0.95$ balances short and long-term rewards. A soft update rate $\tau = 0.01$ ensures smooth policy updates, while an exploration noise of $\sigma_{\text{noise}} = 0.2$ promotes exploration, preventing premature convergence to suboptimal policies. The selected values of all hyperparameters are summarized in Table II. The simulations have been

Algorithm 1 Proposed MADDPG Solution

Input: Number of agents k , replay buffer \mathcal{D} , batch size W , discount factor γ , target network update rate τ .

- 1: Initialize actor network μ_{θ_j} and critic network Q_{ϕ_j} for each agent j , with random parameters θ_j and ϕ_j .
- 2: Initialize target networks $\mu_{\theta'_j}$ and $Q_{\phi'_j}$ with weights $\theta'_j \leftarrow \theta_j$, $\phi'_j \leftarrow \phi_j$.
- 3: Initialize replay buffer \mathcal{D} (shared by all agents).
- 4: **for** episode = 1 to M **do**
- 5: Initialize a random process \mathcal{N} for action exploration.
- 6: Receive initial global state \mathbf{s}_0 .
- 7: **for** $t = 0$ to $T - 1$ **do**
- 8: **for** each agent $j \in \{1, \dots, K\}$ **do**
- 9: Select action $a_j^t = \mu_{\theta_j}(\mathbf{o}_j^t) + \epsilon$, where $\epsilon \sim \mathcal{N}$, and \mathbf{o}_j^t is agent j 's local observation.
- 10: **end for**
- 11: Execute joint action $\mathbf{a}^t = (a_1^t, \dots, a_K^t)$ in the environment.
- 12: Check the power limit and prioritize to nearby UE.
- 13: Collect the power matrix of all UEs, calculate the interference and finalize the data rate matrix.
- 14: Observe next global state \mathbf{s}_{t+1} and immediate rewards r_1^t, \dots, r_K^t .
- 15: Store transition $(\mathbf{s}_t, \mathbf{a}^t, r^t, \mathbf{s}_{t+1})$ in \mathcal{D} .
- 16: $\mathbf{s}_t \leftarrow \mathbf{s}_{t+1}$
- 17: **If** replay buffer \mathcal{D} has enough samples **then**
- 18: **for** each agent j :
- 19: Sample a mini-batch of W transitions from \mathcal{D} .
- 20: Compute target $y_j = r_j + \gamma Q_{\phi'_j}(\mathbf{s}_{t+1}, \mathbf{a}_1^{t+1}, \dots, \mathbf{a}_K^{t+1})|_{a_j^{t+1} = \mu_{\theta'_j}(\mathbf{o}_j^{t+1})}$.
- 21: Update critic by minimizing loss:

$$\mathcal{L}(\phi_j) = \frac{1}{W} \sum (y_j - Q_{\phi_j}(\mathbf{s}_t, \mathbf{a}_1^t, \dots, \mathbf{a}_K^t))^2.$$
- 22: Update actor using policy gradient:

$$\nabla_{\theta_j} J \approx \frac{1}{W} \sum \nabla_{a_j} Q_{\phi_j}(\mathbf{s}_t, \mathbf{a}_t)|_{a_j = \mu_{\theta_j}(\mathbf{o}_j^t)} \nabla_{\theta_j} \mu_{\theta_j}(\mathbf{o}_j^t).$$
- 23: Update target networks:

$$\theta'_j \leftarrow \tau \theta_j + (1 - \tau) \theta'_j, \quad \phi'_j \leftarrow \tau \phi_j + (1 - \tau) \phi'_j.$$
- 24: **end for**
- 25: **end for**

conducted over 10 different seeds, and all figures present the average results across these 10 runs, with 95% confidence interval (CI) bars indicating variability.

B. Results and Discussion

1) *Training Convergence*: Fig. 2 shows the convergence behavior of MADDPG training over 500 time-steps for 3, 5, and 7 clusters. The reward starts low and steadily increases, stabilizing after 100 time-steps. Minor drops likely result from policy updates or exploration-exploitation trade-offs. Training

TABLE I
DEFAULT ENVIRONMENTAL PARAMETERS USED IN THE SIMULATIONS

Symbol	Description	Value
L	Side of square field Ψ	10000 meters
$l \times l$	Default cell size	100×100 meters
h	Height of UAVs	500 meters
N	Total Number of UE	30
P_t	Total Power of each UAV	1 W
B	Total bandwidth of each UAV	10 MHz
R_{th}	Data Rate Requirement per UE	30 Mbps
N_o	Noise Power	4×10^{-15} W
α_{LoS}	Path Loss Exponent for LoS	3
α_{NLoS}	Path Loss Exponent for NLoS	4
c	Environmental Constant (Dense Urban)	11.95
b	Environmental Constant (Dense Urban)	0.136
\mathcal{K}	Fading Factor	10
μ	Mean Power	0.5

TABLE II
MADDPG HYPERPARAMETERS

Symbol	Description	Value
B_s	Replay Buffer Size	100,000 samples
W	Batch Size for Training	64 samples
α_a	Actor Network Learning Rate	0.0001
α_c	Critic Network Learning Rate	0.0001
γ	Discount Factor for Future Rewards	0.95
τ	Target Network Update Rate	0.01
σ_{noise}	Exploration Noise Level	0.2
H	Hidden Layer Sizes for Actor and Critic	[128, 128]

with 7 clusters yields the most stable policy with minimal variance and the highest reward, suggesting that more clusters enhance learning through richer interactions and exploration. Additionally, a higher number of clusters provides more UAV resources to serve extra users, leading to improved rewards compared to fewer clusters.

2) *Served UEs Comparison*: Fig. 3 compare the performance of the proposed MADDPG solution against DQN and equal power allocation. To ensure a fair comparison, three different R_{th} values are considered. The results indicate that as R_{th} increases, the performance gap between MADDPG and DQN widens, particularly for a smaller number of clusters, leading to a higher number of served users with the proposed approach. Also, with less R_{th} requirements, fewer clusters/UAVs are sufficient to cover all the users. Furthermore, Fig. 4 shows the comparison results with higher user density (with $N=60$ UEs) indicating better performance of MADDPG over DQN and equal power allocation.

TABLE III
MEAN TRANSMISSION POWER USAGE

Clusters	MADDPG	DQN	Equal Power
5	98.81%	99.00%	100%
10	40.53%	46.00%	100%
15	7.19%	10.27%	100%
20	1.73%	3.85%	100%
25	0.89%	2.80%	100%

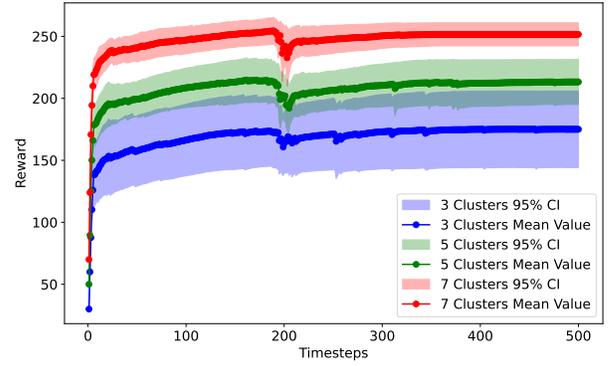


Fig. 2. MADDPG Training Convergence ($N = 30$ UEs, $R_{th} = 30$ Mbps)

3) *Power Usage Comparison*: Table III presents the average transmission power consumption of UAVs for MADDPG, DQN, and equal power allocation across varying cluster counts. With fewer clusters, UAVs must cover larger distances to serve users, resulting in higher transmission power requirements. As the number of clusters increases, power consumption decreases since users are distributed more evenly, reducing the distance between UAVs and their associated users. Among the evaluated approaches, MADDPG demonstrates better performance with lower transmission power usage.

4) *Cell Scale Impact*: Fig. 5 shows MADDPG performance across different cell scales/coverage areas with $L=10000$ m, $L=30000$ m, and $L=50000$ m. Larger coverage areas/cell scales result in greater distances between UEs and their associated UAV clusters, leading to a lower number of served users. However, as the number of clusters/UAVs increases, this performance gap narrows since UAVs are positioned closer to UEs, improving coverage efficiency.

VI. CONCLUSION

This paper has presented a multi-UAV-assisted wireless network proposing K-means clustering and MADDPG-based solution for optimal positioning of UAVs and optimal power allocation, respectively. Compared to centralized DQN and equal power distribution, our decentralized MADDPG approach improves UE coverage efficiency maximum of 2.07 times and 8.84 times, respectively. The framework incorporates realistic LoS/NLoS fading and interference modeling, accurately capturing wireless dynamics. By leveraging MADDPG, UAVs autonomously learn optimal strategies and enhance UE coverage, as well as data rates while maximizing network performance. Our ongoing research aims to further enhance the system's adaptability by incorporating dynamic UE mobility models and tackling energy-efficient trajectory optimization .

ACKNOWLEDGEMENTS

This work is supported in part by National Science and Engineering Research Council (NSERC) Discovery and NSERC CREATE TRAVERSAL programs.

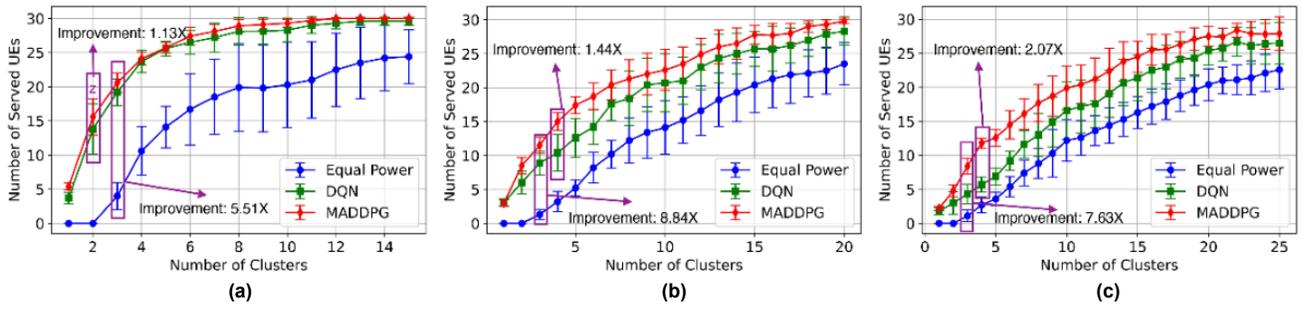


Fig. 3. Performance comparison for $N = 30$ UEs: (a) $R_{th} = 10$ Mbps (b) $R_{th} = 20$ Mbps (c) $R_{th} = 30$ Mbps

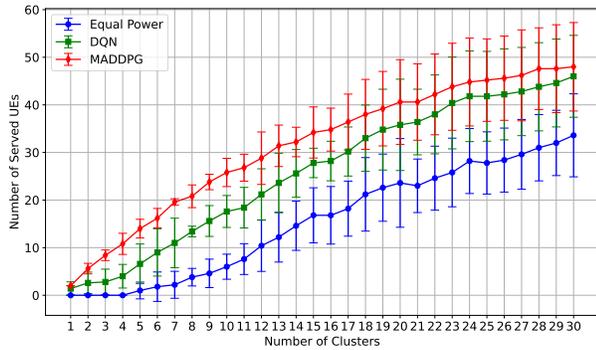


Fig. 4. Num. of Served UEs ($N = 60$ UEs, $R_{th} = 30$ Mbps)

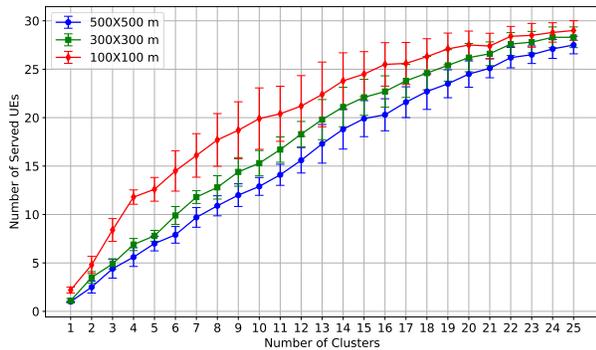


Fig. 5. MADDPG performance for different cell scales ($N = 30$ UEs, $R_{th} = 30$ Mbps)

REFERENCES

- [1] Y. He, Y. Gan, H. Cui, and M. Guizani, "Fairness-Based 3-D Multi-UAV Trajectory Optimization in Multi-UAV-Assisted MEC System," *IEEE Internet of Things Journal*, vol. 10, no. 13, pp. 11 383–11 395, 2023.
- [2] N. Parvaresh and B. Kantarci, "A Continuous Actor-Critic Deep Q-Learning-Enabled Deployment of UAV Base Stations: Toward 6G Small Cells in the Skies of Smart Cities," *IEEE Open Journal of the Communications Society*, vol. 4, pp. 700–712, 2023.
- [3] N. Parvaresh, M. Kulhandjian, H. Kulhandjian, C. D'Amours, and B. Kantarci, "A tutorial on AI-powered 3D deployment of drone base stations: State of the art, applications and challenges," *Vehicular Communications*, vol. 36, p. 100474, 2022.
- [4] C. Zhang, Z. Li, C. He, K. Wang, and C. Pan, "Deep Reinforcement Learning Based Trajectory Design and Resource Allocation for UAV-Assisted Communications," *IEEE Commun. Letters*, vol. 27, no. 9, pp. 2398–2402, 2023.
- [5] Y. He, K. Xiang, X. Cao, and M. Guizani, "Task Scheduling and Trajectory Optimization Based on Fairness and Commun. Security for Multi-UAV-MEC System," *IEEE Internet of Things Journal*, vol. 11, no. 19, pp. 30 510–30 523, 2024.
- [6] X. Cai, P. Lohan, and B. Kantarci, "A Novel Joint DRL-Based Utility Optimization for UAV Data Services," in *2024 IEEE 10th World Forum on Internet of Things (WF-IoT)*, 2024, pp. 930–935.
- [7] X. Zhang, Z. Liu, J. Zhang, and B. Ai, "Joint UAV Trajectory and Power Optimization in Cell-Free mMIMO Systems With Deep Q-Network," in *Intl Conf. on Ubiquitous Commun.*, 2024, pp. 395–399.
- [8] P. Qin, Y. Fu, J. Zhang, S. Geng, J. Liu, and X. Zhao, "DRL-Based Resource Allocation and Trajectory Planning for NOMA-Enabled Multi-UAV Collaborative Caching 6G Network," *IEEE Transactions on Vehicular Technology*, vol. 73, no. 6, pp. 8750–8764, 2024.
- [9] B. Yin, X. Fang, and X. Wang, "Joint Optimization of Trajectory Control, Resource Allocation, and User Association Based on DRL for Multi-Fixed-Wing UAV Networks," *IEEE Transactions on Wireless Commun.*, vol. 23, no. 10, pp. 13 330–13 343, 2024.
- [10] L. Wang, H. Liang, Y. Tang, G. Mao, H. Zhang, and D. Zhao, "DRL-Based Joint Resource Allocation and Platoon Control Optimization for UAV-Hosted Platoon Digital Twin," *IEEE Internet of Things Journal*, vol. 11, no. 22, pp. 37 114–37 126, 2024.
- [11] M. Zhang, S. Fu, and Q. Fan, "Joint 3D Deployment and Power Allocation for UAV-BS: A Deep Reinforcement Learning Approach," *IEEE Wireless Commun. Letters*, vol. 10, no. 10, pp. 2309–2312, 2021.
- [12] F. Xu, Y. Ruan, and Y. Li, "Soft Actor-Critic Based 3-D Deployment and Power Allocation in Cell-Free Unmanned Aerial Vehicle Networks," *IEEE Wireless Commun. Letters*, vol. 12, no. 10, pp. 1692–1696, 2023.
- [13] S. Fu, X. Feng, A. Sultana, and L. Zhao, "Joint Power Allocation and 3D Deployment for UAV-BSs: A Game Theory Based Deep Reinforcement Learning Approach," *IEEE Transactions on Wireless Commun.*, vol. 23, no. 1, pp. 736–748, 2024.
- [14] L. Wang, K. Wang, C. Pan, W. Xu, N. Aslam, and L. Hanzo, "Multi-Agent Deep Reinforcement Learning-Based Trajectory Planning for Multi-UAV Assisted Mobile Edge Computing," *IEEE Transactions on Cognitive Commun. and Networking*, vol. 7, no. 1, pp. 73–84, 2021.
- [15] X. Kong, C. Ni, G. Duan, G. Shen, Y. Yang, and S. K. Das, "Energy Consumption Optimization of UAV-Assisted Traffic Monitoring Scheme With Tiny Reinforcement Learning," *IEEE Internet of Things Journal*, vol. 11, no. 12, pp. 21 135–21 145, 2024.
- [16] B. Chen, D. Liu, and L. Hanzo, "Decentralized Trajectory and Power Control Based on Multi-Agent Deep Reinforcement Learning in UAV Networks," in *IEEE Intl Conf. on Commun.*, 2022, pp. 3983–3988.
- [17] P. Qin, J. Li, J. Zhang, and Y. Fu, "Joint Task Allocation and Trajectory Optimization for Multi-UAV Collaborative Air-Ground Edge Computing," *IEEE Trans. on Network Science and Engineering*, vol. 11, no. 6, pp. 6231–6243, 2024.
- [18] Z. Wang, H. Wang, L. Liu, E. Sun, H. Zhang, Z. Li, C. Fang, and M. Li, "Dynamic Trajectory Design for Multi-UAV-Assisted Mobile Edge Computing," *IEEE Trans. on Vehicular Technology*, pp. 1–15, 2024.
- [19] A. Al-Hourani, S. Kandeepan, and S. Lardner, "Optimal LAP Altitude for Maximum Coverage," *IEEE Wireless Commun. Lett.*, vol. 3, no. 6, pp. 569–572, Dec. 2014.
- [20] M. Simon and M.-S. Alouini, *Digital Communication Over Fading Channels*. 2nd ed. New York, NY, USA: Wiley, 2005.