

Resistance Calculation for an infinite Simple Cubic Lattice Application of Green's Function

J. H. Asad^{*†}, R. S. Hijjawi^{††}, A. Sakaj^{†††} and J. M. Khalifeh^{†*}

[†]*Department of Physics, University of Jordan, Amman-11942, Jordan.*

^{††}*Physics Department, Mutah University, Jordan.*

^{†††}*Physics Department, Ajman University, UAE.*

Abstract

It is shown that the resistance between the origin and any lattice point (l, m, n) in an infinite perfect Simple Cubic (SC) is expressible rationally in terms of the known value of $G_o(0,0,0)$. The resistance between arbitrary sites in a SC is also studied and calculated when one of the resistors is removed from the perfect lattice. Finally, the asymptotic behavior of the resistance for both the perfect and perturbed SC is also investigated.

Key words: Lattice Green's Function, Resistors, Simple Cubic Lattice.

- Corresponding author EMAIL: jhasad1@yahoo.com.

1. Introduction

The calculation of the resistance between two arbitrary grid points of infinite networks of resistors is a new-old subject¹⁻⁷.

Recently, Cserti⁸ and Cserti et. al⁹ studied the problem where they introduced for the first time a method based on the Lattice Green's Function (LGF) which is an alternative approach to using the superposition of current distributions presented by Venezian³ and Atkinson et. al⁴.

The LGF for cubic lattices has been investigated by many authors¹⁰⁻²⁰, and the so-called recurrence formulae which are often used to calculate the LGF of the SC at different sites are presented^{21,22}.

The values of the LGF for the SC have been recently evaluated exactly²³, where these values are expressed in terms of the known value of the LGF at the origin.

In this paper; we calculate the resistance between two arbitrary points in a perfect and perturbed (i.e. a bond is removed) infinite SC using the method presented by Cserti⁸ and Cserti et. al⁹.

The LGF presented here is related to the LGF of the Tight-Binding Hamiltonian (TBH)²⁴.

2. Perfect SC Lattice

In this section we express the resistance in an infinite SC network of identical resistors between the origin and any lattice site (l, m, n) rationally, where it can be easily shown that^{8,23}

$$\frac{R_0(l, m, n)}{R} = \rho_1 g_0 + \frac{\rho_2}{\pi^2 g_0} + \rho_3 \quad (1)$$

where $g_0 = G_0(0,0,0)$ is the LGF at the origin.

and ρ_1, ρ_2, ρ_3 are related to r_1, r_2, r_3 (i.e. $\lambda_1, \lambda_2, \lambda_3$ Duffin and Shelly's parameters^{23,25}) as

$$\begin{aligned} \rho_1 &= 1 - r_1 = 1 - \lambda_1 - \frac{15}{12} \lambda_2 \\ \rho_2 &= -r_2 = \frac{1}{2} \lambda_2 \\ \rho_3 &= -r_3 = \frac{1}{3} \lambda_3 \end{aligned} \quad (2)$$

Various values of r_1, r_2, r_3 are shown in Glasser et. al²³ [Table 1] for (l, m, n) ranging from $(0,0,0) - (5,5,5)$. To obtain other values of r_1, r_2, r_3 one has to use the following relation²²

$$G_0(l+1, m, n) + G_0(l-1, m, n) + G_0(l, m+1, n) + G_0(l, m-1, n) +$$

$$G_0(l, m, n+1) + G_0(l, m, n-1) = -2\delta_{l0}\delta_{m0}\delta_{n0} + 2EG_0(l, m, n) \quad (3)$$

$; E = 3$

In some cases one may need to use the recurrence formulae (i.e. Eq. (3)) two or three times, and by the method explained above we calculate different values for r_1, r_2, r_3 for (l, m, n) beyond $(5,5,5)$. Various values of ρ_1, ρ_2, ρ_3 are shown in Table 1.

The value of the LGF at the origin (i.e. $G_0(0,0,0)$) was first evaluated by Watson in his famous paper²⁶, where he found that

$$G_0(0,0,0) = \left(\frac{2}{\pi}\right)^2 (18 + 12\sqrt{2} - 10\sqrt{3} - 7\sqrt{6}) [K(k_o)]^2 = 0.505462.$$

$$\text{where } k_o = (2 - \sqrt{3})(\sqrt{3} - \sqrt{2})$$

$$K(k) = \int_0^{\frac{\pi}{2}} d\theta \frac{1}{\sqrt{1 - k^2 \sin^2 \theta}} \text{ is the complete elliptic integral}$$

of the first kind.

A similar result was obtained by Glasser and Zucker²⁷ in terms of gamma function.

To study the asymptotic behavior of the resistance in a SC, one can show that⁸ as any of l, m, n goes to infinity then, $G_0(l, m, n) \rightarrow 0$. Thus

$$\frac{R_o(l, m, n)}{R} \rightarrow G_0(0,0,0). \quad (4)$$

3. Perturbed SC Lattice

In this section we calculate the resistance between any two lattice sites in a SC, when one of the resistors (i.e. bonds) between the sites

$i_o = (i_{ox}, i_{oy}, i_{oz})$ and $j_o = (j_{ox}, j_{oy}, j_{oz})$ is broken, where⁹

$$R(i, j) = R_o(i, j) + \frac{[R_o(i, j_o) + R_o(j, i_o) - R_o(i, i_o) - R_o(j, j_o)]^2}{4[R - R_o(i_o, j_o)]} \quad (5)$$

As an example; let us assume that the bond between $i_o = (0,0,0)$ and $j_o = (1,0,0)$ is broken. So, we calculate the resistance between any two sites. Our results are arranged in Table 2, and for example: The resistance between the sites $i = (0,0,0)$ and $j = (1,0,0)$ is

$$R(1,0,0) = \frac{R}{2}. \quad (6)$$

i.e. the resistance between the two ends of the broken bond is $\frac{R}{2}$, which is a predictable result⁹.

Now, if the broken bond is shifted to be between the sites $i = (1,0,0)$ and $j = (2,0,0)$, then one can find the resistance between any two sites (i.e. $i = (i_x, i_y, i_z)$ and $j = (j_x, j_y, j_z)$). Using Eq. (5) again one obtains the results arranged in Table 3.

For large values of i and j the resistance in a perturbed SC, becomes

$$\frac{R(i, j)}{R} \rightarrow \frac{R_o(i, j)}{R} = g_o. \quad (7)$$

We conclude that for large separation between the two sites the perturbed resistance approaches the perfect one (i.e. it approaches a finite value).

4. Results and Discussion

Fig. 1. shows the resistance against the site (l, m, n) along the [100] direction for both a perfect infinite and perturbed SC (i.e the bond between $i_o = (0,0,0)$ and $j_o = (1,0,0)$ is broken). It is seen from the figure that the resistance is symmetric (i.e. $R_o(l,0,0) = R_o(-l,0,0)$) for the perfect case due to the inversion symmetry of the lattice while for the perturbed case the symmetry is broken so, the resistance is not symmetric. As (l, m, n) goes away from the origin the resistance approaches its finite value for both cases⁸.

Fig. 2. shows the resistance against the site (l, m, n) along the [010] direction for a perfect infinite and perturbed SC (i.e the bond between $i_o = (0,0,0)$ and $j_o = (1,0,0)$ is broken). The figure shows that the resistance is symmetric for the perfect and perturbed case, since there is no broken

bond along this direction. As (l,m,n) goes away from the origin the resistance approaches its finite value for both cases⁸.

Fig. 3. shows the resistance against the site (l,m,n) along the [111] direction for a perfect and for a perturbed SC (i.e the bond between $i_0 = (0,0,0)$ and $j_0 = (1,0,0)$ is broken). The resistance is symmetric along [111] direction for both the perfect and perturbed cases.

Figures. 4-6. same as the above figures except that the broken bond is shifted (i.e the bond between $i_0 = (1,0,0)$ and $j_0 = (2,0,0)$ is broken). The resistance along [100] direction is not symmetric in the perturbed case since the broken bond is taken to be along that direction.

From Figs. 1-6, as the broken bond is shifted from the origin along [100] direction then the resistance of the perturbed SC approaches that of the perfect lattice. Also, one can see that the perturbed resistance is always larger than the perfect one. Measurement of the resistance of a finite SC is under investigation in order to compare results.

References:

- 1- B. Van der Pol and H. Bremmer, Operational Calculus Based on the Two-Sided Laplace integral (Cambridge University Press, England, 1955) 2nd ed., p. 372.
- 2- P. G. Doyle and J. L. Snell, Random walks and Electric Networks, (The Carus Mathematical Monograph, series **22**, The Mathematical Association of America, USA, 1984) pp. 83.
- 3- Venezian, G. 1994. Am. J. Phys. **62**, 1000.
- 4- Atkinson, D. and Van Steenwijk, F. J. 1999. Am. J. Phys. **67**, 486.
- 5- R. E. Aitchison. 1964. Am. J. Phys. **32**, 566.
- 6- F. J. Bartis. 1967. Am. J. Phys. **35**, 354.
- 7- Monwhea Jeng. 2000. Am. J. Phys. **68(1)**, 37.
- 8- Cserti, J. 2000. Am. J. Phys. **68**, 896-906.
- 9- Cserti, J. Gyula, D. and Attila P. 2002. Am. J. Phys, **70**, 153.
- 10- Morita, T. and Horiguchi, T. 1975. J. phys. C **8**, L232.
- 11- Joyce, G. S. 1971. J. Math. Phys. **12**, 1390.
- 12- Sakaji, A. Hijjawi, R. S. Shawagfeh, N. and Khalifeh, J. M. 2002. *J. of Math. Phys.* **43(1)**, 1.
- 13- Hijjawi, R. S. and Khalifeh, J. M. 2002. *J. of Theo. Phys.* **41(9)**, 1769.
- 14- Sakaji, A. Hijjawi, R. S. Shawagfeh, N. and Khalifeh, J. M. 2002. *J. of Theo. Phys.* **41(5)**, 973.
- 15- Hijjawi, R. S. and Khalifeh, J. M. *J. of Theo. Phys.* in press.
- 16- Morita, T. and Horigucih, T. 1971. *J. of Math. Phys.* **12(6)**, 986.
- 17- Inoue, M. 1975. *J. of Math. Phys.* **16(4)**, 809.
- 18- Mano, K. 1975. *J. of Math. Phys.* **16(9)**, 1726.
- 19- Katsura, S. and Horiguchi, T. 1971. *J. of Math. Phys.* **12(2)**, 230.
- 20- Glasser, M. L. 1972. *J. of Math. Phys.* **13(8)**, 1145.
- 21- Morita, T. 1975. *J. Phys. A* **8**, 478.
- 22- Horiguchi, T. 1971. *J. Phys. Soc. Japan* **30**, 1261.
- 23- Glasser, M. L. and Boersma, J. 2000. *J. Phys. A: Math. Gen.* **33**, No. 28, 5017.
- 24- Economou, E. N. Green's Function in Quantum Physics. 1983. Springer-Verlag, Berlin.
- 25- Duffin, R. J and Shelly, E. P. 1958. *Duke Math. J.* **25**, 209.
- 26- Watson, G. N. 1939. *Quart. J. Math. (Oxford)* **10**, 266.
- 27- Glasser, M. L. and Zuker, I. J. 1977. *Proc. Natl. Acad. Sci. USA*, **74**, 1800.

Figure Captions

Fig. 1 The resistance on the perfect (squares) and the perturbed (circles) SC between $i = (0,0,0)$ and $j = (j_x, 0, 0)$ along the [100] direction as a function of j_x . The ends of the removed bond are $i_o = (0,0,0)$ and $j_o = (1,0,0)$.

Fig. 2 The resistance on the perfect (squares) and the perturbed (circles) SC between $i = (0,0,0)$ and $j = (0, j_y, 0)$ along the [010] direction as a function of j_y . The ends of the removed bond are $i_o = (0,0,0)$ and $j_o = (1,0,0)$.

Fig. 3 The resistance on the perfect (squares) and the perturbed (circles) SC between $i = (0,0,0)$ and $j = (j_x, j_y, j_z)$ along the [111] direction as a function of j . The ends of the removed bond are $i_o = (0,0,0)$ and $j_o = (1,0,0)$.

Fig. 4 The resistance on the perfect (squares) and the perturbed (circles) SC between $i = (0,0,0)$ and $j = (j_x, 0, 0)$ along the [100] direction as a function of j_x . The ends of the removed bond are $i_o = (1,0,0)$ and $i_o = (2,0,0)$.

Fig. 5 The resistance on the perfect (squares) and the perturbed (circles) SC between $i = (0,0,0)$ and $j = (0, j_y, 0)$ along the [010] direction as a function of j_y . The ends of the removed bond are $i_o = (1,0,0)$ and $i_o = (2,0,0)$.

Fig.3.6 The resistance on the perfect (squares) and the perturbed (circles) SC between $i = (0,0,0)$ and $j = (j_x, j_y, j_z)$ along the [111] direction as a function of j . The ends of the removed bond are $i_o = (1,0,0)$ and $i_o = (2,0,0)$.

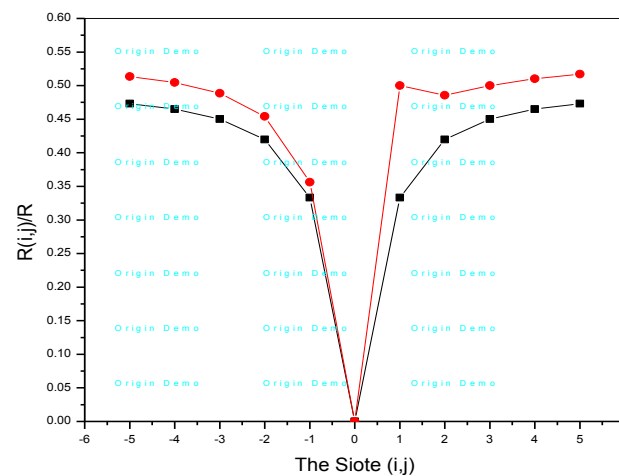


Fig. 1

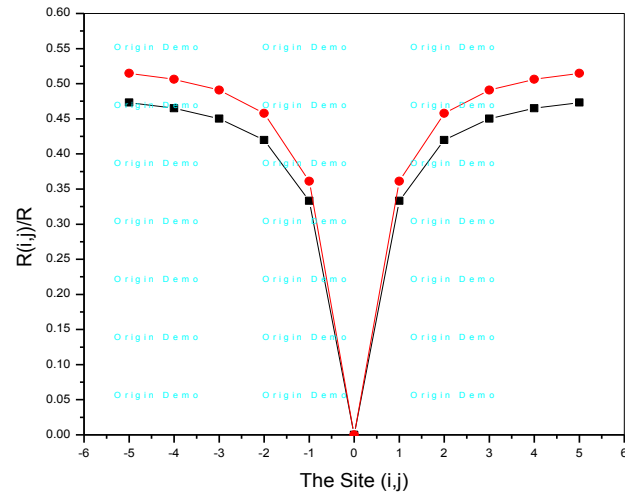


Fig. 2

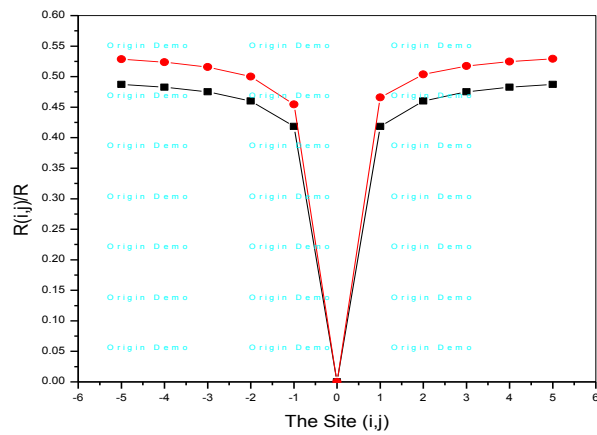


Fig. 3

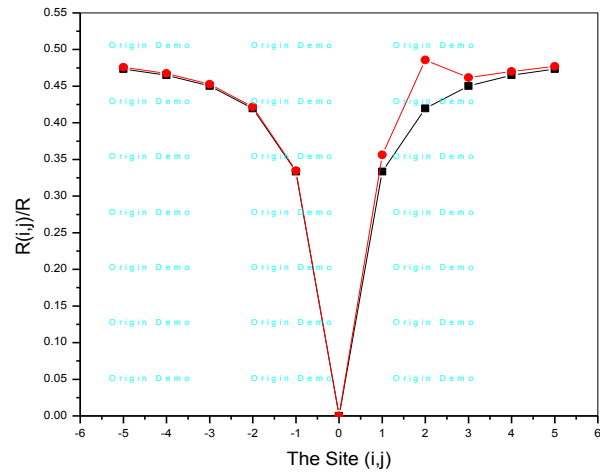


Fig. 4

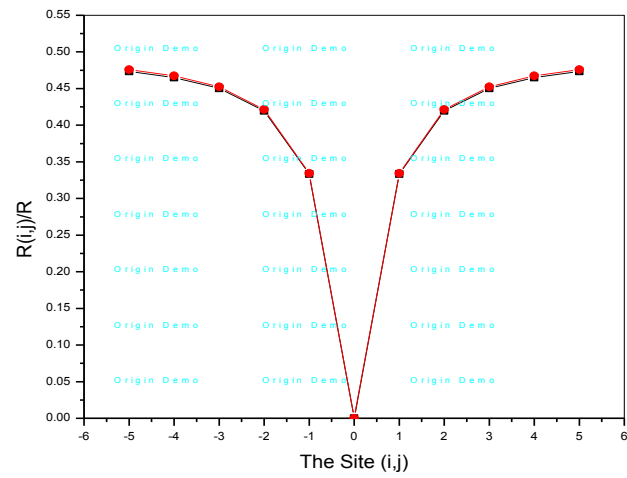


Fig. 5

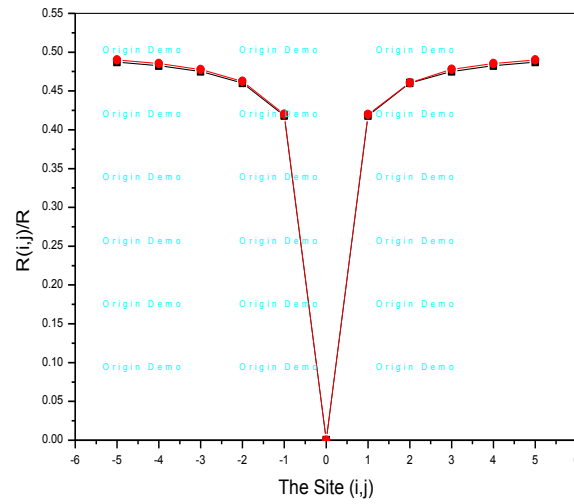


Fig. 6

Table Captions

Table 1: Various values of the resistance in a perfect infinite SC for arbitrary sites.

Table 2: Calculated values of the resistance between the sites $i = (0,0,0)$ and $j = (j_x, j_y, j_z)$, for a perturbed SC (the bond between $i_0 = (0,0,0)$ and $j_o = (1,0,0)$ is broken).

Table 3: Calculated values of the resistance between the sites $i = (0,0,0)$ and $j = (j_x, j_y, j_z)$, for a perturbed SC (the bond between $i_0 = (1,0,0)$ and $j_o = (2,0,0)$ is broken).

Table 1

lmn	ρ_1	ρ_2	ρ_3	$\frac{R_0(l, m, n)}{R} = \rho_1 g_0 + \frac{\rho_2}{\pi^2 g_0} + \rho_3$
000	0	0	0	0
100	0	0	1/3	0.333333
110	7/12	1/2	0	0.395079
111	9/8	-3/4	0	0.418305

200	-7/3	-2	2	0.419683
210	5/8	9/4	-1/3	0.433598
211	5/3	-2	0	0.441531
220	-37/36	29/6	0	0.449351
221	31/16	-21/8	0	0.453144
222	3/8	27/20	0	0.460159
300	-33/2	-21	13	0.450371
310	115/36	85/6	-4	0.454415
311	15/4	-21/2	2/3	0.457396
320	-271/48	119/8	1/3	0.461311
321	161/36	-269/30	0	0.463146
322	-19/16	213/40	0	0.467174
330	-47/3	1046/25	0	0.468033
331	38/3	-148/5	0	0.469121
332	-26/9	1012/105	0	0.471757
333	51/16	-1587/280	0	0.475023
400	-985/9	-542/3	92	0.464885
410	531/16	879/8	-115/3	0.466418
411	11/2	-357/5	12	0.467723
420	-2111/72	13903/300	6	0.469777
421	245/16	-1251/40	-1	0.470731
422	-32/3	1024/35	0	0.473076
430	-2593/48	28049/200	-1/3	0.473666
431	1541/36	-110851/1050	0	0.474321
432	-493/32	4617/112	0	0.476027
433	667/72	-8809/420	0	0.478288
440	-5989/36	620161/1470	0	0.477378
441	4197/32	-919353/2800	0	0.477814
442	-2927/48	31231/200	0	0.479027
443	571/32	-119271/2800	0	0.480700
444	-69/8	186003/7700	0	0.482570
500	-9275/12	-3005/2	2077/3	0.473263
510	11653/36	138331/150	-348	0.473986
511	-271/4	-5751/10	150	0.474646
520	-2881/16	15123/200	229/3	0.475807
521	949/12	-27059/350	-24	0.476341
522	-501/8	4209/28	2	0.477766
530	-3571/18	1993883/3675	-8	0.478166
531	1337/8	-297981/700	4/3	0.478565
532	-2519/36	187777/1050	0	0.479693
533	2281/48	-164399/1400	0	0.481253
540	-18439/32	28493109/19600	1/3	0.480653
541	1393/3	-286274/245	0	0.480920
542	-7745/32	1715589/2800	0	0.481798
543	5693/72	-4550057/23100	0	0.483012
544	-1123/32	560001/6160	0	0.484441
550	-196937/108	101441689/22050	0	0.483050
551	12031/8	-18569853/4900	0	0.483146
552	-1681/2	5718309/2695	0	0.483878
553	5175/16	-2504541/3080	0	0.484777
554	-24251/312	-1527851/7700	0	0.485921
555	9459/208	-12099711/107800	0	0.487123
600	-34937/6	-313079/25	5454	0.478749
610	71939/24	160009/20	-9355/3	0.479137

633	18552/72	-747654/1155	0	0.483209
644	-388051/1872	23950043/46200	0	0.486209
655	13157/78	-5698667/13475	0	0.488325
700	-553847/12	5281913/50	44505	0.482685

Table 2

$j = (j_x, j_y, j_z)$	$R(i, j) / R$	$j = (j_x, j_y, j_z)$	$R(i, j) / R$
(1,0,0)	0.5	(-1,0,0)	0.356208
(2,0,0)	0.485733	(-2,0,0)	0.454031
(3,0,0)	0.500062	(-3,0,0)	0.4526508
(4,0,0)	0.510257	(-4,0,0)	0.467337
(5,0,0)	0.5170241	(0,-1,0)	0.360993
(0,1,0)	0.360993	(0,-2,0)	0.457943
(0,2,0)	0.457943	(0,-3,0)	0.491033
(0,3,0)	0.491033	(0,-4,0)	0.506167
(0,4,0)	0.506167	(0,-5,0)	0.5147228
(0,5,0)	0.5147228	(0,0,-1)	0.360993
(0,0,1)	0.360993	(0,0,-2)	0.457943
(0,0,2)	0.457943	(0,0,-3)	0.491033
(0,0,3)	0.491033	(0,0,-4)	0.506167
(0,0,4)	0.506167	(0,0,-5)	0.5147228
(0,0,5)	0.5147228	(-1,-1,-1)	0.454367
(1,1,1)	0.4659804	(-2,-2,-2)	0.50009
(2,2,2)	0.503597	(-3,-3,-3)	0.5158855
(3,3,3)	0.517510166	(-4,-4,-4)	0.5237707
(4,4,4)	0.524705	(-5,-5,-5)	0.528490451
(-5,0,0)	0.513569	(5,5,5)	0.5290906

Table 3

$j = (j_x, j_y, j_z)$	$R(i, j) / R$	$j = (j_x, j_y, j_z)$	$R(i, j) / R$
(1,0,0)	0.356208	(-1,0,0)	0.334495
(2,0,0)	0.485733	(-2,0,0)	0.421618
(3,0,0)	0.461555	(-3,0,0)	0.452650
(4,0,0)	0.470021	(-4,0,0)	0.467337
(5,0,0)	0.477057	(-5,0,0)	0.475810
(0,1,0)	0.334191	(0,-1,0)	0.334191
(0,2,0)	0.421552	(0,-2,0)	0.421552
(0,3,0)	0.452738	(0,-3,0)	0.452738