

A weakly universal cellular automaton on the tessellation $\{8, 3\}$.

Maurice MARGENSTERN

September 19, 2018

Abstract

In this paper, we construct a weakly universal cellular automaton on the tessellation $\{8, 3\}$ which is not rotation invariant but which is truly planar.

1 Introduction

This paper is basically an improvement of paper [9] where I proved the same result in the tessellation $\{9, 3\}$. The reason of this improvement lies in the relatively small number of rules for paper [9] and the fact, noticed in that paper, that several rules were uselessly duplicated. Also, as it is usual in this process of reducing the possibilities of the automaton, here its neighbourhood, it is needed to change something in the previous scenario of the simulation. This time, I simplified a structure involved in the simulation by replacing it by the combination of two other existing structures. The morale of this result compared to that of [6] is that relaxing the rotation invariance allows us to significantly reduce the number of neighbours: from 11 in [6] to 8 in the present paper. As in [9], I use the new system of coordinates introduced in [8] for the tilings $\{p, 3\}$ and $\{p-2, 4\}$.

In this paper, the same model as in [6] and [5] and the other quoted papers is used.

In Section 2, I just indicate how the model is tuned a bit in order to replace the structure above evoked by new ones. In Section 3, we give the rules of the automaton, insisting in the way we defined these rules in a context where rotation invariance is no more required, which allows us to prove the following result:

THEOREM 1 *There is a weakly universal cellular automaton on the tessellation $\{8, 3\}$ which is truly planar and which has two states.*

Presently, we turn to the proof of this result.

2 The scenario of the simulation

I reproduced the model used for these simulations in each paper. This time, to spare space and time, I just mention where the reader can find a description of the model and what is changed with respect to the previous simulation for the tessellation $\{9, 3\}$.

We sketchily remember that we simulate a register machine by a railway circuit. Such circuit assembles infinitely many portions of straight lines, quarters of circles and switches. There are three kinds of switches, see [13, 3], for a description of the circuit and of its working. In [3] the simulation is thoroughly described and it is adapted to the hyperbolic context.

As in previous papers, the flip-flop and the memory switch are decomposed into simpler ingredients which we call sensors and control devices. This reinforces the importance of the tracks as their role for conveying key information is more and more decisive. Here too, tracks are blank cells marked by appropriate black cells we call **milestones**. We carefully study this point in Sub-section 2.1. Later, in Sub-section 2.2, we adapt the configurations described in [9] to the tessellation $\{8, 3\}$.

2.1 The tracks

In this implementation, the tracks are represented in a way which is a bit similar to that of [9]. The present implementation is given by Figure 1.

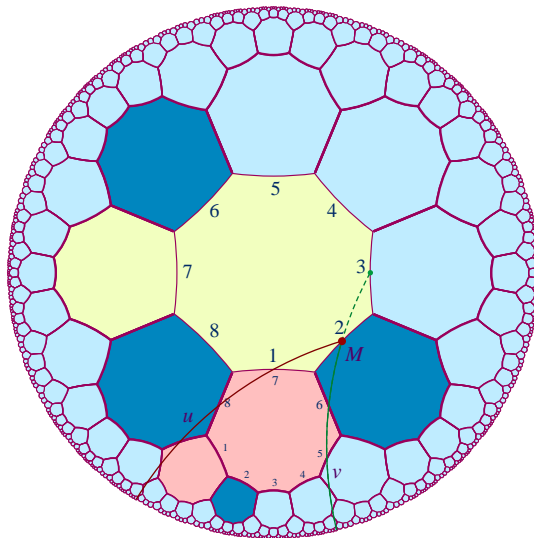


Figure 1 *Element of the tracks.*

Here, we explicitly indicate the numbering of the sides in a cell which will be systematically used through the paper. We fix a side which will be, by definition,

side 1 in the considered cell. Then, all the other sides are numbered starting from this one and growing one by one while counter-clockwise turning around the cell. Note that, in our setting, the same side, which is shared by two cells, can receive two different numbers in the cells which share it. An example of this situation is given in Figure 1: in the central cell we denote by $0(0)$, side 1 is side 7 in the neighbour of the central cell sharing this side. In Sub-section 3.1, we go back to the construction of the tracks starting from the elements indicated in Figure 1. Note that Figure 1 shows us two rays starting from M , the mid-point of the side 2 of the central cell. These rays allow us to introduce the numbering of the tiles based on [8]. It will be used in the figures illustrating the paper.

The rays delimit what we call a **sector**. The rays are defined as follows. The ray u starts from the mid-point M of the side 2 of $0(0)$ and it passes through the mid-point of its side 1. The ray also passes through the mid-point of the side 8 of the neighbour of $0(0)$ which is seen through its side 1 and which we denote $1(1)$. It also passes through the mid-point of the side 8 of $1(1)$. The ray v , also issued from M , cuts the sides 6 and 5 of $1(1)$ at their mid-points. Its support also passes through the mid-point of the side 3 of $0(0)$.

In the figures of the paper, the central cell is the tile whose centre is the centre of the circle in which the figure is inscribed. The central cell is numbered by 0, denoted by $0(0)$. We number the sides of the tile as indicated in Figure 1. For $i \in \{1..8\}$, the cell which shares the side i with the central cell is called **neighbour i** and it is denoted by $1(i)$. The rotation around $0(0)$ allows us to attach a sector to each tile $1(i)$. Number 1 in this notation is the number given to the root of the tree attached to the sector defined from this tile, see [1, 8]. Here, that definition is adapted to the case of the tessellation $\{8, 3\}$. We invite the reader to follow the present explanation on Figure 1. Consider the sector defined by the rays u and v . The neighbours of the cell $1(1)$ sharing its sides j , $j \in \{1..4\}$ are numbered $j+1$ and are denoted by $j+1(1)$. We say that the cell $1(1)$ is a *W*-cell and its sons are defined by the rule $W \rightarrow BWWW$, which means that $2(1)$ is a *B*-cell. This means that the sons of $2(1)$ are defined by the rule $B \rightarrow BWW$, where the *B*-son has two consecutive sides crossed by u in their mid-points. These sons of $1(1)$ constitute the level 1 of the tree. The sons of $2(1)$, starting from its *B*-son are numbered 6, 7 and 8 denoted by $6(1)$, $7(1)$ and $8(1)$ respectively. By induction, the level $n+1$ of the tree are the sons of the cells which lie on the level n . The cells are numbered from the level 0, the root, level by level and, on each level from left to right, *i.e.* starting from the ray u until the ray v . What we have seen on the numbering of the sons of $2(1)$ is enough to see how the process operates on the cells. From now on, we use this numbering of the cells in the figures of the paper.

As can be seen in Figures of Section 3, the locomotive is implemented as a single black cell: it has the same colour as the milestones of the tracks. Only the position of the locomotive with respect to the milestones allows us to distinguish it from the milestones. As clear from the next sub-section, we know that besides this **simple locomotive**, the locomotive also occurs as a **double one** in some portions of the circuit. In a double locomotive, we call its first, second cell the **front**, **rear** respectively of the locomotive. In a simple locomotive, the front

only is present.

The circuit also makes use of signals which are implemented in the form of a simple locomotive. So that at some point, it may happen that we have three simple locomotives travelling on the circuit: the locomotive and two auxiliary signals involved in the working of some switch. For aesthetic reasons, the black colour which is opposed to the blank is dark blue in the figures.

2.2 The structures of the simulation

The crossings of [13] are present in many ones of my papers. Starting from [2], I replaced the crossing by roundabouts, a road traffic structure, in my simulations in the hyperbolic plane. At a roundabout where two roads are crossing, if you want to keep the direction arriving at the roundabout, you need to leave the roundabout at the second road. I refer the reader to [3] for references. The structure is a complex one, which requires a fixed switch, a doubler and a selector. Other structures are used to simulate the switches used in [13, 3]: the fork, the controller and the sensor. In this section, we present the implementation of these structures which are those of [9] adapted to the present tessellation with one exception: the doubler, which is here different from that of that paper.

2.2.1 The fixed switch

As the tracks are one-way and as an active fixed switch always sends the locomotive in the same direction, no track is needed for the other direction: there is no active fixed switch. Now, passive fixed switches are still needed as just seen in the previous paragraph.

Figure 2 illustrates the passive fixed switch when there is no locomotive around: we say that such a configuration is **idle**. We shall again use this term in the similar situation for the other structures. We can see that it consists of elements of the tracks which are simply assembled in the appropriate way in order to drive the locomotive to the bottom direction in the picture, whatever upper side the locomotive arrived at the switch. The path followed by the locomotive to the switch is in yellow until the central cell which is also yellow. The path from the left-hand side consists, in this order of the cells 13(8), 4(8), 5(8), 2(1) and 1(1). From the right-hand side, it consists of the cells 16(6), 4(6), 5(6), 2(7) and 1(7). Of course, 1(1) and 1(7) are neighbours of 0(0). The path followed by the locomotive when it leaves the cell is in pink. It consists of the following cells in this order: 1(4), 2(4), 5(3), 4(3) and 16(3). Note that the cell 0(0) in Figure 2 has five black neighbours: the cells 1(2), 1(3), 1(5), 1(6) and 1(8). Note that 1(6) and 1(8) are also milestones for the cell 1(7), that 1(3) and 1(5) are milestones for 1(4) and that 1(8) and 1(2) are milestones for 1(1).

From our description of the working of the roundabout, a passive fixed switch must be crossed by a double locomotive as well as a simple one. Later, in Subsection 3.2, we shall check that the structure illustrated by Figure 2 allows those crossings.

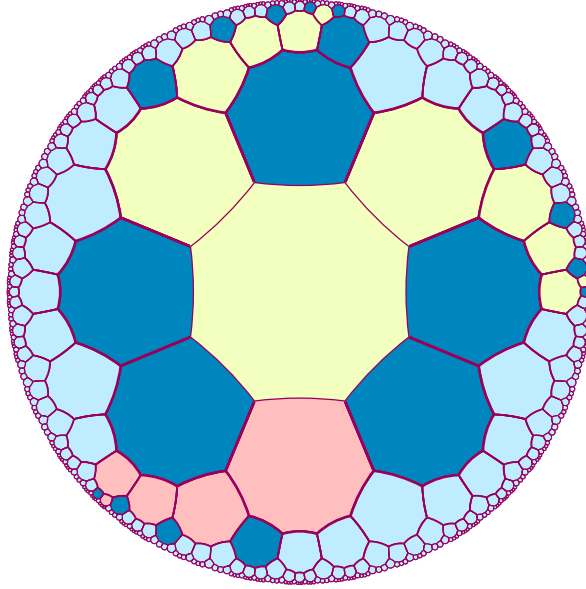


Figure 2 *Idle configuration of the passive fixed switch.*

2.2.2 The doubler and the fork

The fork is the structure illustrated by the left-hand side picture of Figure 3. Note that its structure is very different from that of the tracks or of the fixed switch. The central cell $0(0)$ is black and two paths start from $1(1)$, each one on one side of the central cell with respect to its axis crossing its sides 1 and 5, and traversing a quarter of the cells around $0(0)$. The cell $1(1)$ is yellow in the figure. The left-hand side track is green, consisting of the following cells, in this order: $1(2)$, $1(3)$, $3(3)$, $9(3)$ and $35(3)$. The right-hand side track is pink. It consists of the cells: $1(8)$, $1(7)$, $5(7)$, $6(8)$ and $21(8)$. The locomotive, a simple one, arrives through the yellow path: $21(2)$, $6(2)$, $5(1)$, and $1(1)$. From $1(1)$, two simple locomotives appear: one in $1(2)$, the other in $1(8)$. The locomotive in $1(2)$ goes along the light green path while the one in $1(8)$ goes along the pink path.

The doubler is illustrated by the right-hand side of Figure 3. This structure is different from that of [9]. Indeed, the even number of sides of a tile does not allow us to divide the path around $0(0)$ in two equal sub-paths both excluding $1(1)$. The doubler is a structure which receives a simple locomotive and yields a double one which consists of two consecutive black cells on the track. The idea is to use two already defined structures: the fork and the fixed switch. This combination can make a double locomotive provided that two simple ones arrive at the fixed switch from each side with a delay of one top of the clock. This is

realized by the paths illustrated by the figure. The picture uses the same colours as the picture of the fork with the same meaning. Consider the green paths. Its cells are, in this order: 1(2), 2(3), 3(3), 4(3), 5(3), 2(4) and 3(4), which makes 7 cells. The pink path consists of the following cells, in this order: 1(8), 1(7), 1(6), 1(5), 2(5) and 5(4). We can see that the cells around 4(4) are exactly the neighbours of the central cell of a fixed switch, see Figure 2. According to this description, the two simple locomotives created at the same time in 1(2) and 1(8) respectively do not arrive at the same time at the cell 4(4). When the locomotive created in 1(8) arrives at the cell 4(4), the locomotive created in 1(2) is at 3(4), so that the two black cells in 3(4) and 4(4) constitute a double locomotive arriving to the fixed switch from the left-hand side. We shall see that the double locomotive does cross the switch. Accordingly the structure works as expected for a doubler. Note the configuration of three black cells around a common vertex.

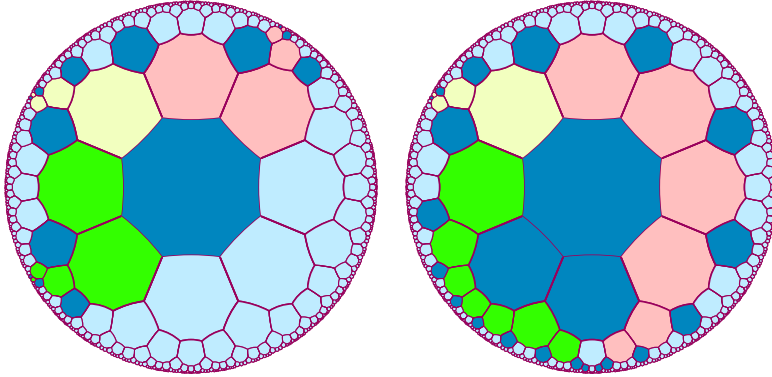


Figure 3 Idle configurations. To left: the fork. To right: the doubler.

2.2.3 The selector

The selector is illustrated by Figure 4. This structure is not as symmetric as the corresponding structure of [9], which makes another difference with that paper. We have a yellow track through which the locomotive arrives, simple or double, both cases are possible. When a simple locomotive arrives, it leaves the cell through 1(8), via the pink path which consists of the cells 1(8), 2(8), 9(8) and 32(8). When a double locomotive arrives, a simple locomotive leaves the structure through the green path, the cells: 1(4), 2(5), 6(5) and 24(5). Both cells 1(6) and 1(8) can detect whether the locomotive is simple or double. They can do that when the front of the locomotive is in 0(0). Then, if the locomotive is double, its rear is in 1(6). Both cells 0(0) and 1(6) are neighbours of 1(5) and of 1(7) too.

In Subsubsection 2.2.3, the rules will show that such a working will be observed.

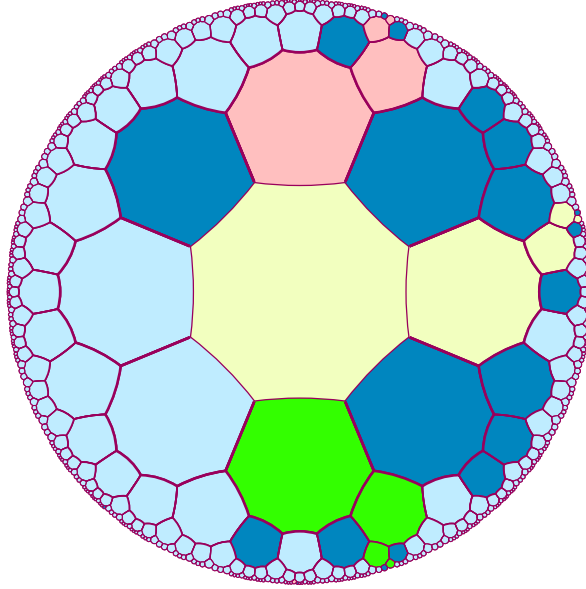


Figure 4 *Idle configuration of the selector. The cells 1(7) and 1(5) detect whether the locomotive is simple or double.*

2.3 The controller and the controller-sensor

In this Sub-section, we look at the additional structures used for the flip-flop and for the memory switch, see [13, 3] for the definitions and for the implementation in the hyperbolic plane. As explained in [3], the flip-flop and the active memory switch are implemented by using the fixed switch, the fork and a new structure we shall study in Subsubsection 2.3.1: the **controller**. The structure is illustrated by Figure 5. For the passive memory switch, we need the fork, the fixed switch and another new structure we shall study in Subsubsection 2.3.2: the **sensor** illustrated by Figure 6.

2.3.1 The controller

As shown by Figure 5, the controller sits on an ordinary cell of the track. The locomotive which runs on that track is always simple. The track consists of the cells 20(6), 6(7), 2(7), 1(6), 0(0), 1(4), 2(5), 3(5), 10(5) and 35(5). The cell 1(3) defines the **colour** of the controller. If it is black, then the cell 0(0) is typically a cell of the track, so that the locomotive goes on its way along the track, leaving the controller. If the cell 1(3) is white, then the cell 0(0) can no more work as a cell of the track. It remains white, which means that the locomotive is stopped at 1(6): after that, it vanishes. This corresponds to the working of a selection in an active passage: the locomotive cannot run along a non-selected track. Here it can for a while, but at some point, it is stopped by

the controller. Note that the occurrence of a locomotive in the structure does not change the colour in 1(3). The change of colour in that cell is performed by a signal which takes the view of a simple locomotive arriving through another track: 24(4), 6(4) and 2(4), that latter cell being a neighbour of 1(3). When the locomotive-signal arrives at 2(4), it makes the cell 1(3) change its colour: from white to black and from black to white.

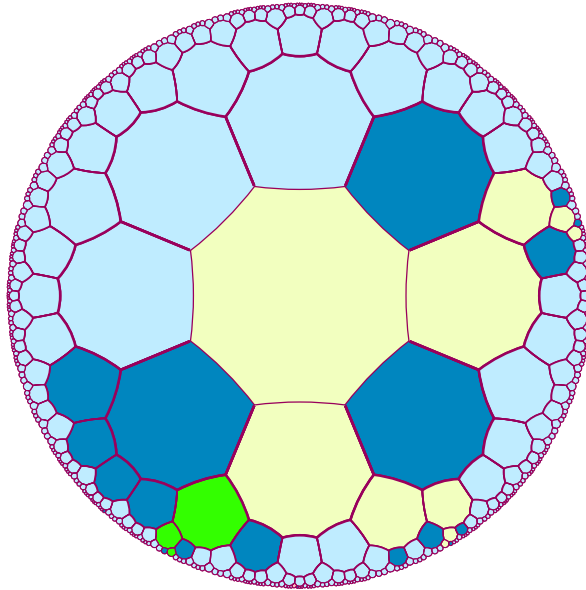


Figure 5 *Idle configuration of the controller of the flip-flop and of the active memory switch.*

2.3.2 The sensor

Let us now turn to the sensor, illustrated by Figure 6. As suggested by its name, the sensor does not exactly behave like the controller. When the locomotive passes on the non-selected track, it does not stop it. It uses it as a messenger for the signal it has to send to the active switch in order to change the selection of the tracks.

This is illustrated by the structure of the figure. The path is the same as in Figure 5. The cell which plays the role of a sensor is this time the cell 1(1) whose state we call the **colour** of the sensor. Note that the neighbourhood of that cell in Figure 6 is the same, up to rotation, to the neighbourhood of the cell 1(3) in Figure 5: the green path here consists of the cells are 24(2), 6(2) and 2(2) the latter being a neighbour of 1(1).

Figure 6 shows a very different structure for the cell 0(0) compared with that of Figure 5. When the sensor is white, its neighbourhood is exactly that of the

cell $0(0)$ when the controller is black: it is an ordinary cell of the track so that the locomotive goes on its way on the track. The difference in both structures lies in the logic of the switches. In the case of the controller, when the locomotive goes on its way, it is the locomotive of the circuit going to another switch or to a round-about. In the case of the sensor, the locomotive which goes on its way on the track becomes a signal sent to the active switch associated to the passive switch.

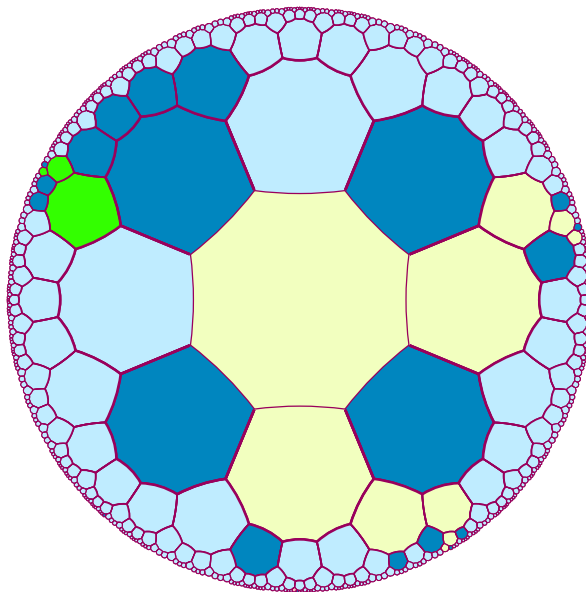


Figure 6 *Idle configuration of the sensor of the passive memory switch.*

We can just note that the change of colour is different in the sensor: when the sensor is white, if a locomotive passes, it must become black: the signal is the locomotive itself, as will be seen in the Subsection 3.6. When the sensor is black, it has to be changed if a locomotive passed through the other sensor which then changed from white to black. The locomotive which arrived at the formerly white sensor is sent to the still black one in order to make it change to white. The locomotive arrives through the green path of Figure 6. As the configuration is the same around the cell $1(1)$ of that Figure as that around $1(3)$ in Figure 5, the change from black to white is performed.

3 Rules

The figures of Section 2 help us to establish the rules. Their application is illustrated by figures of this section which were drawn by a computer program which checked the coherence of the rules. The program also wrote the PostScript files of the pictures from the computation of the application of the rules to the

configurations of the various type of parts of the circuit. The computer program also established the traces of execution which contribute to the checking of the application of the rules.

Let us explain the format of the rules and what is allowed by the relaxation from rotation invariance. We remind the reader that a rule has the form $\underline{x}_o x_1 \dots x_8 \underline{x}_n$, where x_o is the state of the cell c , x_i is the **current** state of the neighbour i of c and x_n is the **new** state of c applied by the rule. As the rules no more observe the rotation invariance, we may freely choose which is side 1 for each cell. We take this freedom from the format of the rule which only requires to know which is neighbour 1. In order to restrict the number of rules, it is decided that as a general rule, for a cell which is an element of the track, side 1 is the side shared by the cell and its next neighbour on the track, so that tracks are one way. There can be exceptions when the cell is in a switch or the neighbour of the central cell in a switch. In particular, when a cell belongs to two tracks, side 1 is arbitrarily chosen among the two possible cases. The milestones may have their side 1 shared by an element of the track.

We have to keep in mind that there are two types of rules. Those which keep the structure invariant when it is idle, we call this type of rules **conservative**, and those which control the motion of the locomotive. Those latter rules, which we call **motion rules**, are the rules applied to the cells of the tracks as well as their milestones and, sometimes to the cells of the structures which may be affected by the passage of the locomotive. Next, in each sub-section, we give the rules for the motion of the locomotive in the tracks, then for the fixed switch, then for the doubler and for the fork, then for the selector, then for the controller and, eventually, for the sensor. In each sub-section, we also illustrate the motion of the locomotive in the structure as well as a table giving traces of execution for the cells of the track involved in the crossing.

3.1 The rules for the tracks

Figure 1 shows us a single element of the track. Figure 7 shows us how to assemble elements as illustrated in Figure 1 in order to constitute tracks. In Figure 7, we can see two tracks a part of which goes around the central cell. We consider the following tracks: to the right-hand side of 0(0), in yellow: the cells 17(8), 4(8), 3(8), 2(8), 1(7), 1(6), 1(5), 1(4), 2(4), 5(3), 4(3) and 13(3); to the left-hand side of 0(0), in green: 32(3), 9(3), 2(3), 1(2), 1(1), 2(1), 6(1) and 21(1). With this order, both tracks can be seen as a traversal in a clockwise motion. We shall look at both directions as suggested by Table 1 whose rules concern both tracks when a simple locomotive runs over them.

A close look at the tracks shows us at least two kinds of cells. There are three-milestoned cells as, for instance, 2(8) and 1(6), and four-milestoned ones as, for instance, 4(8) and 1(4). Table 2 shows us that for the cells 2(8) and 1(6), the same rules were applied:

16 WWBWWBWBW 18 WWBWWBBBB 24 BWBWWBWBW 30 WBBWWBWBW

Indeed, in those cells, taking into account the numbering of the sides defined

in Section 2, the milestones are neighbours 2, 6 and 8. Rule 16 is the conservative rule of the cell. Rule 18 can see the locomotive through neighbour 7, rule 24 can see the locomotive in the cell so that its neighbourhood is the same as that of rule 16, at last, rule 30 can see the locomotive in neighbour 1, witnessing that the locomotive is now in the next cell of the track. Here and in the tables, a red number for a rule means that its new state is opposite to its current one.

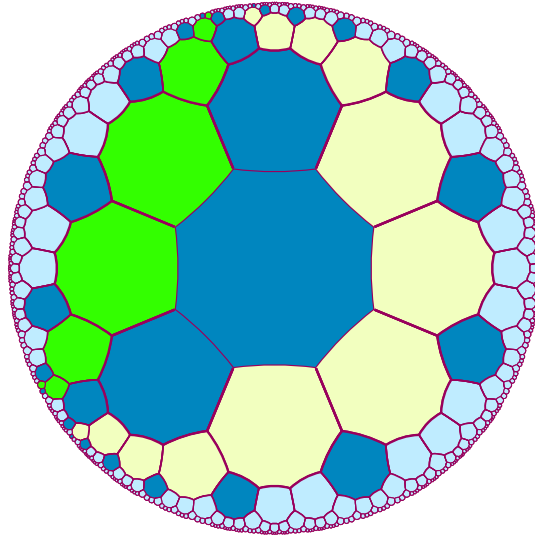


Figure 7 *Assembling elements of the tracks in order to construct tracks, idle configuration.*

Table 2 shows us that for the cells 4(8) and 1(4), the rules are:

4 WWBWBWBW 27 WBWBWBBB 19 BWBWBWBW 25 WBBWBWBW

Table 1 *Rules managing the motion of a simple locomotive on the tracks.*

clockwise motion			
1	<u>W</u> W	11	<u>W</u> B
2	<u>B</u> W	12	<u>W</u> B
3	<u>B</u> W	13	<u>W</u> B
4	<u>W</u> B	14	<u>B</u> B
5	<u>W</u> B	15	<u>W</u> W
6	<u>W</u> W	16	<u>W</u> B
7	<u>W</u> B	17	<u>B</u> B
8	<u>W</u> B	18	<u>W</u> B
9	<u>B</u> B	19	<u>B</u> B
10	<u>B</u> B	20	<u>B</u> B
21	<u>W</u> B	21	<u>W</u> B
22	<u>W</u> B	22	<u>W</u> B
23	<u>B</u> B	23	<u>B</u> B
24	<u>B</u> B	24	<u>B</u> B
25	<u>W</u> B	25	<u>W</u> B
26	<u>B</u> B	26	<u>B</u> B
27	<u>W</u> B	27	<u>W</u> B
28	<u>B</u> B	28	<u>B</u> B
29	<u>B</u> B	29	<u>B</u> B
30	<u>W</u> B	30	<u>W</u> B
31	<u>B</u> B	31	<u>B</u> B
32	<u>B</u> B	32	<u>B</u> B
33	<u>B</u> B	33	<u>B</u> B
34	<u>B</u> B	34	<u>B</u> B
35	<u>B</u> B	35	<u>B</u> B
36	<u>B</u> B	36	<u>B</u> B
37	<u>B</u> B	37	<u>B</u> B
38	<u>B</u> B	38	<u>B</u> B
counter-clockwise motion			
39	<u>B</u> B	41	<u>W</u> B
40	<u>W</u> B	42	<u>B</u> B
		43	<u>W</u> B

The milestones of the cell are in neighbours 2, 5, 7 and 8. The conservative rule of the cell is rule 4. Rule 27 can see the arriving locomotive through neighbour 6, rule 19 can see it in the cell, so that its neighbouring is also that of rule 4. At last, rule 25 can see the locomotive in neighbour 1, witnessing that it is now in the next cell of the track. Table 3 shows us that the same rules for four-milestoned cells are used as in the motion on the left-hand side, still in the clockwise motion.

Table 2 Execution of the rules 1 up to 38: motion along the tracks in the clockwise direction.

	4 ₈	3 ₈	2 ₈	1 ₇	1 ₆	1 ₅	1 ₄	2 ₄	5 ₃	4 ₃
1	25	24	18	4	16	16	4	16	16	4
2	4	30	24	27	16	16	4	16	16	4
3	4	16	30	19	18	16	4	16	16	4
4	4	16	16	25	24	18	4	16	16	4
5	4	16	16	4	30	24	27	16	16	4
6	4	16	16	4	16	30	19	18	16	4
7	4	16	16	4	16	16	25	24	18	4
8	4	16	16	4	16	16	4	30	24	27
9	4	16	16	4	16	16	4	16	30	19

Table 3 Execution of the rules 1 up to 38: in the clockwise direction, on the left-hand side of 0(0).

	9 ₃	2 ₃	1 ₂	1 ₁	2 ₁	6 ₁
1	22	19	27	4	4	4
2	12	25	19	27	4	4
3	12	4	25	19	27	4
4	12	4	4	25	19	27

Table 4 Execution of the rules 1 up to 38: in the counter-clockwise direction, on the right-hand side of 0(0).

	6 ₁	2 ₁	1 ₁	1 ₂	2 ₃	9 ₃
1	41	39	43	11	11	16
2	11	41	39	43	11	16
3	11	11	41	39	43	16
4	11	11	11	41	39	18

Now, Table 5 and 4 show us that other rules occur when the motion happens on the same tracks but in the opposite direction: counter-clockwise. For three-milestoned cells we have now the following rules:

$$12 \quad \underline{W}BWBWWWB \quad 40 \quad \underline{W}B BBBWWWB \quad 42 \quad \underline{B}WBWBWWWB \quad 22 \quad \underline{W}BBWBWWWB$$

Note that the milestones are now in neighbours 2, 4 and 8 instead of 2, 6 and 8: the change of side 1 explains the new situation. The rules show that the locomotive is successively seen in neighbours 3, 0 and 1 as expected, where neighbour 0 is the cell itself.

For four-milestoned cells the rules are now:

11 WBBWBWBW 43 WBBBBWB 39 BWBWBWBW 41 WBBWBWBW

The milestones are now in neighbours 2, 3, 5 and 8 instead of 2, 5, 7 and 8 for the same reason. The rules indicate that the locomotive is successively seen in neighbours 4, 0 and 1.

Table 5 Execution of the rules 1 up to 43: the locomotive on the tracks in the counter-clockwise direction.

	4 ₃	5 ₃	2 ₄	1 ₄	1 ₅	1 ₆	1 ₇	2 ₈	3 ₈	4 ₈
1	41	42	40	11	12	12	11	12	12	11
2	11	22	42	43	12	12	11	12	12	11
3	11	12	22	39	40	12	11	12	12	11
4	11	12	12	41	42	40	11	12	12	11
5	11	12	12	11	22	42	43	12	12	11
6	11	12	12	11	12	22	39	40	12	11
7	11	12	12	11	12	12	41	42	40	11
8	11	12	12	11	12	12	11	22	42	43
9	11	12	12	11	12	12	11	12	22	39

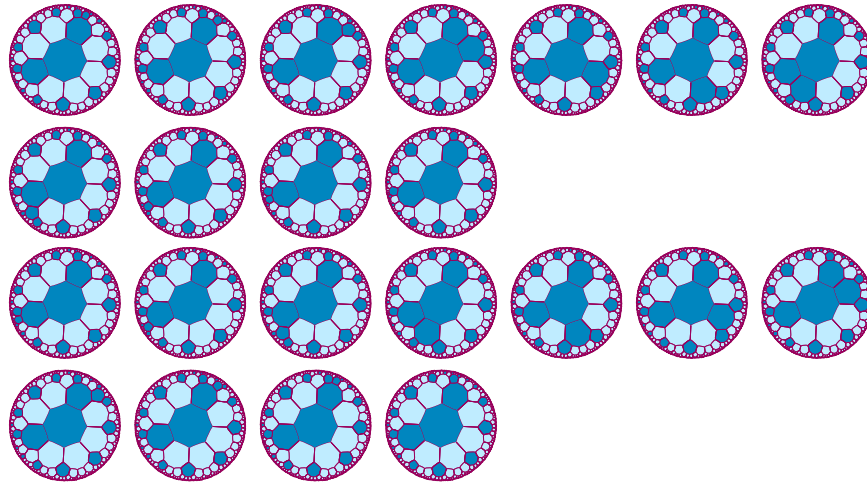


Figure 8 Illustration of the motion of a simple locomotive in a clockwise motion, above, and in a counterclockwise one, below.

Figure 8 illustrates the executions given by Tables 2 and 5. The motion of the simple locomotive is performed on the tracks which lie on the right-hand side of the central cell in Figure 7. In the first two rows the motion is clockwise. In the last two rows, the motion is counterclockwise on the same set of cells. Figure 9 illustrates the executions given by Tables 3 and 4 where the simple

locomotive runs over the tracks illustrated by the left-hand side of cell 0(0) in Figure 7. In the first row, the motion is clockwise, on the second one, it is counterclockwise.

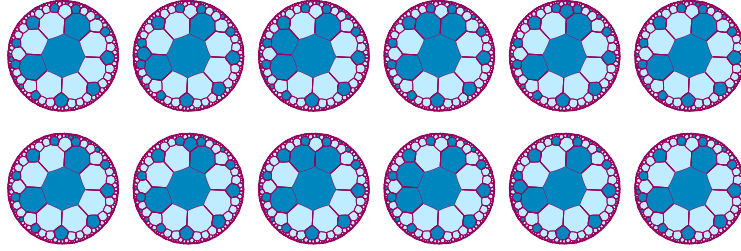


Figure 9 Illustration of the motion of a simple locomotive on tracks in an counterclockwise motion.

Let us now look at the motion of a double locomotive on the same tracks, again in both directions. Table 6 gives the rules concerning that situation.

Table 6 Rules for the motion of a double locomotive on the tracks.

44	<u>B</u> BWBBBWB	51	<u>B</u> BWWWWWB	58	<u>B</u> BBBWBWBW	65	<u>B</u> BBBWWWB
45	<u>B</u> WBWWWBBB	52	<u>B</u> BBBWBWB	59	<u>B</u> WBWBWBWB	66	<u>B</u> WBWBWBWB
46	<u>B</u> BBWBWBW	53	<u>B</u> BWBWBWB	60	<u>B</u> BBBWWWB	67	<u>B</u> BWWWBBW
47	<u>B</u> BBWWWWB	54	<u>B</u> WBWBWBWB	61	<u>B</u> WBWBWBWB	68	<u>B</u> BBBWWWB
48	<u>B</u> BWBWBWB	55	<u>B</u> WBWWWBBB	62	<u>B</u> BWWWWBW	69	<u>B</u> WBWBWBWB
49	<u>B</u> BBWWWB	56	<u>B</u> BWBWBWB	63	<u>B</u> BWBWWWB	70	<u>B</u> BWWWBBB
50	<u>B</u> WBWBWBWB	57	<u>B</u> BWBWBWB	64	<u>B</u> WBWBWBWB		

As can be seen on Tables 7, 8, 10 and 9, the rules for a double locomotive on the tracks makes use of the already mentioned rules. To these ones, we have to append rules which are induced by the structure of the double locomotive. This has an impact on the motion rules and also on several milestones. From Table 7, we can see that for the three-milestoned cells, the sequence of rules is not 16, 18, 24 and 30. Rule 24 is no more used and it is replaced by the occurrence of two rules:

$$45 \quad \underline{BWBWWWBBB} \quad 49 \quad \underline{BBBWWWBWB}$$

Indeed, rule 18 applies as the cell can only see the front of the arriving locomotive. When the front of the locomotive is in the cell, its rear is in neighbour 7 so that rule 24 cannot be applied. But rule 45 does apply: it can see the front of the locomotive in the cell itself and the rear in neighbour 7. Next, rule 49 applies: the front of the locomotive has been absorbed by the next cell: it is in the neighbour 1 of the cell under examination. The rear is still here, so it must leave the cell, which is performed by rule 49. Now, when the rear of the locomotive is in neighbour 1, the cell cannot see the front of the locomotive. Accordingly, rule 30 again applies, witnessing that the locomotive left the cell.

Table 7 Execution of the rules 1 up to 70: motion in the clockwise direction for a double locomotive.

	4 ₈	3 ₈	2 ₈	1 ₇	1 ₆	1 ₅	1 ₄	2 ₄	5 ₃	4 ₃
1	25	49	45	27	16	16	4	16	16	4
2	4	30	49	50	18	16	4	16	16	4
3	4	16	30	46	45	18	4	16	16	4
4	4	16	16	25	49	45	27	16	16	4
5	4	16	16	4	30	49	50	18	16	4
6	4	16	16	4	16	30	46	45	18	4
7	4	16	16	4	16	16	25	49	45	27
8	4	16	16	4	16	16	4	30	49	50

Table 8 Execution of the rules 1 up to 70: clockwise, double locomotive, on the left-hand side of 0(0).

	9 ₃	2 ₃	1 ₂	1 ₁	2 ₁	6 ₁
1	22	46	50	27	4	4
2	12	25	46	50	27	4
3	12	4	25	46	50	27

Table 9 Execution of the rules 1 up to 70: counterclockwise, double locomotive, on the left-hand side of 0(0).

	6 ₁	2 ₁	1 ₁	1 ₂	2 ₃	9 ₃
1	41	58	61	43	11	16
2	11	41	58	61	43	16
3	11	11	41	58	61	18

Table 10 Execution of the rules 1 up to 70 for a double locomotive in a counterclockwise motion.

	4 ₃	5 ₃	2 ₄	1 ₄	1 ₅	1 ₆	1 ₇	2 ₈	3 ₈	4 ₈
1	41	60	59	43	12	12	11	12	12	11
2	11	22	60	61	40	12	11	12	12	11
3	11	12	22	58	59	40	11	12	12	11
4	11	12	12	41	60	59	43	12	12	11
5	11	12	12	11	22	60	61	40	12	11
6	11	12	12	11	12	22	58	59	40	11
7	11	12	12	11	12	12	41	60	59	43
8	11	12	12	11	12	12	11	22	60	61

We can perform a similar analysis for the cells with four milestones:

50 BWBWBBBB B 46 BBBWBWBB

In that case, where rules 4, 27, 19, and 25 apply for a simple locomotive, here rule 19 is no more used and is replaced by rules 50 and 46 which then

allows rule 25 to be again applied.

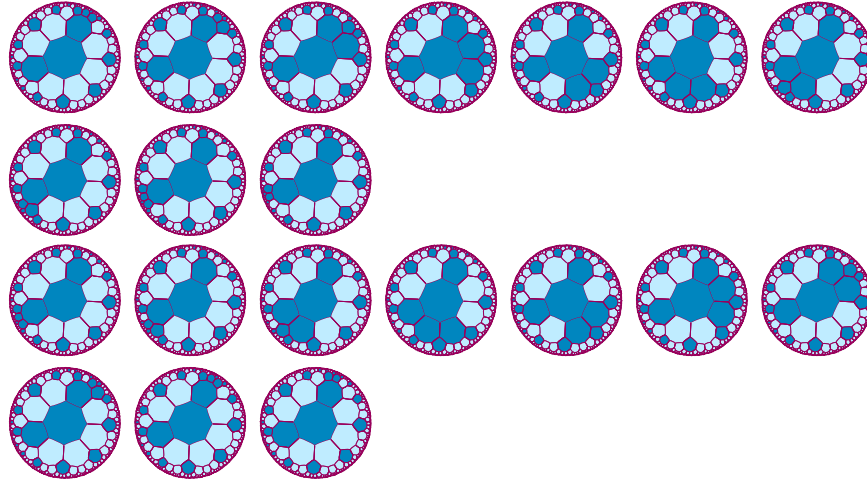


Figure 10 *Illustration of the motion of a double locomotive in a clockwise motion, above, and in a counterclockwise one, below.*

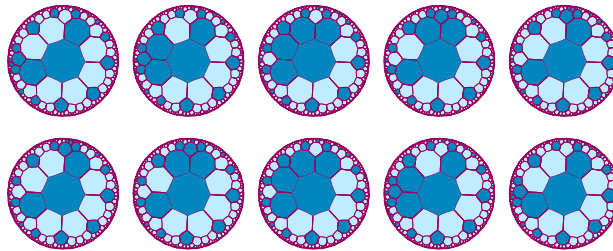


Figure 11 *Illustration of the motion of a double locomotive in a clockwise motion, above, and in a counterclockwise one, below.*

We noticed for a simple locomotive that the counterclockwise motion involved new rules with respect to those managing a clockwise motion. The same occurs for the double locomotive. In a three-milestoned cell, instead of the sequence of rules 12, 40, 42 and 22 we have the rules 12, 40, 59, 60, and 22. Indeed, rule 42 cannot be applied for the same reason that the locomotive now occupies two consecutive cells of the track. Instead rule 42, two new rules are involved, rule 59 and 60, see below and Table 6. Similarly, for a four-milestoned cell, the sequence of rules 11, 43, 39 and 41 is replaced by 11, 43, 61, 58 and 41 where the two new rules 61 and 58, see below and Table 6, replace rule 39 which cannot be applied here.

59 BWBBBWWBB 60 BBBWBWWBW 61 BWBBBWWBB 58 BBBWBWWBW

We conclude the sub-section with a remark on the rules managing the milestones. Several of them witness the passage of the locomotive, either when it is simple or when it is double. We shall consider three examples: the cells 1(8), 0(0) and 2(7), see Figure 7. Table 11 gives the rules used for those cells during the motion of the locomotive for the four cases: the simple locomotive clockwise running, then for the same one counterclockwise running, then for the double locomotive when it clockwise traverses the tracks and, at last, for the same locomotive when it counterclockwise traverses the tracks.

Table 11 Rules witnessing the passage of the locomotive. Symbols \curvearrowright , \curvearrowleft indicate clockwise motion, counterclockwise motions respectively.

0(0):	simple, \curvearrowright	simple, \curvearrowleft	double, \curvearrowright	double, \curvearrowleft
	3 <u>BWBBWWBWB</u>	3 <u>BWBWWBWBW</u>	3 <u>BWBBWWBWB</u>	3 <u>BWBWWBWBW</u>
	31 <u>BWBBWWBWB</u>	34 <u>BWBWWBWBW</u>	31 <u>BWBBWWBWB</u>	34 <u>BWBWWBWBW</u>
	29 <u>BWBWWBWBW</u>	32 <u>BWBWWBWBW</u>	52 <u>BWBWWBWBW</u>	54 <u>BWBWWBWBW</u>
	32 <u>BWBWWBWBW</u>	29 <u>BWBWWBWBW</u>	53 <u>BWBWWBWBW</u>	53 <u>BWBWWBWBW</u>
	34 <u>BWBWWBWBW</u>	31 <u>BWBWWBWBW</u>	54 <u>BWBWWBWBW</u>	52 <u>BWBWWBWBW</u>
	3 <u>BWBWWBWBW</u>	3 <u>BWBWWBWBW</u>	34 <u>BWBWWBWBW</u>	31 <u>BWBWWBWBW</u>
			3 <u>BWBWWBWBW</u>	3 <u>BWBWWBWBW</u>
1(8):	simple, \curvearrowright	simple, \curvearrowleft	double, \curvearrowright	double, \curvearrowleft
	17 <u>BBWWBBWBW</u>	10 <u>BBWWBBWBW</u>	44 <u>BBWWBBWBW</u>	10 <u>BBWWBBWBW</u>
	23 <u>BBWWBBWBW</u>	20 <u>BBWWBBWBW</u>	48 <u>BBWWBBWBW</u>	20 <u>BBWWBBWBW</u>
	29 <u>BBWWBBWBW</u>	29 <u>BBWWBBWBW</u>	52 <u>BBWWBBWBW</u>	52 <u>BBWWBBWBW</u>
	20 <u>BBWWBBWBW</u>	23 <u>BBWWBBWBW</u>	20 <u>BBWWBBWBW</u>	48 <u>BBWWBBWBW</u>
	10 <u>BBWWBBWBW</u>	17 <u>BBWWBBWBW</u>	10 <u>BBWWBBWBW</u>	44 <u>BBWWBBWBW</u>
2(7):	simple, \curvearrowright	simple, \curvearrowleft	double, \curvearrowright	double, \curvearrowleft
	2 <u>BWWWWWWWB</u>	2 <u>BWWWWWWWB</u>	2 <u>BWWWWWWWB</u>	2 <u>BWWWWWWWB</u>
	14 <u>BWBWWWWWB</u>	26 <u>BWBWWWWWB</u>	14 <u>BWBWWWWWB</u>	26 <u>BWBWWWWWB</u>
	26 <u>BWBWWWWWB</u>	14 <u>BWBWWWWWB</u>	47 <u>BWBWWWWWB</u>	47 <u>BWBWWWWWB</u>
	2 <u>BWBWWWWWB</u>	2 <u>BWBWWWWWB</u>	26 <u>BWBWWWWWB</u>	14 <u>BWBWWWWWB</u>
			2 <u>BWBWWWWWB</u>	2 <u>BWBWWWWWB</u>

It can be noted that all rules given in Table 11 do not change the current state of the cell. As they witness the passage of the locomotive, we cannot call them conservative rules.

The difference of direction of the motion makes it that, both for the simple and the double locomotive, that the same rules are used for both directions but in reverse order. Also, in the case of the double locomotive, new rules appear when both cells of the locomotive can be seen. At last, note for the cell 0(0), that the four neighbours 1(7), 1(6), 1(5) and 1(4) as represented in the rule constitute a window over consecutive cells of the tracks occupying neighbours 2, 1, 8 and 7 in this order, see rules 31, 29, 32 and 34 respectively. Similar observations hold for the cell 1(8) with also a window of four consecutive cells of the tracks and for the cell 2(7) too, whose window consists of two cells only: cells 1(7) and 1(6), *i.e.* neighbours 1 and 2 respectively.

3.2 The rules for the fixed switch

We now turn to the study of the fixed switch, a passive structure as noted in Sub-section 2.2. Table 12 gives new rules which are used for the crossing of the structure together with already used rules.

Table 12 Rules for the crossing of a fixed switch.

simple locomotive							
71	<u>WBBWBWBBW</u>	76	<u>WBBBWWWBW</u>	81	<u>BWBWWWWB</u>	86	<u>BWBWWWWB</u>
72	<u>BWBWBWWWB</u>	77	<u>BWWWBWBWB</u>	82	<u>BWWWBWWWB</u>	87	<u>BWBWWWWB</u>
73	<u>WWWWBWBBW</u>	78	<u>WBBBWWWBW</u>	83	<u>BBWBWBBW</u>	88	<u>BWBWWWWB</u>
74	<u>BWBWBWWWB</u>	79	<u>BWWWBWBWB</u>	84	<u>WBBWBWBBW</u>	89	<u>WBBBWBWBB</u>
75	<u>BWWWBWBWB</u>	80	<u>WBBWBWBBW</u>	85	<u>BWWWBWWWB</u>		
double locomotive							
90	<u>BWWWBWBWB</u>	93	<u>BBWBWBBWB</u>	96	<u>BWBWWWWB</u>	99	<u>BBBBWBWBB</u>
91	<u>BWWWBWBWB</u>	94	<u>BBBWWWWB</u>	97	<u>BWBWWWWB</u>		
92	<u>BWWWBWBWB</u>	95	<u>BBWBWBBWB</u>	98	<u>BWBWWWWB</u>		

Table 13 Execution of the rules for the fixed switch when a simple locomotive comes from the left-hand side.

	4 ₈	5 ₈	2 ₁	1 ₁	0 ₀	1 ₄	2 ₄	5 ₃	4 ₃
1	41	42	40	12	71	16	16	16	12
2	11	22	42	40	71	16	16	16	12
3	11	12	22	42	80	16	16	16	12
4	11	12	12	22	83	18	16	16	12
5	11	12	12	12	84	24	18	16	12
6	11	12	12	12	71	30	24	18	12
7	11	12	12	12	71	16	30	24	40

Table 13 shows us that the rules we have seen for a simple locomotive on the tracks are also used here: both the sequence 16, 18, 24 and 30 and 12, 40, 42 and 22. For 0(0), the central cell of the switch, we have the sequence of rules: 71, 80, 83, 84:

71	<u>WBBWBWBBW</u>	80	<u>WBBWBWBBW</u>	83	<u>BBWBWBBW</u>	84	<u>WBBWBWBBW</u>
----	------------------	----	------------------	----	-----------------	----	------------------

We can see that rule 71 is the conservative rule of 0(0). The cell has five milestones in its neighbours 1, 2, 4, 6 and 7. A locomotive arriving from the left is seen in neighbour 5 as shown by rule 80. Rule 83 witnesses that the simple locomotive is in the cell: it has the same neighbourhood as rule 71. At last, rule 84, which can see the locomotive in its neighbour 1, witnesses that the locomotive left the cell 0(0).

Table 14 shows us that when the locomotive comes from the right, the sequence 71, 80, 83, 84 is replaced by 71, 89, 83, 84: rule 80 is replaced by rule 89 WBBBWBWBB, where we can see that the locomotive is in neighbour 3, which corresponds to an arriving locomotive from the right.

Table 14 Execution of the rules for the fixed switch when a simple locomotive comes from the right-hand side.

	4 ₆	5 ₆	2 ₇	1 ₇	0 ₀	1 ₄	2 ₄	5 ₃	4 ₃
1	30	42	40	12	71	16	16	16	12
2	16	22	42	40	71	16	16	16	12
3	16	12	22	42	89	16	16	16	12
4	16	12	12	22	83	18	16	16	12
5	16	12	12	12	84	24	18	16	12
6	16	12	12	12	71	30	24	18	12
7	16	12	12	12	71	16	30	24	40

Table 15 Execution of the rules for the fixed switch when a double locomotive crosses the switch.

from the left-hand side									
	4 ₈	5 ₈	2 ₁	1 ₁	0 ₀	1 ₄	2 ₄	5 ₃	4 ₃
1	41	60	59	40	71	16	16	16	12
2	11	22	60	59	80	16	16	16	12
3	11	12	22	60	93	18	16	16	12
4	11	12	12	22	95	45	18	16	12
5	11	12	12	12	84	49	45	18	12
6	11	12	12	12	71	30	49	45	40

from the right-hand side									
	4 ₆	5 ₆	2 ₇	1 ₇	0 ₀	1 ₄	2 ₄	5 ₃	4 ₃
1	30	60	59	40	71	16	16	16	12
2	16	22	60	59	89	16	16	16	12
3	16	12	22	60	99	18	16	16	12
4	16	12	12	22	95	45	18	16	12
5	16	12	12	12	84	49	45	18	12
6	16	12	12	12	71	30	49	45	40

In Table 15 we can see the application of the rules when a double locomotive crosses the switch. The sequences of rules we have noticed for the three-milestoned cells of the track are replaced by the corresponding ones for a double locomotive. Also, the sequence of cells for the cell 0(0) is a bit changed as follows:

93 EBBWBBBBWB 99 BBBBWBWBWB 95 BBBWBBBBWB

When the locomotive comes from the left, rule 80 is replaced by rule 93, when it comes from the right, rule 89 is replaced by rule 99. In both cases, rule 83 is replaced by rule 95 and then, rule 84 applies as in the case of a simple

locomotive.

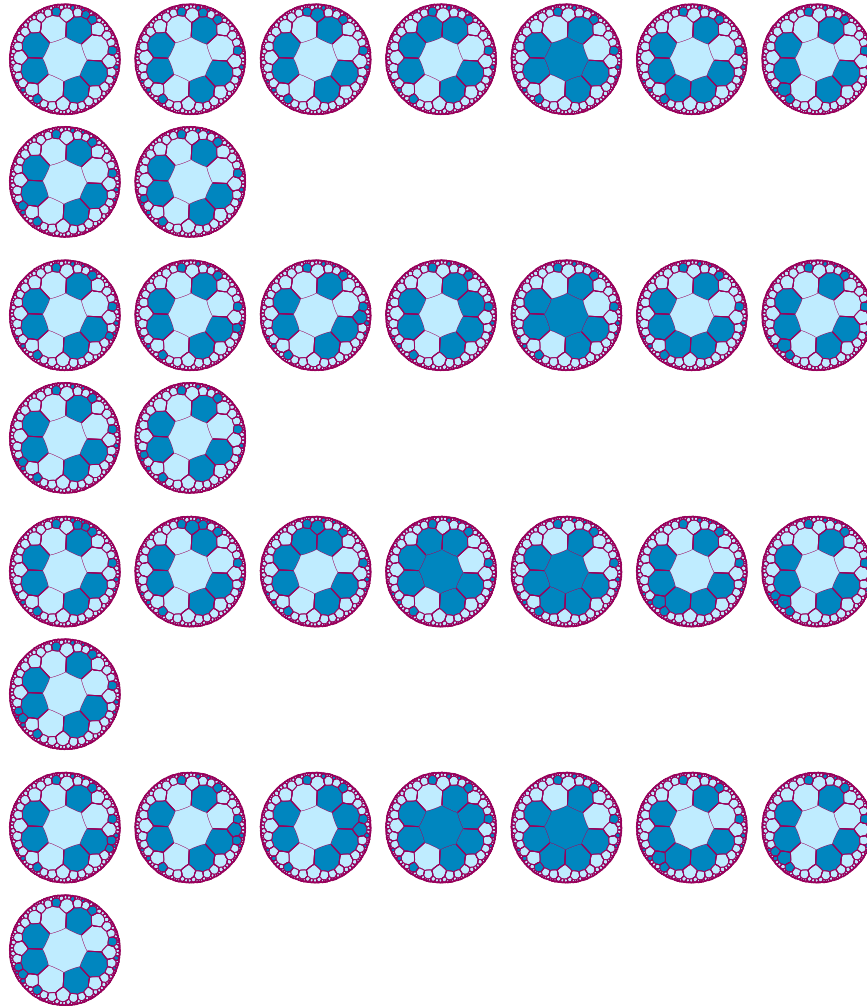


Figure 12 *Illustration of the motion of a double locomotive in a clockwise motion, above, and in a counterclockwise one, below.*

Figure 12 illustrates the four motions we have to consider for the fixed switch for which Tables 13, 14 and 15 give the rules used for such motions.

As in Sub-subsection 3.1, we conclude the sub-section with a study of a specific milestone of the configuration: the cell 1(8), see Table 16. Rule 85 is the conservative rule of the cell. The cell itself is black, as required for a milestone. It has a single black neighbour which is a milestone for the tracks arriving to the switch from the left.

Table 16 Rules witnessing the passage of the locomotive. Symbols \rightarrow , \leftarrow indicate a motion from the left, the right respectively.

1(8):	simple, \rightarrow	simple, \leftarrow	double, \rightarrow	double, \leftarrow
	75 <u>BWWWBBWWWB</u>	85 <u>BWWWBWWWWB</u>	90 <u>BWWWBBBWB</u>	85 <u>BWWWBWWWWB</u>
	77 <u>BWWWBWWWB</u>	72 <u>BWBWBWWWWB</u>	91 <u>BWWWBWBWB</u>	72 <u>BWBWBWWWWB</u>
	79 <u>BWWWBWWWB</u>	9 <u>BBWBWWWWB</u>	92 <u>BWWWBWBWB</u>	65 <u>BBWBWWWWB</u>
	82 <u>BWWWBWWWB</u>	85 <u>BWWWBWWWWB</u>	35 <u>BBWBWWWWB</u>	9 <u>BBWBWWWWB</u>
	9 <u>BBWBWWWWB</u>		9 <u>BBWBWWWWB</u>	85 <u>BWWWBWWWWB</u>
	85 <u>BWWWBWWWB</u>		85 <u>BWWWBWWWWB</u>	

The cell has two windows on the tracks: its neighbour 2 look at a cell of the tracks arriving to the switch from the right, see rules 72 in the case of a simple locomotive. Neighbours 5, 6, 7 and 8 offer a view on the tracks arriving to the switch from the left: see rules 75, 77, 79 and 82 in the case of a simple locomotive. At last, neighbour 1 is cell 0(0), the central cell of the switch. Note that rule 9 is common to all motions: the last cell of the locomotive is seen in the cell 0(0) which is neighbour 1 for 1(8).

When the locomotive is double, the rules are different when the locomotive arrives from the left: the window consists of four consecutive cells so that the two cells are visible for three tops of the clock as witnessed by rules 90, 91 and 93. When the last cell of the locomotive is in 1(1), *i.e.* neighbour 8 for 1(8), the front of the locomotive is in 0(0), which is neighbour 1 for 1(8), see rule 35. Note that rule 35 appears in Table 1. That rule is also used by the cell 1(3) when the locomotive is in the cell 1(4): it occurs in the motions on the track we already studied. It also occurs here, when a simple locomotive crosses the switch whatever the side from which it came.

3.3 The rules for the doubler and for the fork

Presently, we look at the new rules involved by the doubler and by the fork. The rules for the fork are mainly contained in those for the doubler as the doubler contains a fork. It also contains a fixed switch so that the rules of Table 12 should also be involved. The function of the fork is performed by the configuration of the cell 1(1) together with the sequence of rules 100, 104, and 106:

100 W₁WBWBWBW 104 W₁WBWBWBWB 106 BWBWBWBWB 84 W₁BBWBWBWB

Rule 100 is the conservative rule for 1(1). Note that two tracks have their origin in 1(1). We chose side 1 to be shared with the cell 1(8). This is why rule 104 can see the arriving locomotive in neighbour 5. Rule 106 witnesses the locomotive in the cell and makes it leave the cell. Rule 84 can see the locomotive in both neighbours 1, *i.e.* 1(8), and 7 which is 1(2). The left-hand side part of Table 18 shows us that starting from the application of rule 84, each locomotive goes on its way in the tracks: the locomotive created in 1(2) counterclockwise goes on, that created in 1(8) clockwise goes on.

Table 17 Rules for the motion of the locomotive through the doubler and through the fork.

100	<u>W</u> W <u>B</u> W <u>B</u> W <u>B</u> W	106	<u>B</u> W <u>B</u> W <u>B</u> W <u>B</u> W	112	<u>B</u> B <u>B</u> W <u>W</u> W <u>B</u> W	118	<u>B</u> W <u>W</u> W <u>W</u> B <u>B</u> B <u>W</u>
101	<u>B</u> W <u>W</u> W <u>W</u> B <u>W</u> W	107	<u>B</u> W <u>W</u> W <u>B</u> B <u>B</u> B	113	<u>B</u> B <u>B</u> W <u>W</u> W <u>W</u> W		fork
102	<u>B</u> W <u>W</u> B <u>W</u> W <u>W</u> W	108	<u>B</u> W <u>B</u> W <u>W</u> W <u>B</u> B	114	<u>B</u> B <u>B</u> B <u>B</u> W <u>W</u> W		
103	<u>W</u> W <u>W</u> W <u>W</u> B <u>W</u> W	109	<u>B</u> B <u>B</u> W <u>W</u> W <u>B</u> B	115	<u>B</u> W <u>B</u> B <u>W</u> W <u>W</u> W	119	<u>B</u> W <u>W</u> W <u>B</u> W <u>W</u> W
104	<u>W</u> W <u>B</u> W <u>B</u> B <u>B</u> W	110	<u>B</u> B <u>W</u> W <u>W</u> W <u>B</u> B	116	<u>B</u> B <u>B</u> W <u>B</u> W <u>W</u> W	120	<u>B</u> W <u>B</u> W <u>W</u> W <u>B</u> W
105	<u>B</u> W <u>W</u> W <u>B</u> W <u>B</u> B	111	<u>B</u> B <u>W</u> W <u>B</u> W <u>W</u> B	117	<u>W</u> W <u>W</u> W <u>B</u> B <u>B</u> B		

Table 18 Execution of the rules for the doubler. To left, around the cell 1(1), the fork; to right, around the cell 4(4), the fixed switch.

	5 ₁	1 ₁	1 ₂	2 ₃	1 ₈	1 ₇		2 ₄	3 ₄	4 ₄	5 ₄	2 ₅	15 ₄
1	24	104	11	12	16	16	5	11	12	71	16	16	16
2	30	106	43	12	18	16	6	11	12	71	16	18	16
3	16	84	39	40	24	18	7	43	12	71	18	24	16
4	16	100	41	42	30	24	8	39	40	89	24	30	16
5	16	100	11	22	16	30	9	41	60	93	30	16	18
							10	11	22	95	30	16	45
							11	11	12	84	16	16	49

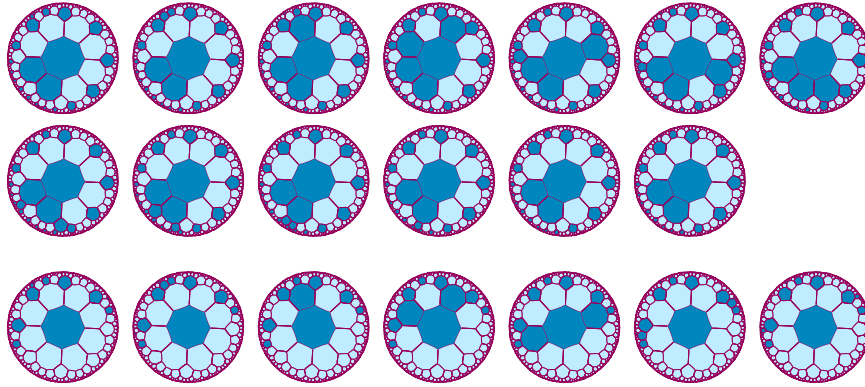


Figure 13 Illustration of the crossing of the doubler, above, and of the fork, below, by the locomotive.

Note that rule 84 is also applied when a locomotive crosses a fixed switch: it witnesses that the locomotive left the central cell of the switch. We also note that rule in the right-hand side part of Table 18 which deals with the fixed-switch part of the doubler.

The upper two rows of Figure 13 illustrate the crossing of the doubler by a locomotive. The last row of the figure illustrates the working of the fork: we can see as it is the same as the one which is installed in the doubler.

The doubler also contains a fixed switch, as already mentioned in Section 2. The right-hand side part of Table 18 shows us that the two locomotives arrive at the cell 4(4) with a time difference of one top of the clock as already mentioned. We can see that the locomotive which moved in a clockwise way arrive sooner than the other one, so that at time 8, see Table 18, we have a double locomotive in the fixed switch with its front in the cell 4(4) and its rear in the cell 3(4), the neighbour 5 of the cell 4(4):

71 WBBWBWBWBW 89 WBBBBWBWBW 93 BWBWBWBWBW 95 BWBWBWBWBW 84 WBBWBWBWBW

Note that the sequence of rules is a bit different from that of Table 15: the situation is a kind of mix between the two parts of Table 15 as here, the double locomotive arrives as two simple locomotive coming from *both* sides of the switch.

We conclude this subsection by two sequences of rules concerning milestones: the cells 1(3) and 1(4). The former witnesses the passage of the locomotive around it on six steps. The latter is a neighbour of 4(4), the central cell of the fixed switch, which is also a neighbour of 3(4) and 5(4), cells which belong to the tracks arriving to 4(4).

Table 19 *Rules used at the milestones 1(3) and 1(4) of the doubler.*

1(3)			1(4)		
51	<u>BW</u>	<u>WWW</u>	111	<u>BW</u>	<u>WWW</u>
94	<u>BB</u>	<u>WWW</u>	38	<u>BW</u>	<u>WWW</u>
109	<u>BW</u>	<u>BWWW</u>	110	<u>BW</u>	<u>WWW</u>
35	<u>BW</u>	<u>WBWWW</u>	51	<u>BW</u>	<u>WWW</u>
47	<u>BB</u>	<u>BBWWW</u>	52	<u>BB</u>	<u>BBWWW</u>
94	<u>BB</u>	<u>BBWWW</u>	114	<u>BB</u>	<u>BBWWW</u>
112	<u>BB</u>	<u>BBWWW</u>	116	<u>BB</u>	<u>BBWWW</u>
			47	<u>BB</u>	<u>BBWWW</u>

Table 19 shows us the rules applied to the cells 1(3) and 1(4). The rules for each cell are displayed on two columns and they follow each other from top to bottom first in the left-hand side column and then in the right-hand side one. We can see that for 1(3), the window of six consecutive cells is clear as well as the motion of the locomotive in the window. The cell 1(4) also has a window of six cells but their display is a bit different and the rules do not concern the rightmost cell of the window. In the first column devoted to 1(4), we can see the motion of the locomotive which arrives from the right. The motion of both locomotives clearly appears in the second column. We can see the constitution of the double locomotive, see rule 52 followed by rule 114. We also can see that the front corresponds to the right-hand side locomotive which arrives to 4(4) as the first one. Rule 116 shows us that the rear of the double locomotive is in 4(4). Table 18 shows us that when this is the case, rule 49 shows us that the front of the double locomotive arrived in 15(4). Table 19 shows us that the cell 4(4) did the job more clearly than Figure 13.

3.4 The rules for the selector

The selector is the last structure we need to implement roundabouts. The new rules needed by the structure are given in Table 20 while the execution of the rules used by the crossing of a locomotive are given in Table 21: the left-, right-hand side sub-table gives the rules used by a simple, double locomotive respectively.

In both sub-tables of Table 21, we can see that the track leading the locomotive to the selector make use of motion rules examined in Sub-section 3.1. We can see that the entrance to the selector, the cell 1(6), makes use of the same neighbourhood as the fixed switch. But as side 1 for 1(6) is different, the rules managing the cell are different from those used in the fixed switch for the cell 0(0).

Table 20 Rules for the locomotive through the selector.

simple locomotive					
121	<u>BWWWBWB</u>	128	<u>BWWWBWB</u>	135	<u>BWBWBWB</u>
122	<u>WBWBWB</u>	129	<u>BWBWBWB</u>	136	<u>WWWBWB</u>
123	<u>WBWBWB</u>	130	<u>BBBWWW</u>	137	<u>WBWBWB</u>
124	<u>BWBWBWB</u>	131	<u>BWBWBWB</u>	138	<u>BWWWBWB</u>
125	<u>WWWBWB</u>	132	<u>WBWBWB</u>	139	<u>WBWBWB</u>
126	<u>BWWWBWB</u>	133	<u>BWBWBWB</u>	140	<u>WBWBWB</u>
127	<u>WBWBWB</u>	134	<u>WBWBWB</u>	141	<u>WBWBWB</u>
142	<u>BWBWBWB</u>				
143	<u>BWBWBWB</u>				
144	<u>WBWBWB</u>				
145	<u>BWBWBWB</u>				
146	<u>BWBWBWB</u>				
147	<u>WWWBWB</u>				
double locomotive					
148	<u>BWBWBWB</u>	152	<u>BBBWBWB</u>	156	<u>BBBWBWB</u>
149	<u>BWBWBWB</u>	153	<u>BBBWWW</u>	157	<u>WBWBWB</u>
150	<u>BBBWWW</u>	154	<u>BBBWWW</u>	158	<u>WBWBWB</u>
151	<u>BWWWBWB</u>	155	<u>BWBWBWB</u>		

Table 21 Execution of the rules for a locomotive passing through the selector.

	simple locomotive							double locomotive							
	6 ₇	5 ₆	1 ₆	0 ₀	1 ₈	2 ₈	9 ₈	6 ₇	5 ₆	1 ₆	0 ₀	1 ₄	2 ₅	7 ₅	
1	22	24	127	16	125	12	16	1	22	49	149	18	16	16	12
2	12	30	129	18	125	12	16	2	12	30	152	45	132	16	12
3	12	16	134	24	136	12	16	3	12	16	157	154	155	18	12
4	12	16	141	137	143	40	16	4	12	16	123	16	30	24	40
5	12	16	123	16	147	42	18	5	12	16	123	16	16	30	42

The sequence of rules used by 1(6) when a simple locomotive crosses it is given by: 123, 127, 129, 134, 141:

123 WBWBWB 127 WBWBWB 129 BWBWBWB 134 WBWBWB 141 WWWBWB

Rule 123 is the conservative rule for the structure, see Figure 4. Rule 127 can see the locomotive arrived in neighbour 6 which is the cell 5(6). Rule 129 can see the locomotive in the cell and it makes it leave the cell. Rule 134 witnesses

that the locomotive is now in the cell 0(0). Rule 141 can see that the cell 1(5) turned to white and then the next time, rule 123 again applies, witnessing that the cell 1(5) turned back to black. We shall see the effect of this flash issued by the cell 1(5).

The sequence of rules used by 1(6) when the locomotive is double is given by the sequence: 123, 127, 149, 152, 157:

123 WBBWBWBW 127 WBBWBBBB 149 BWBWBBBB 152 BBBWBBB 157 WBBWBWBW

The first two rules are the same as previously. Now, after that, rule 149 is needed to make the rear of the double locomotive enter the cell 1(6). Then, rule 152 makes 1(6) turn back to white as the locomotive, seen in neighbour 1, is now in the cell 0(0). Then, rule 157 can see the rear of the locomotive in 0(0) and it also can see that the cell 1(7) turned to white as neighbour 8 in the rule is white. As rule 123 again applies, there is no locomotive in 0(0) and 1(7) turned back to black.

Table 22 gives the rules used by the cells 1(5) and 1(7) which we call the **sensors** of the selector.

For each sensor, we give the rules for a passage of a simple locomotive and those for the passage of a double one. Let us first look at the cell 1(5). The conservative rule is rule 121 and the position of the three consecutive black neighbours shows us that side 1 is shared with 0(0). Rule 126 witnesses that the locomotive is in the cell 1(6). Rule 133 can see the locomotive in 0(0) and as the locomotive is simple, cell 1(6) is now white, so that the sensor 1(5) flashes: it becomes white. Now, rule 139 shows us that there is a locomotive in 1(4) and the rule makes the cell 1(5) return to black. As cell 121 again applies, we can see that the locomotive which was in 1(4) vanished as the cell 2(5) which belongs to the track starting from 1(4) is white. Also see Figure 14.

Table 22 *The rules used by the sensors 1(5), to left, and 1(7), to right, of the selector.*

simple		double		simple		double	
121	<u>B</u> WWW <u>BBB</u> <u>W</u>	121	<u>B</u> WWW <u>BBB</u> <u>W</u>	124	<u>B</u> WB <u>BBB</u> <u>WW</u> <u>B</u>	124	<u>B</u> WB <u>BBB</u> <u>WW</u> <u>B</u>
126	<u>B</u> WWW <u>BBB</u> <u>B</u>	126	<u>B</u> WWW <u>BBB</u> <u>B</u>	131	<u>B</u> WB <u>BBB</u> <u>WW</u> <u>B</u>	131	<u>B</u> WB <u>BBB</u> <u>WW</u> <u>B</u>
133	<u>B</u> B <u>WWW</u> <u>BBB</u> <u>W</u>	151	<u>B</u> B <u>WWW</u> <u>BBB</u> <u>B</u>	135	<u>B</u> B <u>WB</u> <u>BBB</u> <u>WW</u> <u>B</u>	153	<u>B</u> B <u>BBB</u> <u>BB</u> <u>WW</u> <u>W</u>
139	<u>W</u> WB <u>WWW</u> <u>BBB</u> <u>W</u>	156	<u>B</u> BB <u>WB</u> <u>BBB</u> <u>W</u>	142	<u>B</u> WB <u>BBB</u> <u>WW</u> <u>B</u>	158	<u>W</u> B <u>WB</u> <u>BBB</u> <u>WW</u> <u>B</u>
121	<u>B</u> WWW <u>BBB</u> <u>W</u>	160	<u>B</u> WB <u>WB</u> <u>BBB</u> <u>W</u>	146	<u>B</u> WB <u>BBB</u> <u>WB</u> <u>B</u>	124	<u>B</u> WB <u>BBB</u> <u>WW</u> <u>B</u>
		121	<u>B</u> WWW <u>BBB</u> <u>W</u>	124	<u>B</u> WB <u>BBB</u> <u>WW</u> <u>B</u>		

Consider the case when a double locomotive crosses the selector: for 1(5), it is the second column of Table 22. We can see that rule 151 detects that the locomotive is double: both neighbours 1, 0(0), and 8, 1(6), are black. Next, rule 156 can see the rear of the locomotive in 0(0) and a new one in 1(4). Then, rule 160 witnesses that there is no locomotive in 0(0), nor in 1(4), but that the locomotive which was previously in 1(4) is now in 2(5). This means that when the locomotive is simple, it does not go through the track starting from 1(4), but when it is double, then a simple locomotive is sent on the track starting

from 1(4). This is illustrated by the first row of Figure 14.

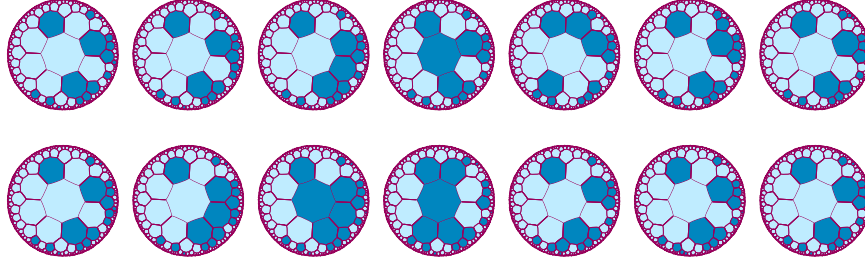


Figure 14 *Illustration of the crossing of the selector: above, by a simple locomotive, below, by a double one.*

Let us now study what happens at the sensor 1(7). It has the same neighbourhood as the sensor 1(5). Its side 1 is also shared with 0(0), but as the numbering is always defined with the same orientation, rule 121 cannot apply and a new rule is needed: rule 124. The detection of the front of the locomotive is detected by rule 131. Rule 135 detects that a simple locomotive arrived. Accordingly, the sensor remains black. After that, rules 142 and 146 witness that a simple locomotive was in 1(8) and 2(8) respectively: the locomotive goes on the track issued from 1(8).

If a double locomotive arrives, rule 131 again applies and at the next step, when the front of the locomotive is in 0(0), its rear is in 1(6) which is detected by rule 153 which makes the sensor flash: it becomes white. Rule 158 restores the black colour of the sensor and witnesses that a simple locomotive is in 1(8) and that the rear of the double locomotive is in 0(0). Rule 124 shows that, at the next time, there is no locomotive in 0(0), neither in 1(8) nor in 2(8). This is illustrated by the second row of Figure 14. Accordingly, the rules up to the last one of Table 20 allow the selector to work as indicated in Section 2.

3.5 The rules for the controller

Let us now consider the rules for the controller of the active switches. The rules are displayed by Table 24. As mentioned in the table itself, the two columns in the left-hand side deal with the passage of the locomotive while the last column deals with the change of colour of the controller. We remind the reader that the colour of the controller is the colour of the cell 1(3) in Figure 5. Table 25 and Figure 24 illustrate the crossing of a black controller by the locomotive. All cells of the track obey the rules we have considered for the tracks for three-milestoned rules but the cell 1(4) for which specific rules are used, although it is also a three-milestoned cell. Let us look at those specific rules as well as the rules used for the cell 1(3), also specific rules, all of them repeated in Table 23.

Let us first consider the cell 1(4) when the locomotive crosses a black controller. Rule 164 is the conservative rule. The next cell on the track is 2(5) so

that the side shared by those cells is side 1 for 1(4), whence the new rules 164, 167, 168 and 169 although 1(4) is a three-milestoned cell. The reason is that in the usual situation of the tracks, the exit occurs through a cell which stands in between two milestones. This is not the case here: this requires specific rules. To these rules, we could append corresponding rules for the case of a double locomotive: $\underline{BWBWBWBWB}$ and $\underline{BBWBWBWBW}$. Note that the following rules:

$$\underline{WWWBWBWBW} \quad 136 \quad \underline{WWWBWBWBW} \quad 143 \quad \underline{BWBWBWBWB} \quad \underline{WBWBWBWBW}$$

are compatible with the present rules. To these rules, it would also be possible to use rules for a double locomotive, looking these cells as tracks only: rules $\underline{BWBWBWBWB}$ and $\underline{BBWBWBWBW}$. As can be expected, cell 1(4) is not affected when the locomotive arrives to a white controller. Rule 173 is the conservative rule in that case and it is always applied during such a passage: the locomotive does not even arrive to 0(0).

Table 23 Rules for 1(4) and for 1(3), when the locomotive passes and when the signal passes.

cell 1(4)		cell 1(3)	
locomotive	signal	locomotive	signal
black	black	black	black
164 $\underline{WBWBWBWBW}$	164 $\underline{WBWBWBWBW}$	68 $\underline{BBBBBWWWB}$	68 $\underline{BBBBBWWWB}$
167 $\underline{WBWBWBWBW}$	180 $\underline{WBWBWBWBW}$	163 $\underline{BBBBBWBWB}$	153 $\underline{BBBBBWWWB}$
168 $\underline{WBWBWBWBW}$	173 $\underline{WBWBWBWBW}$	166 $\underline{BBBBBWBWB}$	172 $\underline{BBBBBWWWB}$
169 $\underline{WBWBWBWBW}$		68 $\underline{BBBBBWWWB}$	
164 $\underline{WBWBWBWBW}$	white		white
	173 $\underline{WBWBWBWBW}$	white	172 $\underline{WBWBWBWBW}$
	178 $\underline{WBWBWBWBW}$	172 $\underline{WBWBWBWBW}$	177 $\underline{WBWBWBWBW}$
173 $\underline{WBWBWBWBW}$	164 $\underline{WBWBWBWBW}$		68 $\underline{BBBBBWWWB}$

Table 24 Rules for the control: passage of the locomotive and signal for changing the selected track.

passage of the locomotive		signal
black	white	$W \rightarrow B$
161 $\underline{WWWWWBWBW}$	170 $\underline{WBWBWBWBW}$	175 $\underline{WBWBWBWBW}$
162 $\underline{WBWBWBWBW}$	171 $\underline{WBWBWBWBW}$	176 $\underline{WBWBWBWBW}$
163 $\underline{BBBBBWBWB}$	172 $\underline{WBWBWBWBW}$	177 $\underline{WBWBWBWBW}$
164 $\underline{WBWBWBWBW}$	173 $\underline{WBWBWBWBW}$	178 $\underline{WBWBWBWBW}$
165 $\underline{WBWBWBWBW}$	174 $\underline{WBWBWBWBW}$	179 $\underline{WBWBWBWBW}$
166 $\underline{BBBBBWBWB}$		
167 $\underline{WBWBWBWBW}$		$B \rightarrow W$
168 $\underline{WBWBWBWBW}$		180 $\underline{WBWBWBWBW}$
169 $\underline{WBWBWBWBW}$		

When the signal arrives to the controller in order to change the colour in the cell 1(3), the cell 1(4) remains white and it simply witnesses the arrival of the signal to the cell 2(4) and the corresponding change in 1(3): rule 180 when 1(3) is black, rule 178 when it is white.

Presently, consider the case of the cell 1(3). Rule 68 is the conservative rule when the controller is black, rule 172 is the conservative rule when it is white. When 1(3) is black, rule 163 can see the locomotive in 0(0), its neighbour 7, and rule 166 can see it in 1(4), its neighbour 6. When 1(3) is white, it remains unchanged when the locomotive arrives and remains under rule 172 for the same reason as the cell 1(4) remains under rule 173.

The cell 1(3) can see the signal when it is in the cell 2(4) only: the cell 6(4) is not visible from 1(3). The change from black to white is performed by rule 153 and the change from white to black is performed by rule 177. In both cases, the signal is seen in neighbour 5, see Table 23. See Table 26 too.

Table 25 Execution of the rules used during the traversal of a black controller by the locomotive.

	6 ₇	2 ₇	1 ₆	0 ₀	1 ₄	2 ₅	3 ₅	10 ₅	1 ₃
1	22	42	18	12	164	16	16	16	68
2	12	22	24	40	164	16	16	16	68
3	12	12	30	42	167	16	16	16	163
4	12	12	16	22	168	132	16	16	166
5	12	12	16	12	169	24	18	16	68

Table 26 Execution of the rules when the locomotive arrives to a white controller and when the signal for changing the colour arrives.

locomotive, 1(3) white					signal for changing the colour							
	6 ₇	2 ₇	1 ₆	0 ₀	W → B			B → W				
1	22	42	18	170								
2	12	22	24	175	1	177	30	179	1	153	30	39
3	12	12	16	170	2	68	16	11	2	172	16	174

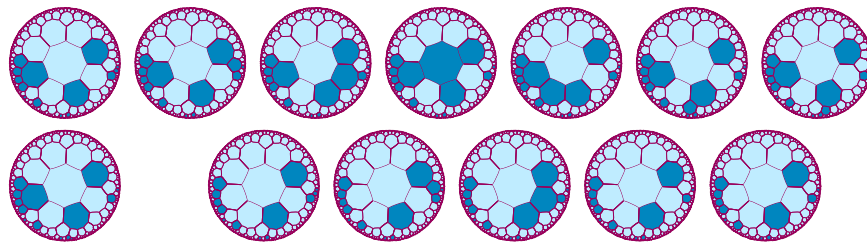


Figure 15 Illustration of the crossing of the controller by the locomotive: above and first figure of the second row, when it is black, below after the first figure, when it is white.

Figure 15 illustrates the crossing of controller by the locomotive in both

cases, according to the colour of 1(3). Figure 16 illustrates the arrival of the signal for changing the colour of the controller.

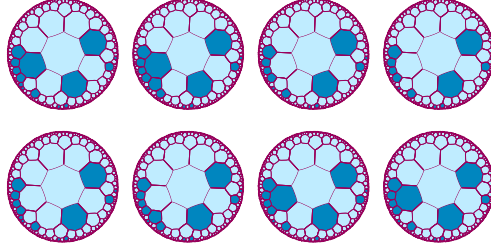


Figure 16 *Illustration of the arrival of the signal to the controller. Above: from black to white; below: from white to black.*

3.6 The rules for the sensor

In this last subsection of Section 3, we examine the rules which manage the working of the sensor, the specific control structure of the passive memory switch. Sub-section 2.3 in Section 2 explained the working of the structure, pointing at the differences between the controller and the sensor illustrated by Figures 5 and 6.

Table 27 illustrates the rules which have to be appended to the already examined ones in order to make the structure working as expected.

Table 27 *Rules for the sensor of the passive memory switch.*

	black	white	B → W
181	<u>W</u> BBWBBW <u>W</u>	184 <u>W</u> WBWBBW <u>W</u>	189 <u>W</u> BBBBB <u>W</u> <u>B</u>
182	<u>W</u> WBW <u>W</u> W <u>W</u> <u>W</u>	185 <u>W</u> WBW <u>W</u> W <u>B</u> <u>W</u>	190 <u>B</u> WBWBBW <u>W</u>
183	<u>W</u> BBB <u>W</u> B <u>W</u> <u>B</u>	186 <u>W</u> BBBB <u>W</u> B <u>B</u>	191 <u>W</u> WBW <u>W</u> W <u>W</u> <u>W</u>
		187 <u>W</u> BBW <u>W</u> W <u>B</u> <u>W</u>	
		188 <u>W</u> BBW <u>B</u> W <u>B</u> <u>W</u>	

A few rules are appended to the 180 previous rules examined in the previous sections. As can be seen in the comparison of Figures 5 and 6, many rules used for the controller are also used for the sensor. As an example, as long as the sensor is white, the rules executed in the cells of the tracks when the locomotive passes are the same as those used in the same action when the controller is black, see Tables 25 and 28.

Besides the fact that the cell 1(3) is no more considered in Table 28, the difference is in the rules concerning the cell 0(0) starting from time 4. The reason is that the passage of the locomotive through the white sensor transforms it into a black sensor, see the first row of Figure 17.

Let us look at what happens at the cell 0(0). Instead of the rules 12, 40, 42,

22 for the passage of a simple locomotive, where rule 12 is the conservative rule of 0(0) in the white sensor, we have the sequence 12, 40, 42, 188, 100:

$$188 \quad \underline{WBBWBWBWBW} \quad 100 \quad \underline{WBBWBWBWBW}$$

where rule 100 is the conservative rule for 0(0) in a black sensor. The comparison with rule 12, $\underline{WBBWBWBWBW}$, shows us that the locomotive is in 1(4), which means that it left the cell 0(0), and that the cell 1(1), neighbour 6 of 0(0), is now black. Rule 100 confirms that the cell 1(1) remains black: the sensor turned to black.

Table 28 Execution of the rules when the sensor is white and then a locomotive passes.

	6 ₇	2 ₇	1 ₆	0 ₀	1 ₄	2 ₅	3 ₅	10 ₅
1	22	42	18	12	164	16	16	16
2	12	22	24	40	164	16	16	16
3	12	12	30	42	167	16	16	16
4	12	12	16	188	168	132	16	16
5	12	12	16	100	169	24	18	16

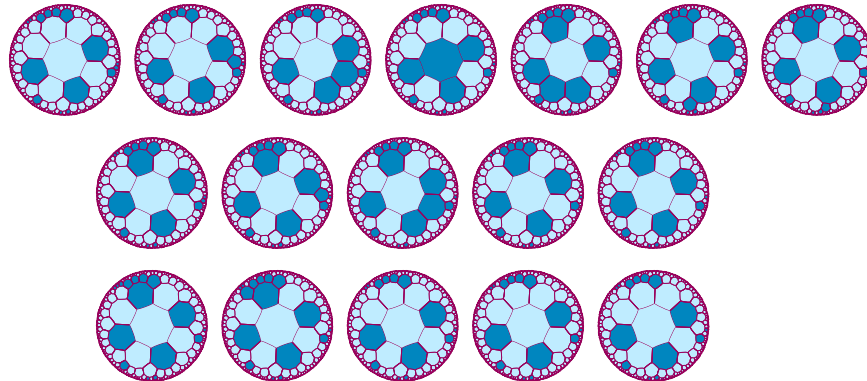


Figure 17 Illustration of the working of the sensor. First row: passage of the locomotive; second row: the locomotive is stopped; third row: the signal changes a black sensor to a white one.

Table 29 displays the rules in the cells of the tracks when the locomotive arrives at a black sensor as well as the rules used by the cells of the track which conveys the signal for changing the colour.

Let us look at the cell 1(1) which gives its colour to the sensor. The conservative rule for 1(1) is rule 68 when it is black, rule 172 when it is white. The change of colour are induced by rule 186 for $W \rightarrow B$ and by rule 153 for $B \rightarrow W$. We have already seen rule 153 which operates the same change for the cell 1(3) which gives the colour of the controller. In rule 186, $\underline{WBBBBWBWBW}$,

we can see that the change is triggered by the arrival of the locomotive at the cell 0(0) which is neighbour 7 in 1(1). In the controller, 0(0) is also neighbour 7 for 1(3). But rule 186 cannot be applied in the controller: when 1(3) is white in the controller, the locomotive never occurs in 0(0). In the controller, the change was triggered by the occurrence of the signal in neighbour 5. This is why we again find rule 153 here for turning the colour from black to white, as in the case of the controller. Note that the conservative rules for the cell 1(1) are the same as those for the cell 1(3) in the controller.

Table 29 Execution of the rules for the black sensor, for the locomotive and for the signal.

	locomotive						signal			
	6 ₇	2 ₇	1 ₆	0 ₀	1 ₄		10 ₅	1 ₁	6 ₂	2 ₂
1	22	42	18	100	164	1	16	153	30	190
2	12	22	24	183	164	2	16	172	16	184
3	12	12	16	100	164					

We observe that the sub-table of Table 29 ruling the signal is almost the same as the corresponding one in Table 26. The difference is in the cell at which the signal arrives: the cell 2(4) in the controller, the cell 2(2) here, in the sensor. For the black sensor, the rules for 2(2) are 181, 189, 190, 184:

181 WBBBWWWW 189 WBBBBBWWB 190 BBBBWWWW 184 WWBWBWWWW

Rule 181 is the conservative rule for 2(2) in a black sensor. Rule 189 can see the arriving signal in neighbour 4 which is 6(2) and it makes it enter the cell. Rule 190 restores the white colour of 2(2). But the content of 1(1), neighbour 2, is changed so that the new conservative rule is rule 181, when the sensor is white. Why is the cell 2(2) of the sensor different from the cell 2(4) of the controller? The reason is that according to the natural definition of side 1 which would be the side shared with 1(2), a new rule making the cell enter 2(2) could be accepted but then, the rule BBBBBBWWWW would be in conflict with rule 131, BBBBBBWWWB which is not compatible as a motion rule.

Let us remark that Table 29 shows us that the locomotive is stopped by a black sensor: the conservative rule for 0(0) in the black sensor is rule 100, as already noticed. Also note that we already met the rule in the doubler and in the fork. At some point rule 183, WBBBWBWBW, is used. The rule shows us that 0(0) can see the arriving locomotive in 1(6), its neighbour 3, so that it remains white as the sensor, neighbour 6, is black. This is enough to cancel that locomotive as the usual motion rules of the tracks erase it from the cell 2(7), see Figure 6.

We completed the examination of the rules for the sensor. Accordingly, Theorem 1 is proved. \square

Conclusion

The result is close to the best: the tessellation $\{7, 3\}$ is the tessellation $\{p, 3\}$ where p has the smallest value as possible for the hyperbolic plane. Is it possible to implement the same model there? The question seems to be very difficult.

References

- [1] M. Margenstern, *Cellular Automata in Hyperbolic Spaces, vol. 2, Implementation and computations*, Collection: *Advances in Unconventional Computing and Cellular Automata*, Editor: Andrew Adamatzky, Old City Publishing, Philadelphia, (2008), 360p.
- [2] M. Margenstern, A family of weakly universal cellular automata in the hyperbolic plane with two states, *arXiv:1202.1709*, (2012), 83 p.
- [3] M. Margenstern, *Small Universal Cellular Automata in Hyperbolic Spaces: A Collection of Jewels*, Springer Verlag, (2013), 331p.
- [4] M. Margenstern, A weakly universal cellular automaton in the pentagrid with three states, *arXiv:1510.09129*, (2015), 40p.
- [5] M. Margenstern, A weakly universal cellular automaton on the pentagrid with two states, *arXiv:1512.07988v1*, (2015), 38p.
- [6] M. Margenstern, A weakly universal cellular automaton with 2 states in the tiling $\{11, 3\}$, *Journal of Cellular Automata*, **11**(2-3), (2016), 113-144.
- [7] M. Margenstern, Cellular Automata in Hyperbolic Spaces, chapter in *Advances in Unconventional Computing*, Springer, to appear.
- [8] M. Margenstern, A new system of coordinates for the tilings $\{p, 3\}$ and $\{p-2, 4\}$, *arXiv:1605.03753*, (2016), 33p.
- [9] M. Margenstern, A weakly universal cellular automaton on the tessellation $\{9, 3\}$, *arXiv:1605.09518*, (2016), 37p.
- [10] M. Margenstern, Y. Song, A universal cellular automaton on the ternary heptagrid, *Electronic Notes in Theoretical Computer Science*, **223**, (2008), 167-185.
- [11] M. Margenstern, Y. Song, A new universal cellular automaton on the pentagrid, *Parallel Processing Letters*, **19**(2), (2009), 227-246.
- [12] M.L. Minsky, *Computation: Finite and Infinite Machines*, Prentice-Hall, Englewood Cliffs, NJ, 1967.
- [13] I. Stewart, A Subway Named Turing, Mathematical Recreations in *Scientific American*, (1994), 90-92.