

NEW APPROACHS TO QUANTUM COMPUTER SIMULATION IN A CLASSICAL SUPERCOMPUTER

J. Robert Burger

California State University Northridge

CSUN Report Number HCEEN006_3

ABSTRACT

Classical simulation is important because it sets a benchmark for quantum computer performance. Classical simulation is currently the only way to exercise larger numbers of qubits. To achieve larger simulations, sparse matrix processing is emphasized below while trading memory for processing. It performed well within NCSA supercomputers, giving a state vector in convenient continuous portions ready for post processing.

1. BACKGROUND

Simulation is critical to confidence and to the yet-to-be-designed quantum computer, as it was for nuclear energy. Certainly simulation, scaled as it may be, will be less costly than experimental testing of a quantum computer. Without extensive simulation, a working model invariably will have unacceptable limitations, such as low probability for a correct answer. Today, better simulators, to the limits of classical computational power, are urgently needed to incorporate recent results in reversible logic, and to study performance in space and time [1,2,3].

There have been serious efforts at simulation in the private sector [4]. A beautiful simulator is Universal Quantum Computation Simulator, listed on the web in 1999, with a free version available to the public [5]. This version accepts only a limited number of qubits however.

Another interesting package entitled LGP2 and QC Simulator was listed on the web in 1997. This simulator can employ 'genetic' programming system to discover new quantum algorithms [4]. But the overhead involving random variables is likely to subtract from the power available for simulation in a conventional computer.

Attempts at simulation have emerged in studies of quantum neural networks [6]. Here the state of a quantum system is computed in the time domain, in contrast to the work below, which considers only the steady state.

A general comprehensive reference that defines terms and ideas in quantum computation and information is readily available [7]. To begin, a quantum computer simulator, like the physical implementation itself, must be initialized [8,9,10,11]. Below we allow arbitrary magnitude and phase in a state vector to begin.

In a basic model with M qubits, M bits can be used to address a given entry in the state vector. Considering projected numerical requirements, and considering redundancy for error correction, the ideal number of address bits should be perhaps a few hundred [1]. Jobs of this size run classically only for special cases, that is, with limited quantum parallelism [12]. Assuming full parallelism and $M = 64$, the word size in a modern workstation, it is impossible today to store completely even one state vector ($2^M \approx 1.8 \times 10^{19}$) in RAM. The first question is how large a state vector can we run? The second question is how long will it take?

To partially answer such questions in today's technology, the author implemented his sparse matrix algorithm using modi4 at NCSA (National Center for Supercomputer Applications). This system offers 64 processors, 16 Gb, and 123 Gb of scratch disk.

2. SPARSE MATRIX APPROACH

(a) Overview

In this presentation there is a unitary matrix that transforms the initial state \mathbf{k}_1 into a new state \mathbf{k}_2 . Any matrix that satisfies $\mathbf{U}^+\mathbf{U} = \mathbf{I}$ is unitary, for example,

$$\begin{bmatrix} & & & 1 \\ 1 & & & \\ & & 1 & \\ & -1 & & \end{bmatrix}$$

To simplify, we assume a class of unitary matrices implied by a wiring diagram. In contrast to the above matrix, any one step in a wiring diagram gives a matrix that is symmetrical about the principle diagonal as shown below. Assuming that phase gates are not used, each matrix element produced by a wiring diagram will be non-negative. Sparse matrices from wiring diagrams have only one non-zero entry per row and it is unity. Below in parts (b) through (g) it is shown how to calculate a unitary matrix from a wiring diagram.

(b) Approach When a(1) is the Target Bit

In this paper the identifier, or address bits $a(M) \dots a(2)a(1)$ where $a(1)$ is the LSB in Figure 1, point to an element in the state vector. In Step 1, $a(1)$ is the target bit and $a(2)$ is the controlling bit. The steps in the wiring diagrams, of course, scramble addresses in a certain useful way. Assuming eight addresses, each is modified, for example, 011 to 010.

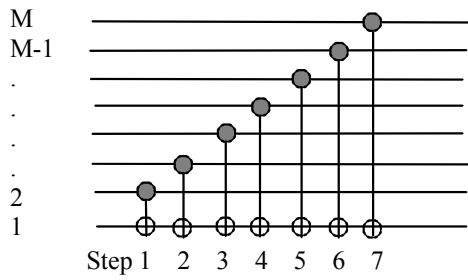


Figure 3. Test Program.

Using the automatic parallelizing option (apo) with up to 64 processors Figure 4 resulted. Plotted are cpu times divided by 64, that is, approximate run times. Fewer than 28 qubits does not require all 64 processors, which is why the curve deviates from a straight line on the left. Note the apo could not run nested loops in parallel, although it did mark the inner loop as parallelized. The extrapolated results are sensitive to the slope of the data (roughly x3.4 per bit shown going from $M = 30$ to 31). This slope depends on computer efficiency with large arrays, so extrapolation to large M is not recommended.

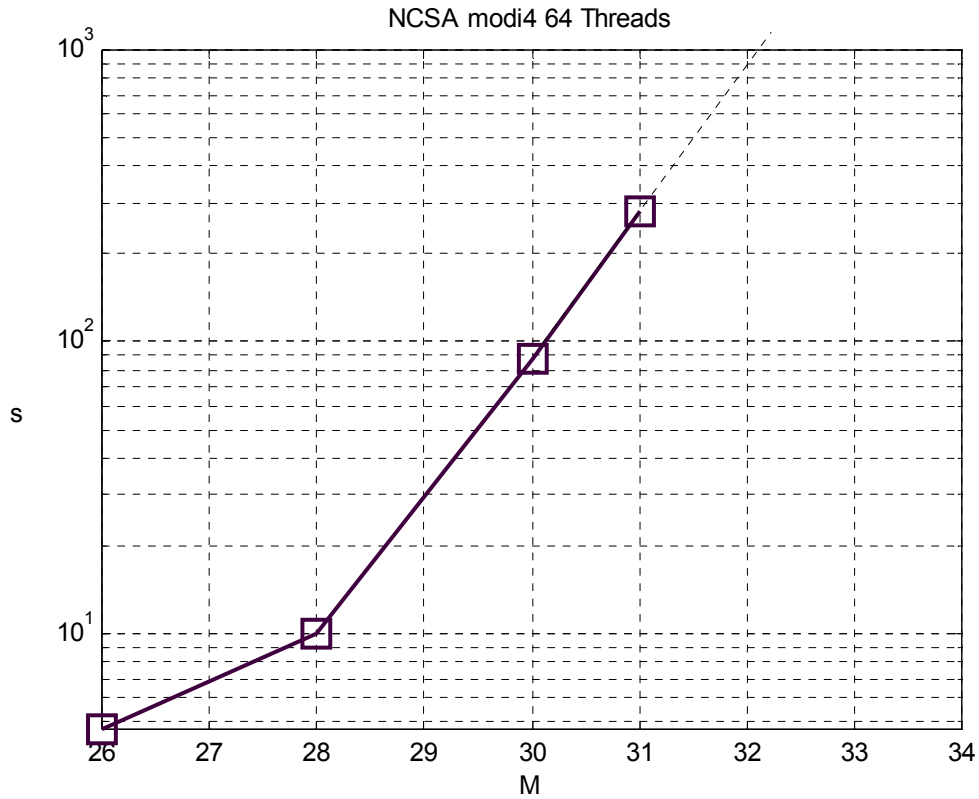


Figure 4. Data Using up to 64 Threads

5. CONCLUSIONS

Currently there is no other way to exercise non-trivial quantum algorithms except by simulation. Questions posed in the introduction have been answered at least in a special case. Without special programming, the modi4 classical parallel processor easily processed up to 32 qubits. This required less than 20 minutes. If parallelism can be exploited effectively, and data structures managed efficiently, it appears that many more qubits can be processed in the equivalent of a single modi4.

Compared to a basic accumulation method that avoids the unitary matrix, the sparse matrix approach has advantages, including the possibility of a user-controlled tradeoff between number of parallel processors and size of memory. The algorithm given can calculate a state vector from top to bottom, as seen, without special sorting. It has the advantage that it can save information about the unitary matrix, enabling new possibilities for design automation. Because a matrix approach is modifiable to accept quantum gates not envisioned today, this approach is well worth considering.

Future work involves finding ways to operate quantum computers themselves in parallel.

REFERENCES

- [1] Christof Zalka, Fast versions of Shor's quantum factoring approach, arXiv:quant-ph/9806084 v1 24 Jun 1998.
- [2] Kazuo Iwama, Yahiko Kambayashi, and Shigeru Yamashita, 'Transformation rules for designing CNOT-based quantum circuits,' DAC 2002 June 10-14, 2002, New Orleans, Louisiana, USA.
- [3] Vivek Shende, Aditya Prasad, Igor Markov, John Hayes, 'Reversible logic circuit synthesis,' DAC 2002 June 10-14, 2002, New Orleans, Louisiana, USA.
- [4] J. Wallace, WEB SURVEY, <http://www.dcs.ex.ac.uk/~jwallace/simtable.htm>
- [5] Senko Corporation, SOFTWARE PACKAGE, <http://www.senko-corp.co.jp/qcs/download.html>
- [6] E.C. Behrman, et. al., Simulations of quantum neural networks, Information Sciences 128, Elsevier Science Inc., pp. 257-269, 2000.
- [7] M. A. Nielson and I. L. Chuang, Quantum computation and quantum information, Cambridge, 2000.
- [8] Leonard J. Schulman and Umesh V. Vazirani, Molecular Scale Heat Engines and Scalable Quantum Computation, STOC '99, pp. 322-329, Atlanta GA, 1999.
- [9] Subhash Kak, Rotating a qubit, Information Sciences 128, Elsevier Science Inc., pp. 149-154, 2000.
- [10] John Robert Burger, SYMMETRIC AND ANTISYMMETRIC FUNCTIONS, A NEW WAY TO TEST A QUANTUM COMPUTER, Web Published 2003, <http://www.ecs.csun.edu/~jrb/q/> and <http://arXiv.org/abs/cs.CE/0304016>
- [11] John Robert Burger, NOTE ON NEEDLE IN A HAYSTACK, Web Published 2003, <http://www.ecs.csun.edu/~jrb/q/>
- [12] Leslie Valiant, Quantum computers that can be simulated classically in polynomial time, STOC 2001, July 6-8, Hersonissos, Crete, Greece.
- [13] David J. Evans, Editor, Sparsity and its applications, Cambridge University Press, 1985.

Appendix 1

CALCULATING THE INPUT STATE ON THE FLY

The input can be stored in the form of M qubits labeled q_i , $1 \leq i \leq M$, each represented as a pair of complex numbers $[q_i(0) \ q_i(1)]$. k_i is such that its elements are generated by a Kronecker (direct) matrix product:

$$k_i = q_M \otimes q_{M-1} \otimes \dots \otimes q_3 \otimes q_2 \otimes q_1$$

There is a way to obtain random $k_i(i)$. Imagine each qubit as being replaced by $|1\rangle$, that is, by the pair $[0 \ 1]$. Then after a Kronecker product, $k_i(0)$ is addressed by M bits, all zero: 00...000, $k_i(1)$ is addressed by: 00...001, and so on up to $k_i(2^{M-1})$ which is addressed by M bits, all ones: 11...111.

If a particular element of $k_i(i)$ is wanted, simply use the binary form of i to identify the appropriate components of each qubit to be multiplied. For example, if $k_i(5)$ is wanted, use $i = 101$ to obtain $q_3(1)q_2(0)q_1(1)$.