

Resonant Analytic Fields Applied to Generic Multi-state Systems

Toshiya Takami

Research Institute for Information Technology, Kyushu University, Fukuoka 812-8581, Japan

Hiroshi Fujisaki

*Institut für Physikalische und Theoretische Chemie, J. W. Goethe-Universität,
Max-von-Laue-Str. 7, D-60438 Frankfurt am Main, Germany*

(Dated: November 13, 2018)

Rotating-wave approximation and its validity in multi-state quantum systems are studied through analytic approach. Their applicability is also verified from the viewpoint of generic states by the use of direct numerical integrations of the Schrödinger equation. First, we introduce an extension of the rotating-wave approximation for multi-state systems. Under an assumption that a smooth transition is induced by the optimal field, we obtain three types of analytic control fields and demonstrate their validity and deficiency for generic systems represented by random matrices. Through the comparison, we conclude that the analytic field based on our coarse-grained approach outperforms the other ones for generic quantum systems with a large number of states. Finally, the further extension of the analytic field is introduced for realistic chaotic systems and its validity is shown in banded random matrix systems.

I. INTRODUCTION

Theoretical and experimental studies of controlling quantum states have been attracting much attention because of the theoretical progress in the field of quantum computing [1] and of the technical developments in manipulating atomic and molecular systems [2]. Various control schemes are known in these fields: A π pulse in a transition between two eigenstates [3], the nonadiabatic transitions induced by laser fields [4], the STIRAP scheme by a counterintuitive pulse sequence for more than three-level systems [5], etc. If we use an electronically excited state in the controlled system, a simple control of a pulse-timing can selectively break a chemical bond by pump and dump pulses [6]. When two pathways exists from an initial state to a target state, quantum mechanical interference can be utilized to modify the ratio of products, which is called a coherent control scheme [7].

These control schemes are effective for a certain class of processes but are not versatile for general multilevel-multilevel transitions. When we consider to design quantum devices with a large number of states interacting with a complex environment or with short-time laser pulses, such a multi-state control problem should be considered. Optimal control theory [8, 9] and genetic algorithms [10, 11] are most successful methods to solve this kind of complicated problems, but its implementation and interpretation can be still difficult: What kinds of dynamical processes are involved in the controlled dynamics?

On the other hand, we know that highly excited systems exhibit quantum chaotic features [12]. Such a "complex" quantum system driven by an external field [13, 14] is modeled by fully random matrix systems with a parameter, where statistical properties of eigenenergies and eigenvectors [15, 16, 17, 18] are characterized under universality classes [19]. These statistical properties stem from multilevel-multilevel interactions of eigen-

states, which are related to the existence of many avoided crossings [20, 21]. Hence it is necessary to consider the interaction between many eigenstates when we study dynamics in such a system. Gong and Brumer applied the coherent control method [7, 22] to a quantum chaos system [23, 24] and its prediction has been recently confirmed by experiment.

Several attempts have also been done to obtain control fields analytically in multi-level systems [25, 26]. We also derived an analytic optimal field to control the fully random matrix systems [27], which is based on the naive idea of "coarse-grained approach" [28, 29], and the results are promising. In this paper, at first, we introduce several analytic schemes from the viewpoint of applicability to generic quantum systems, and confirm the so-called rotating-wave approximation for multistate systems. Next, we improve our previous approach [27] to deal with more realistic quantum systems with a banded random Hamiltonian, since the most realistic quantum systems may be modeled with such a banded random matrix [19]. The validity of the extended analytic field is evaluated by numerically solving the Schrödinger equation for the multilevel-multilevel control problem.

II. ANALYTIC FIELDS FOR MULTI-STATE SYSTEMS

In a simple two-state transition problem, the Bloch vector in a three dimensional space is introduced to represent the transition dynamics [3]. The rotating-wave approximation (RWA) is also introduced if we note slowly varying dynamics on a rotating frame in the Bloch space, where a transition by a π -pulse is also represented as a rotation with an angle π . The first problem considered in this section is "what is the natural extension of this representation in multi-state quantum systems."

A. The rotating-wave approximation

Actual procedure of the RWA for two-state problems is to ignore off-resonant terms in the Schrödinger equation, where an intuitive interpretation of this is that a rapid motion induced by oscillating terms can be averaged out and only slow dynamics by near-resonant terms remain. We can extend this idea to the multi-state dynamics induced by an external field.

We consider the Hamiltonian system

$$\hat{H}(t) = \hat{H}_0 + \varepsilon(t)\hat{V} \quad (1)$$

with an interaction term $\varepsilon(t)\hat{V}$ by an external field $\varepsilon(t)$. If we introduce an eigenstate representation

$$|\psi(t)\rangle = \sum_j a_j(t)|\varphi_j\rangle \exp\left[\frac{E_j t}{i\hbar}\right], \quad (2)$$

the time evolution of $\{a_j(t)\}$ is represented by

$$\dot{a}_k(t) = \frac{\varepsilon(t)}{i\hbar} \sum_j V_{kj} a_j(t) \exp\left[\frac{(E_j - E_k)t}{i\hbar}\right], \quad (3)$$

where E_j and $|\varphi_j\rangle$ are the j -th eigenvalue and eigenstate, respectively, and V_{kj} is a shorthand of $\langle\varphi_k|\hat{V}|\varphi_j\rangle$.

We consider the case [26] that the external field is a sum of oscillating terms with frequencies of the transition energies $\omega_{jk} \equiv (E_j - E_k)/\hbar$,

$$\varepsilon(t) = \sum_{j,k (\neq j)} \varepsilon_{jk} e^{-i\omega_{jk}t} + \text{c.c.}, \quad \omega_{jk} \equiv \frac{E_j - E_k}{\hbar}. \quad (4)$$

According to the standard procedure of the rotating-wave approximation, we can separate the oscillating terms in the Schrödinger equation into slowly varying ones and rapidly changing ones. Further, we can introduce an approximation that all the oscillating terms are ignored when we consider the limit of infinitely long transition time under a non-degenerate condition between energy differences,

$$E_j - E_k \neq E_{j'} - E_{k'} \quad \text{for } j \neq j' \text{ and } k \neq k'. \quad (5)$$

Note that the validity of this simplification of the Schrödinger equation is not trivial although this seems a direct extension of the usual RWA.

B. Slow transition dynamics

Consider a control problem from an initial state $|\Phi_0\rangle$ at $t = 0$ to a target state $|\Phi_T\rangle$ at $t = T$. The interaction representation [30] is introduced by

$$|\phi_0(t)\rangle = \hat{U}_0(t, 0)|\Phi_0\rangle, \quad |\chi_0(t)\rangle = \hat{U}_0(t, T)|\Phi_T\rangle, \quad (6)$$

where $\hat{U}_0(t_2, t_1)$ is a propagator by \hat{H}_0 from $t = t_1$ to $t = t_2$.

An overlap between $|\phi_0(t)\rangle$ and $|\chi_0(t)\rangle$ is parameterized by an angle Θ ($0 \leq \Theta < \pi/2$) with a phase α ($0 \leq \alpha < 2\pi$),

$$\langle\phi_0(t)|\chi_0(t)\rangle = \langle\Phi_0|\hat{U}_0(0, T)|\Phi_T\rangle = ie^{i\alpha} \sin \Theta \quad (7)$$

which includes an orthogonal case ($\Theta = 0$). For the case of $\Theta \neq 0$, the phase α is uniquely determined. Then, we can introduce orthogonal basis states,

$$|\tilde{\phi}_0(t)\rangle = |\phi_0(t)\rangle, \quad |\tilde{\chi}_0(t)\rangle = \frac{|\chi_0(t)\rangle - ie^{i\alpha} \sin \Theta |\phi_0(t)\rangle}{\cos \Theta}. \quad (8)$$

From the result of optimally controlled dynamics in random matrix systems [27], the time-evolution is assumed to be

$$|\psi(t)\rangle = |\tilde{\phi}_0(t)\rangle \cos \theta - ie^{-i\alpha} |\tilde{\chi}_0(t)\rangle \sin \theta, \quad (9)$$

in the limit of $T \rightarrow \infty$. Substituting it into the Schrödinger equation, we obtain

$$\dot{\theta} \left[-|\tilde{\phi}_0(t)\rangle \sin \theta - ie^{-i\alpha} |\tilde{\chi}_0(t)\rangle \cos \theta \right] = \frac{\varepsilon(t)}{i\hbar} \hat{V} \left[|\tilde{\phi}_0(t)\rangle \cos \theta - ie^{-i\alpha} |\tilde{\chi}_0(t)\rangle \sin \theta \right]. \quad (10)$$

If we operate $\langle\tilde{\phi}_0(t)|$ from the left, the relation

$$\dot{\theta} = -\frac{\varepsilon(t)}{i\hbar} \left[\langle\tilde{\phi}_0(t)|\hat{V}|\tilde{\phi}_0(t)\rangle \cot \theta - ie^{-i\alpha} \langle\tilde{\phi}_0(t)|\hat{V}|\tilde{\chi}_0(t)\rangle \right] \quad (11)$$

is obtained, and the operation of $\langle\tilde{\chi}_0(t)|$ gives another

relation

$$\dot{\theta} = \frac{\varepsilon(t)}{i\hbar} \left[ie^{i\alpha} \langle\tilde{\chi}_0(t)|\hat{V}|\tilde{\phi}_0(t)\rangle + \langle\tilde{\chi}_0(t)|\hat{V}|\tilde{\chi}_0(t)\rangle \tan \theta \right]. \quad (12)$$

It is almost impossible to satisfy these equations strictly since such a field realizing the given dynamics Eq.(9) does

not exist always. However, approximate fields can be obtained within a restriction to the form of Eq.(4). In the following, we try to determine $\varepsilon(t)$ under the RWA for several special cases.

1. Exact field for a transition from an eigenstate

The simplest example [26] is given by the case that $|\Phi_0\rangle$ is an eigenstate, and $|\Phi_T\rangle$ is a linear combination of multiple eigenstates,

$$|\Phi_0\rangle = |\varphi_0\rangle, \quad |\Phi_T\rangle = \sin \Theta |\varphi_0\rangle + \cos \Theta \sum_{j \neq 0} d_j |\varphi_j\rangle. \quad (13)$$

The angle Θ satisfies $0 \leq \Theta < \pi/2$, and the normalization

$$\sum_{j \neq 0} |d_j|^2 = 1 \quad (14)$$

should be satisfied. We introduce

$$|\phi_0(t)\rangle = |\varphi_0\rangle e^{E_0 t / i\hbar}, \quad (15)$$

$$|\chi_0(t)\rangle = \sin \Theta |\varphi_0\rangle e^{E_0(t-T)/i\hbar} + \cos \Theta \sum_{j \neq 0} d_j |\varphi_j\rangle e^{E_j(t-T)/i\hbar}, \quad (16)$$

and, from the relation Eq.(7), the phase is determined by

$$\alpha = \frac{E_0 T}{\hbar} - \frac{\pi}{2}. \quad (17)$$

Then, the orthogonal basis states are

$$|\tilde{\phi}_0(t)\rangle = |\varphi_0\rangle e^{E_0 t / i\hbar}, \quad |\tilde{\chi}_0(t)\rangle = \sum_{j \neq 0} d_j |\varphi_j\rangle e^{E_j(t-T)/i\hbar}. \quad (18)$$

The multiplication of $\langle \varphi_0 |$ from the left to Eq.(10) gives a relation

$$\dot{\theta} = -\frac{\varepsilon(t)}{i\hbar} \left[V_{00} \cot \theta + \sum_{j \neq 0} V_{0j} d_j e^{-i\omega_{j0}(t-T)} \right], \quad (19)$$

and the operation of $\langle \varphi_j |$ ($j \neq 0$) from the left gives another relation

$$\dot{\theta} d_j = \frac{\varepsilon(t)}{i\hbar} \left[V_{j0} e^{i\omega_{j0}(t-T)} + \sum_k V_{jk} d_k e^{i\omega_{jk}(t-T)} \tan \theta \right]. \quad (20)$$

If we restrict $\varepsilon(t)$ to a sum of terms with transition frequencies from the 0-th eigenstate to the j -th eigenstate, i.e.,

$$\varepsilon(t) = \sum_{j \neq 0} \varepsilon_{j0} e^{-i\omega_{j0}(t-T)} + c.c., \quad (21)$$

we obtain the optimal field

$$\varepsilon_e(t) = i\hbar\Omega \sum_{j \neq 0} \frac{d_j}{V_{j0}} e^{-i\omega_{j0}(t-T)} + c.c. \quad (22)$$

by ignoring all the oscillating terms (for details, see Appendix A), where Ω (> 0) is a constant or a slowly varying function of time. If we substitute $\varepsilon_e(t)$ into Eq.(19) or Eq.(20), $\dot{\theta} = \Omega$ is easily shown. Since the target state $|\Phi_T\rangle$ is realized by $\theta = \frac{\pi}{2}$ at $t = T$ in Eq.(9), the smallest rotation angle is $\frac{\pi}{2} - \Theta$. Thus, the smallest Ω is determined by

$$\Omega = \left(\frac{\pi}{2} - \Theta \right) / T, \quad (23)$$

which induces the perfect control $|\langle \Phi_T | \psi(t) \rangle| = 1$ at the target time $t = T$.

We note that $\varepsilon_e(t)$ is obtained under the assumption of a slow transition Eq.(9) with a sufficiently long target time T . Then, the quantum state $|\psi(t)\rangle$ driven by $\varepsilon_e(t)$ stays in a plane determined by the two states, $|\tilde{\phi}_0(t)\rangle$ and $|\tilde{\chi}_0(t)\rangle$, during the controlled dynamics from $t = 0$ to $t = T$.

2. Approximate field for a transition between multi-level states

We study the case that the initial state $|\Phi_0\rangle$ and the target state $|\Phi_T\rangle$ are two different linear combinations of many eigenstates

$$|\Phi_0\rangle = \sum_j c_j |\varphi_j\rangle, \quad |\Phi_T\rangle = \sum_j d_j |\varphi_j\rangle. \quad (24)$$

If we use Eq.(7) for the phase, the pair of orthogonal states is defined by

$$|\tilde{\phi}_0(t)\rangle = \sum_j c_j |\varphi_j\rangle e^{E_j t / i\hbar} \quad (25)$$

$$|\tilde{\chi}_0(t)\rangle = \sum_j \frac{d_j e^{-E_j T / i\hbar} - i e^{i\alpha} c_j \sin \Theta}{\cos \Theta} |\varphi_j\rangle e^{E_j t / i\hbar} \equiv \sum_j \tilde{d}_j |\varphi_j\rangle e^{E_j t / i\hbar}. \quad (26)$$

Based on the assumption that the controlled state represents a smooth rotation Eq.(9) and that $\varepsilon(t)$ has a restricted form Eq.(4), we can define

$$\varepsilon_a(t) = \hbar\Omega \sum_{j,k (\neq j)} \left[\frac{c_j \tilde{d}_k^*}{V_{jk}} e^{i\alpha} e^{-i\omega_{jk}t} + \text{c.c.} \right] \quad (27)$$

as an approximate control field (for details, see Appendix II). If we substitute $\varepsilon_a(t)$ into Eq.(11) and Eq.(12), we obtain

$$\dot{\theta} = \Omega [1 + O(N^{-1})] \quad (28)$$

by ignoring all the oscillating terms, where N is the number of eigenstates contained in the state, and $\{c_j\}$ and $\{\tilde{d}_k\}$ are assumed as random complex numbers. Note that the approximate field $\varepsilon_a(t)$ is valid in the limit of $N \rightarrow \infty$ as well as $T \rightarrow \infty$.

3. Another field for a transition containing many eigenstates

We use another approach to the approximate analytic field in the limit of infinitely many eigenstates. By the assistance of the optimal control theory [27], we can introduce a control field defined by

$$\varepsilon_{cg}(t) = \frac{2\hbar\Omega}{|V|^2} \text{Re} \left[e^{-i\alpha} \langle \tilde{\phi}_0(t) | \hat{V} | \tilde{\chi}_0(t) \rangle \right] \quad (29)$$

where

$$|V|^2 \equiv \frac{1}{T} \int_0^T \left| \langle \tilde{\phi}_0(t) | \hat{V}^2 | \tilde{\chi}_0(t) \rangle \right|^2 dt. \quad (30)$$

Substituting $\varepsilon_{cg}(t)$ into Eqs. (11) and (12), we obtain

$$\theta(T) = \int_0^T \dot{\theta}(t) dt \approx \Omega T \quad (31)$$

under the limit of $T \rightarrow \infty$ and $N \rightarrow \infty$. This is the optimal field based on the coarse-grained approach we derived before [28, 29].

III. NUMERICAL EVALUATION FOR GENERIC SYSTEMS

In the previous section, we have obtained several optimal fields for multi-state transitions, i.e., $\varepsilon_e(t)$, $\varepsilon_a(t)$, and $\varepsilon_{cg}(t)$. Applicability of these fields depends mainly on the validity of the RWA. Furthermore, for the cases of $\varepsilon_e(t)$ and $\varepsilon_a(t)$, the matrix element V_{jk} in the denominator may deteriorate the results while the effect of the number of states should be checked for $\varepsilon_a(t)$ and $\varepsilon_{cg}(t)$. All these points can be verified in a direct numerical integration of the Schrödinger equation for generic quantum

systems with a random matrix Hamiltonian under Gaussian Orthogonal Ensemble (GOE) or Gaussian Unitary Ensemble (GUE) [19].

The GOE random matrix represents the case of “complex” Hamiltonian systems with a time-reversal symmetry [19]. This is constructed by a real symmetric matrix with off-diagonal elements v subject to a distribution function

$$P_{goe}(v)dv \propto \exp \left[-\frac{v^2}{2\Delta^2} \right] dv. \quad (32)$$

This means that the density of v has a maximum value at $v = 0$.

The GUE random matrix represents Hamiltonian systems without time-reversal symmetry [19]. This is constructed by a Hermitian matrix with off-diagonal elements $z = x + iy$ subject to a distribution function

$$P_{gue}(z)dz \propto \exp \left[-\frac{|z|^2}{2\Delta^2} \right] dz \quad (33)$$

If we take a polar-angle representation (r, ϕ) , $z = x + iy = re^{i\phi}$, the distribution function for r is

$$P_{gue}(r)dr \propto r \exp \left[-\frac{r^2}{2\Delta^2} \right] dr \quad (34)$$

This means that the density of r vanishes at $r = 0$. Thus, the number of small off-diagonal elements in GUE matrices are relatively fewer than that in GOE matrices.

A. Final overlaps of transition from an eigenstate

For the numerical evaluation, Hamiltonian matrices \hat{H}_0 and \hat{V} are created by random numbers subject to GOE or GUE. \hat{H}_0 is scaled so that the average spacing $\Delta E \equiv \langle |E_j - E_{j-1}| \rangle$ is unity, and the target time T is shown in units of $\hbar/\Delta E$. The exact control field $\varepsilon_e(t)$ is defined immediately after the target state $|\Phi_T\rangle$, i.e., coefficients $\{d_j\}$, is determined. Then, the final overlap $|\langle \Phi_T | \psi(T) \rangle|$ is obtained by numerical integration of the controlled dynamics by $\varepsilon_e(t)$ written in the Schrödinger equation without RWA. Fig.1 represents the result obtained as an ensemble average over 100 different samples of H_0 , V , and $\{d_j\}$.

It is shown that $\varepsilon_e(t)$ works only for sufficiently large T in spite of the exact control field under the RWA, which means that the RWA is valid only for such a large T . The reason why the RWA breaks down for smaller T is that the field amplitude for the frequency corresponding to the $0 \rightarrow j$ transition becomes accidentally large when $|V_{j0}| \approx 0$. In order to avoid the breakdown, we must use the field $\varepsilon_e(t)$ with the smaller amplitude which is realized by a larger T . If we take the limit $T \rightarrow \infty$, in this case, it is expected that $|\langle \Phi_T | \psi(T) \rangle| \rightarrow 1$ since $\varepsilon_e(t)$ is the exact control field within the RWA.

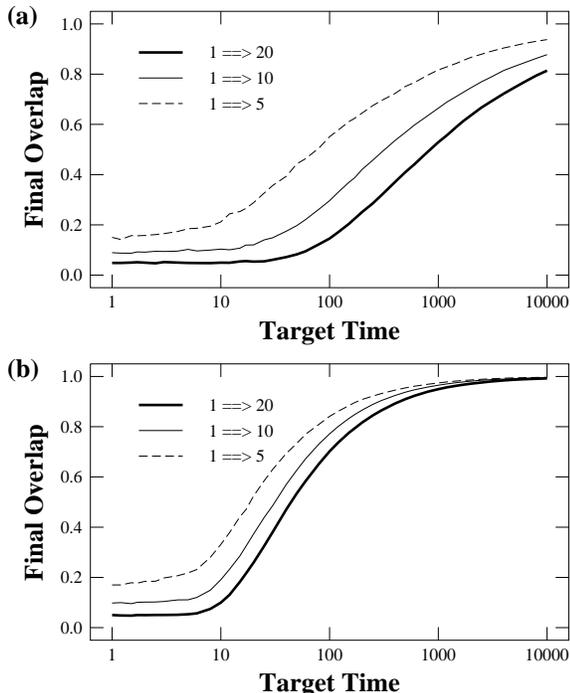


FIG. 1: Final overlaps by $\varepsilon_e(t)$ for the transition from an eigenstate to generic states constructed from 5 (dashed curve), 10 (thin curve), and 20 eigenstates (thick curve) in (a) GOE and (b) GUE random matrix systems. Each curve is obtained as an average over 100 different random configurations of H_0 , V , and $\{d_j\}$.

Difference in the performance of this field with respect to the universality class is also explained by the difference in probability distribution functions for smaller $|V_{j0}|$ (See Eq.(32) and Eq.(34)). When we use larger matrices, larger target times will be necessary to obtain a certain final overlap since the probability for accidental divergence of the amplitude tends to occur for many off-diagonal elements.

B. Final overlaps in transition between multi-level states

In case of multilevel-multilevel transitions, the same procedure can be executed with a numerical integration of the Schrödinger equation without the RWA. In this case, control fields $\varepsilon_a(t)$ and $\varepsilon_{cg}(t)$ is determined by H_0 , V , $\{c_j\}$, and $\{d_j\}$, which are created from pseudo-random numbers according to distribution functions under each universality class. Fig.2 shows the performance of $\varepsilon_a(t)$ for GOE and GUE random matrices. Almost the same properties can be observed as the case of the transition from an eigenstate. However, even if we take the limit $T \rightarrow \infty$, the final overlap $|\langle \Phi_T | \psi(T) \rangle|$ does not seem to converge to 1. This is because $\varepsilon_a(t)$ is an approximate field obtained by ignoring quantities with the

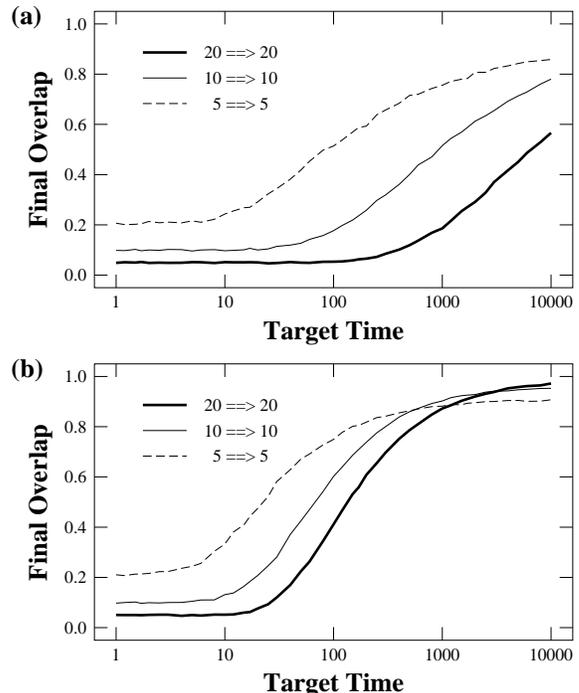


FIG. 2: Final overlaps by $\varepsilon_a(t)$ for the transition between generic states constructed from 5 (dashed curve), 10 (thin curve), and 20 eigenstates (thick curve) in (a) GOE and (b) GUE random matrix systems. Each curve is obtained as an average over 100 different random configurations of H_0 , V , $\{c_j\}$, and $\{d_j\}$.

order of $1/N$.

Fig.3 is the result by $\varepsilon_{cg}(t)$. In GOE case (Fig.3(a)), much improvement can be seen when it is compared to one by $\varepsilon_a(t)$, while it is almost the same for GUE (Fig.3(b)). The overlap does not converge to 1 in the limit of $T \rightarrow \infty$ since $\varepsilon_{cg}(t)$ is valid under $N \rightarrow \infty$. The important thing observed here is that, in case of $\varepsilon_{cg}(t)$, longer target times are not necessary even for larger matrices. This is significant in the practical application of controlling large systems.

IV. EXTENSION TO REALISTIC CHAOTIC SYSTEMS

The full random matrix systems studied in the previous section is a model of strongly chaotic systems. In order to consider realistic quantum systems, one of candidates to be studied is a banded random matrix [31]. In this section, we try to improve our external field $\varepsilon_{cg}(t)$ for the case of the banded random matrix [32].

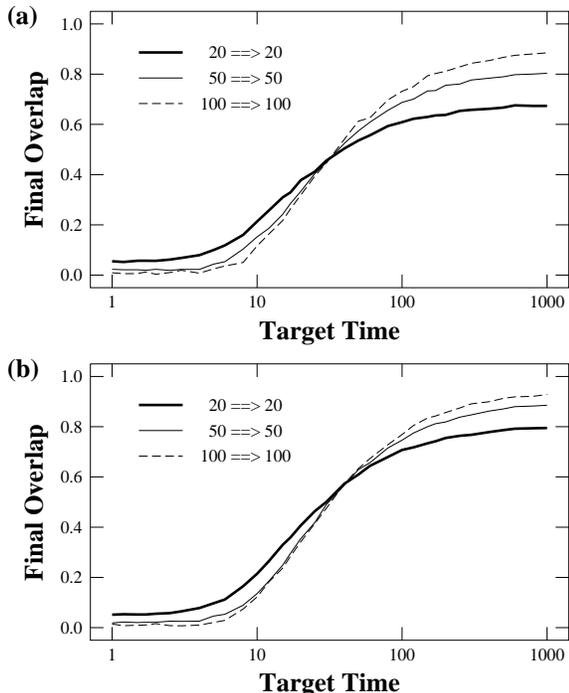


FIG. 3: Final overlaps by $\varepsilon_{cg}(t)$ are shown for the transition between generic states constructed from 20 (thick curve), 50 (thin curve), and 100 eigenstates (dashed curve) in (a) GOE and (b) GUE random matrix systems. Each curve is obtained as an average over 100 different random configurations of H_0 , V , $\{c_j\}$, and $\{d_j\}$.

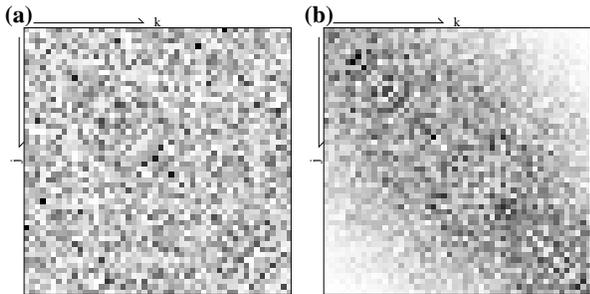


FIG. 4: Examples of the interaction Hamiltonian V (50×50). The magnitude of matrix elements are shown for (a) full random matrix subject to GOE, and (b) a banded random matrix subject to GUE ($\Delta_0 = 15$).

A. Analytic field for banded random matrix systems

We consider the case that the interaction Hamiltonian \hat{V} is a banded random matrix in the eigenstate representation of \hat{H}_0 . The elements of V are random complex

numbers with the following distribution

$$\langle |V_{jk}|^2 \rangle \equiv \langle |\langle \phi_j | \hat{V} | \phi_k \rangle|^2 \rangle = \exp \left[-\frac{(E_j - E_k)^2}{\Delta_0^2} \right]. \quad (35)$$

We introduce a new field $\varepsilon_{brm}(t)$ as an extension of $\varepsilon_{cg}(t)$,

$$\varepsilon_{brm}(t) = \sum_{jk} \text{Re} [A_{jk} c_j^* V_{jk} d_k e^{iw_{jk}t}], \quad (36)$$

with an extra-amplitude factor A_{jk} . The coefficients $a_j(t)$ in Eq.(2) satisfy the Schrödinger equation

$$i\hbar \frac{d}{dt} a_k(t) = \frac{1}{2} \sum_j [A_{jk} c_j^* d_k + A_{kj}^* c_k d_j^*] |V_{jk}|^2 a_j(t) \quad (37)$$

after ignoring all the oscillating terms. If we assume that the transition is smooth, $a_j(t)$ should be written as

$$a_k(t) = c_k \cos \left(\frac{\pi t}{2T} \right) - id_k \sin \left(\frac{\pi t}{2T} \right), \quad (38)$$

where we take $\Theta = 0$ in Eq.(7) for simplicity. Substituting these coefficients into Eq.(37), we obtain a relation

$$\begin{aligned} & \frac{i\pi\hbar}{2T} \left[-c_k \sin \left(\frac{\pi t}{2T} \right) - id_k \cos \left(\frac{\pi t}{2T} \right) \right] \\ &= \frac{1}{2} \sum_j \left[A_{jk} |c_j|^2 d_k \cos \left(\frac{\pi t}{2T} \right) \right. \\ & \quad \left. - iA_{kj}^* c_k |d_j|^2 \sin \left(\frac{\pi t}{2T} \right) \right] |V_{jk}|^2 \quad (39) \end{aligned}$$

under the assumption of random phases [27]. Finally, we obtain the conditions for the coefficients A_{jk}

$$A_{jk} = A_{kj}^* \simeq \frac{\pi\hbar}{T} \exp \left[\frac{(E_j - E_k)^2}{\Delta_0^2} \right]. \quad (40)$$

If we consider the case that those coefficients c_j and d_k have Gaussian distribution functions in the energy space,

$$\begin{aligned} \langle |c_j|^2 \rangle &\propto \exp \left[-\frac{(E_j - E_c)^2}{\Delta_c^2} \right], \\ \langle |d_k|^2 \rangle &\propto \exp \left[-\frac{(E_k - E_d)^2}{\Delta_d^2} \right], \quad (41) \end{aligned}$$

with centers E_c and E_d and widths Δ_c and Δ_d , we can define

$$\varepsilon_{brm}(t) = \frac{\pi\hbar}{T} \sum_{jk} \text{Re} [c_j^* V_{jk} d_k e^{iw_{jk}t}] \exp \left[\frac{(E_j - E_k)^2}{\Delta_0^2} \right]. \quad (42)$$

This field has a finite amplitude only when

$$\Delta_c < \Delta_0 \quad \text{and} \quad \Delta_d < \Delta_0. \quad (43)$$

If not, the field has an infinite amplitude in the limit of $E_j, E_k \rightarrow \pm\infty$ due to the exponential factor A_{jk} in Eq.(42). Thus, the analytic field is refined when the widths of the initial and target states are relatively small compared to the width of the banded random matrix elements.

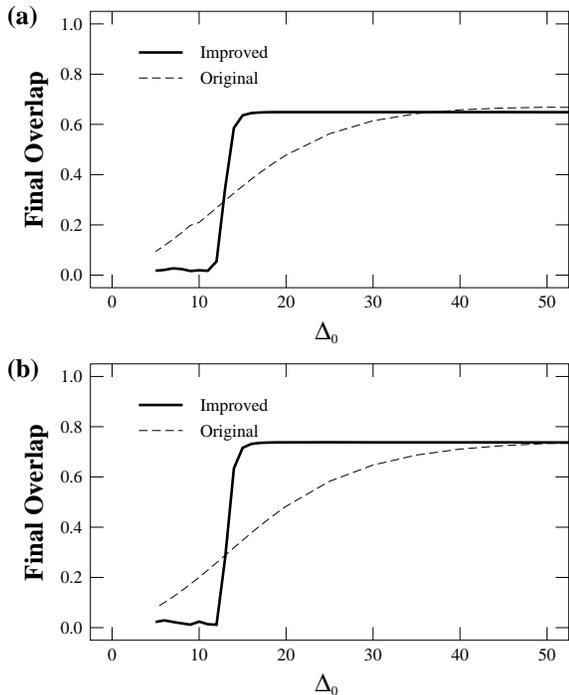


FIG. 5: Improvements by $\varepsilon_{\text{brm}}(t)$ is shown for (a) GOE case and (b) GUE case. The initial and the target states are both Gaussian wavepacket in the energy space with $\Delta_c = \Delta_d = 15$.

B. Numerical evaluation

We confirm the validity of $\varepsilon_{\text{brm}}(t)$ for the system with a banded random-matrix interaction. The numerical test is configured as follows. The initial and target states are defined as quantum vectors with random complex coefficients c_j and d_j subject to Eq.(41). Here, we choose $\Delta_c = \Delta_d = 15$, $E_c = -10$, and $E_d = 10$, where H_0 is a 50×50 random matrix of GOE and GUE, and is scaled so that its eigenvalues $\{E_j\}$ are distributed in an interval $[-25, 25]$. The interaction Hamiltonian \hat{V} is also a 50×50 matrix while its elements obey a banded-random distribution in the eigenstate representation of \hat{H}_0 with Δ_0 .

The optimal field Eq.(42) is calculated from those quantities $\{c_j\}$, $\{d_k\}$, $\{V_{jk}\}$, and $\{E_j\}$ with parameters T and Δ_0 . In order to check the validity of $\varepsilon_{\text{brm}}(t)$ Eq.(42), we solve the initial value problems with Hamiltonian Eq.(1) driven by Eq.(42) for various band widths Δ_0 of the interaction Hamiltonian \hat{V} . The results are shown in Figure 5. When we use the original analytic field $\varepsilon_{\text{cg}}(t)$ Eq.(29), the performance of the optimal field (dashed curve) decreases for the banded matrices with smaller widths. On the other hand, the final overlaps (solid curve) by the refined analytic field Eq.(42) does not change even for the smaller width until the limit $\Delta_0 \approx \Delta_c$ or $\Delta_0 \approx \Delta_d$. In Fig.6, the performance of $\varepsilon_{\text{brm}}(t)$ is shown for the various target time T . The final

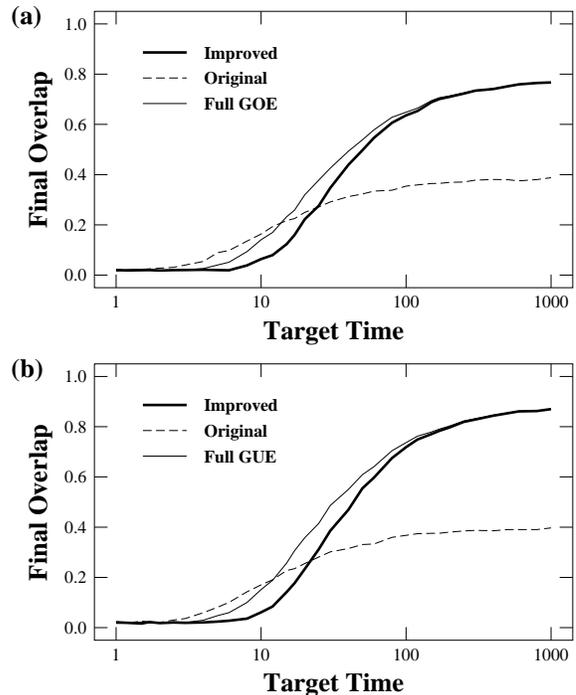


FIG. 6: Improved final overlap by $\varepsilon_{\text{brm}}(t)$ (thick curve) is compared to that by $\varepsilon_{\text{cg}}(t)$ (dashed curve) for the case of banded random matrix systems with $\Delta_c = \Delta_d = \Delta_0 = 15$ subject to (a) GOE and (b) GUE. The result by $\varepsilon_{\text{cg}}(t)$ in a full random matrix system is also shown for comparison (thin curve). Each curve is obtained as an average over 100 different random configurations of H_0 , V , $\{c_j\}$, and $\{d_j\}$.

overlap by $\varepsilon_{\text{brm}}(t)$ (thick curve) is much improved from the result by $\varepsilon_{\text{cg}}(t)$ (dashed curve), which is comparable to the level of the original result by a full random matrix (thin curve).

V. CONCLUSION

We studied several forms of analytic fields to steer quantum states in generic systems. Through numerical evaluations of those fields, the rotating-wave approximation for multi-level systems are also validated in the limit of the large target time. It was shown that the analytic field defined through the coarse-grained idea can be used in the limit of many states. We extended our previous analytic approaches for controlling complex quantum systems to deal with more realistic systems with a banded random matrix. The key ingredient is the amplitude factor A_{jk} , which is an exponentially growing function, introduced in the analytic optimal field Eq.(42). We showed that the new analytic field outperforms the previous field Eq.(29) for a full random matrix. In the near future we will apply this optimal field to quantum chaos systems such as quantum kicked rotors (top) [33] and to more realistic molecular systems [34, 35].

APPENDIX A: DERIVATION OF THE EXACT FIELD $\varepsilon_e(t)$

Substitution of the restricted form Eq.(21) into Eqs.(19) and (20) gives relations

$$\dot{\theta} = -\frac{1}{i\hbar} \sum_{j' \neq 0} \left(\varepsilon_{j'0} e^{-i\omega_{j'0}(t-T)} + \text{c.c.} \right) \left[V_{00} \cot \theta + \sum_{j \neq 0} V_{0j} d_j e^{-i\omega_{j0}(t-T)} \right] \quad (\text{A1})$$

and

$$\dot{\theta} d_j = \frac{1}{i\hbar} \sum_{j' \neq 0} \left(\varepsilon_{j'0} e^{-i\omega_{j'0}(t-T)} + \text{c.c.} \right) \left[V_{j0} e^{i\omega_{j0}(t-T)} + \sum_{k \neq 0} V_{jk} d_k e^{i\omega_{jk}(t-T)} \tan \theta \right], \quad (\text{A2})$$

respectively. By dropping all the oscillating terms from these expressions, we obtain

$$i\hbar \dot{\theta} = -\sum_{j \neq 0} V_{0j} d_j \varepsilon_{j0}^*, \quad i\hbar d_j \dot{\theta} = V_{j0} \varepsilon_{j0} \quad (3)$$

as relations under RWA. From the second relation, ε_{j0} is determined to be

$$\varepsilon_{j0} = \frac{id_j}{V_{j0}} \hbar \Omega, \quad (4)$$

and it is easily shown that this definition also satisfies the first relation if we note $V_{0j} = V_{j0}^*$ and $\sum |d_j|^2 = 1$. Thus, the exact control field under RWA is obtained as Eq.(22).

II. DERIVATION OF THE APPROXIMATE FIELD $\varepsilon_a(t)$

By substituting Eqs.(25) and (26) into Eqs.(11) and (12), we obtain equations for $\varepsilon(t)$ in the eigenstate representation,

$$\dot{\theta} = -\frac{\varepsilon(t)}{i\hbar} \sum_{j,k} c_j^* \left(c_k \cot \theta - ie^{-i\alpha} \tilde{d}_k \right) V_{jk} e^{i\omega_{jk}t}, \quad (1)$$

$$\dot{\theta} = \frac{\varepsilon(t)}{i\hbar} \sum_{j,k} \tilde{d}_j^* \left(ie^{i\alpha} c_k + \tilde{d}_k \tan \theta \right) V_{jk} e^{i\omega_{jk}t}, \quad (2)$$

respectively. If we assume the restricted form Eq.(4) as the control field, these equations can be simplified to

$$\dot{\theta} = -\frac{1}{i\hbar} \sum_{j,k(\neq j)} \left(\varepsilon_{jk} + \varepsilon_{kj}^* \right) c_j^* \left(c_k \cot \theta - ie^{-i\alpha} \tilde{d}_k \right) V_{jk}, \quad (3)$$

$$\dot{\theta} = \frac{1}{i\hbar} \sum_{j,k(\neq j)} \left(\varepsilon_{jk} + \varepsilon_{kj}^* \right) \tilde{d}_j^* \left(ie^{i\alpha} c_k + \tilde{d}_k \tan \theta \right) V_{jk}, \quad (4)$$

after dropping all the oscillating terms. The problem is to determine the amplitude factors ε_{jk} which satisfy these equations for given $\dot{\theta}$.

Here, we try to define a simple solution that is independent of θ . Such a solution, if exist, should satisfies Eqs.(3) and (4) for any value of θ . From Eq.(3) with $\theta = \pi/2$ or Eq.(4) with $\theta = 0$, a condition for ε_{jk} ,

$$\dot{\theta} = \frac{e^{-i\alpha}}{\hbar} \sum_{j,k(\neq j)} \left(\varepsilon_{jk} + \varepsilon_{kj}^* \right) c_j^* V_{jk} \tilde{d}_k \quad (5)$$

is required. While it is still difficult to define ε_{jk} satisfying this equation exactly, an approximate one is defined when the number of states N is large enough. By introducing amplitudes,

$$\varepsilon_{jk} = \frac{e^{i\alpha} c_j \tilde{d}_k^*}{V_{jk}} \hbar \Omega, \quad (6)$$

as an extension of Eq.(4), the required Eq.(5) leads to Eq.(28) by the use of

$$\begin{aligned} \sum_{j,k(\neq j)} c_j^* c_j \tilde{d}_k^* \tilde{d}_k &= 1 + O(N^{-1}), \\ \sum_{j,k(\neq j)} c_j^* \tilde{d}_j c_k^* \tilde{d}_k &= O(N^{-1}), \end{aligned} \quad (7)$$

under the assumption that there are no special correlations between c_j and \tilde{d}_j other than the orthogonal relation $\sum_j c_j^* \tilde{d}_j = 0$.

Moreover, Eq.(6) approximately satisfies Eqs.(3) and (4) for any θ , because small quantities

$$\sum_{j,k(\neq j)} c_j^* c_j \tilde{d}_k^* c_k, \quad \sum_{j,k(\neq j)} \tilde{d}_j^* \tilde{d}_j c_k^* \tilde{d}_k, \quad (8)$$

of the order $O(N^{-1})$ are also ignored in the limit of $N \rightarrow \infty$. Thus, the control field Eq.(27) is approximately valid for a transition between multi-level states.

-
- [1] M. A. Nielsen and I. L. Chuang, *Quantum Computation and Quantum Information* (Cambridge University Press, Cambridge, 2000).
- [2] S. A. Rice and M. Zhao, *Optical Control of Molecular Dynamics* (John Wiley & Sons, New York, 2000).
- [3] L. Allen and J. H. Eberly, *Optical Resonance and Two-level Atoms* (Dover, New York, 1987).
- [4] Y. Teranishi and H. Nakamura, Phys. Rev. Lett. **81**, 2032 (1998).
- [5] K. Bergmann, H. Theuer, and B. W. Shore, Rev. Mod. Phys. **70**, 1003 (1998).
- [6] D. J. Tannor and S. A. Rice, J. Chem. Phys. **83**, 5013 (1985).
- [7] M. Shapiro and P. Brumer, *Principles of the Quantum Control of Molecular Processes* (John Wiley & Sons, New York, 2003).
- [8] A. P. Peirce, M. A. Dahleh, and H. Rabitz, Phys. Rev. A **37**, 4950 (1988).
- [9] W. Zhu, J. Botina, and H. Rabitz, J. Chem. Phys. **108**, 1953 (1998).
- [10] H. A. Rabitz, M. M. Hsieh, and C. M. Rosenthal, Science **303**, 1998 (2004).
- [11] V. I. Prokhorenko, A. M. Nagy, S. A. Waschuk, L. S. Brown, R. R. Birge, and R. J. D. Miller, Science **313**, 1257 (2006).
- [12] M. C. Gutzwiller, *Chaos in Classical and Quantum Mechanics* (Springer-Verlag, New York, 1990).
- [13] A. Igarashi and H. Yamada, Chem. Phys. **327**, 395 (2006).
- [14] A. Sethi and S. Keshavamurthy, J. Chem. Phys. **128**, 164117 (2008).
- [15] P. Gaspard, S. A. Rice, H. J. Mikeska, and K. Nakamura, Phys. Rev. A **42**, 4015 (1990).
- [16] T. Takami, J. Phys. Soc. Jpn. **60**, 2489 (1991).
- [17] T. Takami and H. Hasegawa, Phys. Rev. Lett. **68**, 419 (1992).
- [18] J. Zakrzewski and D. Delande, Phys. Rev. E **47**, 1650 (1993).
- [19] F. Haake, *Quantum Signatures of Chaos* (Springer-Verlag, Heidelberg, 2001), 2nd ed.
- [20] T. Takami, Phys. Rev. Lett. **68**, 3371 (1992).
- [21] J. Zakrzewski and D. Delande, Phys. Rev. E **47**, 1665 (1993).
- [22] M. Shapiro and P. Brumer, J. Chem. Phys. **84**, 4103 (1986).
- [23] J. Gong and P. Brumer, Phys. Rev. Lett. **86**, 1741 (2001).
- [24] J. Gong and P. Brumer, Ann. Rev. Phys. Chem. **56**, 1 (2005).
- [25] L. E. E. de Araujo, I. A. Walmsley, and C. R. Stroud, Jr., Phys. Rev. Lett. **81**, 955 (1998).
- [26] P. Král, Z. Amitay, and M. Shapiro, Phys. Rev. Lett. **89**, 063002 (2002).
- [27] T. Takami and H. Fujisaki, Phys. Rev. E **75**, 036219 (2007), arXiv: nlin.CD/0701056.
- [28] T. Takami, H. Fujisaki, and T. Miyadera, Adv. Chem. Phys. **130 part A**, 435 (2005), arXiv: nlin.CD/0402005.
- [29] T. Takami and H. Fujisaki, J. Phys. Soc. Jpn. **73**, 3215 (2004), arXiv: nlin.CD/0402003.
- [30] J. J. Sakurai, *Modern Quantum Mechanics* (Addison-Wesley, New York, 1994), 2nd ed.
- [31] D. Cohen, F. M. Izrailev, and T. Kottos, Phys. Rev. Lett. **84**, 2052 (2000).
- [32] T. Takami and H. Fujisaki, AIP Conf. Proc. **963**, 821 (2007), arXiv: 0707.2624.
- [33] H. Fujisaki, T. Miyadera, and A. Tanaka, Phys. Rev. E **67**, 066201 (2003).
- [34] H. Fujisaki, K. Yagi, K. Hirao, and J. E. Straub, Chem. Phys. Lett. **443**, 6 (2007).
- [35] H. Fujisaki, Y. Zhang, and J. E. Straub, J. Chem. Phys. **124**, 144910 (2006).