

Electron transport in a two-terminal Aharonov-Bohm ring with impurities

M.A. Kokoreva, V.A. Margulis, M.A. Pyataev

Mordovian State University 430005, Saransk, Russia

Abstract

Electron transport in a two-terminal Aharonov-Bohm ring with a few short-range scatterers is investigated. An analytical expression for the conductance as a function of the electron Fermi energy and magnetic flux is obtained using the zero-range potential theory. The dependence of the conductance on positions of scatterers is studied. We have found that the conductance exhibits asymmetric Fano resonances at certain energies. The dependence of the Fano resonances on magnetic field and positions of impurities is investigated. It is found that collapse of the Fano resonances occurs and discrete energy levels in the continuous spectrum appear at certain conditions. An explicit form for the wave function corresponding to the discrete level is obtained.

Key words: zero-range potential, conductance, Fano resonance, quantum ring, scattering

PACS: 73.63.-b

1 Introduction

2 Quantum ring interferometers of various geometry are intensively studied
3 theoretically [1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11] and experimentally [12, 13, 14,
4 15, 16, 17, 18, 19] for several decades starting from pioneering works [1, 2].
5 The interest to the systems is stipulated by several new phenomena such
6 as Aharonov-Bohm oscillations [20, 21], persistent current [22, 23], electron
7 trapping effect in magnetic field [24] and so forth. Recently, the interest
8 to the system has been enhanced due to the experimental detection [18,

Email addresses: maria-kokoreva@yandex.ru (M.A. Kokoreva),
theorphysics@mrsu.ru (V.A. Margulis), pyataevma@math.mrsu.ru (M.A. Pyataev)

9 19] of the Fano resonances [25] in the electron transport. These resonances
10 consist of asymmetric peak and dip on the energy dependence of transmission
11 coefficient. They are caused by interference of bound states and continuum of
12 propagating electron waves. Fano resonances in electron transport through
13 various systems are widely studied in literature [26, 27, 28, 29, 30, 31].

14 The simplest and most popular model of quantum interferometer is the
15 one-dimensional ring with two wires attached to it. This model has been
16 studied in a lot of papers [1, 2, 3, 4, 5, 6, 7]. In particular, the periodic
17 dependence of conductance on the magnetic field was obtained in Ref. [1]
18 using the scattering matrix approach. The dependence of the transmission
19 probability on the phase shift of the transmitted wave for different degrees
20 of coupling between the current leads and the ring in the presence of a flux
21 was investigated in Ref. [2]. It was found that sharp resonances of the Breit–
22 Wigner type exist in the transmission probability. Two mechanisms giving
23 rise to sharp resonances were considered. A one-dimensional quantum
24 waveguide theory for mesoscopic structures was proposed in Ref. [3]. In
25 particular, the conductance of two-terminal Aharonov-Bohm ring as a function
26 of the magnetic flux, the arm lengths, and the electron wave vector
27 was found. The resonant-transport properties of the two-terminal ring and
28 multiply connected ring systems threaded by the magnetic flux was studied
29 using the tight-binding model [4]. An explicit form for the conductance
30 of the one-dimensional two-terminal ring threaded by the magnetic flux was
31 found in Ref. [5] using the zero-range potential theory. The charge carrier
32 interference in mesoscopic semiconductor rings formed by two quantum wires
33 in self-organizing silicon quantum wells was investigated in Ref. [12]. The
34 periodic dependence of the transmission coefficient and the phase shift on
35 source-drain bias in the presence of several δ -shaped barriers in wires was
36 obtained. The model of one-dimensional quantum ring was used to explain
37 the results in this work.

38 The presence of an additional scatterer, for instance a quantum dot or
39 an impurity, in the interferometer provides new possibilities to control the
40 electron transport. Therefore the effect of scatterers on the conductance is
41 considered in a number of papers [6, 7, 8]. The electron transport and the
42 persistent current in a mesoscopic ring connected to current leads was investi-
43 gated in Ref. [7] using an S-matrix approach. The case of one impurity in the
44 ring and diametrically opposite contacts was considered. A contact between
45 wires and ring was defined using an a priori given energy-independent scat-
46 tering matrix. It was shown that in the presence of an impurity transmission

47 probability of the ring may exhibit resonances of the Fano type in addition
48 to symmetric Breit-Wigner peaks. It was found that the transition from the
49 weak to the strong coupling regime leads to Fano line shapes with gradually
50 smaller asymmetry parameters, but the positions of the transmission zeros
51 and ones remain unaffected. The Breit-Wigner like shape is sensitive to the
52 coupling and disappears in the strong coupling limit. The presence of an
53 Aharonov-Bohm flux alters the amplitudes of the Fano resonances, turning
54 them progressively into broad oscillations. It was found that placing the
55 impurity in a special positions in the arm and certain values of flux causes
56 systematic collapse of certain Fano resonances.

57 However, the effect of impurities on the electron transport in the quantum
58 ring requires further analysis. In spite of the large number of theoretical
59 works the case of many impurities has not been studied in detail yet. At the
60 same time, strong dependence of the conductance on positions of impurities
61 might be expected in the system due to quantum interference phenomena.

62 The main purpose of the present paper is the investigation of the elec-
63 tron transport in the Aharonov-Bohm ring containing several short-range
64 scatterers. The role of scatterers may be played by impurities or small quan-
65 tum dots. We consider the model of one-dimensional ring with two one-
66 dimensional wires attached to it. The advantage of the model is the possibil-
67 ity to obtain an analytical expression for the transmission coefficient of the
68 device. In the case of one-dimensional wires the one-mode transport regime
69 takes place and the conductance does not exceed a unit of the conductance
70 quantum. In this case the transport properties of the device are determined
71 by the single transmission coefficient. To obtain this coefficient we use an
72 approach based on the zero-range potential theory that was used before in
73 Refs. [32, 33, 34, 35, 36]. In this method, contacts and impurities are de-
74 scribed by boundary conditions at the points of perturbations. The general
75 form of the conditions is defined with the help of the self-adjoint extensions
76 theory for symmetric operators [39, 40, 41, 42, 37, 38]. In the framework of
77 the approach, the system is described by the single Hamiltonian and parts
78 of the device are connected to each other via energy independent boundary
79 conditions. At the same time, the scattering matrix of each contact is energy
80 dependent in this case. Since the Hamiltonian of the device should be the
81 energy-independent operator our method seems to be more accurate then the
82 approach based on a priori defined energy-independent scattering matrix of
83 each contact.

84 It should be mentioned that non-zero width rings have been studied nu-

85 merically [9, 10, 11]. Results of those papers are in qualitative increment
 86 with the results obtained in the framework of the one-dimensional model.
 87 In particular, the one-dimensional model describes correctly quantum inter-
 88 ference phenomena if the width of the ring is much smaller then its radius
 89 [11].

90 1. Hamiltonian and transmission coefficient

91 Let us consider a quantum ring \mathbb{S}_ρ of radius ρ with two one-dimensional
 92 wires W_1 and W_2 attached to it at points A_1 and A_2 respectively. The scheme
 of the device is shown in Fig. 1.

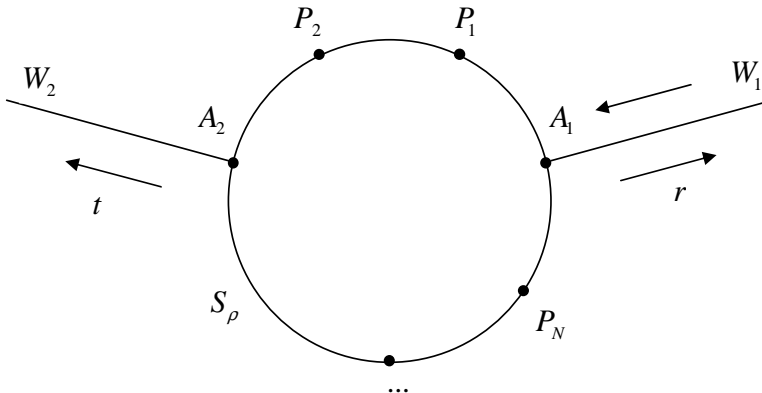


Figure 1: Two-terminal Aharonov-Bohm ring \mathbb{S}_ρ with impurities located at points P_i . The wires are denoted by W_1 and W_2 . Points A_1 and A_2 define positions of contacts, r and t are transmission and reflection amplitudes for the electron wave.

93 We assume that the ring contains N short-range impurities at points P_i
 94 ($i = 1, \dots, N$). All perturbations are described by the same method using
 95 the boundary conditions for the wave function. Angles defining positions of
 96 perturbations we denote by φ_j , where indexes $j = 1, 2$ correspond to contacts
 97 while indexes $j = 3, \dots, N + 2$ correspond to impurities. It is convenient to
 98 use continuous numeration for all perturbations (contacts and impurities)
 99 since they all are described by the same way. Without loss of generality we
 100 can put $\varphi_1 = 0$. The wires W_j are modeled by semiaxes $x \geq 0$. We suppose
 101

102 that the ring is placed in the magnetic field B perpendicular to the plane of
 103 the system. The magnetic flux through the ring is denoted by $\Phi = \pi\rho^2 B$.

The electron Hamiltonian of the unperturbed ring is given by the following equation [5]

$$H_\rho = \frac{\hbar^2}{2m^*\rho^2} \left(-i \frac{d}{d\varphi} + \eta \right)^2. \quad (1)$$

104 Here m^* is the electron effective mass, $\eta = \Phi/\Phi_0$ is the number of magnetic
 105 flux quanta and $\Phi_0 = 2\pi\hbar c/|e|$ is the magnetic flux quantum.

The eigenvalues of the Hamiltonian H_ρ are well known

$$E_m^\eta = \frac{\hbar^2}{2m^*\rho^2} (m + \eta)^2, \quad (2)$$

106 where m is the magnetic quantum number.

The electron Hamiltonian H_j of each wire W_j has the form

$$H_j = -\frac{\hbar^2}{2m^*} \frac{d^2}{dx^2}. \quad (3)$$

The electron wave function of the device may be represented in the form of one-column matrix

$$\psi = \begin{pmatrix} \psi_\rho \\ \psi_1 \\ \psi_2 \end{pmatrix}, \quad (4)$$

107 where ψ_ρ is the wave function on the ring \mathbb{S}_ρ , and ψ_j are wave functions in
 108 wires W_j .

The impurities are described by the potential

$$V(\varphi) = \sum_{j=3}^{N+2} V_j \delta(\varphi - \varphi_j), \quad (5)$$

where $\delta(\varphi)$ is the Dirac δ -function, and coefficients V_j define the strength of the point perturbations. It should be mentioned that the potential $V(\varphi)$ is equivalent to the boundary conditions of the following form

$$\psi_\rho(\varphi_j) = \frac{1}{v_j} [\psi'_\rho(\varphi_j + 0) - \psi'_\rho(\varphi_j - 0)], \quad j = 3, \dots, N + 2, \quad (6)$$

109 where ψ'_ρ means the derivative of ψ_ρ on angle φ and $v_j = 2m^*\rho^2 V_j/\hbar^2$ is the
 110 dimensionless parameter determining the strength of the point perturbation.

The contacts are modeled with the help of the zero-range potential theory [32, 33, 34, 35, 36, 37]. If there were no contact between different parts of the system then the Hamiltonian H_0 should have the form

$$H_0 = H_\rho \oplus H_1 \oplus H_2. \quad (7)$$

111 The direct sum in Eq. (7) means that each operator acts on its own part of
 112 the wave function and those parts are independent. Hamiltonian H of the
 113 systems is obtained from the Hamiltonian H_0 by applying linear boundary
 114 conditions for the wave function at points of contacts.

The most general form of the conditions may be obtained from the operator extension theory [37]

$$\begin{cases} \psi_\rho(\varphi_j) = \frac{b_j}{\rho} [\psi'_\rho(\varphi_j + 0) - \psi'_\rho(\varphi_j - 0)] + a_j \psi'_j(0), \\ \psi_j(0) = \frac{\bar{a}_j}{\rho} [\psi'_\rho(\varphi_j + 0) - \psi'_\rho(\varphi_j - 0)] + c_j \psi'_j(0), \end{cases} \quad (8)$$

115 where ψ'_j is the derivative of ψ_j on x , a_j are complex parameters of dimension
 116 of length, while b_j and c_j are real parameters of the same dimension (here $j =$
 117 $1, 2$). In the framework of the approach each contact is characterized by four
 118 real parameters. We note that the same general form of boundary conditions
 119 may be obtained from the current conservation law for each contact.

In the present paper, we will restrict ourselves by the case of continuous one-dimensional wave function at the point of contact that corresponds to equal effective width of the ring and the wires. One can see from Eqs. (8) that parameters a_j , b_j and c_j should be equal in this case. It is convenient to represent them in terms of the dimensionless coupling constant u_j by the equation

$$a_j = b_j = c_j = \rho/u_j. \quad (9)$$

Then the boundary conditions are written in the form

$$\psi_j(0) = \psi_\rho(\varphi_j) = \frac{1}{u_j} \{ \psi'_\rho(\varphi_j + 0) - \psi'_\rho(\varphi_j - 0) + \rho \psi'_j(0) \}, \quad (10)$$

120 where $j = 1, 2$.

To obtain the transmission coefficient we have to find a solution of the Schrödinger equation that is the superposition of incident and reflected wave in the first wire and corresponds to propagated wave in the second wire. Consequently, the wave function in the wire W_1 has the form

$$\psi_1(x) = \exp(-ikx) + r \exp(ikx), \quad (11)$$

where r is the reflection amplitude and $k = \sqrt{2m^*E}/\hbar$ is the electron wave number. The wave function in the second wire is given by

$$\psi_2(x) = t \exp(ikx), \quad (12)$$

121 where t is the transmission amplitude.

Since the Hamiltonian H_0 is perturbed by the zero-range potentials the wave-function $\psi_\rho(\varphi)$ can be represented in terms of the Green function $G_\rho(\varphi, \varphi_j; E)$ of the operator H_ρ

$$\psi_\rho(\varphi, E) = \sum_{j=1}^{N+2} A_j(E) G_\rho(\varphi, \varphi_j; E). \quad (13)$$

122 Here $A_j(E)$ are coefficients which should be determined from the boundary
123 conditions.

The Green function of the Hamiltonian H_ρ is well-known [5]

$$G_\rho(\varphi, \varphi_j; E) = \frac{m^*}{2\hbar^2 k} \left[\frac{\exp(i(\varphi_j - \varphi \pm \pi)(\eta - k\rho))}{\sin \pi(\eta - k\rho)} - \frac{\exp(i(\varphi_j - \varphi \pm \pi)(\eta + k\rho))}{\sin \pi(\eta + k\rho)} \right], \quad (14)$$

124 where “plus” sign corresponds to $\varphi \geq \varphi_j$ and “minus” sign should be used
125 otherwise.

We denote $Q_{ij}(E) = \frac{\hbar^2}{m^* \rho} G_\rho(\varphi_i, \varphi_j; E)$ and $\alpha_j = \frac{m^* \rho}{\hbar^2} A_j$. The matrix $Q_{ij}(E)$ is called Krein’s Q -matrix [37, 38]. Applying the boundary conditions (6) and (10) to the wave function given by Eqs. (11)–(13), we obtain the system of $N + 4$ equations

$$\begin{cases} \alpha_1 Q_{11} + \alpha_2 Q_{12} + \dots + \alpha_{N+2} Q_{1,N+2} = \frac{2\alpha_1 + ik\rho(r-1)}{u_1}, \\ \alpha_1 Q_{21} + \alpha_2 Q_{22} + \dots + \alpha_{N+2} Q_{2,N+2} = \frac{2\alpha_2 + ik\rho t}{u_2}, \\ \alpha_1 Q_{31} + \alpha_2 Q_{32} + \dots + \alpha_{N+2} Q_{3,N+2} = \frac{2\alpha_3}{v_1}, \\ \dots \\ \alpha_1 Q_{N+2,1} + \alpha_2 Q_{N+2,2} + \dots + \alpha_{N+2} Q_{N+2,N+2} = \frac{2\alpha_{N+2}}{v_N}, \\ 1 + r = [2\alpha_1 + ik\rho(r-1)]/u_1, \\ t = [2\alpha_2 + ik\rho t]/u_2. \end{cases} \quad (15)$$

Using two last equations we can represent r and t in terms of α_j . Then the system takes the form

$$\sum_{l=1}^{N+2} [Q_{jl} - P_j \delta_{jl}] \alpha_l = D \delta_{j1}, \quad j = 1 \dots, N+2. \quad (16)$$

Here we use the following notations

$$P_j(E) = \begin{cases} 2/(u_j - ik\rho), & j = 1, 2 \\ 2/v_j, & j = 3, \dots, N + 2, \end{cases}$$

$$D(E) = \frac{2ik\rho}{ik\rho - u_1}.$$

The solution of system (16) may be represented in the form

$$\alpha_n = \frac{\Delta_n}{\Delta}, \quad (17)$$

where Δ is the principal determinant of the system

$$\Delta = \det [Q_{jl} - P_j \delta_{jl}], \quad (18)$$

and Δ_n is the determinant of the matrix which is obtained from the basic matrix by replacing of n -th column with the column of absolute terms

$$\Delta_n = \det [(Q_{jl} - P_j \delta_{jl})(1 - \delta_{nl}) + D \delta_{j1} \delta_{nl}]. \quad (19)$$

Taking into account Eq. (17), we can represent the transmission amplitude in the form

$$t(E) = \frac{2}{u_2 - ik\rho} \frac{\Delta_2}{\Delta}. \quad (20)$$

126 We note that Eq. (20) is valid for arbitrary values of magnetic field and
 127 contact parameters. To study the effect of impurity positions on the electron
 128 transport we will restrict ourselves by the case of equal contacts ($u_1 = u_2 = u$)
 129 and impurities ($v_3 = \dots = v_{N+2} = v$).

130 2. Case of one impurity and diametrically opposite contacts

Let us consider at first the case of one impurity. Then the system (16) consist of three equations. Using Eq. (20) and the explicit form (14) of the Green function $G_\rho(\varphi, \varphi_j; E)$, we obtain the following equation for transmission amplitude t :

$$t(k, \eta) = \frac{F_1(k, \eta) + vF_2(k, \eta)}{F_3(k, \eta) + vF_4(k)}. \quad (21)$$

Here

$$F_1(k, \eta) = -16ik^3 \rho^3 \cos \pi \eta \sin \pi k \rho, \quad (22)$$

$$F_2(k, \eta) = 8ik^2\rho^2 e^{-i\pi\eta} \sin[(\pi - \Delta\varphi)k\rho] \sin(\Delta\varphi k\rho), \quad (23)$$

$$\begin{aligned} F_3(k, \eta) = & 4k\rho\{(-u^2 + k\rho 2iu + 5k^2\rho^2) \sin^2 \pi k\rho \\ & - 4ik\rho(iu + k\rho) \sin 2\pi k\rho\} \\ & - 16k^3\rho^3 \sin \pi\eta, \end{aligned} \quad (24)$$

$$\begin{aligned} F_4(k) = & 2k\rho(u - ik\rho)\{2 \cos 2\pi k\rho - \cos(2\Delta\varphi k\rho) \\ & - \cos[2(\pi - \Delta\varphi)k\rho]\} \\ & + 2(u - ik\rho)^2 \sin \pi k\rho \cos[(\pi - 2\Delta\varphi)k\rho] \\ & + (5k^2\rho^2 + 2ik\rho u - u^2) \sin 2\pi k\rho, \end{aligned} \quad (25)$$

131 and $\Delta\varphi = \varphi_3 - \varphi_2$.

132 Equation (21) coincides with the corresponding equation for transmission
133 amplitude of the ring without impurities [5] if we take $v = 0$ and represent
134 parameter u in terms of the scattering length λ by the equation $u = -2\rho/\lambda$.
135 As it follows from Eqs. (21)–(25) transmission coefficient is a periodic func-
136 tion of the magnetic flux with the period equal to the flux quantum. It should
137 be mentioned that the behavior of the transmission coefficient changes con-
138 siderably at integer and half-integer values of the magnetic flux η since the
139 eigenvalues of the Hamiltonian H_0 are degenerated in that case.

140 We will start with the general case of non-zero magnetic field. The de-
141 pendence of the transmission coefficient on the dimensionless parameter $k\rho$
142 is shown in Fig. 2. One can see that the transmission coefficient oscillates
143 as a function of the electron energy. Oscillations are caused by interference
144 of electron waves multiply scattered by contacts. In the absence of the im-
145 purity the dependence $T(k\rho)$ exhibits asymmetrical resonances in vicinities
146 of $k\rho = m$ (Fig. 2a). The maximal values of resonance peaks reach unity
147 while the minimal values of dips are equal to zero. The impurity leads to
148 destruction of absolute reflection and transmission that results in decrease
149 of peaks and increase of dip values (Fig. 2b). This result may be explained
150 with help of Eq. (21). If the impurity is absent ($v = 0$) then the numerator
151 in Eq. (21) contains only one term F_1 which vanishes at integer values of $k\rho$.
152 On the other hand, the denominator of Eq. (21) contains non-trivial real and
153 imaginary parts and does not vanish at non-integer values of the magnetic
154 flux. Therefore transmission coefficients has zeros at $k\rho = m$ (m is integer)
155 if the ring does not contain the impurity. In presence of the impurity, zeros

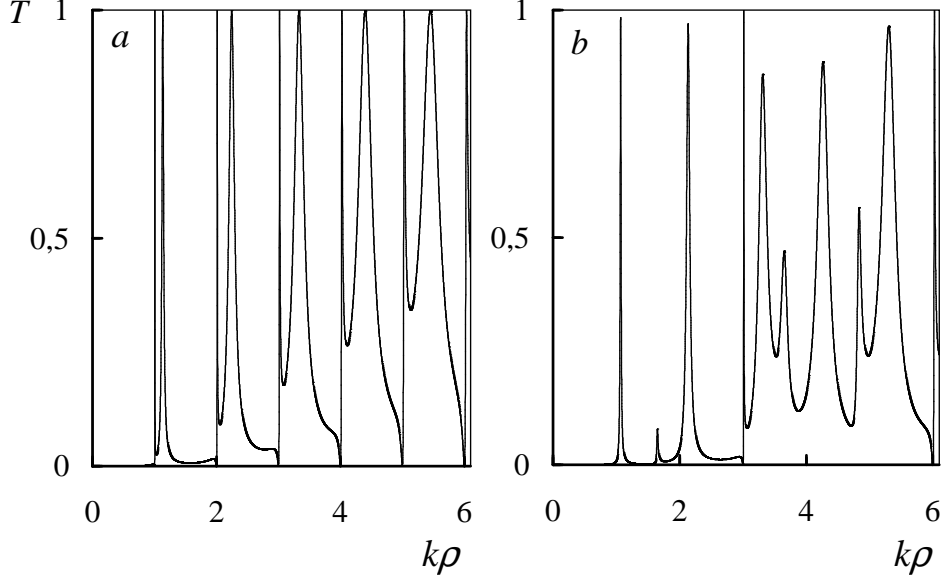


Figure 2: Transmission probability T versus the dimensionless wave vector $k\rho$ in the presence of the magnetic flux $\eta = 0.14$. (a) The case of the ring without impurities. (b) The case of an impurity located at point $\varphi_3 = 4\pi/3$. All figures are plotted for $u = v = 10$.

156 disappear. However, some of them are conserved at specific positions of impurity. In particular, the zero at $k\rho = m$ is conserved if the following relation
 157 holds $\sin m\Delta\varphi = 0$.
 158

Let us consider the behavior of the transmission coefficient in vicinities of energy values E_m^0 where the asymmetric Fano resonances can appear. To study the energy dependence of the transmission coefficient in the vicinity of $E = E_m^0$ we expand numerator and denominator of Eq. (21) in the Taylor series up to the first-order terms. After some simple algebra we obtain the following asymptotic expression for the transmission amplitude in the vicinity of $E = E_m^0$

$$t(E) \simeq 2i(-1)^m \frac{\pi m^2 \cos \pi\eta \Delta E + v E_m^0 e^{-i\pi\eta} \sin^2 m\Delta\varphi}{\pi m(2im - 2u - v)\Delta E + 4m E_m^0 \sin^2 \pi\eta}, \quad (26)$$

159 where $\Delta E = E - E_m^0$.

Equation (26) shows that the transmission coefficient does not vanish at $E = E_m^0$ in presence of the impurity if $\sin m\Delta\varphi \neq 0$. However, the zero of

transmission at $E = E_m^0$ is conserved if the position of impurity satisfies the condition $\sin m\Delta\varphi = 0$ (Fig. 2b). The transmission amplitude near $E = E_m^0$ may be represented in the form

$$t(E) \simeq \mu_m \frac{E - E_m^0}{E - E_m^{(r)} - i\Gamma_m}. \quad (27)$$

Here we use the following notations

$$\mu_m = \frac{(-1)^m 2im \cos \pi\eta}{2im - 2u - v}, \quad (28)$$

$$E_m^{(r)} = E_m^0 \left(1 + \frac{4(2u + v) \sin^2 \pi\eta}{\pi[(2u + v)^2 + 4m^2]} \right), \quad (29)$$

$$\Gamma_m = \frac{8mE_m^0 \sin^2 \pi\eta}{\pi[(2u + v)^2 + 4m^2]}. \quad (30)$$

160 Equation (27) shows that transmission coefficient has the form of asymmetric
161 Fano resonance [25] in the vicinity of E_m^0 .

162 The peak of the Fano resonance corresponds to the pole $E_m^{(r)} + i\Gamma_m$ on
163 the complex plane. Here $E_m^{(r)}$ determines the position of the resonance and
164 Γ_m determines the half-width of the resonance curve. The zeros associated
165 with the Fano resonances are situated on the real axis at the points E_m^0 .

166 One can see from Eq. (30) that the width Γ_m of the Fano resonance is
167 proportional to $\sin^2 \pi\eta$ therefore the width tends to zero as the magnetic flux
168 approaches to integer values. In this case, the pole $E_m^{(r)} + i\Gamma_m$ and the zero
169 E_m^0 on the complex plane coincide and cancel each other that corresponds to
170 collapse of the Fano resonance.

171 Let us consider now the dependence of T on k in the case of integer
172 magnetic flux. The influence of the impurity on the transmission coefficient
173 is shown in (Fig. 3). One can see that transmission coefficient has no zeros
174 in absence of the impurity (Fig. 3a), as it was shown in previous studies [5].
175 The presence of the impurity leads to decrease of oscillating maxima and
176 appearing of Fano resonances (Fig. 3b).

Zeros associated with the Fano resonances does not coincide with the values E_m^0 . We denote by κ_m the values of the electron wave vector corresponding to the zeros of transmission coefficient. According to equations (22) and (23) values of κ_m are determined by the equation

$$2\kappa\rho \sin(\pi\kappa\rho) - v \sin[(\pi - \Delta\varphi)\kappa\rho] \sin(\Delta\varphi\kappa\rho) = 0. \quad (31)$$

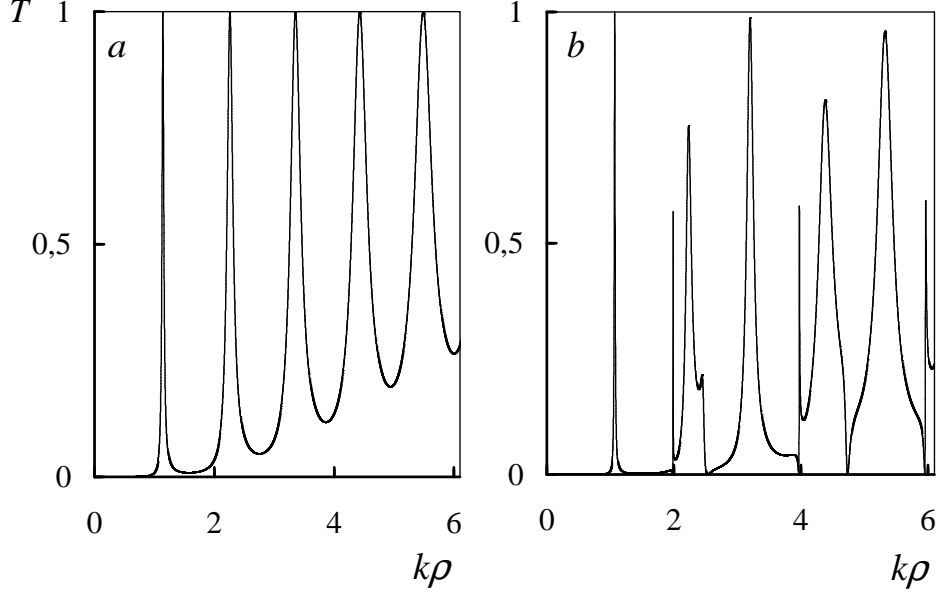


Figure 3: Transmission probability T versus the dimensionless wave vector $k\rho$ at the zero magnetic field. (a) The case of the ring without impurities. Transmission coefficient has no zeros in this case. (b) The case of an impurity located at $\varphi_3 = 1.475\pi$. One can see sharp Fano resonances in vicinities of $k\rho = 2n$, where n is integer.

The following approximate expression for κ_m may be obtained if $|\sin(n\Delta\varphi)| \ll 1$:

$$\kappa_n \approx \frac{n}{\rho} - \frac{v \sin^2 n\Delta\varphi}{2\pi n\rho}, \quad (32)$$

The corresponding electron energy is given by

$$E_n^{(z)} = \frac{\hbar^2 \kappa_n^2}{2m^*} \simeq \frac{\hbar^2}{2m^* \rho^2} \left(n - \frac{v \sin^2 n\Delta\varphi}{2\pi n} \right)^2. \quad (33)$$

Let us consider the behavior of the transmission amplitude in the vicinity of $E_m^{(z)}$. For this purpose we expand the numerator and the denominator of $t(k)$ in Eq. (21) in the Taylor series near $k_m = m/\rho$ neglecting the second order terms with regard to $\sin m\Delta\varphi$. Then we get the following approximate equation for $t(k)$:

$$t(k, 0) \simeq \frac{2i\pi(-1)^{m+1}m^2\rho(k - \kappa_m)}{\pi m\rho(v - 2i)(k - k_m) + v(u - im) \sin^2 m\Delta\varphi}. \quad (34)$$

Now we introduce the following notations:

$$\mu_m = -\frac{2i(-1)^m m}{(v-2i)}, \quad (35)$$

$$E_m^{(r)} \simeq E_m^0 \left(1 - \frac{2v(vu+2m)\sin^2 m\Delta\varphi}{\pi m^2(v^2+4)} \right) \quad (36)$$

and

$$\Gamma_m \simeq \frac{2E_m^0 v(vm-2u)\sin^2 m\Delta\varphi}{\pi m^2(v^2+4)}. \quad (37)$$

Then we obtain the following equation for the transmission amplitude in the vicinity of κ_m

$$t(E) \simeq \mu_m \frac{E - E_m^{(z)}}{E - E_m^{(r)} - i\Gamma_m}. \quad (38)$$

177 One can see from Eq. (38) that the transmission amplitude has the form
 178 of the Fano resonance in the vicinity of $E_m^{(z)}$. The the width of the resonance
 179 curve is determined by the position of the impurity. If the position satisfies
 180 the condition $\sin m\Delta\varphi = 0$ then the collapse of the Fano resonance in the
 181 vicinity of $E_m^{(r)}$ occurs (Fig. 4). It should be mentioned that the similar result
 182 was obtained in Ref. [7] in the framework of the scattering matrix approach.

183 We note that the Fano resonance near E_m^0 disappear if the magnetic field
 184 is absent and the impurity position is determined by the equation $\varphi_3 = l\pi/n$
 185 where n is the integer divisor of m . In the case of the non-zero magnetic field
 186 the resonances at those E_m^0 appear again.

187 Let us consider in detail the case of half-integer magnetic flux. The trans-
 188 mission coefficient vanishes for all electron energies if there is no impurity
 189 on the ring and contacts are located in diametrically opposite points. The
 190 presence of the impurity leads to appearance of the non-zero transmission
 191 as follows from Eq. (21). The phenomenon might be explained in terms of
 192 the electron wave phase. The electron waves spreading on the ring from the
 193 point A_1 in different directions get phase shifts $\pi(k\rho + \eta)$ and $\pi(k\rho - \eta)$ at
 194 the point A_2 (Fig. 1). The phase difference is equal to $2\pi\eta$ therefore those
 195 waves have opposite phases in the second lead and cancels each other for
 196 all energies at half-integer values of the magnetic flux η . Consequently the
 197 reflection coefficient equals to unity and the device may be considered as an
 198 ideal electron mirror. The impurity breaks destructive interference and the
 199 non-zero transmission coefficient appears.

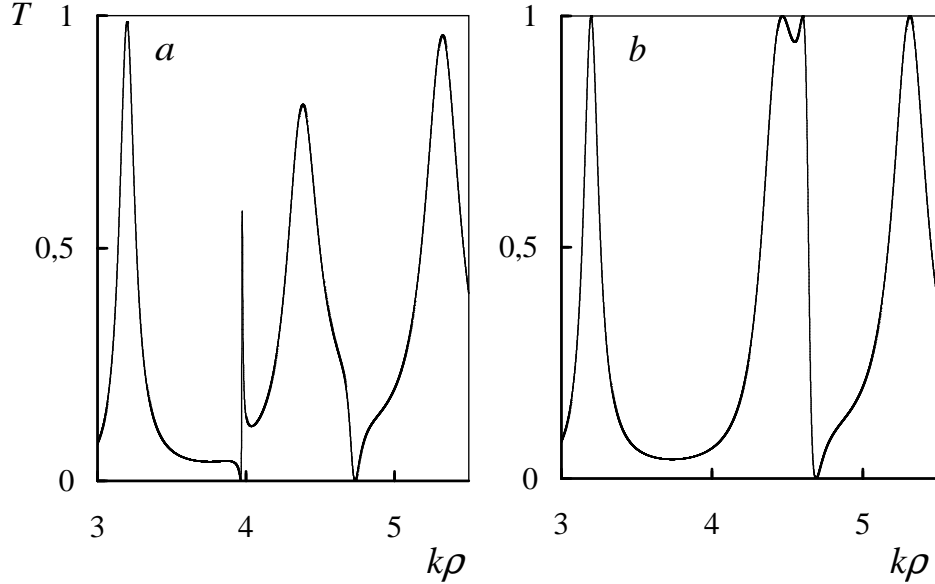


Figure 4: Transmission probability T versus the dimensionless wave vector $k\rho$ at the zero magnetic field. (a) The impurity is located at point $\varphi_3 = 1.475\pi$. One can see the Fano resonance in the vicinity of $k\rho = 4$. (b) Collapse of the Fano resonance occurs if the impurity is located at $\varphi_3 = 1.5\pi$.

200 Let us consider the dependence of the transmission coefficient on the mag-
 201 netic field that is represented in Fig. 5. It follows from Eq. (21) that $T(k, \eta)$
 202 is a periodic function of η with the period equal to 1. The dependence of
 203 the transmission coefficient on η contains one or two maxima on the period
 204 (Fig. 5a) depending on the electron energy and the impurity position. Fig-
 205 ure 5b shows that maxima of $T(\eta)$ can conjugate and diverge with variation
 206 of the electron energy. The similar features are present on the dependence of
 207 the transmission coefficient on the magnetic field and the impurity position.

208 3. Non-opposite position of contacts

Let us consider now the system with contacts attached at arbitrary points
 ($\varphi_2 - \varphi_1 \neq \pi$). The transmission amplitude in this case is given by

$$t(k, \eta) = \frac{\tilde{F}_1(k, \eta) + v\tilde{F}_2(k, \eta)}{\tilde{F}_3(k, \eta) + v\tilde{F}_4(k)}, \quad (39)$$

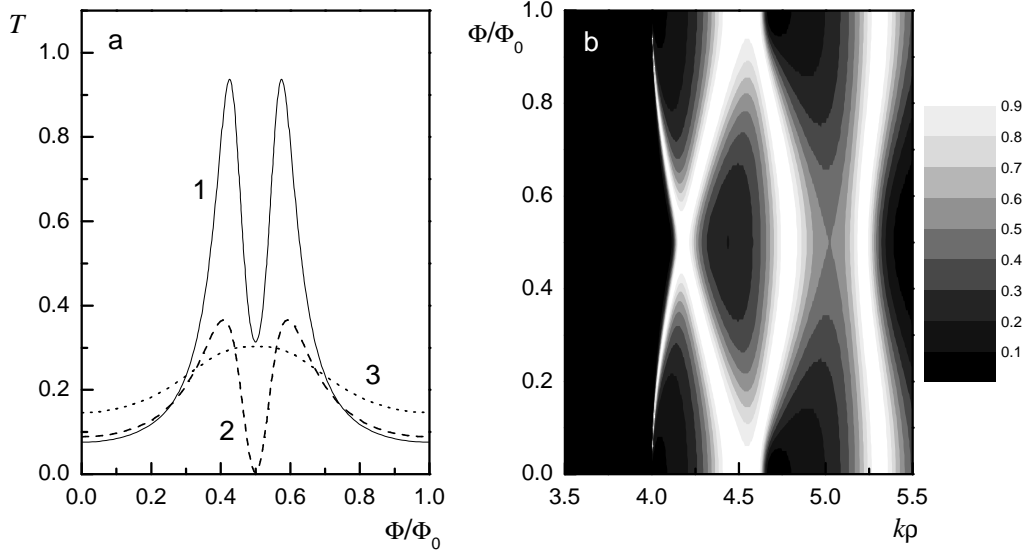


Figure 5: (a) Transmission probability T versus the magnetic flux η for the case of diametrically opposite contacts for several impurity positions: $\varphi_3 = 1.02\pi$ (solid line 1), $\varphi_3 = 1.033\pi$ (dashed line 2) and $\varphi_3 = 1.06\pi$ (dotted line 3). (b) Transmission probability T as a function of magnetic flux η and dimensionless wave vector kr for the case of diametrically opposite contacts. The impurity is located at the point $\varphi_3 = 3\pi/2$.

where

$$\begin{aligned} \tilde{F}_1(k, \eta) = & -8ik^3 \rho^3 e^{-i\varphi_2 \eta} \{ \sin[(2\pi - \varphi_2)k\rho] \\ & + e^{2i\pi\eta} \sin(\varphi_2 k\rho) \}, \end{aligned} \quad (40)$$

$$\tilde{F}_2(k, \eta) = 8ik^2 \rho^2 e^{-i\varphi_2 \eta} \sin[(2\pi - \varphi_3)k\rho] \sin(\Delta\varphi k\rho), \quad (41)$$

$$\begin{aligned} \tilde{F}_3(k, \eta) = & 2k\rho \{ u^2 \cos 2\pi k\rho \\ & + (iu + k\rho)^2 \cos [2(\pi - \varphi_2)k\rho] \\ & + k\rho [4k\rho \cos 2\pi\eta - (2iu + 5k\rho) \cos 2\pi k\rho \\ & + 4(u - ik\rho) \sin 2\pi k\rho] \}, \end{aligned} \quad (42)$$

and

$$\tilde{F}_4(k) = 2ik\rho(iu + k\rho) \{ \cos[2(\pi - \Delta\varphi)k\rho] +$$

$$\begin{aligned}
& + \cos [2(\pi - \varphi_3)k\rho] - 2 \cos 2\pi k\rho \} + \\
& + (iu + k\rho)^2 \{ \sin [2(\pi - \varphi_3)k\rho] - \\
& - \sin [2(\pi - \varphi_2)k\rho] - \sin [2(\pi - \Delta\varphi)k\rho] \} + \\
& + (5k^2\rho^2 + 2ik\rho u - u^2) \sin 2\pi k\rho.
\end{aligned} \tag{43}$$

If the ring has no impurities and the magnetic field is absent then Eq. (39) takes the form

$$t(k, 0) = \tilde{F}_1(k, 0)/\tilde{F}_3(k, 0), \tag{44}$$

where $\tilde{F}_1(k, 0)$ is given by

$$\tilde{F}_1(k, 0) = -16ik^3\rho^3 \sin k\pi\rho \cos [(\pi - \varphi_2)k\rho]. \tag{45}$$

209 Equation (45) shows that the transmission coefficient vanishes if $\sin k\pi\rho = 0$
210 or $\cos [(\pi - \varphi_2)k\rho] = 0$ and the function \tilde{F}_3 remains non-zero.

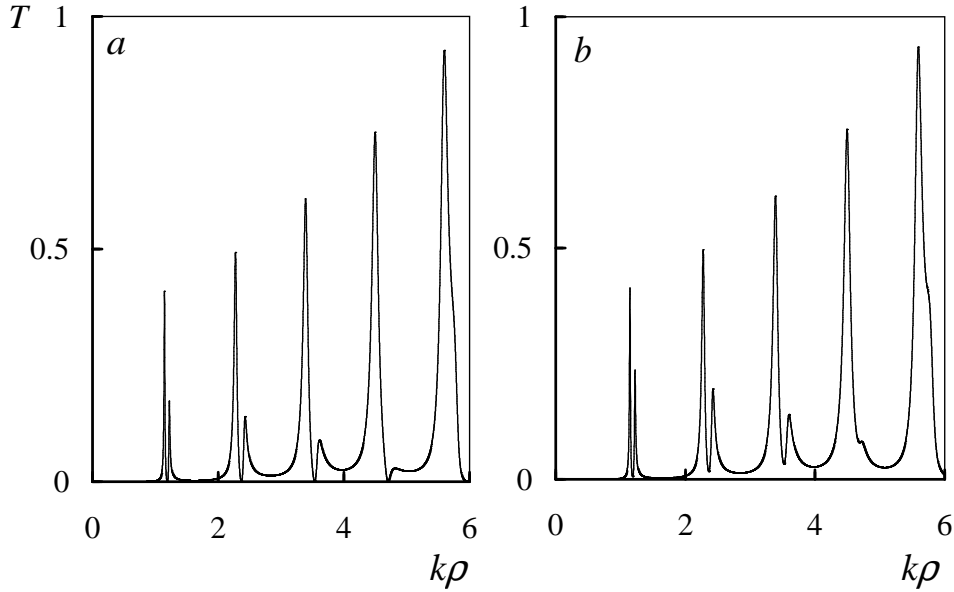


Figure 6: Transmission probability T versus the dimensionless wave vector $k\rho$ for the case of non-opposite contacts ($\varphi_1 = 0$, $\varphi_2 = 14\pi/15$). The impurity is located at the point $\varphi_3 = 1.1\pi$. (a) The magnetic field is absent. (b) The magnetic flux is equal to $\eta = 0.05$.

The presence of the impurity leads to shift of transmission zeros from the values $k\rho = n$ (Fig. 6 a). The positions of zeros are determined by the

equation

$$2k\rho \sin k\pi\rho \cos [(\pi - \varphi_2)k\rho] - v \sin[(2\pi - \varphi_3)k\rho] \sin(\Delta\varphi k\rho) = 0. \quad (46)$$

Equation (46) shows that if the impurity position is defined by $\Delta\varphi = \pm l\pi/m$ (l and m are integer) then zeros are situated at $k\rho = n$ where n is integer multiply m . The magnetic field leads to disappearing of zeros at $k\rho = n$ (Fig. 6 b). In contrast to the collapse of the Fano resonances the depth of dips decreases while the width remains finite. Transmission zeros on the complex plane are shifted from the real axis and corresponding dips do not reach zero in the case of the applied magnetic field. The energy determining the position of the zero on the complex plane acquire an imaginary part which increases with the magnetic field. Thus there are two different mechanisms of disappearing of zeros in the system: the first one is collapse of the Fano resonance and the second one is shift of the transmission zero from the real axis in the complex plane. We mention that the collapse of the Fano resonance is accompanied by increase in symmetry of the system while the second mechanism is caused by decrease in symmetry.

We mention that the transmission reaches maximal value when the system has mirror symmetry. In particular, the height of the conductance peak is maximal if the impurity is located in the middle of an arc connecting contacts and parameters of contacts are equal.

4. Discrete levels in the continuum

It is known [26, 27, 28, 29] that the collapse of the Fano resonance is accompanied by appearance of the discrete level in the continuous spectrum. This level corresponds to localized state on the ring. The wave function ψ_ρ^d corresponding to this state has to satisfy the boundary conditions (6) and (10) and vanish at the points of contacts

$$\psi_\rho^d(\varphi_1) = \psi_\rho^d(\varphi_2) = 0. \quad (47)$$

If the electron energy coincides with the eigenvalue E_m^η of the Hamiltonian H_ρ then the wave function is a linear combination of the corresponding eigenfunctions. The eigenvalues E_m^η are non-degenerated if 2η is not integer. In this case, the eigenfunction has the form

$$\psi_\rho^m(\varphi) = \frac{1}{\sqrt{2\pi}} e^{im\varphi}. \quad (48)$$

230 The function $\psi_\rho^m(\varphi)$ has no zeros and therefore it does not satisfy the condi-
 231 tion (47).

At integer and half-integer values of the magnetic flux η the eigenvalues E_m^η are double-degenerated. The general form of the wave function for these cases is given by

$$\psi_\rho(\varphi) = C_1 e^{im\varphi} + C_2 e^{-i(m+2\eta)\varphi}, \quad (49)$$

where C_1 and C_2 are some coefficients. It is easy to obtain the function of the form (49) which vanishes at $\varphi_1 = 0$

$$\psi_\rho^d(\varphi) = \frac{1}{\sqrt{\pi}} \exp(-i\eta\varphi) \sin[(m + \eta)\varphi]. \quad (50)$$

According to Eq. (47) the function $\psi_\rho^d(\varphi)$ has to vanish at the point φ_2 . Since the wave function (50) is smooth it has to vanish at the point φ_3 to satisfy the boundary condition (6). Therefore the discrete level appears in the continuous spectrum if the wave function given by Eq. (50) has zeros at all perturbation points on the ring. Positions of the impurity and the second contact corresponding to the collapse of the Fano resonance at E_m^η are given by the following equations

$$\varphi_2 = \frac{n_2}{m + \eta}\pi, \quad \varphi_3 = \frac{n_3}{m + \eta}\pi. \quad (51)$$

232 where n_2 and n_3 are arbitrary integer numbers. Equation (51) coincides
 233 with the condition of the collapse of the Fano resonance obtained in previous
 234 sections.

In the case of $E \neq E_m^\eta$ the wave function corresponding to the discrete level should have the form

$$\psi_m^d(\varphi) = A_3 G(\varphi, \varphi_3, E). \quad (52)$$

Applying the boundary condition (6) to the function (52) we obtain the equation

$$Q_{33}(E) + \frac{2}{v} = 0. \quad (53)$$

determining the energy of the discrete level associated with the impurity. In the case of the zero magnetic field Eq. (53) is written in the form

$$\cot \pi k \rho + \frac{2k\rho}{v} = 0. \quad (54)$$

However Eq. (53) is not enough for appearance of the discrete level in the case of attached leads. The condition (47) has to be satisfied in addition to Eq. (53). That means the contacts should be situated at zeros of the function (52). Applying the boundary conditions (47) to the wave function (52) we obtain the conditions of appearance of the discrete level

$$Q_{31}(E) = Q_{32}(E) = 0. \quad (55)$$

235 This equation is valid only at special positions of the impurity and at special
 236 energies. We note that the function (52) has no zeros at irrational values
 237 of the magnetic flux η . Furthermore the position of zeros depends on the
 238 strength of the impurity potential. Therefore the positions of contacts have
 239 to be coordinated with the value of impurity potential. The coordination
 240 does not take place for all levels at the same time. Hence only one discrete
 241 level can appear in the continuous spectrum at $E \neq E_m^\eta$. By virtue of the
 242 symmetrical property of the function (52), the appearance of this level is
 243 more likely if the contacts are situated on equal distance from the impurity.

244 5. Case of two impurities

245 In the general case of arbitrary location of impurities and contacts, the de-
 246 pendence of transmission coefficient on the electron energy contains different
 247 type of overlapping resonances and oscillations. The dependence is irregular
 248 in this case and hardly analyzable, therefore we will restrict ourselves by the
 249 configuration of diametrically opposite contacts.

250 If the angles defining positions of the impurities are incommensurable and
 251 magnetic field is absent then the dependence $T(k\rho)$ exhibits Fano resonances
 252 (Fig. 7a) in the vicinity of the values $k\rho = m$ where m is integer. If the
 253 impurities are located at equal distances from the contacts ($\varphi_4 = 2\pi - \varphi_3$)
 254 then the simultaneous collapse of all Fano resonances occurs (Fig 7b).

The wave function of the discrete level associated with the collapse in the case of two impurities at $E \neq E_m^\eta$ has the form

$$\psi_m^d(\varphi) = A_3 G(\varphi, \varphi_3, E) + A_4 G(\varphi, \varphi_4, E). \quad (56)$$

The energy of the discrete level is defined by the equation

$$\begin{vmatrix} Q_{33}(E) + \frac{2}{v} & Q_{34}(E) \\ Q_{43}(E) & Q_{44}(E) + \frac{2}{v} \end{vmatrix} = 0. \quad (57)$$

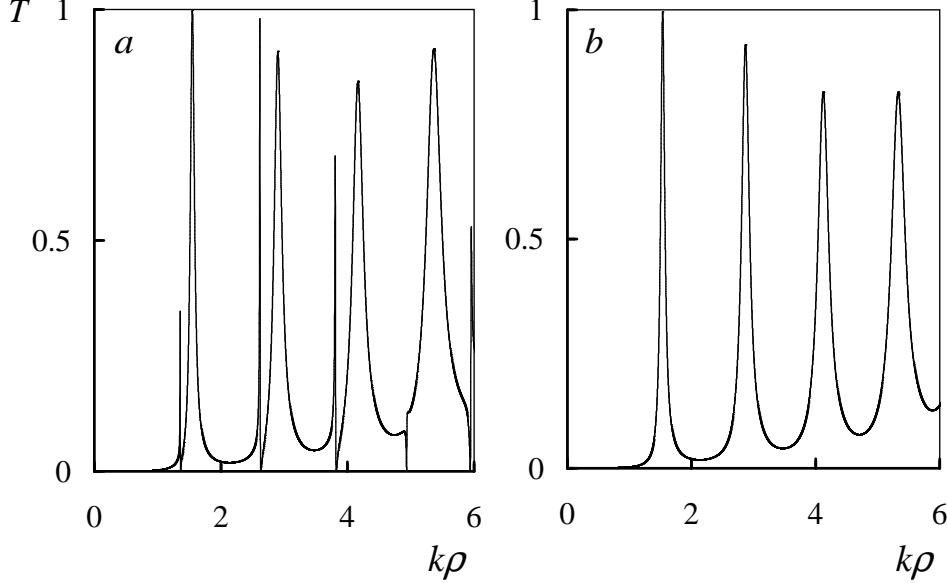


Figure 7: Transmission probability T versus the dimensionless wave vector $k\rho$ for the case of diametrically opposite contacts and the zero magnetic field at $u = 10$ and $v = 5$. (a) Two impurities are located at points $\varphi_3 = 0.8\pi$ and $\varphi_4 = 1.15\pi$. (b) The impurities are located on equal distance from each contact ($\varphi_3 = 0.83\pi$ and $\varphi_4 = 1.17\pi$).

The condition (47) should be satisfied in addition to Eq. (57). At zero magnetic field, the Green function $G(\varphi, \varphi_j, E)$ has the property

$$G(\varphi_j - \Delta\varphi, \varphi_j, E) = G(\varphi_j + \Delta\varphi, \varphi_j, E). \quad (58)$$

Taking into account Eq. (58), one can see that the wave function

$$\psi_m^d(\varphi) = A_3[G(\varphi, \varphi_3, E) - G(\varphi, \varphi_4, E)]. \quad (59)$$

255 satisfies the boundary condition (47) at arbitrary energy. Therefore the pres-
 256 sence of the mirror symmetry in the system leads to simultaneous collapse of
 257 all Fano resonances. The Fano resonances appear again if the symmetry is
 258 broken by shift of any impurity or by different values of point potentials
 259 ($v_1 \neq v_2$). Collapse of several Fano resonances in vicinities of $k\rho = m$ occurs
 260 if the positions of the impurities are given by $\varphi_3 = n_3\pi/m$ and $\varphi_4 = n_4\pi/m$
 261 where n_3 , n_4 and m are integer.

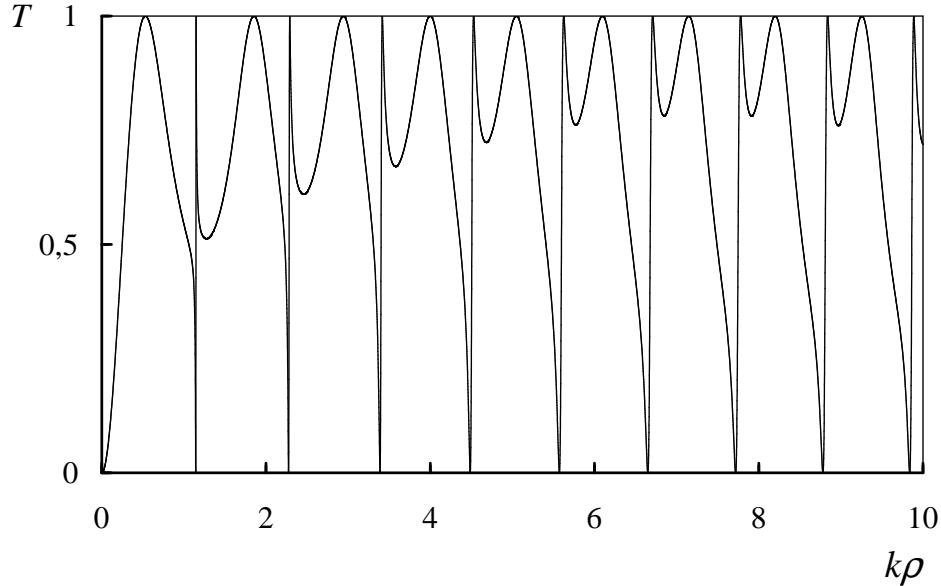


Figure 8: Transmission probability T versus the dimensionless wave vector $k\rho$ for the case of diametrically opposite contacts and zero magnetic field at $u = 10$ and $v = 5$ in presence of two impurities located diametrically opposite at points $\varphi_3 = \pi/15$ and $\varphi_4 = 16\pi/15$.

262 If the impurities are located in diametrically opposite points ($\varphi_4 = \varphi_3 + \pi$)
 263 then the maximal values of transmission peaks reach unity (Fig. 8) in contrast
 264 to the case of single impurity. Hence the addition of the second impurity at
 265 the diametrically opposite point leads to increase of the conductance due do
 266 constructive interference.

267 It should be mentioned that the destructive interference at half-integer
 268 values of the magnetic flux leads to the perfect reflection if the system has
 269 mirror or inverse symmetry. Therefore the transmission coefficient vanishes
 270 at the half-integer magnetic flux if two identical impurities are located at
 271 diametrically opposite points ($\varphi_4 = \varphi_3 + \pi$) or at the same distance from
 272 contacts ($\varphi_4 = 2\pi - \varphi_3$).

273 Zeros of transmission coefficient disappear in the magnetic field with mag-
 274 netic flux $\eta \neq n/2$ where n is integer. The similar effect has been considered
 275 in the case of one impurity and illustrated by Fig. 6.

276 **Conclusion**

277 We have investigated the electron transport in the two-terminal Aharonov–
278 Bohm ring with impurities. Using the zero-range potential theory we have
279 obtained analytical expressions for the electron transmission coefficient as a
280 function of the electron energy. The effect of the magnetic field and position
281 of impurities on the electron transport has been studied. We have found
282 that the dependence of the transmission coefficient on the electron energy
283 exhibits oscillations caused by the interference of electron waves on the ring.
284 The presence of impurities can lead either to decrease or to increase in the
285 transmission coefficient. In particular, the transmission increases in presence
286 of impurities due to breaking of the destructive interference if the value mag-
287 netic flux through the ring equals to half-integer number of the magnetic
288 flux quanta. The ring without impurities may be considered as ideal electron
289 mirror in this case.

290 Our analysis shows that the dependence of the transmission coefficient
291 on the electron energy exhibits Fano resonances at certain energies. These
292 resonances consist of the sharp transmission peak and the nearby transmis-
293 sion zero. In the complex plane of energy, the Fano resonance is represented
294 by pole and nearby zero of the transmission amplitude. Resonances arise
295 as a result of interaction between discrete level and continuous spectrum.
296 The necessary condition of appearing of the Fano resonance in the quantum
297 ring is partial symmetry breaking by the magnetic field or the asymmetrical
298 location of impurities or contacts. We have found that the collapse of Fano
299 resonances occurs at certain parameters of the system. In this case, the pole
300 and the zero of the transmission amplitude coincide and cancel each other.
301 The discrete level immersed in the continuous spectrum arises in this case.
302 In particular, collapse of the Fano resonance in the vicinity of the discrete
303 level E_m^n occurs if all perturbations on the ring are situated at zeros of the
304 wave function defined by Eq. (50).

305 Another mechanism of disappearing of transmission zeros is possible in
306 the system in addition to the collapse of Fano resonances. The zero may
307 be shifted from the real axis in the complex plane. In this case, the dip of
308 transmission coefficient is conserved but the minimum value does not reach
309 zero. We mention that the collapse of the Fano resonance is accompanied by
310 increase in symmetry of the system while the shift of the zero is accompanied
311 by decrease in symmetry.

312 The work is supported by Russian funding program "Development of

References

- [1] Y. Gefen, Y. Imry, M.Ya. Azbel, Phys. Rev. Lett. 52 (1984) 129.
- [2] M. Büttiker, Y. Imry, M.Ya. Azbel, Phys. Rev. A 30 (1984) 1982.
- [3] J.-B. Xia, Phys. Rev. B 45 (1992) 3593.
- [4] J. Li, Z.-Q. Zhang, Y. Liu, Phys. Rev. B 55 (1997) 5337.
- [5] V.A. Geyler, V.V. Demidov, V.A. Margulis, Zh. Tekh. Fiz. 73, 6 (2003) 1 [Tech. Phys. 48, 6 (2003) 661].
- [6] K.-K. Voo, C.S. Chu Phys. Rev. B 72 (2005) 165307.
- [7] V. Vargiamidis, H.M.Polatoglou, Phys. Rev. B 74 (2006) 235323.
- [8] T. Nakanishi, K. Terakura, T. Ando, Phys. Rev. B 69 (2004) 115307.
- [9] O.A. Tkachenko, V.A. Tkachenko, D.G. Baksheev, Z.D. Kvon, Zh.K. Portal, Pis'ma Zh. Eksp. Teor. Fiz. 71 (2000) 366 [JETP Lett. 71 (2000) 255].
- [10] A.A. Bykov, D.G. Baksheev, L.V. Litvin, V.P. Migal', E.B. Olshanetsky, M. Cassé, D.K. Mod, Zh.K. Portal, Pis'ma Zh. Eksp. Teor. Fiz. 71 (2000) 631 [JETP Lett. 71 (2000) 434].
- [11] K.N. Pichugin, A.F. Sadreev, Phys. Rev. B 56 (1997) 9662.
- [12] N.T. Bagraev, A.D. Buravlev, V.K. Ivanov, L. E. Klyachkin, A. M. Malyarenko, S. A. Rykov and I. A. Shelykh, Fiz. Tekh. Poluprovodn. 34 (2000) 846 [Semicond. 34, 7 (2000) 817].
- [13] J. Yang, M. Heiblum, D. Sprinzak, D. Mahalu, H. Shtrikman, Science 290 (2000) 779.
- [14] W.G. van der Wiel, S.De Franceschi, T. Fujisawa, J.M. Elzerman, S. Tarucha, L.P. Kouwenhoven, Science 289 (2000) 2105.
- [15] A.A. Bykov, A.K. Bakarov, L.V. Litvin, A.I. Toropov, Pis'ma Zh. Eksp. Teor. Fiz. 72 (2000) 300 [JETP Lett. 72 (2000) 209].

- [16] A. Yacoby, M. Heiblum, D. Mahalu, and H. Shtrikman, Phys. Rev. Lett. 74 (1995) 4047.
- [17] C. Ryu, S.Y. Cho, Phys. Rev. B 58 (1998) 3572.
- [18] K. Kobayashi, H. Aikawa, S. Katsumoto, and Y. Iye, Phys. Rev. Lett. 88 (2002) 256806.
- [19] K. Kobayashi, H. Aikawa, A. Sano, S. Katsumoto, and Y. Iye, Phys. Rev. B 70 (2004) 035319.
- [20] S. Pedersen, A.E. Hansen, A. Kristensen, C.B. Sørensen, and P.E. Lindelof, Phys. Rev. B 61 (2000) 5457.
- [21] J. Liu, W.X. Gao, K. Ismail, K.Y. Lee, J.M. Hong, and S. Washburn, Phys. Rev. B 48 (1993) 15148.
- [22] D. Maily, C. Chapelier, and A. Benoit, Phys. Rev. Lett. 70 (1993) 2020.
- [23] V. Chandrasekhar, R.A. Webb, M.J. Brady, M.B. Ketchen, W.J. Gallagher, and A. Kleinsasser, Phys. Rev. Lett. 67 (1991) 3578.
- [24] J. Liu, K. Ismail, K.Y. Lee, J.M. Hong, S. Washburn, Phys. Rev. B 47 (1993) 13039.
- [25] U. Fano, Phys. Rev. B 104 (1961) 1866.
- [26] C.S. Kim, A.M. Satanin, Y.S. Joe, and R.M. Cosby, Zh. Eksp. Teor. Fiz. 116 (1999) 263 [JETP 89 (1999) 114].
- [27] C.S. Kim, A.M. Satanin, Physica E 4 (1999) 211.
- [28] C.S. Kim, A.M. Satanin, V.B. Stenberg, Zh. Eksp. Teor. Fiz. 118 (2000) 413 [JETP 91 (2000) 361].
- [29] C.S. Kim, O.N. Roznova, A.M. Satanin, Zh. Eksp. Teor. Fiz. 121 (2002) 1157 [JETP 94 (2002) 992].
- [30] J.U. Nöckel, Phys. Rev. B 46 (1992) 15348.
- [31] A.A. Clerk, X. Waintal, P.W. Brouwer, Phys. Rev. Lett. 86 (2001) 4636.

- [32] V.A. Geyler, I.Yu. Popov, *Teor. Mat. Fiz.* 107 (1996) 12 [*Theor. Math. Phys.* 107 (1996) 427].
- [33] B.S. Pavlov, I.Yu. Popov, V.A. Geyler, O.S. Pershenko, *Europhys. Lett.* 52 (2000) 196.
- [34] V.A. Geyler, A.V. Popov, *Reps. Math. Phys.* 42 (1998) 347.
- [35] P. Exner, M. Tater, D. Vaněk, *J. Math. Phys.* 42 (2001) 4050.
- [36] V.A. Geyler, V.A. Margulis, M.A. Pyataev, *Zh. Eksp. Teor. Fiz.* 124 (2003) 851 [*JETP* 97 (2003) 763].
- [37] J. Brüning, V.A. Geyler, *J. Math. Phys.* 44 (2003) 371.
- [38] M.G. Krein, *Mat. Sb.* 20, (1947) 431.
- [39] A.I. Baz, Y.B. Zel'dovich, and A.M. Perelomov, *Scattering, Reactions and Decay in Nonrelativistic Quantum Mechanics*, Israel Program for Scientific Translations, Jerusalem, 1969.
- [40] Yu.N. Demkov, V.N. Ostrovsky, *Zero-Range Potentials and Their Applications in Atomic Physics*, Plenum, New York, 1988.
- [41] B.S. Pavlov, *Usp. Mat. Nauk* 42 (1987) 99 [*Russ. Math. Surv.* 42 (1987) 127].
- [42] S. Albeverio, F. Gesztesy, R. Høegh-Krohn, and H. Holden, *Solvable Models in Quantum Mechanics*, Springer-Verlag, Berlin, 1988.