

# A long-term frequency-stabilized erbium-fiber-laser-based optical frequency comb with an intra-cavity electro-optic modulator

Zhang Yan-Yan(张颜艳)<sup>a)</sup>, Yan Lu-Lu(闫露露)<sup>a)</sup>, Zhao Wen-Yu(赵文字)<sup>a,b)</sup>, Meng Sen(孟森)<sup>a,c)</sup>, Fan Song-Tao(樊松涛)<sup>a,b)</sup>, Zhang Long(张龙)<sup>a)</sup>, Guo Wen-Ge(郭文阁)<sup>c)</sup>, Zhang Shou-Gang(张首刚)<sup>a)</sup> and Jiang Hai-Feng(姜海峰)<sup>a)†</sup>

a) Key laboratory of Time and Frequency Standards, National Time Service Center, Xi'an 710600, China

b) Graduate University of Chinese Academy of Sciences, Beijing, 100039, China

c) School of Science, Xi'an Shiyu University, Xi'an, 710065, China

We demonstrate a home-made optical frequency comb based on an erbium-doped-fiber femtosecond laser with a ring cavity. The repetition rate of the laser is about 209 MHz determined by optical length of the laser cavity. By controlling an intra-cavity electro-optic modulator and a piezo-transducer, the repetition rate can be stabilized with megahertz bandwidth in a range of 3 kilohertz, enabling long-term repetition rate phase-locking. The in-loop frequency instability of the repetition rate, limited by measurement system, is  $1.6 \times 10^{-13}$  at 1 second integration time and inversely proportional to integration time for short terms. Using a common path  $f$ - $2f$  interferometer, the carrier envelope offset (CEO) frequency of the frequency comb is obtained with a signal-to-noise ratio of 40 dB for 3 megahertz resolution spectrum. Stabilized CEO frequency exhibits a deviation of 0.6 millihertz at 1 second integration time.

**Keywords:** optical frequency comb, fiber laser, frequency stabilization, frequency instability

**PACS:**42.55.Wd, 42.62.Eh, 42.65.Re

## 1. Introduction

Optical frequency combs, based on Ti:sapphire femtosecond (fs) laser, were firstly invented in the end of 1990s<sup>[1,2]</sup>. Two scientists from Germany and USA shared Nobel Prize 2005 in physics, due to this invention. Nowadays, Optical frequency combs are widely used in many applications, including attosecond science<sup>[3]</sup>, spectroscopy<sup>[4]</sup>, astronomical spectrograph<sup>[5]</sup>, low-noise microwave generation<sup>[6]</sup>, distance measurement<sup>[7]</sup>, time & frequency transfer<sup>[8]</sup>, optical clock development and application<sup>[9]</sup>, and so on. Requirement of various applications drives scientists and engineers developing new optical comb based on different fs laser sources, such as Cr:LiSAF<sup>[10]</sup>, Er:fiber<sup>[11]</sup>, Cr:forsterite<sup>[12]</sup>, Er:Yb:glass<sup>[13]</sup>, Yb:fiber<sup>[14]</sup>. Especially, Er:fiber frequency combs attract more attention because of their compactness, reliability, low power consumption and directly covering

---

\*Project supported by the National Natural Science Foundation of China (Grant No. 91336101 and 61127901), and West Light Foundation of The Chinese Academy of Sciences (Grant No. 2013ZD02).

†Corresponding author. E-mail: haifeng.jiang@ntsc.ac.cn

telecommunication wavelength. As a result, Er: fiber frequency comb rapidly evolves, and its performance is as good as that of the best comb; the frequency instability of optical spectrum transfer can reach  $\sim 1 \times 10^{-17}$  at 1 s averaging time<sup>[15]</sup>.

Since optical frequency combs were invented, optical frequency measurement has always been one of the most important applications. The best optical atomic clocks, generating ultra-stable optical frequency signal, exhibit both accuracy and stability in the range of  $10^{-18}$ <sup>[16]</sup>. By taking advantage of these high performance frequency standards, scientist have done lots of pioneer experimental researches involved in fundamental physics, such as gravitational redshift<sup>[17]</sup> and physics constant<sup>[9]</sup>. However, these works cannot be realized without optical frequency combs which synthesize the output of these optical clocks into other frequency signals for utilization. In order to fulfill these tasks, the frequency conversion of optical frequency combs should have better stability than that of optical frequency standards.

In this paper, we present the research progress of a home-made erbium-fiber-laser-based optical frequency comb for strontium optical clock frequency measurement. Its repetition rate ( $f_r$ ) is about 209 MHz determined by optical length of the laser cavity. In order to control  $f_r$ , an intra-cavity electro-optic modulator (EOM) and a long-range piezo-transducer (PZT) are used as the feedback terminals simultaneously, yielding megahertz-bandwidth frequency response in a tunable range of 3 kHz. Consequently,  $f_r$  can be continuously phase-stabilized over long time. Intra-cavity EOM technique, resulting in fast repetition rate control, was originally employed at the Joint Institute for Laboratory Astrophysics (JILA) in USA<sup>[18]</sup>. In China, there are a few capable research groups, e.g. Wei ZY's group at institute of physics (Chinese Academy of Sciences)<sup>[19]</sup>, Fang ZJ's group at national institute of metrology<sup>[20]</sup> and Zhang ZG's group at Peking University<sup>[21]</sup>, making efforts to develop fiber-based comb system with an intra-cavity EOM.

## 2. System setup

Fig. 1 shows the setup of the optical frequency comb which is based on an Er: fiber fs laser. Output of the laser is separated into three parts. One part is the optical frequency comb output for utilization; the other two are used for detection and control of carrier envelope offset frequency ( $f_{ceo}$ ) and repetition rate ( $f_r$ ) respectively.

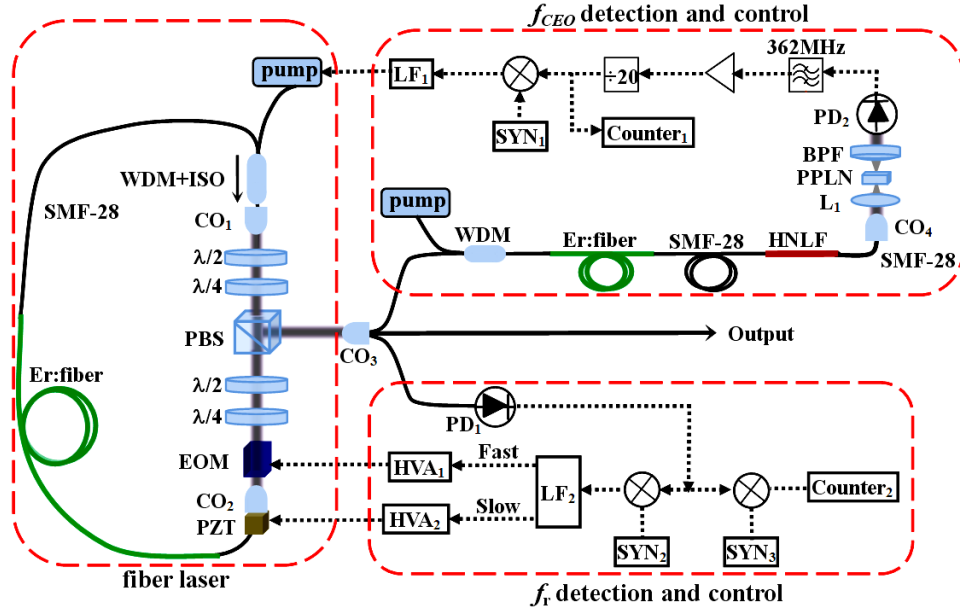


Fig 1. Schematic of the Erbium fiber laser frequency comb. The thick solid lines represent free-space paths, the thin solid lines represent fiber paths and the dotted lines represent electrical paths.  $\lambda/2$ : Half-wave plate;  $\lambda/4$ : Quarter-wave plate; WDM: Wavelength division multiplexer; ISO: Isolator; PBS: Polarization beam splitter; CO: Collimator; PD: Photodetector; PZT: Piezoelectric transducer; EOM: Electro-Optic Modulator; L: Lens; BPF: Bandpass filter; PPLN: Periodically poled lithium niobate; HNLF: Highly nonlinear fiber; LF: Loop filter; HVA: High voltage amplifier; SYN: Synthesizer.

## 2.1 Er:fiber based mode-locked laser

As shown in Fig. 1, the Er:fiber fs laser source has a ring cavity including four wave plates, a polarization beam splitter (PBS), two collimators, a WDM with isolator, an Electro-optic modulator (EOM) and fibers. A 2-cm PZT mounted on a stage is employed to adjust the cavity length. The cavity contains 39 cm SMF-28 fiber, 8 cm HI1060 fiber and 39 cm highly Erbium-doped fiber (Liekki 110-4/125). Dispersion of the cavity is supposed to be slightly negative, considering all components and fibers in the cavity. The laser is pumped with two power-combined single-mode 980 nm pigtailed diode lasers whose power is up to 1 W. By setting wave plates in proper angles, the laser can start mode-locking automatically while the pumping power is 1 Watt. Unfortunately, this mode-locked laser works in a multi-pulses state. In order to avoid multi-pulses, we decrease the pumping power to be around 550 mW. The mode-locked laser has about 50 mW output power with  $\sim 83$  fs pulse-width and  $\sim 50$  nm of 3-dB optical spectrum width.

Both EOM and PZT are employed to control  $f_r$ . The EOM is a 8-mm long lithium niobate crystal with  $800 \text{ fs}^2$  dispersion at 1550 nm. To measure the response bandwidth of the EOM, we setup a Mach-Zehnder interferometer which contains the EOM in one arm. After that, we drive the EOM with an external radio-frequency (RF) source and monitor the phase response of the EOM at the

output of the interferometer by using a 2 GHz bandwidth photodetector (PD). The 3 dB bandwidth in the magnitude is about 10 MHz while the phase delay is close  $\pi/2$ .  $f_r$  shifts about 60 Hz monotonically while tuning offset voltage of the EOM from -200 V to 200 V. The  $f_r$  tuning range with the PZT (from 0 V to 200 V) is measured to be around 3 kHz with a response bandwidth of hundreds Hz.

## 2.2 $f_r$ detection and control

To detect the repetition rate, we sent a fraction of the output from the mode-locked laser into a 2 GHz bandwidth InGaAs PD. At the output of the PD, we obtain a current pulses train exhibiting  $n \times f_r$ , where  $n$  is an integer, in frequency domain.

Usually, we do not stabilize  $f_r$  directly, but stabilize its high order harmonics, so as to reduce technical noise induced by the phase-locking process. However, no microwave synthesizer is available for the moment. Eventually, phase-lock the forth harmonics onto an 838 MHz reference signal which is the highest reference frequency we have.

The phase detector is a RF mixer which produces an error signal indicating phase difference between  $4f_r$  signal and the reference signal. Following the mixer, a home-made loop filter converts the error signal into negative feedback signal for driving EOM with high bandwidth and PZT with long range. Although the EOM has a response bandwidth well beyond 5 MHz, the control bandwidth of EOM control-loop is estimated to be 100 kHz - 200 kHz according the response measurement results of the home-made loop-filter and the home-made high voltage amplifier. PZT control-loop has a bandwidth of below 100 Hz for compensating only temperature drift effect.

In addition,  $f_r$  keeps being phase-locked while the box of the laser being hit with fist, because EOM control-loop cancels vibration influence efficiently. The peak-to-peak temperature fluctuation is about 1 °C in the laboratory, and well-below 1 °C in the laser box, so that PZT control-loop can eliminate the thermal drift effect independently. Extra thermal control is not required. Consequently,  $f_r$  of the laser can be continuously phase-locked onto the reference signal over a week.

## 2.3 $f_{ceo}$ detection and control

We use  $f-2f$  interference method to produce  $f_{ceo}$  signal; and lock  $f_{ceo}$  to an extra-reference (radio-frequency RF) signal in phase by controlling ring laser's pumping power.

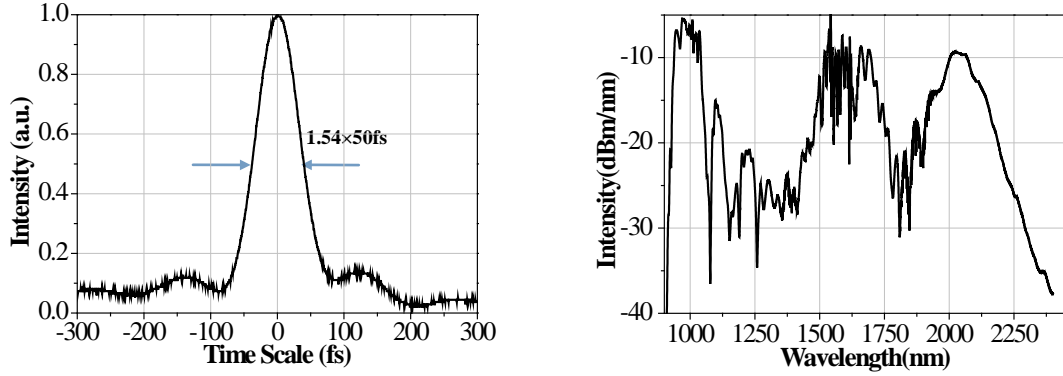


Fig 2 (a) the measured intensity autocorrelation of the compressed pulse (b) the octave-spanning supercontinuum produced with HNLF.

In order to perform  $f-2f$  interference, we first pre-chirp seed pulses for reducing the pulse peak power, aiming to decrease nonlinear effect in amplification stage. Secondly, the pre-chirped pulses are feed into an erbium-doped fiber amplifier with a selective optimum gain of  $\sim 22$  dB. Thirdly, compress laser pulse width by chirping the amplified pulse with SMF-28 fiber, yielding  $\sim 50$  fs pulse width as shown in Fig. 2(a). Fourthly, feed these narrow pulses into a short highly nonlinear fiber (HNLF), resulting in an octave spanning supercontinuum (SC) as shown in Fig. 2(b). This figure gives the optical spectrum of the SC spanning from 950 nm to 2250 nm for 25 dB bandwidth. Most of the energy shifted into two solitons with 1  $\mu\text{m}$  and 2  $\mu\text{m}$  wavelength respectively. It is worth noting that these two solitons are exactly in the right wavelength for  $f-2f$  interference. After that, direct all optical power passing through a 1-mm thick PPLN crystal for frequency-multiplying. Finally, we pick-up 1 $\mu\text{m}$  optical power with a 10 nm bandpass filter and produce beatnote signal of  $f-2f$  with an InGaAs PD.

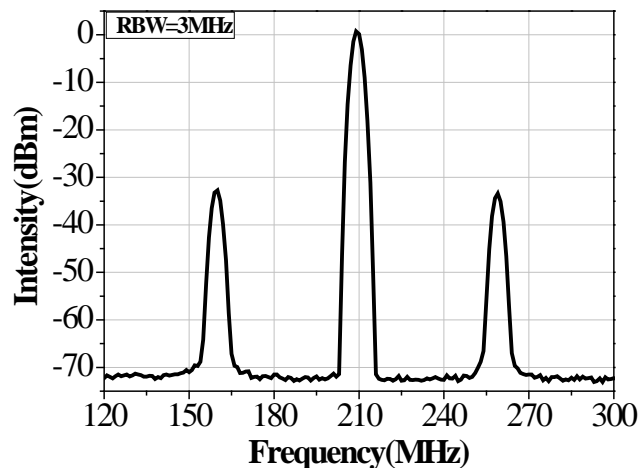


Fig 3. Measured CEO beat SNR in a 3 MHz resolution bandwidth.

Fig. 3 shows the measured RF spectrum of  $f-2f$  interference with 3 MHz resolution, demonstrating the signal-noise-ratio (S/N) of  $f_{\text{ceo}}$  to be 40 dB. This is about 20 dB higher than the previously reported Er:fiber domestic system [20]. High S/N enables the system generating a clean feedback signal to control the pumping power, for stabilizing  $f_{\text{ceo}}$  on a reference frequency provided with a synthesizer. A 20-times frequency-divider is used to enlarge the phase-locking tolerance, making the phase-lock-loop more robust. The control bandwidth of the loop is about 25 kHz indicated by a gain-bump in the spectrum of  $f_{\text{ceo}}$ .

The longest continuously phase-locking time of  $f_{\text{ceo}}$  is more than a day. However, some unknown strong noises coupled from electric ground (introduced by other events) disturb the phase-locking-loop from time to time. We suppose that  $f_{\text{ceo}}$  can be stabilized over a week if the electric ground gets clean.

### 3. Results and discussion

Frequency stability of the optical frequency combs is one of the most important parameters. Measurement of comb's absolute (out-of-loop) frequency instability requires two independent systems which are not available now. Here, we measure only in-loop frequency instability which does not include parts of fiber noise in comparison with the out-of-loop one.

#### 3.1 in-loop frequency instability of $f_r$

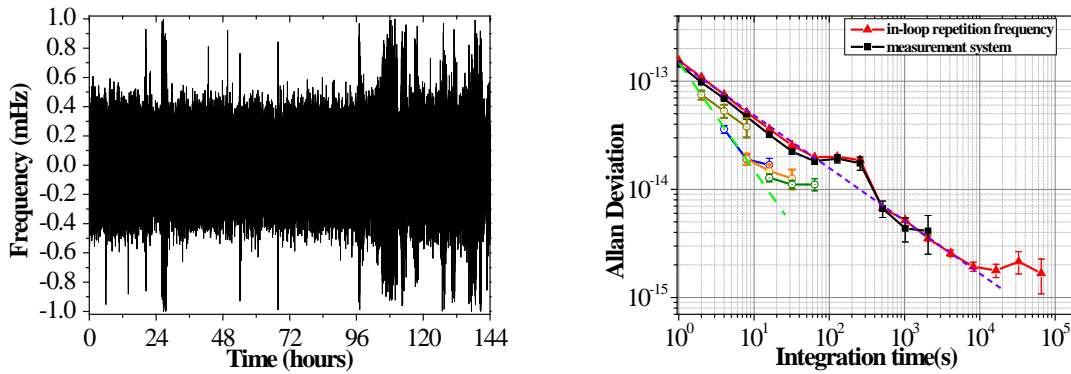


Fig 4. (a) Residual fluctuations of the 4th harmonic of the repetition rate; (b) In-loop frequency stability of  $4f_r$ , measured with different gate (solid red triangle for 1s, empty round for 2s, 4s, 8 s and 16 s) time and measurement noise floor (solid black square).

As shown in Fig. 1, down-converted frequency of  $4f_r$  at 1 MHz is recorded with a frequency counter (Agilent 53230A). Fig. 4(a) shows the frequency fluctuation of  $4f_r$  in 6 days exhibiting a square root mean value of 0.1 mHz. Fig. 4(b) shows frequency stability ( $\Delta f_r/f_r$ ) close  $1 \times 10^{-13}$  @ 1s.

However, this result is totally limited by the noise floor, as shown the figure with solid black squares, which is measured by using the same counter recording a 1 MHz reference signal. On the other hand, the frequency instability is inversely proportional to  $\sqrt{\tau}$ , where  $\tau$  is the integration time, due to the dead-time decouples the data relationship and converts the white phase noise into white frequency noise. For a phase-locked-loop, the controlled signal should exhibit white phase noise, and its frequency instabilities should be inversely proportional to  $\tau$ . This is verified by eliminating dead-time effect with different gate times as shown with a green dashed line in Fig. 4(b). Note that the first point of calculated Allan Deviations has no dead-time effect. Therefore, the frequency instability of  $f_r$  is well below  $1 \times 10^{-13}$  @ 1s and rolls down with a slope of  $1/\tau$  for short terms.

The comb's frequency stability is much better than the best domestic primary-clock (Cs fountain clock), which presents the unit of frequency. It means that this optical frequency comb is good enough for measurement of the strontium clocks transition frequency.

### 3.2 in-loop frequency instability of $f_{ceo}$

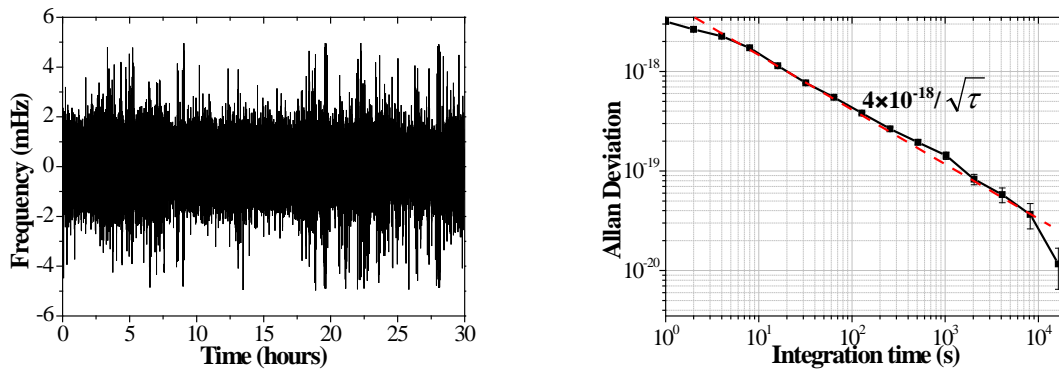


Fig 5. (a) Residual fluctuation of the stabilized in-loop CEO frequency; (b) Optical comb frequency Instability induced by in-loop  $f_{ceo}$  fluctuation.

The average square root of  $f_{ceo}$  fluctuation is about 0.6 mHz @ 1 second, and the peak-to-peak fluctuation is about 10 mHz as shown in Fig. 5(a). Considering the optical frequency is about 200 terahertz, the corresponding optical comb frequency instability induced by in-loop  $f_{ceo}$  fluctuation is  $\sim 4 \times 10^{-18} / \sqrt{\tau}$  as shown in Fig. 5(b).

It is clear that the frequency instability induced by in-loop  $f_{ceo}$  fluctuation is negligible, even compared with the highest stable atomic clock with a stability of  $3.2 \times 10^{-16} / \sqrt{\tau}$ .

## 5. Conclusion and respective

In summary, we demonstrate a home-made Er: fiber based 209 MHz optical frequency comb with an intra-cavity EOM. To the best of our knowledge, this optical frequency comb is the first domestically-made one with the fast  $f_r$  controller in cavity. Both  $f_r$  and  $f_{ceo}$  of the comb can be easily stabilized continuously over long time, thanks to the high bandwidth frequency control (a few tens of kilohertz or higher) and high signal-to-noise ratio of frequency signals detection. The frequency instability of the system is well below  $1 \times 10^{-13}$  @ 1s and rolls down with a slope of  $1/\tau$  for short terms.

Compared with the previous published domestic Er: fiber frequency comb <sup>[20]</sup>, we have obviously improvement in frequency stability and reliability. In the future, we will continuously optimize the system, and extend its operation frequency to strontium clock transition (698 nm) for frequency measurement.

## References

- [1] Holzwarth R, Udem T, Hansch TW, Knight JC, Wadsworth WJ, and Russell PSJ 2000 Physical Review Letters, 85, 2264-2267.
- [2] Diddams SA, Jones DJ, Ye J, Cundiff ST, Hall JL, Ranka JK, Windeler RS, Holzwarth R, Udem T, and Hansch TW 2000 Physical Review Letters, 84, 5102-5105
- [3] Wirth A, Hassan MT, Grguras I, Gagnon J, Moulet A, Luu TT, Pabst S, Santra R, Alahmed ZA, Azzeer AM, Yakovlev VS, Pervak V, Krausz F, and Goulielmakis E 2011 Science, 334, 195-200
- [4] Diddams SA, Hollberg L, and Mbele V 2007 Nature, 445, 627-630
- [5] Murphy MT, Udem T, Holzwarth R, Sizmman A, Pasquini L, Araujo-Hauck C, Dekker H, D'Odorico S, Fischer M, Hansch TW, and Manescau A 2007 Monthly Notices of the Royal Astronomical Society, 380, 839-847
- [6] Fortier TM, Kirchner MS, Quinlan F, Taylor J, Bergquist JC, Rosenband T, and Diddams SA 2011 Nature Photonics, 5, 425-429
- [7] Coddington I, Swann WC, Nenadovic L, and Newbury NR 2009 Nature Photonics, 3, 351-356
- [8] Giorgetta FR, Swann WC, Sinclair LC, Baumann E, Coddington I, and Newbury NR 2013 Nature Photonics, 7, 434-438.
- [9] Rosenband T, Hume DB, Schmidt PO, Chou CW, Brusch A, Lorini L, Oskay WH, Drullinger RE, Fortier TM, Stalnaker JE, Diddams SA, Swann WC, Newbury NR, Itano WM, Wineland DJ, Bergquist JC 2008 Science, 319 1808-1812
- [10] Holzwarth R, Zimmermann M, Udem T, Hänsch TW, Russbüldt P, Gäbel K, Poprawe R, Knight JC, Wadsworth WJ, and Russell PSJ 2001 Optics Letters 26, 1376-1378
- [11] Tauser F, Leitenstorfer A, and Zinth W 2003 Optics Express 11, 594-600
- [12] Kim K, Washburn BR, Wilpers G, Oates CW, Hollberg L, Newbury NR, Diddams SA, Nicholson JW, and Yan MF 2005 Optics Letters 30, 932-934
- [13] Stumpf MC, Pekarek S, Oehler AEH, Südmeyer T, Dudley JM, and Keller U 2009 Applied Physics B99, 401-408
- [14] Zhou H, Li W, and Zeng H P 2011 Laser Physics 21, 399
- [15] Nicolodi D, Argence B, Zhang W, Le Targat R, Santarelli G, and Le Coq Y 2014 Nature Photonics, 8, 219-223



- [16] Bloom B J, Nicholson T L, Williams J R, Campbell S L, Bishof M, Zhang X, Zhang W, Bromley S L, Ye J 2014 *Nature*, 506, 71-75
- [17] Chou C W, Hume D B, Rosenband T, and Wineland D J 2010 *Science*, 329, 1630-1633
- [18] Hudson D D, Holman K W, Jones R J, Cundiff S T, Ye J, and Jones D J 2005 *Optics Letters*, 30, 2948-2950
- [19] Zhang L, Han H N, Zhao Y Y, Hou L, Yu Z J , Wei Z Y 2014 arXiv:1409.7905 [physics.optics]
- [20] Cao S Y, Meng F, Lin B K, Fang Z J, and Li T C 2012 *Acta Physica Sinica*, 61, 134205
- [21] Wang G Z, Meng F, Li C, Jiang T X, Wang A M, Fang Z J, and Zhang Z G 2014 *Optics Letters*, 39, 2534-2536