

# Non-adiabatic holonomic manipulation of the polariton qubit in circuit QED

Zheng-Yuan Xue,<sup>1,\*</sup> Wei-Can Yu,<sup>1</sup> Li-Na Yang,<sup>1</sup> and Yong Hu<sup>2,†</sup>

<sup>1</sup>Laboratory of Quantum Engineering and Quantum Materials, and School of Physics and Telecommunication Engineering, South China Normal University, Guangzhou 510006, China

<sup>2</sup>School of Physics, Huazhong University of Science and Technology, Wuhan 430074, China

(Dated: June 30, 2021)

As a qubit usually has a limited lifetime, its manipulation should be as fast as possible, and thus non-adiabatic operation is more preferable. Moreover, as a qubit inevitably interacts with its surrounding environment, robust operations are of great significance. Here, we propose a scheme for quantum manipulation of the polariton qubit in circuit QED using non-adiabatic holonomy, which is inherently fast and robust. In particular, the polariton qubit is shown to be robust against arbitrary low-frequency noise due to its near symmetric spectrum, which can also be conveniently manipulated by external microwave driven fields in a holonomic way. Therefore, our scheme presents a promising way of manipulating polariton qubits for on-chip solid-state quantum computation.

## I. INTRODUCTION

Geometric phases depend only on certain global geometric property of the evolution path, and thus are largely robust against local noises. This distinct feature makes them promising in implementing quantum computation in a fault-tolerant way [1] and high-fidelity geometric quantum gates have been experimentally realized [2, 3]. Geometric phases can be classified by two types, i.e., the abelian and non-abelian ones, quantum computation based on which are called geometric [4–7] and holonomic quantum computation (HQC) [8–11], respectively. The implementation of quantum gates with geometric phases can be achieved by both adiabatic and non-adiabatic evolution. However, the main challenge of the adiabatic method is the long run time, which is comparable with the lifetime of typical qubits [4, 5]. For this reason, non-adiabatic geometric gates should be more preferable. Recently, non-adiabatic HQC has been proposed with three-level lambda systems [12–15] with several experimental verifications of elementary gates for universal quantum computation [16–19]. However, in such schemes, the upper excited state is resonantly coupled, and thus the limited lifetime of this state is the main challenge in practical experiments.

Here, we propose to manipulate the polariton qubit in a non-adiabatic holonomic way. The polariton qubit is chosen to be a subset of a V-configuration three-level system, which is formed by three dressed states in a typical circuit QED setup. Moreover, due to the polaritonic nature of the qubit, the polariton qubit is shown to be robust against arbitrary low-frequency noise. Finally, the non-adiabatic holonomic quantum gate can be constructed by external driven microwave fields. Therefore, our scheme presents a non-adiabatic and geometric way of manipulating polariton qubits for robust on-chip quantum computation.

## II. THE POLARITON QUBIT

We firstly consider implementing the proposed polariton qubit with a typical circuit QED setup [20], where a superconducting transmon qubit [21] is capacitively coupled to a one-dimensional transmission line resonator (1D cavity). Setting  $\hbar = 1$ , the interaction Hamiltonian can be written as [22]

$$H_{\text{JC}} = \omega_a |1\rangle\langle 1| + \omega_r a^\dagger a + g(a\sigma^+ + a^\dagger\sigma^-), \quad (1)$$

where  $\omega_a$  and  $\omega_r$  are the frequencies of qubit and cavity, respectively;  $\sigma^- = |0\rangle\langle 1|$  with  $|0\rangle$  and  $|1\rangle$  being the ground and excited states of the transmon qubit. Label  $|n\rangle_r$  as the Fock state of the cavity, the ground state of Hamiltonian (1) is  $|G\rangle = |0\rangle|0\rangle_r \equiv |0, 0\rangle$  with its eigenvalue set to be  $E_G = 0$ . As shown in Fig. 1a, for  $n \geq 1$ , due to the transmon qubit-cavity interaction, each energy level is split into two, the eigenstates are

$$|-, n\rangle = \cos \alpha_n |0, n\rangle - \sin \alpha_n |1, n-1\rangle, \quad (2a)$$

$$|+, n\rangle = \sin \alpha_n |0, n\rangle + \cos \alpha_n |1, n-1\rangle, \quad (2b)$$

and corresponding eigenvalues are

$$E_{n,\pm} = n\omega_r + \frac{1}{2} \left( \delta \pm \sqrt{\delta^2 + 4ng^2} \right), \quad (3)$$

where  $\tan(2\alpha_n) = 2g\sqrt{n}/\delta$  with the detuning  $\delta = \omega_r - \omega_a$ . The transition frequencies are

$$\omega_{n,\pm} = \omega_r \pm \frac{1}{2} (\sqrt{\delta^2 + 4(n+1)g^2} - \sqrt{\delta^2 + 4ng^2}), \quad (4a)$$

$$\omega_{n,\nearrow} = \omega_r + \frac{1}{2} (\sqrt{\delta^2 + 4(n+1)g^2} + \sqrt{\delta^2 + 4ng^2}), \quad (4b)$$

$$\omega_{n,\searrow} = \omega_r - \frac{1}{2} (\sqrt{\delta^2 + 4(n+1)g^2} + \sqrt{\delta^2 + 4ng^2}), \quad (4c)$$

where  $\omega_{n,\pm}$  are the transition frequencies between the same transmon states, while  $\omega_{n,\nearrow}$  and  $\omega_{n,\searrow}$  corresponds to the transitions with different transmon states. It is well known that the dynamics of Hamiltonian (1) is constrained within the subspace with certain  $|n\rangle_r$ . For the zero- and one-excitation subspace, the three lowest eigenstates  $|G\rangle$ ,  $|-, 1\rangle$ , and  $|+, 1\rangle$  form a V-configuration, and the latter two are defined as the polariton qubit, as shown in Fig. 1. For the sake of simplicity, we write the qubit states  $|\pm, 1\rangle$  as  $|\pm\rangle$  in the following.

\* zyxue@scnu.edu.cn

† huyong@mail.hust.edu.cn



Setting  $\omega_1 = \omega_{0,-}$  and  $\omega_2 = \omega_{0,\neq}$ , the above Hamiltonian reduces to

$$H''_{1d} = \frac{1}{2} \begin{pmatrix} 0 & -D_1 & D_2 \\ -D_1^* & 0 & 0 \\ D_2^* & 0 & 0 \end{pmatrix},$$

where  $D_1 \approx \Omega_1 + \Omega_2 e^{i(2gt+\varphi)} \approx \Omega_1$  and  $D_2 \approx \Omega_1 e^{-2igt} + \Omega_2 e^{i\varphi} \approx \Omega_2 e^{i\varphi}$ . The two step approximations are hold under the justification of the rotating wave approximation. The first one corresponds the omission of the oscillating terms with much larger frequencies ( $\sim 2\omega_{1,2} \gg 2g$ ). The second one will be hold when  $g \gg (\Omega_1, \Omega_2)$ . Therefore, the driven dynamics of the polariton qubit will be governed by

$$H_{1d} = \frac{1}{2} \begin{pmatrix} 0 & -\Omega_1 & \Omega_2 e^{i\varphi} \\ -\Omega_1 & 0 & 0 \\ \Omega_2 e^{-i\varphi} & 0 & 0 \end{pmatrix}, \quad (11)$$

as shown in Fig. 1b.

In order to investigate the qubit dynamics under the above Hamiltonian, we renormalize it to

$$H_{1v} = \frac{\xi}{2} \left( \sin \frac{\theta}{2} e^{i\varphi} |G\rangle\langle +| - \cos \frac{\theta}{2} |G\rangle\langle -| + \text{H.c.} \right) \quad (12)$$

where the effective Rabi frequency is  $\xi = \sqrt{\Omega_1^2 + \Omega_2^2}$ , and  $\tan(\theta/2) = \Omega_2/\Omega_1$ . The eigenstates of the Hamiltonian (12) are  $|G\rangle$ ,

$$\begin{aligned} |b\rangle &= \sin \frac{\theta}{2} e^{-i\varphi} |+\rangle - \cos \frac{\theta}{2} |-\rangle, \\ |d\rangle &= \cos \frac{\theta}{2} |+\rangle + \sin \frac{\theta}{2} e^{i\varphi} |-\rangle, \end{aligned} \quad (13)$$

and thus its dynamics is governed by

$$H'_1 = \frac{\xi}{2} (|0\rangle\langle b| + \text{H.c.}), \quad (14)$$

which means that, in this eigenbasis, the dynamics of the three level system can be viewed as a resonate coupling between the states  $|G\rangle$  and  $|b\rangle$  while decouples from the "dark" state  $|d\rangle$ , as shown in Fig. 1c.

Therefore, the evolution operator  $U = \exp(-i \int_0^t H_{1v} dt')$  realizes the holonomic gate under certain conditions, the reason of which is explained as the following. First, in the qubit subspace, the qubit states evolve according to  $|\psi_{\pm}(\tau)\rangle = U|\pm\rangle$ . When the duration of the Hamiltonian should satisfies  $\int_0^\tau \xi dt = 2\pi$ , the qubit states undergo cyclic evolution. Second, at any time,  $\langle \psi_a(t) | H_1 | \psi_b(t) \rangle = 0$  ( $a, b \in \{\pm\}$ ). This justifies that  $\{|\psi_+(t)\rangle, |\psi_-(t)\rangle\}$  meets the parallel-transport condition in the qubit states subspace, and thus the evolution is purely geometric. Note that this condition is met due to the structure of the Hamiltonian instead of the slow change of parameters in the adiabatic evolution case. Under the above two conditions, projected the evolution operator onto the qubit space defines the

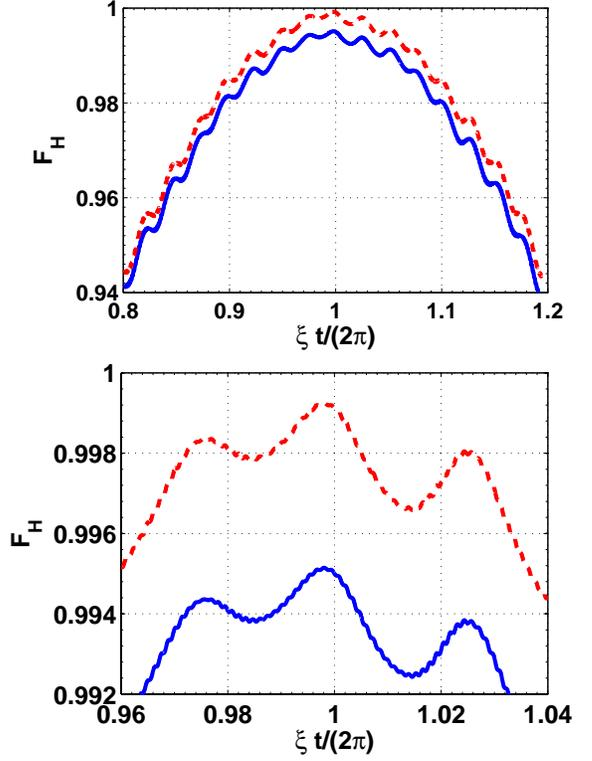


FIG. 2. Fidelity dynamics of the Hadamard gate as a function of  $\xi t/(2\pi)$  with the initial state of the polariton qubit being  $|+\rangle$ , where the red dashed and blue lines being plotted without and with decoherence, respectively.

holonomic gate. Therefore, the non-adiabatic holonomic single-qubit gate can be obtained as

$$U(\theta, \varphi) = \begin{pmatrix} \cos \theta & \sin \theta e^{-i\varphi} \\ \sin \theta e^{i\varphi} & -\cos \theta \end{pmatrix}, \quad (15)$$

where  $\theta$  and  $\varphi$  can be controlled by the driven field, and thus arbitrary single-qubit gate can be obtained by choosing suitable parameters. For example,  $\theta = \pi/4$  and  $\varphi = 0$  implements the Hadamard gate.

The performance of this gate can be evaluated by considering the influence of dissipation using the quantum master equation of

$$\dot{\rho} = i[\rho, H_1] + \frac{\kappa}{2} \mathcal{L}(a) + \frac{\Gamma_1}{2} \mathcal{L}(\sigma^-) + \frac{\Gamma_2}{2} \mathcal{L}(\sigma_z), \quad (16)$$

where  $\rho$  is the density matrix of the considered system,  $\mathcal{L}(A) = 2A\rho A^\dagger - A^\dagger A\rho - \rho A^\dagger A$  is the Lindblad operator,  $\kappa$ ,  $\Gamma_1$  and  $\Gamma_2$  are the decay rate of the cavity, the decay and dephasing rates of the qubits, respectively. We consider the Hadamard gate as a typical example and modulate  $\xi = g/20$  so that  $\xi \ll g$  is well-satisfied to fulfil the requirement of  $g \gg (\Omega_1, \Omega_2)$  in the derivation of Hamiltonian in Eq. (12). For  $\omega_r \simeq 2\pi \times 8$  GHz, the cavity decay rate is  $\kappa \simeq 2\pi \times 7$  kHz [30] and the capacitive transmon-cavity coupling strength can be  $g = \omega_r/20$  [31]. As  $\theta = \pi/4$  for the Hadamard gate,  $\Omega_1 \simeq 2.41\Omega_2 \simeq 0.924\xi$ .

Moreover, for a planar transmon qubit couples to a transmission-line resonator can, relaxation and coherence times of 44 and 20  $\mu\text{s}$  are reported [32], which leads to  $\Gamma_1 \simeq 2\pi \times 8$  kHz and  $\Gamma_2 \simeq 2\pi \times 3.5$  kHz. As  $\kappa$ ,  $\Gamma_1$  and  $\Gamma_2$  are all on the same order, for simplicity, we treat them equally as  $\Gamma_1 = \Gamma_2 = \kappa = 2\pi \times 8$  kHz. Suppose the qubit is initially in the state of  $|+\rangle$ , we evaluate this gate by the fidelity defined by  $F_H = \langle \psi_f | \rho | \psi_f \rangle$  with  $|\psi_f\rangle = (|+\rangle + |-\rangle)/\sqrt{2}$  being the ideally final state under Hadamard gate. We have obtained a high fidelity of  $F_H \simeq 99.5\%$  at  $\xi t/(2\pi) = 1$ , as shown in Fig. 2, where the red dashed and blue lines are plotted without and with decoherence, respectively. Note that to justify our theoretical treatment, we faithfully simulate the quantum process using the original full Hamiltonian  $H_1$  in Eq. (10), and thus do not introduce any approximation.

## V. CONCLUSION

In summary, we propose a scheme for quantum computation with polariton qubit in circuit QED using non-adiabatic holonomy, which is inherently fast and robust. In particular, the polariton qubit is shown to be robust against arbitrary low-frequency noise due to its near symmetric spectrum, which can also be convenient manipulated by external microwave driven fields in a holonomic way. Therefore, our scheme presents a promising geometric way of manipulating polariton qubits for solid-state quantum computation.

This work was supported by the NFRPC (No. 2013CB921804), the PCSIRT (No. IRT1243), and the NSFC (Grants No. 11104096, and No. 11374117).

- 
- [1] E. Sjöqvist, *Physics* **1**, 35 (2008).  
 [2] D. Leibfried *et al.*, *Nature (London)* **422**, 412 (2003).  
 [3] J. Du, P. Zou, and Z. D. Wang, *Phys. Rev. A* **74**, 020302(R) (2006).  
 [4] X.-B. Wang and M. Keiji, *Phys. Rev. Lett.* **87**, 097901 (2001).  
 [5] S. L. Zhu and Z. D. Wang, *Phys. Rev. Lett.* **89**, 097902 (2002).  
 [6] S. L. Zhu and Z. D. Wang, *Phys. Rev. Lett.* **91**, 187902 (2003); S. L. Zhu, Z. D. Wang, and P. Zanardi, *ibid.* **94**, 100502 (2005).  
 [7] Z.-Y. Xue and Z. D. Wang, *Phys. Rev. A* **75**, 064303 (2007); Z.-Y. Xue, *Quantum Inf. Process.* **11**, 1381 (2012).  
 [8] P. Zanardi and M. Rasetti, *Phys. Lett. A* **264**, 94 (1999).  
 [9] J. Pachos, P. Zanardi, and M. Rasetti, *Phys. Rev. A* **61**, 010305(R) (2000).  
 [10] J. A. Jones, V. Vedral, A. Ekert, and G. Castagnoli, *Nature (London)* **403**, 869 (2000).  
 [11] L.-M. Duan, J. I. Cirac, and P. Zoller, *Science* **292**, 1695 (2001).  
 [12] E. Sjöqvist, D. M. Tong, L. M. Andersson, B. Hessmo, M. Johansson, and K. Singh, *New J. Phys.* **14**, 103035 (2012).  
 [13] G. F. Xu, J. Zhang, D. M. Tong, E. Sjöqvist, and L. C. Kwek, *Phys. Rev. Lett.* **109**, 170501 (2012).  
 [14] J. Zhang, L.-C. Kwek, E. Sjöqvist, D. M. Tong, and P. Zanardi, *Phys. Rev. A* **89**, 042302 (2014).  
 [15] Z.-T. Liang, Y.-X. Du, W. Huang, Z.-Y. Xue, and H. Yan, *Phys. Rev. A* **89**, 062312 (2014).  
 [16] G. Feng, G. Xu, and G. Long, *Phys. Rev. Lett.* **110**, 190501 (2013).  
 [17] A. A. Abdumalikov Jr, J. M. Fink, K. Juliusson, M. Pechal, S. Berger, A. Wallraff, and S. Filipp, *Nature* **496**, 482 (2013).  
 [18] C. Zu, W.-B. Wang, L. He, W.-G. Zhang, C.-Y. Dai, F. Wang, and L.-M. Duan, *Nature* **514**, 72 (2014).  
 [19] S. Arroyo-Camejo, A. Lazarev, S. W. Hell, and G. Balasubramanian, *Nat. Commun.* **5**, 4870 (2014).  
 [20] M. H. Devoret and R. J. Schoelkopf, *Science* **339**, 1169 (2013).  
 [21] J. Koch *et al.*, *Phys. Rev. A* **76**, 042319 (2007).  
 [22] A. Blais, R.-S. Huang, A. Wallraff, S. M. Girvin, and R. J. Schoelkopf, *Phys. Rev. A* **69**, 062320 (2004).  
 [23] Y. Makhlin, G. Schön, and A. Shnirman, *Rev. Mod. Phys.* **73**, 357 (2001).  
 [24] J. Q. You and F. Nori, *Phys. Today* **58**(11), 42 (2005).  
 [25] J. Clarke and F. K. Wilhelm, *Nature* **453**, 1031 (2008).  
 [26] Y. Makhlin and A. Shnirman, *Phys. Rev. Lett.* **92**, 178301 (2004).  
 [27] F. Yoshihara, K. Harrabi, A. O. Niskanen, Y. Nakamura, and J. S. Tsai, *Phys. Rev. Lett.* **97**, 167001 (2006).  
 [28] X.-H. Deng, Y. Hu, and L. Tian, *Supercond. Sci. Technol.* **26**, 114002 (2013).  
 [29] F. W. Strauch, *Phys. Rev. Lett.* **109**, 210501 (2012).  
 [30] B. Vlastakis *et al.*, *Science* **342**, 607 (2013).  
 [31] L. S. Bishop *et al.*, *Nat. Phys.* **5**, 105 (2009).  
 [32] R. Barends *et al.*, *Phys. Rev. Lett.* **111**, 080502 (2013).