

Bit-encoding and quantum transfer of Aharonov-Bohm phase from a topological spin transistor to a high-Q cavity

Thiago Prudêncio¹

¹*Coordination in Science and Technology - CCCT, Federal University of Maranhão - UFMA, Campus Bacanga, 65080-805, Sao Luis-MA, Brazil.*

(Dated: March 28, 2019)

Generation of Aharonov-Bohm (AB) phase has achieved a state-of-the-art in mesoscopic systems with manipulation and control of the AB effect. The possibility of transfer information encoded in such systems to light increases the possible scenarios where the information can be manipulated and transferred. In this paper we discuss a bit-encoding of AB phases and propose a quantum transfer of the AB phase generated in a topological spin transistor (TST) to coherent state superposition in high-Q cavity. We demonstrate that the AB phase generated in the TST can be stored in a non-classical state of light, a coherent state superposition, by interacting dispersively the spin state carrying the AB phase with the cavity state initially in a coherent state. We also discuss the storage of bits encoded by AB phases in high-Q and multimode cavities.

PACS numbers: 03.65.Ta, 03.65.Fd, 42.50.Gy, 02.10.De

INTRODUCTION

Aharonov-Bohm (AB) effect [1, 2] is generally exemplified by confining a magnetic field into the interior of a solenoid and observing the imprinting of a phase factor on the electron's wave function that travels in the region outside the solenoid. The main importance of such effect is that a phase factor, the so-called AB phase, can be generated in the presence of a non-zero gauge potential in a region with a null electromagnetic field, modifying the corresponding energy spectrum of the charged particle. The presence of the AB phase represents a direct influence of a vector potential on the particle dynamics and illustrates one of the remarkable possibilities of quantum interference [3–5].

In recent years, several measurements of AB phases have been realized and their role associated to the gauge transformation implemented by the symmetry of the electrodynamics $A_\mu + \partial_\mu \lambda$. Methods of generating AB phases have growth in diverse fields, representing an important role in solid-state interferometers [6, 7], nanotubes [8], transmission microscopy [9], AlSb/InAs heterostructures [10], quantum Hall effect regime [11], Kondo resonance [12] and spin transport [13]. Detection of this effect in photonic states [14], optical induction in mesoscopic systems [15] and interaction of AB ring in a high-Q cavity [16, 17] are examples of the increasing importance of such effect in interacting light-and-matter systems and optical versions of the AB effect [18].

Advances in the domain of artificial gauge fields have given rise new possibilities in exploring AB effect and geometrical phases [19]. Optical Berry phase [20], Aharonov-Casher effect [21, 22] as well as AB effect for neutral particles have also been explored in diverse contexts [23–26] representing important roles likewise the original AB effect.

One important point is the possibility of controlling the

AB effect in different scenarios, exchanging the domains where the effect was originally created. Such a realization is particularly important in the domain of quantum information and computation. Gate controlled AB oscillations [27] and topological spin transistors [28] are advances in such direction.

From the information perspective, the control of the generation of AB phases can be used for transmitting a bit of information using the AB effect, although application in coherence control can also emerge [29]. In this paper, we demonstrate how this can be implemented sequentially in order to generate a string of bits of a given length. The flux control of interference phenomena and applications in gate operations imply that a bit encoding can be experimentally realized by means of a gate control of the AB effect. Other important effect is the quantum transfer that can be used for transport of information. Considering a bit-encoding of AB phases, we can demonstrate that these phases can be quantum transferred for a coherent state superposition. This possibility indirectly generate a AB phase for a non-classical state of light and can also be used to store a string of bits encoded by the AB phases. A quantum transfer of an AB phase to a cavity can bring together the possibility of storage the information of the quantum interference effect.

Here we propose a quantum transfer of an AB phase generated in a topological spin transistor to a coherent state superposition in a high-Q cavity. Considering a topological spin transistor in which the electron is injected in the x -direction and splits due to the helical properties of the edge states, in counterpropagating polarizations in a quantum spin Hall ring with a magnetic flux, the outgoing electron is then injected with the AB phase in a high-Q cavity where interacts dispersively with a coherent state. Under a post-selection of the electronic state in one of the spin polarizations in the

z -direction, the coherent state superposition is projected in a superposition state carrying the AB phase, that can be manipulated in a quantum optical scenario. We also discuss the possibility of improving the scheme to store a string of bits.

This paper is organized as follows: In Sec. II, we discuss the generation and bit-encoding of AB phases by exploring the AB effect. In Sec III, we propose the quantum transfer of AB phase to a coherent state superposition. In Sec. IV, we discuss the use of quantum transfer to store a string of bits encoded by AB phases. Sec. V is reserved to our concluding remarks.

HIGH-Q CAVITY INTERACTING WITH AB-SHIFTED ELECTRON STATE

The emergence of the AB effect term as a contribution of the problem of a charged particle minimally coupled to a gauge field A_μ , ($\hbar = 1$) $\hat{H} = \frac{(\mathbf{p}-e\mathbf{A})^2}{2m} + e\varphi$, where $A_\mu = (\varphi, \mathbf{A})$, for a singly connected region, with $\mathbf{B} = \nabla \times \mathbf{A} = 0$, give rise to a splitting of the wave function in two parties with the acquired AB phase term [1]. Considering a magnetostatic field, $\varphi = 0$, the whole path is closed and the gauge fixing contribution of the AB phase shift term is given by $-i\phi_{AB} = -ie \oint \mathbf{A} \cdot d\mathbf{l}$. The interference in the electron states coming from the right and left paths give rise to a superposition state with the acquired AB phase given by

$$|\psi\rangle = |\downarrow\rangle + e^{i\phi_{AB}}|\uparrow\rangle. \quad (1)$$

This can be undertaken from an interaction between a source-field and the electron, with the whole state given by [30] $|\chi\rangle_I = \frac{1}{\sqrt{2}}(|\uparrow\rangle_e|\psi_L\rangle_S + |\downarrow\rangle_e|\psi_R\rangle_S)$, collapsing to a final configuration where the left and right states are identical except for the presence of the AB phase, $|\psi_L\rangle_S = |\psi\rangle_S$ and $|\psi_R\rangle_S = e^{i\phi_{AB}}|\psi\rangle_S$, leaving the total state in the following final form $|\chi\rangle_F = \frac{1}{\sqrt{2}}|\psi\rangle_S(|\uparrow\rangle + e^{i\phi_{AB}}|\downarrow\rangle)$.

A quantized electromagnetic field in a high-Q cavity initially in a coherent state $|\alpha\rangle$ interacts effectively with the electron states $|\uparrow\rangle$ and $|\downarrow\rangle$, where a degeneracy ω_e is

assumed, corresponding to electron states of same kinetic energy. The single-mode field initially in the coherent state $|\alpha\rangle$ has an associated frequency ω_α , such that a detuning between the electron kinetic energy and the single-mode frequency are related by an overall detuning $\delta = |\omega_\alpha - \omega_e|$. In the case of large detuning and short evolving times, where the magnetostatic flux is much more slow than the frequency of the quantized electromagnetic field, the dispersive interaction between the AB-shifted electrons and the single-mode field can be described by an effective interaction hamiltonian

$$\hat{H}_{int} = \beta\hat{n} \otimes \hat{\xi}, \quad (2)$$

where $\beta = -\lambda^2/\delta$ is the effective coupling, λ represent the transition coupling for the electron states in the dispersive interaction and the number operator $\hat{n} = \hat{a}^\dagger\hat{a}$ is associated to the quantized electromagnetic field, with \hat{a} and \hat{a}^\dagger are the creation and annihilation operators, respectively, acting on the coherent state and the single-electron operator is given by

$$\hat{\xi} = \sum_{i,j=\uparrow,\downarrow} |i\rangle\langle j|. \quad (3)$$

In order to see that the interaction (2) in fact leads to a phase entanglement with the coherent state for an appropriate time of interaction, we can act explicitly with the Hamiltonian

$$\hat{H}_{int}|\uparrow\alpha\rangle = \hat{n}\beta(|\uparrow\alpha\rangle + |\downarrow\alpha\rangle), \quad (4)$$

$$\hat{H}_{int}|\downarrow\alpha\rangle = \hat{n}\beta(|\uparrow\alpha\rangle + |\downarrow\alpha\rangle), \quad (5)$$

$$\hat{H}_{int}^2|\uparrow\alpha\rangle = 2(\hat{n}\beta)^2(|\uparrow\alpha\rangle + |\downarrow\alpha\rangle), \quad (6)$$

$$\hat{H}_{int}^2|\downarrow\alpha\rangle = 2(\hat{n}\beta)^2(|\uparrow\alpha\rangle + |\downarrow\alpha\rangle), \quad (7)$$

$$\hat{H}_{int}^3|\uparrow\alpha\rangle = 4(\hat{n}\beta)^3(|\uparrow\alpha\rangle + |\downarrow\alpha\rangle), \quad (8)$$

$$\hat{H}_{int}^3|\downarrow\alpha\rangle = 4(\hat{n}\beta)^3(|\uparrow\alpha\rangle + |\downarrow\alpha\rangle). \quad (9)$$

In general, we have

$$\hat{H}_{int}^k|\uparrow\alpha\rangle = 2^{k-1}(\hat{n}\beta)^k(|\uparrow\alpha\rangle + |\downarrow\alpha\rangle), k \geq 1, \quad (10)$$

$$\hat{H}_{int}^k|\downarrow\alpha\rangle = 2^{k-1}(\hat{n}\beta)^k(|\uparrow\alpha\rangle + |\downarrow\alpha\rangle), k \geq 1. \quad (11)$$

The unitary evolutions are given explicitly by

$$\begin{aligned} \sum_{k=0}^{\infty} \frac{(-it)^k}{k!} \hat{H}_{int}^k |\uparrow\alpha\rangle &= \sum_{k=0}^{\infty} \frac{(-it)^k}{k!} 2^{k-1} (\hat{n}\beta)^k (|\uparrow\alpha\rangle + |\downarrow\alpha\rangle) + \frac{1}{2} (|\uparrow\alpha\rangle - |\downarrow\alpha\rangle), \\ &= \frac{1}{2} e^{-2i\hat{n}\beta t} (|\uparrow\alpha\rangle + |\downarrow\alpha\rangle) + \frac{1}{2} (|\uparrow\alpha\rangle - |\downarrow\alpha\rangle), \end{aligned} \quad (12)$$

and

$$\begin{aligned} \sum_{k=0}^{\infty} \frac{(-it)^k}{k!} \hat{H}_{int}^k |\downarrow\alpha\rangle &= \sum_{k=0}^{\infty} \frac{(-it)^k}{k!} 2^{k-1} (\hat{n}\beta)^k (|\uparrow\alpha\rangle + |\downarrow\alpha\rangle) + \frac{1}{2} (-|\uparrow\alpha\rangle + |\downarrow\alpha\rangle), \\ &= \frac{1}{2} e^{-2i\hat{n}\beta t} (|\uparrow\alpha\rangle + |\downarrow\alpha\rangle) + \frac{1}{2} (-|\uparrow\alpha\rangle + |\downarrow\alpha\rangle). \end{aligned} \quad (13)$$

We can rewrite

$$e^{-i\hat{H}_{int}t}|\uparrow\alpha\rangle = \frac{1}{2}(|e^{-2i\beta t}\alpha\rangle + |\alpha\rangle)|\uparrow\rangle + \frac{1}{2}(|e^{-2i\beta t}\alpha\rangle - |\alpha\rangle)|\downarrow\rangle \quad (14)$$

$$e^{-i\hat{H}_{int}t}|\downarrow\alpha\rangle = \frac{1}{2}(|e^{-2i\beta t}\alpha\rangle - |\alpha\rangle)|\uparrow\rangle + \frac{1}{2}(|e^{-2i\beta t}\alpha\rangle + |\alpha\rangle)|\downarrow\rangle \quad (15)$$

By interacting the electron superposition carrying the AB phase

$$|\psi\rangle = |\downarrow\rangle + e^{i\phi_{AB}}|\uparrow\rangle \quad (16)$$

with the single mode field in a coherent state $|\alpha\rangle$, in the interaction picture eq. (2), we achieve at the following state

$$\begin{aligned} |\psi(t)\rangle = & \left[\frac{1}{4}(1 + e^{i\phi_{AB}})e^{-2i\hat{n}\beta t} - \frac{1}{4}(1 - e^{i\phi_{AB}}) \right] |\downarrow\alpha\rangle \\ & + \left[\frac{1}{4}(1 + e^{i\phi_{AB}})e^{-2i\hat{n}\beta t} + \frac{1}{4}(1 - e^{i\phi_{AB}}) \right] |\uparrow\alpha\rangle, \end{aligned} \quad (17)$$

where t is the time of interaction.

SETUP DESCRIPTION

We consider a topological spin transistor [28], in which an electron is injected in a quantum spin Hall insulator in the x -direction

$$|\rightarrow\rangle = |\downarrow\rangle + |\uparrow\rangle, \quad (18)$$

Due to the helical property, the edge states of opposite spin polarization counterpropagate in the of spin up (z clockwise direction) $|\uparrow\rangle$ and spin down ($-z$ counterclockwise direction) $|\downarrow\rangle$, in the top and bottom edges of the ring, respectively. An Aharonov-Bohm phase $\phi_{AB} = 2\pi\phi/\phi_0$, with $\phi_0 = hc/e$, is acquired during the path with the outgoing electron state given finally by

$$|\psi\rangle = |\downarrow\rangle + e^{i\phi_{AB}}|\uparrow\rangle. \quad (19)$$

This outgoing state is then injected in the High-Q cavity interacting dispersively with the single-mode field in a coherent state. A detector measures the electron state in one of the spin polarizations $|\uparrow\rangle$ or $|\downarrow\rangle$ (see figure 1).

BIT-ENCODING OF INFORMATION WITH AB PHASES

Bits are the basic units of information and the core of computation and digital electronics. The emergence of qubits and the whole quantum information brought many promises to the actual scenario of computers. Instead of a linear reduction of computer components, the

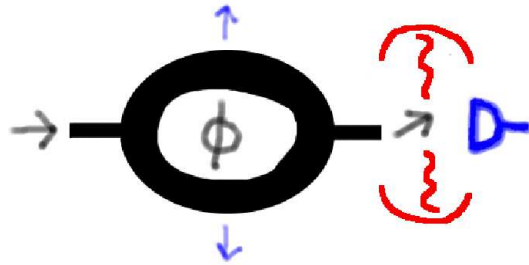


FIG. 1. (Color online) Scheme of a TST coupled to a high-Q cavity. The electron is injected in the x direction and splits in the QSH ring to in the edge states. The outgoing electron with the AB phase is then injected in a cavity-field interacting dispersively. A detector measures one of the spin polarizations in the z direction.

use of quantum systems in the scenario of computers is another possible path that is not directly restricted to the building of a ‘totally quantum’ computer. One possible use of the generation and control of AB phases is the bit encoding of AB phases using the AB effect.

We can propose such a bit-encoding in the generation of AB phases by means of the flux control in the solenoid, in particular, we can control the imprinting or not of the phase, by absence or not of the potential due to the switch-on or switch-off of the flux in the solenoid. Since the absence of the potential will lead to absence of the AB phase, the off-state can be characterized by a null vector potential, while the on-state can be characterized by the presence of the vector potential. This implies in a bit defined from absence of AB phase as an off-state and the presence of AB phase as the on-state

$$bit \rightarrow \{0, \phi_{AB}\}. \quad (20)$$

This can be characterized formally by the binary function dependent of presence of a AB phase or its absence:

$$f(\phi_{AB}) = \begin{cases} 1 & \text{if } \phi_{AB} \neq \mathbf{0}; \\ 0 & \text{if } \phi_{AB} \equiv \mathbf{0}. \end{cases} \quad (21)$$

A sequential generation of AB phases corresponds to a sequence of the following type

$$\phi_{AB}^{(0)}\phi_{AB}^{(1)}\phi_{AB}^{(2)}\dots\phi_{AB}^{(n)}, \quad (22)$$

where (i) corresponds to the i -th order of measurement of the i -th AB phase term. This results in a string of bits

that generates a binary sequence of bits

$$f_{(0)}(\phi_{AB}^{(0)})f_{(1)}(\phi_{AB}^{(1)})f_{(2)}(\phi_{AB}^{(2)})\dots f_{(n)}(\phi_{AB}^{(n)}). \quad (23)$$

In particular, this codification can be used to implement any ASCII code or a given quantity of bytes. For instance, the string of bits 10110 corresponds to the sequence

$$f_{(0)}(\phi_{AB})f_{(1)}(\mathbf{0})f_{(2)}(\phi_{AB})f_{(3)}(\phi_{AB})f_{(4)}(\mathbf{0}). \quad (24)$$

As a result, this binary codification using AB phases can be implemented to generate any binary message and consequently can be used in computer devices. It also contrasts with other proposes that consider chirality or flux orientation for bit-codification. The components of mesoscopic size can be used with solenoids controlled to generate a given string of bits. The possibility of transfer information encoded to light increases this possibility.

QUANTUM TRANSFER OF THE AB PHASE TO A COHERENT STATE SUPERPOSITION

A quantum transfer of the AB phase can be implemented to transmit the bit encoded with AB phases. In particular, this quantum transfer can be realized to a non-classical state of light. We consider this case for a transferring to a superposition of coherent states.

The state carrying the AB phase generated in the topological spin transistor carrying the AB phase $|\psi\rangle = |\downarrow\rangle + e^{i\phi_{AB}}|\uparrow\rangle$ now interact with a high-Q cavity field. We consider a dispersive interaction with the high-Q cavity, whose initial state is a coherent state $|\alpha\rangle$. In this case, the electron-field interaction occurring during a time interval t leads the whole system to take the time-dependent state eq.(17),

$$|\psi(t)\rangle = \left[\frac{1}{4}(1 + e^{i\phi_{AB}})e^{-2i\hat{n}\beta t} - \frac{1}{4}(1 - e^{i\phi_{AB}}) \right] |\downarrow, \alpha\rangle + \left[\frac{1}{4}(1 + e^{i\phi_{AB}})e^{-2i\hat{n}\beta t} + \frac{1}{4}(1 - e^{i\phi_{AB}}) \right] |\uparrow, \alpha\rangle. \quad (25)$$

that can be rewritten rearranging the phase terms to the coherent state superpositions

$$|\psi(t)\rangle = \frac{1}{4} [(1 + e^{i\phi_{AB}})|e^{-2i\beta t}\alpha\rangle - (1 - e^{i\phi_{AB}})|\alpha\rangle] |\downarrow\rangle + \frac{1}{4} [(1 + e^{i\phi_{AB}})|e^{-2i\beta t}\alpha\rangle + (1 - e^{i\phi_{AB}})|\alpha\rangle] |\uparrow\rangle. \quad (26)$$

The state (26) is simplified

$$|\psi_{\alpha\alpha'}\rangle = \left(\frac{1}{4}(1 + e^{i\phi_{AB}})|\alpha'\rangle - \frac{1}{4}(1 - e^{i\phi_{AB}})|\alpha\rangle \right) |\downarrow\rangle + \left(\frac{1}{4}(1 + e^{i\phi_{AB}})|\alpha'\rangle + \frac{1}{4}(1 - e^{i\phi_{AB}})|\alpha\rangle \right) |\uparrow\rangle, \quad (27)$$

where $\alpha' = \alpha'(t)$ is related to α by means of $\alpha' = e^{-2i\beta t}\alpha$. We can now realize an electronic detection in the state $|\uparrow\rangle$ projecting the field in the following superposition of coherent states

$$|\phi_+\rangle = \frac{1}{4}(1 + e^{i\phi_{AB}})|\alpha'\rangle + \frac{1}{4}(1 - e^{i\phi_{AB}})|\alpha\rangle. \quad (28)$$

On the other hand, if the electronic measurement of the electron in the state $|\downarrow\rangle$ will project the field into the cat state

$$|\phi_-\rangle = \frac{1}{4}(1 + e^{i\phi_{AB}})|\alpha'\rangle - \frac{1}{4}(1 - e^{i\phi_{AB}})|\alpha\rangle. \quad (29)$$

We can specify the time of interaction in $t = \pi/2\beta$, such that we now have

$$|\phi_{\pm}\rangle = \frac{1}{4}(1 + e^{i\phi_{AB}})|-\alpha\rangle \pm \frac{1}{4}(1 - e^{i\phi_{AB}})|\alpha\rangle. \quad (30)$$

The coefficients in (30) can be rearranged by the action of a Hadamard-type gate operation in the basis of coherent states [?],

$$\hat{U}_H = \frac{1}{\sqrt{2}}(|-\alpha\rangle\langle-\alpha| - |\alpha\rangle\langle\alpha| + |\alpha\rangle\langle-\alpha| + |-\alpha\rangle\langle\alpha|), \quad (31)$$

considering the projection relations for coherent states $\langle\alpha|\alpha\rangle = 1$ and $\langle\alpha|-\alpha\rangle = e^{-2|\alpha|^2}$. After this gate operation the state takes the form

$$|\xi_{\pm}\rangle = \frac{1}{4}(1 + e^{i\phi_{AB}})|-\alpha\rangle \pm \frac{1}{4}(1 - e^{i\phi_{AB}})|-\alpha\rangle e^{-2|\alpha|^2} - \frac{1}{4}(1 + e^{i\phi_{AB}})|\alpha\rangle e^{-2|\alpha|^2} \mp \frac{1}{4}(1 - e^{i\phi_{AB}})|\alpha\rangle + \frac{1}{4}(1 + e^{i\phi_{AB}})|\alpha\rangle \pm \frac{1}{4}(1 - e^{i\phi_{AB}})|\alpha\rangle e^{-2|\alpha|^2} + \frac{1}{4}(1 + e^{i\phi_{AB}})|-\alpha\rangle e^{-2|\alpha|^2} \pm \frac{1}{4}(1 - e^{i\phi_{AB}})|-\alpha\rangle. \quad (32)$$

Under the condition of negligible overlap, the coherent states $|\alpha\rangle$ and $|-\alpha\rangle$ can be considered orthonormal, $\langle\alpha|-\alpha\rangle \approx 0$, being described by a Hilbert space of the two-level system spanned by $|\alpha\rangle$ and $|-\alpha\rangle$. The resulting states are

$$|\xi_{\pm}\rangle = \frac{1}{4}(1 + e^{i\phi_{AB}})|-\alpha\rangle \mp \frac{1}{4}(1 - e^{i\phi_{AB}})|\alpha\rangle + \frac{1}{4}(1 + e^{i\phi_{AB}})|\alpha\rangle \pm \frac{1}{4}(1 - e^{i\phi_{AB}})|-\alpha\rangle. \quad (33)$$

Simplifying for each field state, including the normalization factor, we have

$$|\xi_+\rangle = |-\alpha\rangle + e^{i\phi_{AB}}|\alpha\rangle, \quad (34)$$

that corresponds to a selective measurement of the right-handed electron state $|\downarrow\rangle$ and

$$|\xi_-\rangle = e^{i\phi_{AB}}|-\alpha\rangle + |\alpha\rangle, \quad (35)$$

to left-handed electron state $|\uparrow\rangle$. In both cases, the AB phase is transferred to the coherent state superposition.

STORAGE OF BITS ENCODED BY QUANTUM TRANSFERRED AB PHASES

The quantum transfer of AB phases as described in the previous section can have several possible utilities. The bit encoding of AB phases imply that such a quantum transfer corresponds to a method of transfer a bit information to a state of light in a coherent state superposition. If we have a parallel setup with parallelized high-Q cavities or multimode cavities the transfer can also be implemented to store of a complete string of bits that can be identified to a broader information transfer, for instance a byte transfer.

In order to consider this scheme, the bit encoded AB phases have now a correspondence with the following product state

$$\begin{aligned} |f(\phi_{AB}^{(0)})f(\phi_{AB}^{(1)})\dots f(\phi_{AB}^{(n)})\rangle &= \left(|0\rangle_{(0)} + e^{i\phi_{AB}^{(0)}}|1\rangle_{(0)} \right) \\ &\otimes \left(|0\rangle_{(1)} + e^{i\phi_{AB}^{(1)}}|1\rangle_{(1)} \right) \\ &\dots \left(|0\rangle_{(n)} + e^{i\phi_{AB}^{(n)}}|1\rangle_{(n)} \right) \end{aligned} \quad (36)$$

This state corresponds to a string of bits stored in parallelized high-Q cavities. This quantum transfer can be implemented for transfer in other systems, as it is expected in a portable computation. The cavities can be used to store sequentially the bit information with the generation of a product state. In the case of the previous section, the string of bits is stored in superpositions of coherent states

$$\begin{aligned} |f(\phi_{AB}^{(0)})f(\phi_{AB}^{(1)})\dots f(\phi_{AB}^{(n)})\rangle &= \left(|-\alpha\rangle + e^{i\phi_{AB}^{(0)}}|\alpha\rangle \right) \\ &\otimes \left(|-\alpha\rangle + e^{i\phi_{AB}^{(1)}}|\alpha\rangle \right) \\ &\dots \left(|-\alpha\rangle + e^{i\phi_{AB}^{(n)}}|\alpha\rangle \right). \end{aligned} \quad (37)$$

For instance, the string of bits 10110 encoded in (24) can be stored in the corresponding product state

$$\begin{aligned} |f_{(0)}(\phi_{AB})f_{(1)}(\mathbf{0})f_{(2)}(\phi_{AB})f_{(3)}(\phi_{AB})f_{(4)}(\mathbf{0})\rangle &= \left(|0\rangle_{(0)} + e^{i\phi_{AB}}|1\rangle_{(0)} \right) \otimes \left(|0\rangle_{(1)} + |1\rangle_{(1)} \right) \\ &\otimes \left(|0\rangle_{(2)} + e^{i\phi_{AB}}|1\rangle_{(2)} \right) \otimes \left(|0\rangle_{(3)} + e^{i\phi_{AB}}|1\rangle_{(3)} \right) \otimes \left(|0\rangle_{(4)} + |1\rangle_{(4)} \right). \end{aligned} \quad (38)$$

The information encoded in the string of bits can be retransferred to other system or detected by measurement of the interference pattern associated to the state. It is important to note that this state can be generated by different methods, imprinting the AB phase in parallel AB devices, and realizing the corresponding protocols of quantum transfer, or modulating the AB phases in a controlled AB device, modulated to generate by quantum transfer the string of bits in a sequential form, storing a bit in each high-Q cavity or in each mode of a multimode cavity.

CONCLUSIONS

We discussed a bit-encoding of AB phases and proposed a quantum transfer of AB phase to a non-classical state of light from a topological spin transistor device to a high-Q cavity field, a superposition of coherent states.

By taking advantage of quantum information meth-

ods for control and manipulation of quantum interference phenomena, the methods of synthetic gauge fields can be improved. In our propose a quantum state transfer protocol implemented with a topological spin transistor that generates an AB phase in an electron spin state is transferred to a high-Q cavity field initially in a coherent state. This shows that the quantum interference associated to AB effect can be manipulated and controlled.

We also discuss the application to parallel setups of high-Q cavities or multimode cavities where the quantum transfer can be used to store of a string of bits encoded by AB phases.

Given the experimental advances in the generation and control of AB effect, such a quantum transfer can be experimentally realized and a binary codification can be included in computer devices and quantum circuits. Our propose contrasts with other schemes where bit-codification is implemented by chirality or flux orientation. The advances in mesoscopic size systems where the AB effect is realized and light-matter interaction can be

used to develop this scheme. The possibility of transfer information encoded to light increases the possible scenarios where the information can be manipulated and transferred.

Our propose can also be useful to make further progress in methods of quantum information associated to modern techniques in synthetic gauge fields.

ACKNOWLEDGEMENTS

T.P. acknowledges the support of this research in the projects Enxoval-PPPG/UFMA No.03/2014 and APCINTER-00273/14-044/2013-FAPEMA (Brazil).

-
- [1] Y. Aharonov, D. Bohm, Phys. Rev. **115** (1959) 485.
 [2] Y. Aharonov, D. Bohm, Phys. Rev. **123** (1961) 1511.
 [3] S. Olariu, I.I.Popescu, Rev. Mod. Phys. **57** (1985) 339.
 [4] A. Caprez, B. Barwick, H. Batelaan, Phys. Rev. Lett. **99** (2007) 210401.
 [5] A. R. Hernández, C. H. Lewenkopf, Phys. Rev. Lett. **103** (2009) 166801.
 [6] L. Duca, et al., Science **347** (2015) 288.
 [7] Z.P. Niu, Eur. Phys. J. B **82** (2011) 153.
 [8] J-C. Charlier, X. Blase, S. Roche, Rev. Mod. Phys. **79** (2007) 677.
 [9] C. J. Edgcombe, J. C. Loudon J. Phys.: Conf. Ser. **371** (2012) 012006.
 [10] J. Nitta, T. Koga, H. Takayanagi, Physica E **12** (2002) 753.
 [11] J. Splettstoesser, M. Moskalets, M. Büttiker, Phys. Rev. Lett. **103** (2009) 076804.
 [12] H.-P. Eckle, H. Johannesson, C. A. Stafford, Phys. Rev. Lett. **87** (2001) 016602.
 [13] S. Matityahu, A. Aharony, O. Entin-Wohlman, S. Tarucha, New J. Phys. **15** (2013) 125017.
 [14] E. Li, B. J. Eggleton, K. Fang, S. Fan, Nature Comm. **5** (2014) 3225.
 [15] H. Sigurdsson, O.V. Kibis, I.A. Shelykh, Phys. Rev. B **90** (2014) 235413.
 [16] A. M. Alexeev, I. A. Shelykh, M. E. Portnoi, Phys. Rev. B **88** (2013) 085429.
 [17] V. M. Ramaglia, F. Ventriglia, G. P. Zuchelli, Phys. Rev. B **52** (1995) 8372.
 [18] M. Vieira, A. M. M. Carvalho, C. Furtado, Phys. Rev. A **90** (2014) 012105.
 [19] J. Dalibard, F. Gerbier, G. Juzeliunas, P. Ohberg, Rev. Mod. Phys. **83** (2011) 1523.
 [20] P. V. Mironova, M. A. Efremov, W. P. Schleich, Phys. Rev. A **87** (2013) 013627.
 [21] Y. Aharonov and A. Casher, Phys. Rev. Lett. **53** (1984) 319.
 [22] F. M. Andrade, E. O. Silva, T. Prudencio, C. Filgueiras, J. Phys. G: Nucl. Part. Phys. **40** (2013) 075007.
 [23] A. A. Kovalev, et al., Phys. Rev. B **76** (2007) 125307.
 [24] S. A. Hartnoll, Phys. Rev. Lett. **98** (2007) 111601.
 [25] E. O. Silva, F. M. Andrade, H. Belich, C. Filgueiras, Eur. Phys. J. C **73** (2013) 2402.
 [26] K. Bakke, E. O. Silva, H. Belich, J. Phys. G: Nucl. Part. Phys. **39** (2012) 055004.
 [27] F. Ding, et al. Phys. Rev. B **82** (2010) 075309.
 [28] J. Maciejko, E-A. Kim, X-L. Qi, Phys. Rev. B **82** (2010) 195409.
 [29] M. Di Liberto et al. Nature Communications **5** (2014) 5735.
 [30] L. Vaidman, Phys. Rev. A **86** (2012) 040101(R).