

# TS-RSR: A provably efficient approach for batch bayesian optimization

Zhaolin Ren, Na Li \*

May 3, 2024

## Abstract

This paper presents a new approach for batch Bayesian Optimization (BO) called Thompson Sampling-Regret to Sigma Ratio directed sampling (TS-RSR), where we sample a new batch of actions by minimizing a Thompson Sampling approximation of a regret to uncertainty ratio. Our sampling objective is able to coordinate the actions chosen in each batch in a way that minimizes redundancy between points whilst focusing on points with high predictive means or high uncertainty. Theoretically, we provide rigorous convergence guarantees on our algorithm’s regret, and numerically, we demonstrate that our method attains state-of-the-art performance on a range of challenging synthetic and realistic test functions, where it outperforms several competitive benchmark batch BO algorithms.

## 1 Introduction

We are interested in the following problem of batch Bayesian Optimization (batch BO). Let  $\mathcal{X} \subset \mathbb{R}^d$  be a bounded compact set. Suppose we wish to maximize an unknown function  $f : \mathcal{X} \rightarrow \mathbb{R}$ , and our only access to  $f$  is through a noisy evaluation oracle, i.e.  $y = f(x) + \epsilon$ ,  $\epsilon \sim N(0, \sigma_n^2)$ , with  $\sigma_n > 0$ . We consider the batch setting, where we assume that we are able to query  $f$  over  $T$  rounds, where at each round, we can send out  $m$  queries in parallel. We are typically interested in the case when  $m > 1$ , where we expect to do better than when  $m = 1$ . In particular, we are interested in quantifying the “improvement” that a larger  $m$  can give us.

To be more precise, let us discuss our evaluation metrics. Let  $x_{t,i}$  denote the query point of the  $i$ -th agent at the  $t$ -th time. Let  $x^* \in X$  denote a maximizer of  $f$ . In this paper, we provide high-probability bounds for the cumulative regret  $R_{T,m}$ , where

$$R_{T,m} := \sum_{t=1}^T \sum_{i=1}^m [f(x^*) - f(x_{t,i})].$$

We also define the simple regret as

$$S_{T,m} := \min_{t \in [T]} \min_{i \in [m]} f(x^*) - f(x_{t,i}),$$

where we note the use of the notation  $[N] := \{1, 2, \dots, N\}$  (for any positive integer  $N$ ), which we will use throughout the paper. We observe that the simple regret satisfies the relationship  $S_{T,m} \leq \frac{1}{Tm} R_{T,m}$ . This shows that a bound on the cumulative regret translates to a bound on the simple regret.

---

\*Zhaolin Ren and Na Li are with Harvard University, Email: [zhaolinren@g.harvard.edu](mailto:zhaolinren@g.harvard.edu), [nali@seas.harvard.edu](mailto:nali@seas.harvard.edu)

Without any assumptions on the smoothness and regularity of  $f$ , it may be impossible to optimize it in a limited number of samples; consider for instance functions that wildly oscillate or are discontinuous at many points. Thus, in order to make the problem tractable, we make the following assumption on  $f$ .

**Assumption 1.** *[GP model] We model the function  $f$  as a sample from a Gaussian Process (GP), where  $\text{GP}(0, k(\cdot, \cdot))$  is our GP prior over  $f$ . A Gaussian Process  $\text{GP}(\mu(x), k(x, x'))$  is specified by its mean function  $\mu(x) = \mathbb{E}[f(x)]$  and covariance function  $k(x, x') = \mathbb{E}[(f(x) - \mu(x))(f(x') - \mu(x'))]$ .*

There are several existing algorithms for batch Bayesian optimization with regret guarantees, e.g. batch-Upper Confidence Bound (UCB) [Srinivas et al., 2009], batch-Thompson sampling (TS) [Kandasamy et al., 2018]. There are known guarantees on the cumulative regret of batch-UCB and batch TS. However, empirical performance of batch-UCB and batch-TS tend to be suboptimal. A suite of heuristic methods have been developed for batch BO, e.g. [Ma et al., 2023, Garcia-Barcos and Martinez-Cantin, 2019a, Gong et al., 2019]. However, theoretical guarantees are typically lacking for these algorithms.

This inspires us to ask the following question:

**Can we design theoretically grounded, effective batch BO algorithms that also satisfy rigorous guarantees?**

Inspired by the literature of information-directed sampling (IDS) [Russo and Van Roy, 2014, Baek and Farias, 2023], we introduce a new algorithm for Bayesian Optimization (BO), which we call *Thompson Sampling-Regret to Sigma Ratio directed sampling* (TS – RSR). The algorithm works for any setting of the batch size  $m$ , and is thus also appropriate for batch BO. Our contributions are as follows.

First, on the algorithmic front, we propose a novel sampling objective for BO that automatically balances exploitation and exploration in a parameter-free manner (unlike for instance in UCB-type methods, where setting the confidence interval typically requires the careful, often domain-specific choice of a suitable hyperparameter). In particular, for batch BO, our algorithm is able to coordinate the actions chosen in each batch in an intelligent way that minimizes redundancy between points.

Second, on the theoretical front, we show that under mild assumptions, the cumulative regret  $R_{T,m}$  of our algorithm scales as  $\tilde{O}(\rho_m \sqrt{mT})$  with the number of time-steps  $T$  and batch size  $m$ , yielding a simple regret of  $\tilde{O}\left(\frac{\rho_m}{\sqrt{mT}}\right)$ . The  $\rho_m$  is a problem dependent quantity that scales linearly with  $m$  for the squared exponential kernel, but with an appropriate modification to our algorithm (cf. Appendix B in [Desautels et al., 2014]), can be reduced to  $O(1)$ , yielding a simple regret of  $\tilde{O}\left(\frac{1}{\sqrt{mT}}\right)$ , which decays at the optimal rate of  $1/\sqrt{m}$  as the batch size  $m$  increases [Chen et al., 2022]. Along the way, we derive a novel high-probability bound for a frequentist version of the regret-sigma ratio, which is known to be a challenging problem [Kirschner and Krause, 2018].

Finally, empirically, we show via extensive experiments on a range of synthetic and real-world nonconvex test functions that our algorithm attains state-of-the-art performance in practice, outperforming other benchmark algorithms for batch BO.

## 2 Related work

There is a vast literature on Bayesian Optimization (BO) [Frazier, 2018] and batch BO. One popular class of methods for BO and batch BO is UCB-inspired methods, [Srinivas et al., 2009, Desautels et al., 2014, Kaufmann et al., 2012, Daxberger and Low, 2017]. Building on the seminal work in [Srinivas et al., 2009] which studied the use of the UCB acquisition function in BO with Gaussian Process and provided regret bounds, subsequent works have extended this to the batch setting. The most prominent approach in this direction is Batch UCB (BUCB) [Desautels et al., 2014], which is a sequential sampling strategy that keeps

the posterior mean constant throughout the batch but updates the covariance as the batch progresses. Another notable work combines UCB with pure exploration by picking the first action in a batch using UCB and subsequent actions in the batch by maximizing posterior uncertainty. One key drawback of UCB-type methods is the strong dependence of empirical performance on the choice of the  $\beta_t$  parameter; note that in UCB-type methods, the UCB-maximizing action is typically determined as  $x_t^{\text{UCB}} \in \text{argmax } \mu_t(x) + \beta_t \sigma_t(x)$ , where  $\beta_t$  shapes the weight allocation between the posterior mean  $\mu_t$  and posterior uncertainty  $\sigma_t$ . While there exist theoretically valid choices of  $\beta_t$  that ensure convergence, practical implementations typically requiring heuristic tuning of the  $\beta_t$  parameter. In contrast, in our algorithm, we do not require the tuning of such a  $\beta_t$  parameter.

Another popular class of methods is Thompson Sampling (TS)-based methods [Kandasamy et al., 2018, Dai et al., 2020, Hernández-Lobato et al., 2017]. The downside of TS-based methods is the lack of penalization for duplicating actions in a batch, which can result in over-exploitation and a lack of diversity, as discussed for instance in [Adachi et al., 2023]. On the other hand, as we will see, our method does penalize duplicating samples, allowing for better diversity across samples.

In many practical applications, Expected Improvement (EI) [Letham et al., 2019, Zhan and Xing, 2020, Ament et al., 2024] is also a popular approach to BO. While EI lacks theoretical guarantees, it is popular amongst practitioners of BO, and has also been extended to the batch setting, where it is also known as qEI [Hunt, 2020, Ginsbourger et al., 2008].

In addition, informational approaches based on maximizing informational metrics have also been proposed for BO [Hennig and Schuler, 2012, Hernández-Lobato et al., 2015, Wang et al., 2016, Wang and Jegelka, 2017] and batch BO [Shah and Ghahramani, 2015, Garrido-Merchán and Hernández-Lobato, 2019, Takeno et al., 2020, Hvarfner et al., 2022]. While such methods can be effective for BO, efficient extension of these methods to the batch BO setting is a challenging problem, since the computational complexity of searching for a batch of actions that maximize information about (for instance) the location of the maximizer scales exponentially with the size of the batch. One interesting remedy to this computational challenge is found in [Ma et al., 2023], which proposes an efficient gradient-descent based method that uses a heuristic approximation of the posterior maximum value by the Gaussian distribution for the output of the current posterior UCB. However, this method also relies on the tuning of the  $\beta_t$  parameter in determining the UCB, and also does not satisfy any theoretical guarantees.

There are also a number of other works in batch BO which do not fall neatly into the categories above. These include an early work that tackles batch BO by trying to use Monte-Carlo simulation to select input batches that closely match the expected behavior of sequential policies [Azimi et al., 2010]. However, being a largely heuristic algorithm, no theoretical guarantees exist. Other heuristic algorithms include an algorithm [Gonzalez et al., 2015] that proposes a batch sampling strategy that utilizes an estimate of the function’s Lipschitz constant, Acquisition Thompson Sampling (ATS) [De Palma et al., 2019], which is based on the idea of sampling multiple acquisition functions from a stochastic process, as well as an algorithm that samples according to the Boltzman distribution with the energy function given by a chosen acquisition function [Garcia-Barcos and Martinez-Cantin, 2019b]. However, being heuristics, these algorithms are not known to satisfy any rigorous guarantees. An interesting recent work proposes inducing batch diversity in batch BO by leveraging the Determinantal Point Process (DPP) [Nava et al., 2022], and provides theoretical guarantees for their algorithm. However, a limitation of the algorithm is that the computational complexity of sampling scales exponentially with the number of agents, limiting the application of the algorithm for large batch problems. For large batch problems, there has been a very recent work [Adachi et al., 2023] that seeks scalable and diversified batch BO by reformulating batch selection for global optimization as a quadrature problem. Nonetheless, this algorithm lacks theoretical guarantees, and being designed for large batch problems, e.g.  $m$  in the hundreds, it may fail to be effective for moderate  $m$  problems, e.g.  $m$  less than 50. Another interesting direction in batch BO considers the case when the delay in receiving the feedback of the function evaluation is stochastic [Verma et al., 2022]; while orthogonal to our work, it could be meaningful

to apply the methods proposed here to the stochastic delay batch BO setting.

Finally, we note that a strong inspiration on our work comes from ideas in the information directed sampling literature (e.g. [Russo and Van Roy, 2014, Baek and Farias, 2023, Kirschner and Krause, 2018]), where the sampling at each stage also takes place based on the optimization of some regret to uncertainty ratio. While [Russo and Van Roy, 2014] and [Baek and Farias, 2023] did not cover the setting of BO with Gaussian Process (GP), we note that the algorithm in [Kirschner and Krause, 2018] does apply to BO with GP, and they also provided high-probability regret bounds. However, the design of the sampling function in [Kirschner and Krause, 2018] also requires choosing a  $\beta_t$  parameter (similar to UCB type methods), which as we observed can be hard to tune in practice.

### 3 Problem Setup and Preliminaries

In the sequel, we denote  $f^* := f(x^*)$ . Let  $X^{t,m} := \{x_{1,1}, \dots, x_{1,m}, x_{2,1}, \dots, x_{2,m}, \dots, x_{t,1}, \dots, x_{t,m}\} \in \mathcal{X}^{tm}$  denote the  $tm$  points evaluated by the algorithm after  $t$  iterations where  $m$  points were evaluated per iteration, with  $x_{\tau,j}$  denoting the  $j$ -th point evaluated at the  $\tau$ -th batch; for notational convenience, we omit the dependence on the batch number  $m$  and refer to  $X^{t,m}$  as  $X^t$  throughout the paper. Then, for any  $x \in \mathcal{X}$ , we note that  $f | \mathcal{F}_t \sim GP(\mu_t(x), k_t(x, x'))$ , where

$$\begin{aligned} \mu_t(x) &= \mathbf{k}_t(x)^\top (\mathbf{K}_t + \sigma_n^2 \mathbf{I})^{-1} \mathbf{y}_t, \\ k_t(x, x') &= k(x, x') - \mathbf{k}_t(x)^\top (\mathbf{K}_t + \sigma_n^2 \mathbf{I})^{-1} \mathbf{k}_t(x'), \end{aligned}$$

where  $\mathbf{K}_t := [k(x', x'')]_{x', x'' \in X^t}$  denotes the empirical kernel matrix,  $\mathbf{k}_t(x) := [k(x', x)]_{x' \in X^t}$ , and  $\mathbf{y}_t$  denotes  $\{f(x') + \epsilon'\}_{x' \in X^t}$ , where we recall that  $\epsilon' \sim N(0, \sigma_n^2)$ . In particular, for any  $x \in \mathcal{X}$ , we have that  $f(x) | \mathcal{F}_t \sim N(\mu_t(x), \sigma_t^2(x))$ , where the posterior variance satisfies

$$\sigma_t^2(x) = k(x, x) - \mathbf{k}_t(x)^\top (\mathbf{K}_t + \sigma^2 \mathbf{I})^{-1} \mathbf{k}_t(x). \quad (1)$$

For any set of  $B$  points  $\{x_b\}_{b \in [B]} \in \mathcal{X}$ , we also find it useful to introduce the following notation of posterior variance  $\sigma_t^2(x | \{x_b\}_{b \in [B]})$ , where

$$\begin{aligned} &\sigma_t^2(x | \{x_b\}_{b \in [B]}) & (2) \\ &:= k(x, x) - \mathbf{k}_{t,B}(x)^\top (\mathbf{K}_{X^t \cup [B]} + \sigma^2 \mathbf{I})^{-1} \mathbf{k}_{t,B}(x), & (3) \end{aligned}$$

where  $\mathbf{k}_{t,B}(x)$  represents the concatenation of  $\mathbf{k}_t(x)$  and  $[k(x_b, x)]_{b \in [B]}$ , and  $\mathbf{K}_{X^t \cup [B]} \in \mathbb{R}^{(tm+B) \times (tm+B)}$  is a block matrix of the form

$$\mathbf{K}_{X^t \cup [B]} = \begin{bmatrix} \mathbf{K}_t & \mathbf{K}_{t,B} \\ \mathbf{K}_{t,B}^\top & \mathbf{K}_{B,B} \end{bmatrix}$$

where  $\mathbf{K}_{t,B} = [k(x', x_b)]_{x' \in X^t, b \in [B]} \in \mathbb{R}^{tm \times B}$ , and  $\mathbf{K}_{B,B} = [k(x_b, x_{b'})]_{b, b' \in [B]} \in \mathbb{R}^{B \times B}$ . In other words,  $\sigma_t^2(x | \{x_b\}_{b \in [B]})$  denotes the posterior variance conditional on having evaluated  $X^t$  as well an additional set of points  $\{x_b\}_{b \in [B]}$ .

To streamline our analysis, we focus our attention on the case when  $\mathcal{X}$  is a discrete (but possibly large depending exponentially on the state dimension  $d$ ) set, which has size  $D$ .

### 4 Algorithm

For clarity, we first describe our algorithm in the case when the batch size  $m$  is 1. At each time  $t$ , the algorithm chooses the next sample according to the following criterion:

$$x_{t+1} \in \operatorname{argmin}_{x \in \mathcal{X}} \frac{\tilde{f}_t^* - \mu_t(x)}{\sigma_t(x)} =: \Psi_t(x), \quad (4)$$

where  $\tilde{f}_t^* := \max_x \tilde{f}_t(x)$ , where  $\tilde{f}_t$  is a single sample from the distribution  $f | \mathcal{F}_t$ . The numerator can be regarded as a TS approximation of the regret incurred by the action  $x$ , whilst the denominator is the predictive standard deviation/uncertainty of the point  $x$ . This explains the name of our algorithm. In this case, the sampling scheme balances choosing points with high predictive mean with those which have high predictive uncertainty.

In the batch setting, where we have to choose a batch of points simultaneously before receiving feedback, our algorithm takes the form

$$\begin{aligned}
x_{t+1,1}^{\text{TS-RSR}} &\in \operatorname{argmin}_{x \in \mathcal{X}} \frac{\tilde{f}_{t,1}^* - \mu_t(x)}{\sigma_t(x)} \\
x_{t+1,2}^{\text{TS-RSR}} &\in \operatorname{argmin}_{x \in \mathcal{X}} \frac{\tilde{f}_{t,2}^* - \mu_t(x)}{\sigma_t(x | \{x_{t+1,1}^{\text{TS-RSR}}\})} \\
&\vdots \\
x_{t+1,m}^{\text{TS-RSR}} &\in \operatorname{argmin}_{x \in \mathcal{X}} \frac{\tilde{f}_{t,m}^* - \mu_t(x)}{\sigma_t(x | \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{m-1})}
\end{aligned} \tag{5}$$

where for each  $i \in [m]$ ,  $\tilde{f}_{t,i}^* := \max_x \tilde{f}_{t,i}(x)$ , where  $\tilde{f}_{t,i}$  denotes an independent sample from the distribution  $f | \mathcal{F}_t$ . Meanwhile,  $\sigma_t(x | \{x_{t+1,j}\}_{j=1}^{\tau})$  denotes the predictive standard deviation of the posterior GP conditional on  $\mathcal{F}_t = \{X^t, \mathbf{y}_t\}$ , as well as on the fact that the first  $\tau$  actions in the  $(t+1)$ -th batch,  $\{x_{t+1,j}\}_{j=1}^{\tau}$ , have been sampled; we recall here that the predictive variance only depends on the points that have been picked, and not the values of those points (see (1)). Intuitively, the denominator in (5) encourages exploration, since it is large when the sample points are both uncertain conditional on the knowledge so far ( $\mathcal{F}_t$ ) and are spaced far apart. In addition, the numerator in (5) is high for points with higher predictive means conditional on  $\mathcal{F}_t$ . So, the objective strikes a balance between picking batches of points which have high uncertainty/spatial separation and points with high predictive means.

## 5 Analysis

As we stated earlier, to streamline our analysis, we focus our attention on the case when  $\mathcal{X}$  is a discrete set of size  $D$ . However, we stress that our algorithm works also for compact bounded sets  $\mathcal{X}$ ; indeed under appropriate smoothness assumptions on the kernel, we believe our analysis also carries over the continuous space setting. We will address this issue more in a remark following the statement of our main result.

We first state our main result.

**Theorem 1.** *Suppose  $k(x, x') \leq 1$  for all  $x, x'$ . Let  $\mathcal{X}$  be a discrete set with  $D$  elements, where  $D \geq 2$ . Then, running TS – RSR for a sample  $f$  of a GP with mean zero and covariance  $k(x, x')$ , we have*

$$\mathbb{E}[R_{T,m}] = O\left(\rho_m \sqrt{Tm\gamma_{Tm}} \sqrt{\log(D(Tm)^3)}\right),$$

where  $\rho_m := \max_{x \in \mathcal{X}} \max_{\tau} \max_{\tilde{X} \subset \mathcal{X}, |\tilde{X}| \leq m} \frac{\sigma_{\tau}(x)}{\sigma_{\tau}(x|\tilde{X})}$  denotes maximal decrease in posterior variance resulting from conditioning on any additional set of samples  $\tilde{X}$  of cardinality up to  $m$ ,  $\gamma_{Tm}$  denotes the maximal informational gain by observing  $Tm$  elements, and the expectation is taken over the random draw of  $f \sim \text{GP}(0, k(\cdot, \cdot))$  as well as the stochasticity of the measurement noises and the stochasticity of the TS draws.

*Proof.* We defer the proof to the proof outline in Section 5.1 below.  $\square$

---

**Algorithm 1** TS – RSR

---

- 1: **Input:** Input set  $\mathcal{X}$ ; GP Prior  $\mu_0 = 0$ ,  $k$ , output noise standard deviation  $\sigma_n$ ; batch size  $m$
- 2: **for**  $t = 0, 1, \dots, T - 1$  **do**
- 3:   Sample  $m$  i.i.d copies of  $\tilde{f}_{t,i} \sim f \mid \mathcal{F}_t$ , and set  $\tilde{f}_{t,i}^* = \max_x \tilde{f}_{t,i}(x)$ .
- 4:   Choose

$$\begin{aligned} x_{t+1,1}^{\text{TS-RSR}} &\in \operatorname{argmin}_{x \in \mathcal{X}} \frac{\tilde{f}_{t,1}^* - \mu_t(x)}{\sigma_t(x)} \\ x_{t+1,2}^{\text{TS-RSR}} &\in \operatorname{argmin}_{x \in \mathcal{X}} \frac{\tilde{f}_{t,2}^* - \mu_t(x)}{\sigma_t(x \mid \{x_{t+1,1}^{\text{TS-RSR}}\})} \\ &\vdots \\ x_{t+1,m}^{\text{TS-RSR}} &\in \operatorname{argmin}_{x \in \mathcal{X}} \frac{\tilde{f}_{t,m}^* - \mu_t(x)}{\sigma_t(x \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{m-1})} \end{aligned}$$

- 5:   Observe  $y_{t+1,i} = f(x_{t+1,i}^{\text{TS-RSR}}) + \epsilon_{t+1,i}$  for each  $i \in [m]$
  - 6:   Perform Bayesian update to obtain  $\mu_{t+1}, \sigma_{t+1}$
  - 7: **end for**
- 

**Remark 1.** We note that in general, the term  $\rho_m$  may scale linearly with  $m$ . However, following a well-known trick where we have an exploration phase of length  $T_{\text{init}}$  where we always sample the point with the highest predictive variance (cf. [Desautels et al., 2014]), we may reduce  $\rho_m$  to be of size  $O(1)$ , at the expense of a  $\tilde{O}(T_{\text{init}})$  term in the regret. For large enough  $Tm$ , the resulting simple regret will then be of the order  $\tilde{O}\left(\frac{\sqrt{\log D}}{\sqrt{Tm}} \sqrt{\gamma_{Tm}}\right)$ . Then, the dependence of the simple regret on the batch size  $m$  scales with the square root  $m$ , which is in general the best possible dependence [Chen et al., 2022].

**Remark 2.** The information gain  $\gamma_{Tm}$  can be bounded for several well-known kernels, as shown in [Srinivas et al., 2009, Vakili et al., 2021]. We have

1. (Linear kernel):  $\gamma_{Tm} = O(d \log(Tm))$
2. (Squared exponential kernel):

$$\gamma_{Tm} = O((\log(Tm))^{d+1})$$

3. (Matern kernel with  $\nu > 1$ ):

$$\gamma_{Tm} = O((Tm)^{\frac{d(d+1)}{2\nu+d(d+1)}} \log(Tm))$$

**Remark 3.** Finally, we note that while our analysis focused on the discrete case, for kernels where the resulting GP sample functions are differentiable with high probability, such as the squared exponential kernel or the Matern kernel (with  $\nu$  parameter at least 1.5), the analysis of regret for a bounded compact set  $\mathcal{X} \in \mathbb{R}^d$  can be essentially reduced to the analysis of a discretization  $\mathcal{D}$  of  $\mathcal{X}$  where  $\mathcal{D}$  is on the order of  $D = \epsilon^{-d}$ , where  $0 < \epsilon < 1$  is a discretization parameter that is a function of the smoothness of the kernel; see for instance the analysis in [Srinivas et al., 2009]. Then, a regret bound for the discrete set  $\mathcal{D}$  that depends on the square root of  $\log D$  translates to a regret bound that depends on  $\sqrt{\log D}$  for the original setting with a bounded compact  $\mathcal{X}$ , i.e. a bound that depends on  $\tilde{O}(\sqrt{d} \log(1/\epsilon))$ . For instance, in combination with the preceding remark, for the linear kernel, our regret bound then becomes

$$R_{T,m} = \tilde{O}\left(d \rho_m \log(Tm) \log(1/\epsilon) \sqrt{Tm}\right),$$

matching known bounds in the batch BO literature (e.g. the bound for the batch UCB algorithm BUCB in [Desautels et al., 2014]).

## 5.1 Proof outline

We now provide the following proof outline for Theorem 1. We first have the following result which expresses  $\mathbb{E}[R_{T,m}]$  in terms of quantities that, as we will demonstrate, can be bounded to yield our final regret bound.

**Lemma 1.** *Let  $R_{T,m} = \sum_{t=0}^{T-1} \sum_{i \in [m]} f^* - f(x_{t+1,i}^{\text{TS-RSR}})$ , and  $\tilde{R}_{T,m} = \sum_{t=0}^{T-1} \sum_{i \in [m]} \tilde{f}_{t,i}^* - f(x_{t+1,i}^{\text{TS-RSR}})$ . Then, for any event  $\mathcal{G}$ , we have*

$$\begin{aligned} \mathbb{E}[R_{T,m}] &= \mathbb{E} \left[ \tilde{R}_{T,m} \right] = \mathbb{E}[\tilde{R}_{T,m} 1_{\mathcal{G}}] + \mathbb{E}[\tilde{R}_{T,m} 1_{\mathcal{G}^c}] \\ &\leq \mathbb{E}[\tilde{R}_{T,m} 1_{\mathcal{G}}] + \sqrt{\mathbb{E}[\tilde{R}_{T,m}^2] \mathbb{P}(\mathcal{G}^c)}, \end{aligned}$$

*Proof.* We first observe that by the tower property, for any  $t \in [T]$  and  $i \in [m]$ , we have

$$\mathbb{E}[f^*] = \mathbb{E} \left[ \mathbb{E} \left[ \tilde{f}_{t,i}^* \mid \mathcal{F}_t \right] \right] = \mathbb{E} \left[ \tilde{f}_{t,i}^* \right],$$

where we recall that  $\tilde{f}_{t,i}^* = \max_{x \in \mathcal{X}} \tilde{f}_{t,i}(x)$ , and  $\tilde{f}_{t,i}$  is a random draw (of the  $i$ -th agent at the  $t$ -th round) from  $f \mid \mathcal{F}_t$ . Thus,

$$\mathbb{E}[R_{T,m}] = \mathbb{E} \left[ \sum_{t=0}^{T-1} \sum_{i \in [m]} f^* - f(x_{t+1,i}^{\text{TS-RSR}}) \right] = \mathbb{E} \left[ \sum_{t=0}^{T-1} \sum_{i \in [m]} \tilde{f}_{t,i}^* - f(x_{t+1,i}^{\text{TS-RSR}}) \right].$$

Letting  $\tilde{R}_{T,m} := \sum_{t=0}^{T-1} \sum_{i \in [m]} \tilde{f}_{t,i}^* - f(x_{t+1,i}^{\text{TS-RSR}})$ , we see then that  $\mathbb{E}[R_{T,m}] = \mathbb{E}[\tilde{R}_{T,m}]$ . Observe that for any event  $\mathcal{G}$  (which we may think intuitively think of as a “clean” event which we will later show happen with high probability), we have

$$\begin{aligned} \mathbb{E}[R_{T,m}] &= \mathbb{E} \left[ \tilde{R}_{T,m} \right] = \mathbb{E}[\tilde{R}_{T,m} 1_{\mathcal{G}}] + \mathbb{E}[\tilde{R}_{T,m} 1_{\mathcal{G}^c}] \\ &\leq \mathbb{E}[\tilde{R}_{T,m} 1_{\mathcal{G}}] + \sqrt{\mathbb{E}[\tilde{R}_{T,m}^2] \mathbb{E}[(1_{\mathcal{G}^c}]^2)} \\ &\leq \mathbb{E}[\tilde{R}_{T,m} 1_{\mathcal{G}}] + \sqrt{\mathbb{E}[\tilde{R}_{T,m}^2] \mathbb{P}(\mathcal{G}^c)}, \end{aligned}$$

where the first inequality follows from applying Cauchy-Schwarz to the term  $\mathbb{E}[\tilde{R}_{T,m} 1_{\mathcal{G}^c}]$ .  $\square$

At a high level, we will use Lemma 1 in the following way. We will bound the regret by (a) defining an event  $\mathcal{G}$  on which we have an almost sure bound on  $\tilde{R}_{T,m} 1_{\mathcal{G}}$  which translates to a bound on  $\mathbb{E}[\tilde{R}_{T,m} 1_{\mathcal{G}}]$ , (b) (loosely) bound  $\mathbb{E}[\tilde{R}_{T,m}^2]$  and show that  $\mathbb{P}(\mathcal{G}^c)$  is small enough such that  $\sqrt{\mathbb{E}[\tilde{R}_{T,m}^2] \mathbb{P}(\mathcal{G}^c)}$  is on the same order as  $\mathbb{E}[\tilde{R}_{T,m} 1_{\mathcal{G}}]$ .

### 5.1.1 Decomposition of $\tilde{R}_{T,m}$

The following helpful lemma demonstrates how we can decompose  $\tilde{R}_{T,m}$  in terms of the Regret-to-Sigma ratio (RSR) and other quantities.

**Lemma 2.** The term  $\tilde{R}_{T,m}$  can be decomposed as

$$\begin{aligned}
\tilde{R}_{T,m} &= \sum_{t=0}^{T-1} \sum_{i=1}^m \tilde{f}_{t,i}^* - f(x_{t+1,i}^{\text{TS-RSR}}) \\
&\leq \sum_{t=0}^{T-1} \left( \sum_{i=1}^m (\mu_t(x_{t+1,i}^{\text{TS-RSR}}) - f(x_{t+1,i}^{\text{TS-RSR}})) \right) \\
&\quad + \bar{\Psi} \sqrt{Tm \sum_{t=0}^{T-1} \sum_{i=1}^m \sigma_t^2(x_{t+1,i}^{\text{TS-RSR}} \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})}
\end{aligned} \tag{6}$$

*Proof.* We observe that

$$\begin{aligned}
\tilde{R}_{T,m} &= \sum_{t=0}^{T-1} \sum_{i=1}^m \tilde{f}_{t,i}^* - f(x_{t+1,i}^{\text{TS-RSR}}) \\
&= \sum_{t=0}^{T-1} \sum_{i=1}^m \tilde{f}_{t,i}^* - \mu_t(x_{t+1,i}^{\text{TS-RSR}}) + \mu_t(x_{t+1,i}^{\text{TS-RSR}}) - f(x_{t+1,i}^{\text{TS-RSR}}) \\
&= \sum_{t=0}^{T-1} \left( \sum_{i=1}^m (\mu_t(x_{t+1,i}^{\text{TS-RSR}}) - f(x_{t+1,i}^{\text{TS-RSR}})) \right) \\
&\quad + \sum_{t=0}^{T-1} \sum_{i=1}^m \frac{(\tilde{f}_{t,i}^* - \mu_t(x_{t+1,i}^{\text{TS-RSR}})) \sigma_t(x_{t+1,i}^{\text{TS-RSR}} \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})}{\sigma_t(x_{t+1,i}^{\text{TS-RSR}} \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})} \\
&\stackrel{(i)}{\leq} \sum_{t=0}^{T-1} \left( \sum_{i=1}^m (\mu_t(x_{t+1,i}^{\text{TS-RSR}}) - f(x_{t+1,i}^{\text{TS-RSR}})) \right) \\
&\quad + \bar{\Psi} \sum_{t=0}^{T-1} \sum_{i=1}^m \sigma_t(x_{t+1,i}^{\text{TS-RSR}} \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1}) \\
&\stackrel{(ii)}{\leq} \sum_{t=0}^{T-1} \left( \sum_{i=1}^m (\mu_t(x_{t+1,i}^{\text{TS-RSR}}) - f(x_{t+1,i}^{\text{TS-RSR}})) \right) \\
&\quad + \bar{\Psi} \sqrt{Tm \sum_{t=0}^{T-1} \sum_{i=1}^m \sigma_t^2(x_{t+1,i}^{\text{TS-RSR}} \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})}
\end{aligned}$$

Above, in obtaining (i), we define the maximum Regret-to-Sigma Ratio (RSR) encountered during the course of the algorithm as

$$\bar{\Psi} := \max_{t=0, \dots, T-1} \left( \max_{i \in [m]} \frac{\tilde{f}_{t,i}^* - \mu_t(x_{t+1,i}^{\text{TS-RSR}})}{\sigma_t(x_{t+1,i}^{\text{TS-RSR}} \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})} \right).$$

In addition, we used Cauchy-Schwarz to derive (ii). This completes our proof.  $\square$

We will next discuss (a) how to bound the term  $\bar{\Psi}$ , and (b) show how to bound

$$\sum_{t=0}^{T-1} \sum_{i=1}^m \sigma_t^2(x_{t+1,i}^{\text{TS-RSR}} \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})$$

in an information-theoretic fashion. After that, we will show how to bound the additional term

$$\sum_{t=0}^{T-1} \sum_{i=1}^m \mu_t(x_{t+1,i}^{\text{TS-RSR}}) - f(x_{t+1,i}^{\text{TS-RSR}}).$$

By using equation 6, these bounds will then give us a handle on bounding  $\tilde{R}_{T,m}$ .

### 5.1.2 Bounding $\bar{\Psi}$ and $\sum_{t=0}^{T-1} \sum_{i=1}^m \sigma_t^2(x_{t+1,i}^{\text{TS-RSR}} \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})$

We begin by bounding  $\bar{\Psi}$ .

**Lemma 3.** *On the event*

$$\mathcal{G}^{(1)}(\delta) := \bigcup_{0 \leq t \leq T-1, i \in [m]} \mathcal{G}_{t,i}^{(1)}(\delta), \quad \text{where} \quad (7)$$

$$\mathcal{G}_{t,i}^{(1)}(\delta) := \left\{ \forall x \in \mathcal{X} : \left| \frac{\tilde{f}_{t,i}(x) - \mu_t(x)}{\sigma_t(x)} \right| \leq \sqrt{2 \log(2DmT/\delta)} \right\}, \quad (8)$$

which happens with probability at least  $1 - \delta$ , we have

$$\begin{aligned} \bar{\Psi} &:= \max_{0 \leq t \leq T-1, i \in [m]} \Psi_{t,i}(x_{t+1,i}^{\text{TS-RSR}}) \\ &= \max_{0 \leq t \leq T-1, i \in [m]} \frac{\tilde{f}_{t,i}^* - \mu_t(x_{t+1,i}^{\text{TS-RSR}})}{\sigma_t(x_{t+1,i}^{\text{TS-RSR}} \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})} \\ &\leq \sqrt{2 \log(2DmT/\delta)} \rho_m, \end{aligned} \quad (9)$$

where  $\rho_m := \max_{x \in \mathcal{X}} \max_{\tau} \max_{\tilde{X} \subset \mathcal{X}, |\tilde{X}| \leq m} \frac{\sigma_{\tau}(x)}{\sigma_{\tau}(x \mid \tilde{X})}$  denotes the maximal decrease in posterior variance resulting from conditioning on an additional set of samples  $\tilde{X}$  of cardinality up to  $m$ .

*Proof.* Recall that the Regret-to-Sigma Ratio (RSR) for our chosen iterates  $x_{t+1,[m]}^{\text{TS-RSR}}$ , which, as presented in (5), takes the form

$$\begin{aligned} x_{t+1,1}^{\text{TS-RSR}} &\in \operatorname{argmin}_{x \in \mathcal{X}} \frac{\tilde{f}_{t,1}^* - \mu_t(x)}{\sigma_t(x)} \\ x_{t+1,2}^{\text{TS-RSR}} &\in \operatorname{argmin}_{x \in \mathcal{X}} \frac{\tilde{f}_{t,2}^* - \mu_t(x)}{\sigma_t(x \mid \{x_{t+1,1}^{\text{TS-RSR}}\})} \\ &\vdots \\ x_{t+1,m}^{\text{TS-RSR}} &\in \operatorname{argmin}_{x \in \mathcal{X}} \frac{\tilde{f}_{t,m}^* - \mu_t(x)}{\sigma_t(x \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{m-1})} \end{aligned}$$

To bound the RSR of the algorithm's iterates, we will show that the iterates  $x_{t+1,i}^{\text{TS}}$  produced by a particular kind of Thompson Sampling has bounded RSR, in the sense that for each  $i \in [m]$ ,  $\Psi_{t,i}(x_{t+1,i}^{\text{TS}})$  is bounded, where  $x_{t+1,i}^{\text{TS}} \in \operatorname{argmax}_x \tilde{f}_{t,i}(x)$ , and

$$\Psi_{t,i}(x) := \frac{\tilde{f}_{t,i}^* - \mu_t(x)}{\sigma_t(x \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})}$$

This in turn implies a bound for  $\Psi_{t,i}(x_{t+1,i}^{\text{TS-RSR}})$ , since  $\Psi_{t,i}(x_{t+1,i}^{\text{TS-RSR}}) \leq \Psi_{t,i}(x_{t+1,i}^{\text{TS}})$  by definition of  $x_{t+1,i}^{\text{TS-RSR}}$ . By Lemma 7 in Section 5.2 which will appear later, we find that for any  $0 < \delta < 1$ , on the event

$$\mathcal{G}^{(1)}(\delta) := \bigcup_{0 \leq t \leq T-1, i \in [m]} \mathcal{G}_{t,i}^{(1)}(\delta), \quad \text{where}$$

$$\mathcal{G}_{t,i}^{(1)}(\delta) := \left\{ \forall x \in \mathcal{X} : \left| \frac{\tilde{f}_{t,i}(x) - \mu_t(x)}{\sigma_t(x)} \right| \leq \sqrt{2 \log(2DmT/\delta)} \right\},$$

which happens with probability at least  $1 - \delta$ , we have

$$\forall 0 \leq t \leq T-1, \forall i \in [m] : \Psi_{t,i}(x_{t+1,i}^{\text{TS}}) \leq \sqrt{2 \log(2DmT/\delta)} \rho_m,$$

where  $\rho_m := \max_{x \in \mathcal{X}} \max_{\tau} \max_{\tilde{X} \subset \mathcal{X}, |\tilde{X}| \leq m} \frac{\sigma_{\tau}(x)}{\sigma_{\tau}(x|\tilde{X})}$  denotes the maximal decrease in posterior variance resulting from conditioning on an additional set of samples  $\tilde{X}$  of cardinality up to  $m$ . Since  $\Psi_{t,i}(x_{t+1,i}^{\text{TS-RSR}}) \leq \Psi_{t,i}(x_{t+1,i}^{\text{TS}})$  by definition of  $x_{t+1,i}^{\text{TS-RSR}}$ , on the event  $\mathcal{G}^{(1)}(\delta)$ , we thus have

$$\begin{aligned} \bar{\Psi} &:= \max_{0 \leq t \leq T-1, i \in [m]} \Psi_{t,i}(x_{t+1,i}^{\text{TS-RSR}}) \\ &= \max_{0 \leq t \leq T-1, i \in [m]} \frac{\tilde{f}_{t,i}^* - \mu_t(x_{t+1,i}^{\text{TS-RSR}})}{\sigma_t(x_{t+1,i}^{\text{TS-RSR}} | \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})} \\ &\leq \sqrt{2 \log(2DmT/\delta)} \rho_m. \end{aligned}$$

□

Next, we bound the term  $\sum_{t=0}^{T-1} \sum_{i=1}^m \sigma_t^2(x_{t+1,i}^{\text{TS-RSR}} | \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})$ .

**Lemma 4.** *Suppose  $k(x, x) \leq 1$  for each  $x \in \mathcal{X}$ . Then, letting  $C_1 := 2\sigma_n^2 / \log(1 + \sigma_n^2)$ , we have*

$$\sum_{t=0}^{T-1} \sum_{i=1}^m \sigma_t^2(x_{t+1,i}^{\text{TS-RSR}} | \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1}) \leq \sigma_n^2 C_1 \gamma_{Tm},$$

where

$$\gamma_{Tm} := \sup_{A \subset \mathcal{X}, |A|=Tm} I(\mathbf{y}_A; \mathbf{y}_A).$$

*Proof.* The proof follows by the calculations in Lemma 5.4 of [Srinivas et al., 2009], which in turn utilizes Lemma 8, which relates informational gain with the predictive variances. □

**5.1.3 Bounding**  $\sum_{t=0}^{T-1} \sum_{i=1}^m \mu_t(x_{t+1,i}^{\text{TS-RSR}}) - f(x_{t+1,i}^{\text{TS-RSR}})$

We have the following result on bounding  $\sum_{t=0}^{T-1} \sum_{i=1}^m \mu_t(x_{t+1,i}^{\text{TS-RSR}}) - f(x_{t+1,i}^{\text{TS-RSR}})$ , a term which also appeared in the decomposition of  $\tilde{R}_{T,m}$  in Lemma 2

**Lemma 5.** *On the event*

$$\mathcal{G}^{(2)}(\delta) := \left\{ \forall 0 \leq t \leq T-1, \forall x \in \mathcal{X} : |\mu_t(x) - f(x)| \leq \sqrt{2 \log(2DT/\delta)} \sigma_t(x) \right\}, \quad (10)$$

which happens with probability at least  $1 - \delta$ , we have

$$\begin{aligned} & \sum_{t=0}^{T-1} \sum_{i=1}^m \mu_t(x_{t+1,i}^{\text{TS-RSR}}) - f(x_{t+1,i}^{\text{TS-RSR}}) \\ & \leq \sqrt{2 \log(2DT/\delta)} \rho_m \sqrt{T m \sigma_n^2 C_1 \gamma_{Tm}}, \end{aligned} \quad (11)$$

*Proof.* Fix some  $0 < \delta < 1$ . Consider any  $0 \leq t \leq T - 1$ . Then, for any  $x \in \mathcal{X}$ , since  $f(x) | \mathcal{F}_t$  is a Gaussian random variable with mean  $\mu_t(x)$  and standard deviation  $\sigma_t(x)$ , by applying a standard subGaussian concentration inequality (cf. the argument in Lemma 6), with probability at least  $1 - \delta/(DT)$ , we have

$$|\mu_t(x) - f(x)| \leq \sqrt{2 \log(2DT/\delta)}.$$

Taking a union bound over all  $x \in \mathcal{X}$  (recall that  $|\mathcal{X}| = D$ ) and  $0 \leq t \leq T - 1$ , the event

$$\mathcal{G}^{(2)}(\delta) := \left\{ \forall 0 \leq t \leq T - 1, \forall x \in \mathcal{X} : |\mu_t(x) - f(x)| \leq \sqrt{2 \log(2DT/\delta)} \sigma_t(x) \right\}$$

happens with probability at least  $1 - \delta$ . Recalling the definition of  $\rho_m$  as

$$\rho_m := \max_{x \in \mathcal{X}} \max_{\tau} \max_{\tilde{X} \subset \mathcal{X}, |\tilde{X}| \leq m} \frac{\sigma_{\tau}(x)}{\sigma_{\tau}(x | \tilde{X})}, \quad (12)$$

it follows that on the event  $\mathcal{G}^{(2)}(\delta)$ , we have that for each  $0 \leq t \leq T - 1$  and  $i \in [m]$ , we have

$$\begin{aligned} \mu_t(x_{t+1,i}^{\text{TS-RSR}}) - f(x_{t+1,i}^{\text{TS-RSR}}) & \leq \sqrt{2 \log(2DT/\delta)} \sigma_t(x_{t+1,i}^{\text{TS-RSR}}) \\ & \leq \sqrt{2 \log(2DT/\delta)} \sigma_t(x_{t+1,i}^{\text{TS-RSR}} | \{x_{t+1,i}^{\text{TS-RSR}}\}_{j=1}^{i-1}) \rho_m. \end{aligned}$$

Thus, on the event  $\mathcal{G}^{(2)}(\delta)$ , we have

$$\begin{aligned} & \sum_{t=0}^{T-1} \sum_{i=1}^m \mu_t(x_{t+1,i}^{\text{TS-RSR}}) - f(x_{t+1,i}^{\text{TS-RSR}}) \\ & \leq \sum_{t=0}^{T-1} \sum_{i=1}^m \sqrt{2 \log(2DT/\delta)} \sigma_t(x_{t+1,i}^{\text{TS-RSR}} | \{x_{t+1,i}^{\text{TS-RSR}}\}_{j=1}^{i-1}) \rho_m \\ & \leq \sqrt{2 \log(2DT/\delta)} \rho_m \sqrt{T m \sum_{t=0}^{T-1} \sum_{i=1}^m \sigma_t^2(x_{t+1,i}^{\text{TS-RSR}} | \{x_{t+1,i}^{\text{TS-RSR}}\}_{j=1}^{i-1})} \\ & \leq \sqrt{2 \log(2DT/\delta)} \rho_m \sqrt{T m \sigma_n^2 C_1 \gamma_{Tm}}, \end{aligned}$$

where the second-to-last inequality follows by Cauchy-Schwarz, and the final inequality uses the information-theoretic bound in Lemma 8.  $\square$

#### 5.1.4 Proof of Theorem 1

We are now ready to prove our main result, Theorem 1.

*Proof of Theorem 1.* Recall that by the derivations in Lemma 2, we have from equation 6 that

$$\tilde{R}_{T,m} = \sum_{t=0}^{T-1} \sum_{i=1}^m \tilde{f}_{t,i}^* - f(x_{t+1,i}^{\text{TS-RSR}})$$

$$\begin{aligned} &\leq \sum_{t=0}^{T-1} \sum_{i=1}^m \mu_t(x_{t+1,i}^{\text{TS-RSR}}) - f(x_{t+1,i}^{\text{TS-RSR}}) \\ &\quad + \bar{\Psi} \sqrt{Tm \sum_{t=0}^{T-1} \sum_{i=1}^m \sigma_t^2(x_{t+1,i}^{\text{TS-RSR}} \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})}. \end{aligned}$$

Consider a fixed  $0 < \delta < 1$ . By combining

- (a) the bound for  $\bar{\Psi}$  in equation 9 of Lemma 3,
- (b) the bound for  $\sum_{t=0}^{T-1} \sum_{i=1}^m \sigma_t^2(x_{t+1,i}^{\text{TS-RSR}} \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})$  in Lemma 8,
- (c) the bound for  $\sum_{t=0}^{T-1} \sum_{i=1}^m \mu_t(x_{t+1,i}^{\text{TS-RSR}}) - f(x_{t+1,i}^{\text{TS-RSR}})$  in equation 11 of Lemma 5,

we obtain that on the event  $\mathcal{G}(\delta) := \mathcal{G}^{(1)}(\delta) \cap \mathcal{G}^{(2)}(\delta)$  (where  $\mathcal{G}^{(1)}(\delta)$  is defined in equation 7 and  $\mathcal{G}^{(2)}(\delta)$  is defined in equation 10), which happens with probability at least  $1 - 2\delta$ , we have

$$\begin{aligned} \tilde{R}_{T,m} &= \sum_{t=0}^{T-1} \sum_{i=1}^m \tilde{f}_{t,i}^* - f(x_{t+1,i}^{\text{TS-RSR}}) \\ &\leq 2\sqrt{2 \log(2DmT/\delta)} \rho_m \sqrt{Tm\sigma_n^2 C_1 \gamma_{Tm}}. \end{aligned}$$

Pick now  $\delta_0 = (Tm)^{-2}/2$ , and define the event  $\mathcal{G} = \mathcal{G}(\delta_0)$ . Note that

$$\mathbb{P}(\mathcal{G}^c) \leq (Tm)^{-2}. \quad (13)$$

Since

$$\begin{aligned} \tilde{R}_{T,m} 1_{\mathcal{G}} &\leq 2\sqrt{2 \log(2DmT/\delta_0)} \rho_m \sqrt{Tm\sigma_n^2 C_1 \gamma_{Tm}} \\ &\leq 2\sqrt{2 \log(4D(mT)^3)} \rho_m \sqrt{Tm\sigma_n^2 C_1 \gamma_{Tm}}, \end{aligned}$$

it follows that  $\mathbb{E} [\tilde{R}_{T,m} 1_{\mathcal{G}}] \leq 2\sqrt{2 \log(4D(mT)^3)} \rho_m \sqrt{Tm\sigma_n^2 C_1 \gamma_{Tm}}$ . Meanwhile, observe that

$$\begin{aligned} \mathbb{E} [\tilde{R}_{T,m} 1_{\mathcal{G}^c}] &\leq \sqrt{\mathbb{E} [\tilde{R}_{T,m}^2] \mathbb{P}(\mathcal{G}^c)} \\ &\leq \sqrt{24 \log D (Tm)^3} \sqrt{(Tm)^{-2}} \\ &\leq \sqrt{24 \log DTm}, \end{aligned}$$

where the second-to-last inequality follows from the bound on  $\mathbb{E} [\tilde{R}_{T,m}^2]$  in Lemma 12 (which we prove in the appendix) and the bound on  $\mathbb{P}(\mathcal{G}^c)$  in equation 13. Thus, it follows from Lemma 1 that

$$\begin{aligned} \mathbb{E} [R_{T,m}] &= \mathbb{E} [\tilde{R}_{T,m}] \leq \mathbb{E} [\tilde{R}_{T,m} 1_{\mathcal{G}}] + \sqrt{\mathbb{E} [\tilde{R}_{T,m}^2] \mathbb{P}(\mathcal{G}^c)} \\ &\leq 2\sqrt{2 \log(4D(mT)^3)} \rho_m \sqrt{Tm\sigma_n^2 C_1 \gamma_{Tm}} + \sqrt{24 \log DTm}. \end{aligned}$$

This completes our proof.  $\square$

A key step in our analysis took place when we used the technical result Lemma 7 to prove Lemma 3, in which we found a bound for the Regret-to-Sigma Ratio (RSR). We discuss this step in detail next.

## 5.2 Bounding the RSR

To bound the Regret-Sigma Ratio (RSR), we first need the following result.

**Lemma 6.** *Suppose  $\mathbf{Y} \sim N(\boldsymbol{\mu}, \boldsymbol{\Sigma})$ , where  $\boldsymbol{\mu} \in \mathbb{R}^D$  and  $\boldsymbol{\Sigma} \succ \mathbf{0}_{D \times D}$ . For each  $j \in [D]$ , we denote  $\sigma_j^2 := \boldsymbol{\Sigma}_{j,j}$ . Let  $\ell^* = \operatorname{argmax}_{j \in [D]} \mathbf{Y}_j$ , and denote  $\mathbf{Y}^* = \max_{j \in [D]} \mathbf{Y}_j = \mathbf{Y}_{\ell^*}$ . Then, for any  $\delta > 0$ , on the event that*

$$\mathcal{E}(\delta) := \left\{ \forall \ell \in [D] : \left| \frac{\mathbf{Y}_\ell - \boldsymbol{\mu}_\ell}{\sigma_\ell} \right| \leq \sqrt{2 \log(D/\delta)} \right\}, \quad (14)$$

which happens with probability at least  $1 - \delta$ , we have

$$\frac{\mathbf{Y}^* - \boldsymbol{\mu}_{\ell^*}}{\sigma_{\ell^*}} \leq \sqrt{2 \log(D/\delta)}$$

*Proof.* Note that by a standard subGaussian concentration bound, for each  $\ell \in [D]$ , for any  $t > 0$ ,

$$P \left( \left| \frac{\mathbf{Y}_\ell - \boldsymbol{\mu}_\ell}{\sigma_\ell} \right| \geq t \right) \leq 2 \exp(-t^2/2)$$

Pick  $t = \sqrt{2 \log(2D/\delta)}$ . Then, it follows that for any  $\ell \in [D]$ ,

$$\begin{aligned} P \left( \left| \frac{\mathbf{Y}_\ell - \boldsymbol{\mu}_\ell}{\sigma_\ell} \right| \geq \sqrt{2 \log(2D/\delta)} \right) &\leq 2 \exp \left( -\frac{(\sqrt{2 \log(2D/\delta)})^2}{2} \right) \\ &= \frac{\delta}{D}. \end{aligned}$$

Thus, by applying union bound, we have that

$$P \left( \forall \ell \in [D] : \left| \frac{\mathbf{Y}_\ell - \boldsymbol{\mu}_\ell}{\sigma_\ell} \right| \leq \sqrt{2 \log(2D/\delta)} \right) \geq 1 - \delta. \quad (15)$$

Consider  $\ell^*$  such that  $\mathbf{Y}_{\ell^*} = \max_{\ell \in [D]} \mathbf{Y}_\ell$ . Then, it follows by (15) that

$$\frac{\mathbf{Y}_{\ell^*} - \boldsymbol{\mu}_{\ell^*}}{\sigma_{\ell^*}} \leq \sqrt{2 \log(2D/\delta)}$$

also holds with probability at least  $1 - \delta$ .  $\square$

We are now ready to state and prove the following result that provides an explicit bound for the RSR.

**Lemma 7.** *For any  $0 < \delta < 1$ , on the event  $\mathcal{G}$  defined as*

$$\begin{aligned} \mathcal{G}(\delta) &:= \bigcup_{0 \leq t \leq T-1, i \in [m]} \mathcal{G}_{t,i}^{(1)}(\delta), \quad \text{where} \\ \mathcal{G}_{t,i}^{(1)}(\delta) &:= \left\{ \forall x \in \mathcal{X} : \left| \frac{\tilde{f}_{t,i}(x) - \mu_t(x)}{\sigma_t(x)} \right| \leq \sqrt{2 \log(2DmT/\delta)} \right\}, \end{aligned}$$

which happens with probability at least  $1 - \delta$ , we have for every  $t \in \{0, 1, \dots, T-1\}$  and  $i \in [m]$  that

$$\frac{\tilde{f}_{t,i}^* - \mu_t(x_{t+1,i}^{\text{TS-RSR}})}{\sigma_t(x_{t+1,i}^{\text{TS-RSR}} \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})}$$

$$\begin{aligned}
&\leq \frac{\tilde{f}_{t,i}^* - \mu_t(x_{t+1,i}^{\text{TS}})}{\sigma_t(x_{t+1,i}^{\text{TS}} \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})} \\
&\leq \sqrt{2 \log(2DTm/\delta)} \rho_m := \tilde{\Psi}(\delta)
\end{aligned}$$

*Proof.* We start by noting that at any time  $t$ , that for each  $i \in [m]$ ,  $\tilde{f}_{t,i}^* := \max_x \tilde{f}_{t,i}(x)$ , where  $\tilde{f}_{t,i}$  is an independent sample from  $f \mid \mathcal{F}_t$ . Let  $x_{t+1,i}^{\text{TS}} := \operatorname{argmax}_x \tilde{f}_{t,i}(x)$ ; we use TS in the superscript of  $x_{t+1,i}^{\text{TS}}$  to represent the fact that if we performed Thompson sampling and drew  $m$  independent samples from  $x^* \mid \mathcal{F}_t$  to be our action, we will play exactly the policy  $\{x_{t+1,i}^{\text{TS}}\}_{i=1}^m$ . By applying Lemma 6, we see that for any  $\delta > 0$ , for a given  $0 \leq t \leq T-1$  and  $i \in [m]$ , on the event

$$\mathcal{G}_{t,i}^{(1)}(\delta) := \left\{ \forall x \in \mathcal{X} : \left| \frac{\tilde{f}_{t,i}(x) - \mu_t(x)}{\sigma_t(x)} \right| \leq \sqrt{2 \log(2DmT/\delta)} \right\},$$

which happens with probability at least  $1 - \delta/(Tm)$ , we have

$$\frac{(\tilde{f}_{t,i}^* - \mu_t(x_{t+1,i}^{\text{TS}}))}{\sigma_t(x_{t+1,i}^{\text{TS}})} \leq \sqrt{2 \log(2DmT/\delta)}.$$

By denoting  $\rho_m$  to be

$$\rho_m := \max_{x \in \mathcal{X}} \max_{\tau} \max_{\tilde{X} \subset \mathcal{X}, |\tilde{X}| \leq m} \frac{\sigma_{\tau}(x)}{\sigma_{\tau}(x \mid \tilde{X})}, \tag{16}$$

we then obtain that

$$\sigma_t(x_{t+1,i}^{\text{TS}}) \leq \rho_m \sigma_t(x_{t+1,i}^{\text{TS}} \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1}),$$

which implies that on the event  $\mathcal{G}_{t,i}^{(1)}(\delta)$ ,

$$\frac{(\tilde{f}_{t,i}^* - \mu_t(x_{t+1,i}^{\text{TS}}))}{\sigma_t(x_{t+1,i}^{\text{TS}} \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})} \leq \sqrt{2 \log(2DmT/\delta)} \rho_m.$$

Since

$$x_{t+1,i}^{\text{TS-RSR}} \in \operatorname{argmin}_{x \in \mathcal{X}} \frac{\tilde{f}_{t,i}^* - \mu_t(x)}{\sigma_t(x \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})},$$

this implies that on the event  $\mathcal{G}_{t,i}^{(1)}(\delta)$ , which happens with probability at least  $1 - \delta/(mT)$ , we have

$$\begin{aligned}
&\frac{\tilde{f}_{t,i}^* - \mu_t(x_{t+1,i}^{\text{TS-RSR}})}{\sigma_t(x_{t+1,i}^{\text{TS-RSR}} \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})} \\
&\leq \frac{\tilde{f}_{t,i}^* - \mu_t(x_{t+1,i}^{\text{TS}})}{\sigma_t(x_{t+1,i}^{\text{TS}} \mid \{x_{t+1,j}^{\text{TS-RSR}}\}_{j=1}^{i-1})} \\
&\leq \sqrt{2 \log(2DmT/\delta)} \rho_m
\end{aligned}$$

The final result then follows by a union bound over  $0 \leq t \leq T-1$  and  $i \in [m]$ .  $\square$

## 6 Numerical results

The performance of our algorithm is compared against the following competitors: namely Batch UCB (BUCB, [Desautels et al., 2014]), Thompson Sampling (TS, [Kandasamy et al., 2018]), GP-UCB with pure exploitation (UCBPE, [Contal et al., 2013]), Fully Distributed Bayesian Optimization with Stochastic Policies (SP, [Garcia-Barcos and Martinez-Cantin, 2019a]), a sequential kriging version of Expected Improvement (qEI, [Zhan and Xing, 2020], [Hunt, 2020], [Ginsbourger et al., 2008]), and DPPTS [Nava et al., 2022] (which is a state-of-the-art batch variant of Thompson Sampling).

### 6.1 Functions sampled from GP prior

To better understand the performance of our algorithm, we first evaluated its performance on functions sampled from a known GP prior. To this end, we 1) sampled 10 random 2D functions from a RBF prior with lengthscale = 0.25, defined on the domain  $[-5, 5]^2$ , and sampled 10 random 3D functions from a GP prior, with a Gaussian RBF kernel that has lengthscale 0.15, defined on the domain  $[0, 1]^3$ . For the 2D function, for each of the ten functions, we repeat each algorithm for ten runs, yielding a total of 100 trials for each algorithm. For the 3D function, for each of the ten functions, we repeat each algorithm for five runs, yielding a total of 50 trials for each algorithm. Before each run, each algorithm has access to 15 random samples, which is identical across all the algorithms. We note that it is nontrivial to compute the standard deviation across the different functions, but in this case, we compute the means and standard deviations in Table 1 by treating each trial as coming from the same function. We see in Table 1 that TS-RSR outperforms its peers in both the 2D and 3D case with known GP prior. The trajectories of simple regret are shown in Figure 1. We note that considering the total number of available function evaluations (400 in the 2D case and 250 in the 3D case), both settings are rather difficult considering their domain size and GP prior lengthscale, and given the large number of trials, these serve as representative demonstrations of the superior efficacy and consistency of the proposed TS-RSR algorithm.

Table 1: Simple regret at last iteration (2D/3D synthetic functions)

	GP-RBF-prior-2D	GP-RBF-prior-3D
(batch size $m$ )	$m = 20$	$m = 5$
(iterations $T$ )	$T = 20$	$T = 50$
(units for regret)	$10^{-2}$	$10^{-2}$
DPPTS	6.1 ( $\pm 11.4$ ) [R: 3]	5.8 ( $\pm 9.1$ ) [R: 3]
BUCB	5.1 ( $\pm 11.3$ ) [R: 2]	36.0 ( $\pm 29.5$ ) [R: 6]
UCBPE	11.8 ( $\pm 16.8$ ) [R: 5]	48.9 ( $\pm 35.5$ ) [R: 7]
SP	12.7 ( $\pm 18.6$ ) [R: 6]	12.4 ( $\pm 20.6$ ) [R: 4]
TS	8.9 ( $\pm 14.6$ ) [R: 4]	3.0 ( $\pm 6.8$ ) [R: 2]
qEI	29.8 ( $\pm 26.1$ ) [R: 7]	29.8 ( $\pm 54.2$ ) [R: 5]
<b>TS-RSR</b>	<b>3.8 (<math>\pm 10.0</math>) [R: 1]</b>	<b>1.9 (<math>\pm 3.6</math>) [R: 1]</b>

### 6.2 Synthetic test functions

#### 6.2.1 2D/3D functions

For the synthetic test functions, we chose from a range of challenging nonconvex test functions, across varying dimensions. In 2D, we have Ackley, Bird, and Rosenbrock. In 3D, we have the 3D version of Ackley. Our results are summarized in Table 2. As we can see, our algorithm outperforms all the other algorithms for all the test functions here except the Bird, where it performs only slightly worse than TS and DPPTS. The plots of the averaged simple regret for the different algorithms on these test functions can be found in Figure 2.

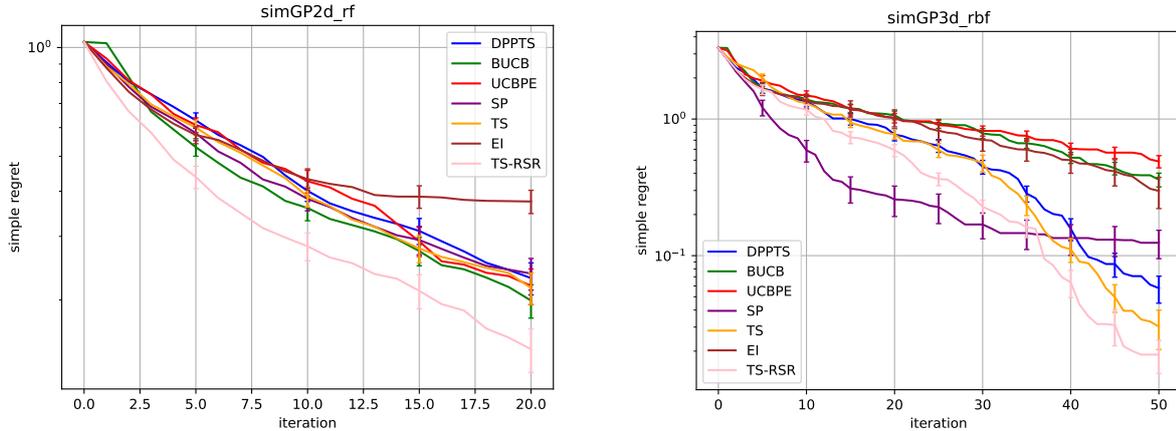


Figure 1: Simple regret for synthetic functions with known prior. Each curve is the average of 10 runs. The error bars represent  $\pm 1$  standard error.

Table 2: Simple regret at last iteration (2D/3D synthetic functions)

	Ackley-2D	Rosenbrock-2D	Bird-2D	Ackley-3d
(batch size $m$ )	$m = 5$	$m = 5$	$m = 5$	$m = 20$
(iterations $T$ )	$T = 50$	$T = 50$	$T = 50$	$T = 15$
(units for regret)	$10^{-3}$	$10^{-3}$	$10^{-4}$	$10^{-2}$
DPPTS	2.2 ( $\pm 1.6$ ) [R: 2]	6.2 ( $\pm 7.2$ ) [R: 3]	0.4 ( $\pm 1.0$ ) [R: 2]	3.9 ( $\pm 4.0$ ) [R: 2]
BUCB	2.3 ( $\pm 1.1$ ) [R: 3]	22.7 ( $\pm 24.1$ ) [R: 5]	7.1 ( $\pm 7.2$ ) [R: 6]	50.1 ( $\pm 71.7$ ) [R: 5]
UCBPE	8.3 ( $\pm 5.4$ ) [R: 6]	207.1 ( $\pm 165.9$ ) [R: 7]	763.3 ( $\pm 1782.0$ ) [R: 7]	158.7 ( $\pm 113.3$ ) [R: 7]
SP	3.5 ( $\pm 1.8$ ) [R: 4]	69.0 ( $\pm 61.1$ ) [R: 6]	1.4 ( $\pm 1.0$ ) [R: 5]	104.2 ( $\pm 97.3$ ) [R: 6]
TS	4.3 ( $\pm 3.1$ ) [R: 5]	3.9 ( $\pm 1.7$ ) [R: 2]	<b>0.3 (<math>\pm 0.0</math>) [R: 1]</b>	18.0 ( $\pm 38.3$ ) [R: 3]
qEI	10.4 ( $\pm 3.5$ ) [R: 7]	12.1 ( $\pm 7.3$ ) [R: 4]	1.4 ( $\pm 2.0$ ) [R: 4]	45.6 ( $\pm 55.6$ ) [R: 4]
<b>TS-RSR</b>	<b>1.7 (<math>\pm 1.1</math>) [R: 1]</b>	<b>2.0 (<math>\pm 1.6</math>) [R: 1]</b>	0.7 ( $\pm 1.0$ ) [R: 3]	<b>1.2 (<math>\pm 0.6</math>) [R: 1]</b>

### 6.2.2 Higher-dimensional test functions

We also tested on the following higher dimensional test functions: Hartmann (6D), Griewank (8D), and Michalewicz (10D), which are well-known nonconvex test functions with many local optima. Our results are summarized in Table 3, and the simple regret curves can be found in Figure 3. Again, our proposed algorithm consistently outperforms its competitors.

### 6.3 Real-world test functions

To better evaluate our algorithm, we also experimented on three realistic real world test functions.

First, we have a 4D hyperparameter tuning task for the hyperparameters of the RMSProp optimizer in a 1-hidden layer NN regression task for the Boston housing dataset. Here, the 4 parameters we tune are 1) the number of nodes in the hidden layer (between 1 and 100), 2) the learning rate of the RMSProp optimizer (between 0.001 and 0.1), 3) the weight decay of the optimizer (between 0 and 0.5), 4) the momentum parameter of the optimizer (between 0 and 0.5). The experiment is repeated 10 times, and the neural network’s weight initialization and all other parameters are set to be the same to ensure a fair comparison. The dataset was randomly split into train/validation sets. We initialize the observation set to have 15 random function evaluations which were set to be the same across all the methods. The performances of the different

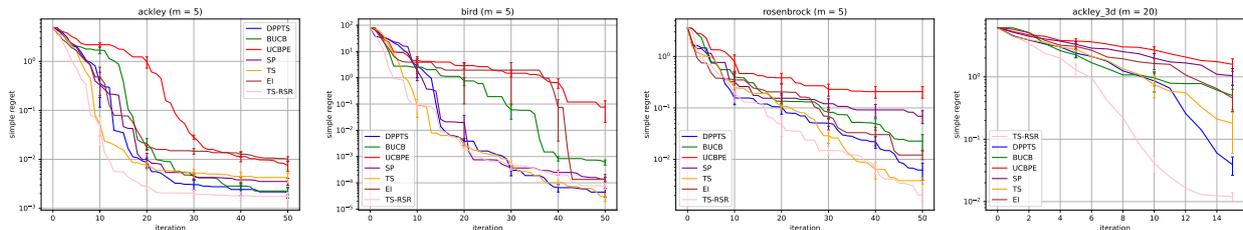


Figure 2: Simple regret for 2D/3D synthetic functions. Each curve is the average of 10 runs. The error bars represent  $\pm 1$  standard error.

Table 3: Simple regret at last iteration (higher-dimensional)

	Hartmann-6D	Griewank-8D	Michaelwicz-10D
(batch size $m$ )	$m = 5$	$m = 10$	$m = 5$
(iterations $T$ )	$T = 30$	$T = 30$	$T = 30$
(units for regret)	$10^{-2}$	$10^{-2}$	$10^0$
DPPTS	11.1 ( $\pm 9.4$ ) [R: 7]	14.0 ( $\pm 5.0$ ) [R: 4]	5.4 ( $\pm 0.8$ ) [R: 4]
BUCB	4.78 ( $\pm 4.9$ ) [R: 4]	5.2 ( $\pm 1.8$ ) [R: 2]	5.4 ( $\pm 1.1$ ) [R: 4]
UCBPE	8.3 ( $\pm 6.5$ ) [R: 6]	14.3 ( $\pm 4.8$ ) [R: 6]	5.8 ( $\pm 0.7$ ) [R: 7]
SP	4.0 ( $\pm 8.0$ ) [R: 3]	15.5 ( $\pm 8.9$ ) [R: 7]	4.8 ( $\pm 0.8$ ) [R: 2]
TS	5.9 ( $\pm 9.5$ ) [R: 5]	14.9 ( $\pm 4.3$ ) [R: 5]	5.5 ( $\pm 0.7$ ) [R: 6]
qEI	1.9 ( $\pm 5.5$ ) [R: 2]	11.0 ( $\pm 4.1$ ) [R: 3]	5.0 ( $\pm 0.7$ ) [R: 3]
TS-RSR	<b>1.6 (<math>\pm 4.7</math>) [R: 1]</b>	<b>3.1 (<math>\pm 1.7</math>) [R: 1]</b>	<b>4.4 (<math>\pm 0.7</math>) [R: 1]</b>

algorithms in terms of the simple regret<sup>1</sup> at the last iteration for the regression L2-loss on the validation set of the Boston housing dataset is shown in Table 4. As we can see, TS-RSR outperforms all its competitors, improving on its closest competitor (BUCB) by 25.7%. The trajectories of the average simple regret is shown in Figure 4.

Table 4: Simple regret at last iteration (real-world test functions)

	(Boston housing) NN regression	Robot pushing (3D)	Robot pushing (4D)
(batch size $m$ )	$m = 5$	$m = 5$	$m = 5$
(iterations $T$ )	$T = 30$	$T = 30$	$T = 30$
(units for regret)	$10^{-1}$	$10^{-2}$	$10^{-1}$
DPPTS	7.6 ( $\pm 3.4$ ) [R: 3]	31.0 ( $\pm 20.1$ ) [R: 6]	3.5( $\pm 2.5$ ) [R:4]
BUCB	6.6 ( $\pm 3.5$ ) [R: 2]	12.6 ( $\pm 5.0$ ) [R: 2]	2.6( $\pm 1.9$ ) [R:2]
UCBPE	9.9 ( $\pm 4.3$ ) [R: 5]	18.9 ( $\pm 6.3$ ) [R: 4]	3.5( $\pm 2.3$ ) [R:3]
SP	11.1 ( $\pm 5.6$ ) [R: 6]	18.6 ( $\pm 19.2$ ) [R: 3]	5.5 ( $\pm 5.6$ )[R:7]
TS	11.4 ( $\pm 4.8$ ) [R: 7]	39.2 ( $\pm 22.3$ ) [R: 7]	3.8 ( $\pm 2.4$ )[R:5]
qEI	7.8 ( $\pm 4.5$ ) [R: 4]	27.1 ( $\pm 38.7$ ) [R: 5]	5.2( $\pm 7.6$ )[R:6]
TS-RSR	<b>4.9 (<math>\pm 2.5</math>) [R: 1]</b>	<b>8.1 (<math>\pm 5.5</math>) [R: 1]</b>	<b>1.9(<math>\pm 1.3</math>) [R:1]</b>

Next, we experimented on the active learning for robot pushing setup from [4]. This consists of conducting active policy search on the task of selecting a pushing action of an object towards a designed goal location. There are two variants to the problem with one being 3D, and another being 4D. For the 3D function, the input includes the robot location  $(r_x, r_y)$  and the pushing duration  $t_r$ ; for the 4D, the input also includes specifying the initial angle the robot faces. In this experiment, we also have ten repetitions for both the two functions, where each repetition represents a different goal. The simple regret performances at the last

<sup>1</sup>Since a grid search is infeasible over the 4-dimensional search space, to compute the average regret, we take the best validation loss found across all the runs of all the algorithms as our proxy for the best possible loss.

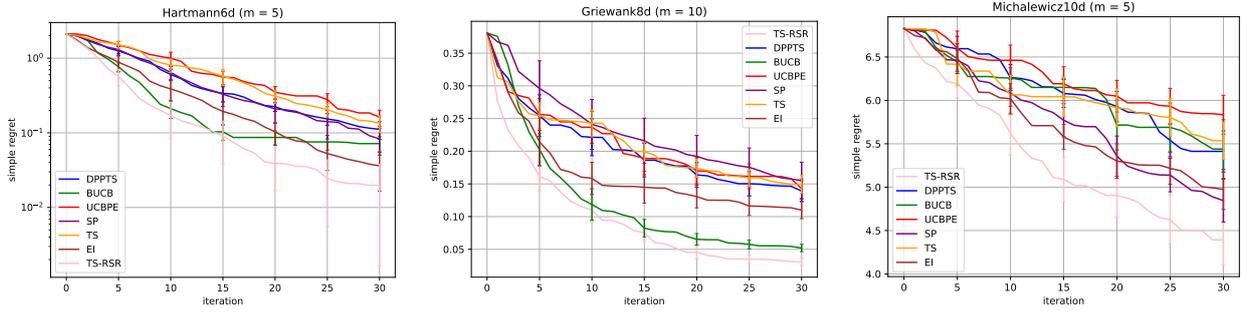


Figure 3: Simple regret for higher-dimensional synthetic functions. Each curve is the average of 10 runs. The error bars represent  $\pm 1$  standard error.

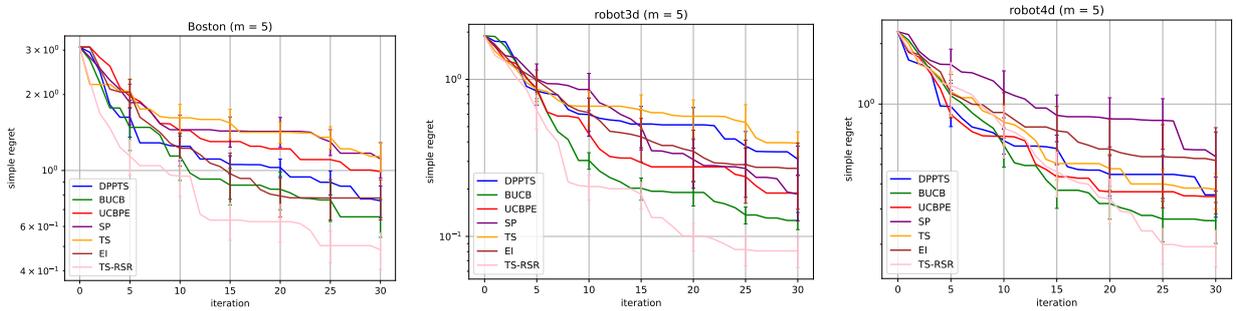


Figure 4: Average simple regret for Boston housing, robot pushing 3D and robot pushing 4D problems. Each curve is the average over ten runs. The error bars represent  $\pm 1$  standard error.

iteration can be found in Table 4, where we again we see that TS-RSR significantly outperforms its peers, improving on its closest competitor (BUCB in both cases) by 35.7% in the 3D case and 25.7% in the 4D case respectively. The trajectories of the average simple regret is shown in Figure 4.

## 6.4 More details about experimental setup

Our detailed experimental setup is as follows. For the GP prior (except the cases with known GP prior), we use the Matern kernel with  $\nu$  parameter set as  $\nu = 1.5$ . For the likelihood noise, we set  $\epsilon \sim N(0, \sigma_n^2)$ , where  $\sigma_n = 0.001$ . We compute the performance of the algorithms across 10 runs, where for each run, each algorithm has access to the same random initialization dataset with 15 samples. Finally, we note that in a practical implementation of our algorithm, for any given  $t$  and  $i \in [m]$ , it may happen that  $\hat{f}_{t,i}^* < \mu_t(x)$ , in which case the algorithm will simply pick out the action  $x$  with the highest  $\mu_t(x)$ . While such a situation does not affect the theoretical convergence, for better empirical performance that encourages more diversity, we resample  $\hat{f}_{t,i}^*$  whenever  $\hat{f}_{t,i}^* < \max_x \mu_t(x)$ , until  $\hat{f}_{t,i}^* > \max_x \mu_t(x)$ . The specific kernel, lengthscale and domain we used in the experiments for each of the test functions can be found in Tables 5 and 6 below; note that all functions use the same initial kernel.

Table 5: Experimental set up for 2D/3D synthetic functions

	Ackley-2D	Rosenbrock-2D	Bird-2D	Ackley-3d	GP-RBF-prior-2D	GP-RBF-prior-3D
Domain	$[-5, 5]^2$	$[-2, 2] \times [-1, 3]$	$[-2\pi, 2\pi]^2$	$[-5, 5]^3$	$[-5, 5]^2$	$[0, 1]^3$
Lengthscale used	$\ln(2)$	$\ln(2)$	$\ln(2)$	$\ln(2)$	0.25	0.15
Kernel	Matern ( $\nu = 1$ )	Matern ( $\nu = 1$ )	Matern ( $\nu = 1$ )	Matern ( $\nu = 1$ )	RBF	RBF
Noise $\sigma$	$10^{-3}$	$10^{-3}$	$10^{-3}$	$10^{-3}$	$10^{-3}$	$10^{-3}$

Table 6: Experimental set up for higher-dimensional and real-world functions

	Hartmann-6D	Griewank-8D	Michalewicz-10D	Boston Housing (NN regression)	Robot-3D	Robot-4D
Domain	$[0, 1]^6$	$[-1, 4]^8$	$[0, \pi]^{10}$	$[1, 100] \times [0.001, 0.1] \times [0.1, 0.5]^2$	$[-5, 5]^2 \times [1, 30]$	$[-5, 5]^2 \times [1, 30] \times [0, 2\pi]$
Lengthscale	$\ln(2)$	$\ln(2)$	$\ln(2)$	$[0.1, 0.005, 0.1, 0.1]$	$\ln(2)$	$\ln(2)$
Kernel	Matern ( $\nu = 1$ )	Matern	Matern			
Noise $\sigma$	$10^{-3}$	$10^{-3}$	$10^{-3}$	$10^{-3}$	$10^{-3}$	$10^{-3}$

## 7 Conclusion

In this paper, we introduced a new algorithm, TS – RSR, for the problem of batch BO. We provide strong theoretical guarantees for our algorithm via a novel analysis, which may be of independent interest to researchers interested in studying IDS methods for BO. Moreover, we confirm the efficacy of our algorithm on a range of simulation problems, where we attain strong, state-of-the-art performance. We believe that our algorithm can serve as a new benchmark in batch BO, and as a building block for more effective batch BO in practical applications.

## 8 Acknowledgement

This work is supported by NSF AI institute: 2112085, NSF ECCS: 2328241, NIH R01LM014465, and NSF CPS: 2038603.

## References

- [Adachi et al., 2023] Adachi, M., Hayakawa, S., Hamid, S., Jørgensen, M., Oberhauser, H., and Osborne, M. A. (2023). SOBER: Highly Parallel Bayesian Optimization and Bayesian Quadrature over Discrete and Mixed Spaces. arXiv:2301.11832 [cs, math, stat].
- [Ament et al., 2024] Ament, S., Daulton, S., Eriksson, D., Balandat, M., and Bakshy, E. (2024). Unexpected improvements to expected improvement for bayesian optimization. *Advances in Neural Information Processing Systems*, 36.
- [Azimi et al., 2010] Azimi, J., Fern, A., and Fern, X. Z. (2010). Batch Bayesian Optimization via Simulation Matching.
- [Baek and Farias, 2023] Baek, J. and Farias, V. (2023). Ts-ucb: Improving on thompson sampling with little to no additional computation. In *International Conference on Artificial Intelligence and Statistics*, pages 11132–11148. PMLR.
- [Chen et al., 2022] Chen, Y., Dong, P., Bai, Q., Dimakopoulou, M., Xu, W., and Zhou, Z. (2022). Society of agents: Regret bounds of concurrent thompson sampling. *Advances in Neural Information Processing Systems*, 35:7587–7598.
- [Contal et al., 2013] Contal, E., Buffoni, D., Robicquet, A., and Vayatis, N. (2013). Parallel gaussian process optimization with upper confidence bound and pure exploration. In *Joint European Conference on Machine Learning and Knowledge Discovery in Databases*, pages 225–240. Springer.
- [Dai et al., 2020] Dai, Z., Low, B. K. H., and Jaillet, P. (2020). Federated bayesian optimization via thompson sampling. *Advances in Neural Information Processing Systems*, 33:9687–9699.
- [Daxberger and Low, 2017] Daxberger, E. A. and Low, B. K. H. (2017). Distributed batch gaussian process optimization. In *International conference on machine learning*, pages 951–960. PMLR.
- [De Palma et al., 2019] De Palma, A., Mendler-Dünner, C., Parnell, T., Anghel, A., and Pozidis, H. (2019). Sampling Acquisition Functions for Batch Bayesian Optimization. arXiv:1903.09434 [cs, stat].
- [Desautels et al., 2014] Desautels, T., Krause, A., and Burdick, J. W. (2014). Parallelizing exploration-exploitation tradeoffs in gaussian process bandit optimization. *Journal of Machine Learning Research*, 15:3873–3923.
- [Frazier, 2018] Frazier, P. I. (2018). A tutorial on bayesian optimization. *arXiv preprint arXiv:1807.02811*.
- [Garcia-Barcos and Martinez-Cantin, 2019a] Garcia-Barcos, J. and Martinez-Cantin, R. (2019a). Fully distributed bayesian optimization with stochastic policies. *arXiv preprint arXiv:1902.09992*.
- [Garcia-Barcos and Martinez-Cantin, 2019b] Garcia-Barcos, J. and Martinez-Cantin, R. (2019b). Fully Distributed Bayesian Optimization with Stochastic Policies. arXiv:1902.09992 [cs, stat].
- [Garrido-Merchán and Hernández-Lobato, 2019] Garrido-Merchán, E. C. and Hernández-Lobato, D. (2019). Predictive entropy search for multi-objective bayesian optimization with constraints. *Neurocomputing*, 361:50–68.
- [Ginsbourger et al., 2008] Ginsbourger, D., Le Riche, R., and Carraro, L. (2008). A multi-points criterion for deterministic parallel global optimization based on gaussian processes.

- [Gong et al., 2019] Gong, C., Peng, J., and Liu, Q. (2019). Quantile stein variational gradient descent for batch bayesian optimization. In *International Conference on machine learning*, pages 2347–2356. PMLR.
- [Gonzalez et al., 2015] Gonzalez, J., Dai, Z., Hennig, P., and Lawrence, N. (2015). Batch Bayesian Optimization via Local Penalization.
- [Hennig and Schuler, 2012] Hennig, P. and Schuler, C. J. (2012). Entropy search for information-efficient global optimization. *Journal of Machine Learning Research*, 13(6).
- [Hernández-Lobato et al., 2015] Hernández-Lobato, J. M., Gelbart, M., Hoffman, M., Adams, R., and Ghahramani, Z. (2015). Predictive entropy search for bayesian optimization with unknown constraints. In *International conference on machine learning*, pages 1699–1707. PMLR.
- [Hernández-Lobato et al., 2017] Hernández-Lobato, J. M., Requeima, J., Pyzer-Knapp, E. O., and Aspuru-Guzik, A. (2017). Parallel and distributed thompson sampling for large-scale accelerated exploration of chemical space. In *International conference on machine learning*, pages 1470–1479. PMLR.
- [Hunt, 2020] Hunt, N. (2020). *Batch Bayesian optimization*. PhD thesis, Massachusetts Institute of Technology.
- [Hvarfner et al., 2022] Hvarfner, C., Hutter, F., and Nardi, L. (2022). Joint entropy search for maximally-informed bayesian optimization. *Advances in Neural Information Processing Systems*, 35:11494–11506.
- [Kandasamy et al., 2018] Kandasamy, K., Krishnamurthy, A., Schneider, J., and Póczos, B. (2018). Parallelised bayesian optimisation via thompson sampling. In *International Conference on Artificial Intelligence and Statistics*, pages 133–142. PMLR.
- [Kaufmann et al., 2012] Kaufmann, E., Cappé, O., and Garivier, A. (2012). On bayesian upper confidence bounds for bandit problems. In *Artificial intelligence and statistics*, pages 592–600. PMLR.
- [Kirschner and Krause, 2018] Kirschner, J. and Krause, A. (2018). Information directed sampling and bandits with heteroscedastic noise. In *Conference On Learning Theory*, pages 358–384. PMLR.
- [Letham et al., 2019] Letham, B., Karrer, B., Ottoni, G., and Bakshy, E. (2019). Constrained bayesian optimization with noisy experiments.
- [Ma et al., 2023] Ma, H., Zhang, T., Wu, Y., Calmon, F. P., and Li, N. (2023). Gaussian max-value entropy search for multi-agent bayesian optimization. *arXiv preprint arXiv:2303.05694*.
- [Nava et al., 2022] Nava, E., Mutný, M., and Krause, A. (2022). Diversified Sampling for Batched Bayesian Optimization with Determinantal Point Processes. *arXiv:2110.11665 [cs, stat]*.
- [Russo and Van Roy, 2014] Russo, D. and Van Roy, B. (2014). Learning to optimize via information-directed sampling. *Advances in Neural Information Processing Systems*, 27.
- [Shah and Ghahramani, 2015] Shah, A. and Ghahramani, Z. (2015). Parallel predictive entropy search for batch global optimization of expensive objective functions. *Advances in neural information processing systems*, 28.
- [Srinivas et al., 2009] Srinivas, N., Krause, A., Kakade, S. M., and Seeger, M. (2009). Gaussian process optimization in the bandit setting: No regret and experimental design. *arXiv preprint arXiv:0912.3995*.

- [Takeno et al., 2020] Takeno, S., Fukuoka, H., Tsukada, Y., Koyama, T., Shiga, M., Takeuchi, I., and Karasuyama, M. (2020). Multi-fidelity bayesian optimization with max-value entropy search and its parallelization. In *International Conference on Machine Learning*, pages 9334–9345. PMLR.
- [Vakili et al., 2021] Vakili, S., Khezeli, K., and Picheny, V. (2021). On information gain and regret bounds in gaussian process bandits. In *International Conference on Artificial Intelligence and Statistics*, pages 82–90. PMLR.
- [Verma et al., 2022] Verma, A., Dai, Z., and Low, B. K. H. (2022). Bayesian optimization under stochastic delayed feedback. In *International Conference on Machine Learning*, pages 22145–22167. PMLR.
- [Vershynin, 2018] Vershynin, R. (2018). *High-dimensional probability: An introduction with applications in data science*, volume 47. Cambridge university press.
- [Wang and Jegelka, 2017] Wang, Z. and Jegelka, S. (2017). Max-value entropy search for efficient bayesian optimization. In *International Conference on Machine Learning*, pages 3627–3635. PMLR.
- [Wang et al., 2016] Wang, Z., Zhou, B., and Jegelka, S. (2016). Optimization as estimation with gaussian processes in bandit settings. In *Artificial Intelligence and Statistics*, pages 1022–1031. PMLR.
- [Zhan and Xing, 2020] Zhan, D. and Xing, H. (2020). Expected improvement for expensive optimization: a review. *Journal of Global Optimization*, 78(3):507–544.

# Appendix

## 8.1 Facts from information theory

We have the following result (Lemma 5.3 in [Srinivas et al., 2009]), which states that the information gain for any set of selected points can be expressed in terms of predictive variances.

**Lemma 8.** *For any positive integer  $t$ , denoting  $\mathbf{f}_t$  as  $\{f(x_i)\}_{i=1}^t$ , we have*

$$I(\mathbf{y}_t; \mathbf{f}_t) = \frac{1}{2} \sum_{i=1}^t \log(1 + \sigma_n^{-2} \sigma_{t-1}^2(x_t))$$

## 8.2 Concentration results for $Sum_1$ and $Sum_2$

In this section, we seek to bound  $Sum_1$  and  $Sum_2$  using martingale concentration inequalities. We first provide a (standard) martingale concentration inequality for subGaussian martingales.

**Lemma 9** (Azuma-Hoeffding [Vershynin, 2018]). *Let  $\mathcal{F}_i$  be a sequence of filtrations, and suppose  $X_{i+1}$  is a sequence of random variables that is adapted to  $\mathcal{F}_i$ , such that  $\mathbb{E}[X_{i+1} | \mathcal{F}_i] = 0$ , and  $X_{i+1} | \mathcal{F}_i$  is  $c_i^2$ -subGaussian, i.e.*

$$\mathbb{E}[\exp(\lambda X_{i+1}) | \mathcal{F}_i] \leq \exp(\lambda^2 c_i^2 / 2) \forall \lambda > 0.$$

Suppose  $c_i \leq c$  for all  $i$ . Then,

$$P\left(\sum_{i=1}^n X_i \geq t\right) \leq \exp\left(-\frac{t^2}{2nc^2}\right).$$

In particular, with probability at least  $1 - \delta$ ,

$$\sum_{i=1}^n X_i \leq c\sqrt{2n \log(1/\delta)}.$$

We next provide a martingale concentration inequality result for the term  $Sum_1$ , which takes the form  $Sum_1 = \sum_{t=0}^{T-1} \sum_{i=1}^m f^* - \tilde{f}_{t,i}^*$ .

**Lemma 10** (Bound for  $Sum_1$ ). *Let  $\tilde{f}_{t,i}^*$  denote an iid sample from  $f^* | \mathcal{F}_t$ . Then, for any  $\delta > 0$ , with probability at least  $1 - \delta$ , we have*

$$\sum_{t=0}^{T-1} \sum_{i=1}^m f^* - \tilde{f}_{t,i}^* \leq 2\sqrt{Tm \log(D/\delta)}.$$

*Proof.* To bound this sum, we use a proxy sequence,  $\{x_{t,i}^{bucb}\}$ , where

We focus first on an arbitrary  $x \in \mathcal{X}$ , and try to bound

$$\sum_{t=0}^{T-1} \sum_{i=1}^m f(x) - \tilde{f}_{t,i}^*.$$

Then, we observe that we have the following:

$$\sum_{t=0}^{T-1} \sum_{i=1}^m f(x) - \tilde{f}_{t,i}^*$$

$$\begin{aligned}
&= \sum_{t=0}^{T-1} \sum_{i=1}^m f(x) - \tilde{f}_{t,i}(x) + \tilde{f}_{t,i}(x) - \tilde{f}_{t,i}^* \\
&\leq \sum_{t=0}^{T-1} \sum_{i=1}^m f(x) - \tilde{f}_{t,i}(x),
\end{aligned}$$

where we note that the inequality follows since  $\tilde{f}_{t,i}(x)$  denotes the random draw of  $x$  at the same time when  $\tilde{f}_{t,i}^*$  was sampled, such that  $\tilde{f}_{t,i}(x) \leq \tilde{f}_{t,i}^*$  has to hold. We proceed to bound  $\sum_{t=0}^{T-1} \sum_{i=1}^m f(x) - \tilde{f}_{t,i}(x)$ . Observe that

$$\left(f(x) - \tilde{f}_{t,i}(x) \mid \mathcal{F}_t\right) \sim N(0, 2\sigma_{t,i}^2(x)).$$

i.e.  $\{Z_{t,i}(x)\}_{t=0}^{T-1}$  is a centered,  $2\sigma_t^2(x)$  Gaussian martingale, where

$$Z_{t,i}(x) := \left(f(x) - \tilde{f}_{t,i}(x) \mid \mathcal{F}_t\right).$$

Thus, by applying Azuma-Hoeffding (Lemma 9), we have that with probability at least  $1 - \delta$ ,

$$\sum_{t=0}^{T-1} \sum_{i=1}^m f(x) - \tilde{f}_{t,i}^* \leq 2\sqrt{Tm \log(D/\delta)}.$$

The result then follows by observing that  $f(x^*) - \tilde{f}_{t,i}(x^*)$  is a centered,  $2\sigma_t^2(x^*)$  subGaussian martingale, the fact that  $\sigma_t^2(x^*) \leq 1$ , and applying Lemma 9 to the sum

$$\sum_{t=0}^{T-1} \sum_{i=1}^m f(x^*) - \tilde{f}_{t,i}(x^*).$$

□

We next bound  $Sum_2$ .

**Lemma 11.** *Let  $\tilde{f}_{t,i}$  denotes a random sample from  $f(x_{t+1,i}^{\text{TS-RSR}}) \mid \mathcal{F}_t$ . Then, with probability at least  $1 - 2\delta$ , we have*

$$\begin{aligned}
Sum_2 &= \sum_{t=0}^{T-1} \sum_{i=1}^m (\mu_t(x_{t+1,i}^{\text{TS-RSR}}) - f(x_{t+1,i}^{\text{TS-RSR}})) \\
&= \underbrace{\sum_{t=0}^{T-1} \sum_{i=1}^m (\mu_t(x_{t+1,i}^{\text{TS-RSR}}) - \tilde{f}_{t,i}(x_{t+1,i}^{\text{TS-RSR}}))}_{Sum_{2,1}} \\
&\quad + \underbrace{\sum_{t=0}^{T-1} \sum_{i=1}^m (\tilde{f}_{t,i}(x_{t+1,i}^{\text{TS-RSR}}) - f(x_{t+1,i}^{\text{TS-RSR}}))}_{Sum_{2,2}} \\
&\leq 4\sqrt{Tm \log(1/\delta)}
\end{aligned}$$

*Proof.* The result follows from applying Lemma 9 to each of  $Sum_{2,1}$  and  $Sum_{2,2}$ . □

We next bound  $\mathbb{E} \left[ \tilde{R}_{T,m}^2 \right]$ , where we recall that  $\tilde{R}_{T,m} := \sum_{t=0}^{T-1} \sum_{i=1}^m \tilde{f}_{t,i}^* - f(x_{t,i}^{\text{TS-RSR}})$ .

**Lemma 12.** Suppose that  $D \geq 2$  (where  $D$  is the size of  $\mathcal{X}$ ), and that  $k(x, x) \leq 1$  for any  $x \in \mathcal{X}$ . Then, for any  $t \in [T]$  and  $i \in [m]$ , we have

$$\mathbb{E}[(\tilde{f}_{t,i}^* - f(x_{t,i}^{\text{TS-RSR}}))^2] \leq 24 \log D,$$

which implies then that

$$\begin{aligned} \mathbb{E} \left[ \tilde{R}_{T,m}^2 \right] &= \mathbb{E} \left[ \left( \sum_{t=0}^{T-1} \sum_{i=1}^m \tilde{f}_{t,i}^* - f(x_{t,i}^{\text{TS-RSR}}) \right)^2 \right] \\ &\leq (Tm)^2 \sum_{t=0}^{T-1} \sum_{i=1}^m \mathbb{E}[(\tilde{f}_{t,i}^* - f(x_{t,i}^{\text{TS-RSR}}))^2] \\ &\leq 24 \log D (Tm)^3 \end{aligned}$$

*Proof.* We observe that for any  $t \in [T]$  and  $i \in [m]$ ,

$$\begin{aligned} \mathbb{E}[(\tilde{f}_{t,i}^* - f(x_{t,i}^{\text{TS-RSR}}))^2] &\leq 2\mathbb{E}[(\tilde{f}_{t,i}^*)^2] + 2\mathbb{E}[(f(x_{t,i}^{\text{TS-RSR}}))^2] \\ &\stackrel{(i)}{=} 2\mathbb{E} \left[ \mathbb{E}[(\tilde{f}_{t,i}^*)^2 \mid \mathcal{F}_t] \right] + 2\mathbb{E}[(f(x_{t,i}^{\text{TS-RSR}}))^2] \\ &\stackrel{(ii)}{=} 2\mathbb{E} \left[ \mathbb{E}[(f^*)^2 \mid \mathcal{F}_t] \right] + 2\mathbb{E}[(f(x_{t,i}^{\text{TS-RSR}}))^2] \\ &\stackrel{(iii)}{=} 2\mathbb{E}[(f^*)^2] + 2\mathbb{E}[(f(x_{t,i}^{\text{TS-RSR}}))^2] \\ &\stackrel{(iv)}{\leq} 24 \log D \end{aligned} \tag{17}$$

Above, we used the tower property of conditional expectation in (equation i), and in (equation ii), we used the fact that  $f^* \mid \mathcal{F}_t$  has the same distribution as  $\tilde{f}_{t,i}^* \mid \mathcal{F}_t$ , which implies also that  $(f^*)^2 \mid \mathcal{F}_t$  has the same distribution as  $(\tilde{f}_{t,i}^*)^2 \mid \mathcal{F}_t$ . The equation (iii) follows again from the tower property, while to derive (iv), we used Lemma 13, which we will prove later.

The final bound on  $\mathbb{E} \left[ \tilde{R}_{T,m}^2 \right]$  then follows from Cauchy-Schwarz and applying equation 17.  $\square$

We introduce the following technical lemma, which gives us a helpful bound relating to a (discrete) Gaussian Process with  $D$  elements.

**Lemma 13.** Consider a  $D$ -dimensional Gaussian,  $\mathbf{Y} \sim N(0, \Sigma)$ , where  $\Sigma \succ \mathbf{0}_{D \times D}$ . Suppose that  $D \geq 2$ , and that for each  $j \in [D]$ , we have  $\sigma_j^2 \leq 1$ , where  $\sigma_j^2 := \Sigma_{j,j}$ . Then,

$$\mathbb{E} \left[ \max_{j \in [D]} (\mathbf{Y}_j)^2 \right] \leq 6 \log D.$$

*Proof.* First, observe that for each  $i \in [D]$ , applying the standard formula for the moment-generating-function (MGF) of a chi-squared random variable, we have  $\mathbb{E} \left[ \exp(\lambda \mathbf{Y}_i^2) \right] = \frac{1}{\sqrt{1-2\lambda\sigma_i^2}}$  whenever  $\lambda \leq \frac{1}{2\sigma_i^2}$ . Since  $\sigma_i^2 \leq 1$ , for any  $\lambda < \frac{1}{2}$ , we have  $\mathbb{E} \left[ \exp(\lambda \mathbf{Y}_i^2) \right] = \frac{1}{\sqrt{1-2\lambda\sigma_i^2}} \leq \frac{1}{\sqrt{1-2\lambda}}$ . Now, for any  $\lambda < 1/2$ , observe that

$$\exp \left( \lambda \mathbb{E} \left[ \max_{i \in [D]} (\mathbf{Y}_i)^2 \right] \right) \stackrel{(v)}{\leq} \mathbb{E} \left[ \exp(\lambda \max_{i \in [D]} (\mathbf{Y}_i)^2) \right]$$

$$\begin{aligned}
&= \mathbb{E} \left[ \max_{i \in [D]} \exp(\lambda(\mathbf{Y}_i)^2) \right] \\
&\leq \mathbb{E} \left[ \sum_{i=1}^D \exp(\lambda(\mathbf{Y}_i)^2) \right] \\
&= \sum_{i=1}^D \mathbb{E} [\exp(\lambda(\mathbf{Y}_i)^2)] \\
&\leq \frac{D}{\sqrt{1-2\lambda}}
\end{aligned}$$

Above, to derive (v) we used Jensen's equality. Taking log on both sides and dividing by  $\lambda$ , we find that

$$\mathbb{E} \left[ \max_{i \in [D]} \mathbf{Y}_i^2 \right] \leq \frac{\log(D) - \frac{1}{2} \log(1-2\lambda)}{\lambda}.$$

Setting  $\lambda = \frac{1}{4}$  (which is less than  $\frac{1}{2}$ ), we then find that

$$\mathbb{E} \left[ \max_{i \in [D]} \mathbf{Y}_i^2 \right] \leq 4 \left( \log(D) + \frac{1}{2} \log(2) \right) \leq 6 \log D,$$

where the final inequality uses the assumption that  $D \geq 2$ . □