

A new class of solutions for the multi-component extended Harry Dym equation¹

Michal Marvan^a, Maxim V. Pavlov^{b,c,d}

^a*Mathematical Institute in Opava, Silesian university in Opava, Na Rybníčku 1, 746 01 Opava, Czech Republic*

^b*Novosibirsk State University, Pirogova street 2, 630090, Novosibirsk, Russia*

^c*Sector of Mathematical Physics, Lebedev Physical Institute of Russian Academy of Sciences, Leninskij Prospekt 53, 119991 Moscow, Russia*

^d*Department of Applied Mathematics, National Research Nuclear University MEPhI, Kashirskoe Shosse 31, 115409 Moscow, Russia*

Abstract

We construct a point transformation between two integrable systems, the multi-component Harry Dym equation and the multi-component extended Harry Dym equation, that does not preserve the class of multi-phase solutions. As a consequence we obtain a new type of wave-like solutions, generalising the multi-phase solutions of the multi-component extended Harry Dym equation. Our construction is easily transferable to other integrable systems with analogous properties.

Keywords: Harry Dym, invertible transformation, high-frequency limit, multi-phase solutions, Lax pair

2010 MSC: 35Q51, 37J35, 37K10, 37K40

PACS: 02.30.Ik, 02.30.Jr

1. Introduction

In a number of papers [2, 3, 4], integrable systems associated with the energy-dependent linear Schrödinger equation

$$\left(\sum_{m=0}^M \epsilon_m \lambda^m \right) \psi_{xx} = \left(\sum_{m=0}^M v_m \lambda^m \right) \psi$$

were investigated in details. In these papers, two main classes were selected by the conditions $\epsilon_M = 0$, $v_M = 1$ (the so called “multi-component KdV systems”) and $\epsilon_M = 0$, $v_0 = 1$ (the so called “multi-component extended Harry Dym systems” or “multi-component Camassa–Holm systems”). In the present paper we consider another class determined by a sole restriction $v_M = 0$ (the so called “multi-component Harry Dym systems” (13) or “multi-component Hunter–Saxton equations”). We show that the multi-component Harry Dym equations are connected with the multi-component extended Harry Dym equations by the κ -transformation introduced below, see (15). The method presented here is applicable to any solutions. Without loss of generality and for simplicity we restrict our consideration to multi-phase solutions only. Applying the κ -transformation to the multi-phase solutions of multi-component Harry Dym systems we obtain a new class of solutions of multi-component extended Harry Dym systems,

¹Dedicated to the 80th birthday of A.B. Shabat

which we call the κ -deformed multi-phase solutions. This new class of solutions cannot be obtained as a reduction of multi-phase solutions. Whilst multi-phase solutions belong to the so called “solitonic sector” (i.e., the case of reflectionless potentials), the new class of solutions (the κ -deformed multi-phase solutions) has a rapidly increasing behaviour with respect to x .

Example 1. The extended Harry Dym equation (κ is an arbitrary constant, $\kappa \neq 0$)

$$v_t = -\frac{1}{2}(\partial_x^2 - \kappa^2)(v^{-1/2})_x$$

possesses the one-phase solution (c is an arbitrary constant)

$$v = \frac{1}{c^2 r^2},$$

where r is a function of $\theta = x + ct$ determined implicitly by (s_0, s_1 are arbitrary constants)

$$\theta = \int^r \frac{\sqrt{\lambda} d\lambda}{\sqrt{4c^{-2} + s_1\lambda + s_0\lambda^2 + \kappa^2\lambda^3}};$$

and simultaneously the κ -deformed one-phase solution

$$v = \frac{e^{2\kappa x}}{c^2 R^2},$$

where the function $R(\vartheta)$ is determined implicitly by

$$\frac{e^{\kappa x} - 1}{\kappa} + ct = \vartheta = \int^R \frac{\sqrt{\lambda} d\lambda}{\sqrt{4c^{-2} + s_1\lambda + s_0\lambda^2}}.$$

These solutions are significantly different: the first solution is essentially one-dimensional (see Figure 1) and is obtained by a regular procedure (one can look for a travelling wave reduction determined by the ansatz $v(\theta)$, where $\theta = x + ct$), while the second solution is two-dimensional (see Figure 2) and is obtained (see below) by means of an invertible point transformation between the extended Harry Dym equation and its high-frequency limit ($\kappa = 0$), which is the well-known Harry Dym equation.

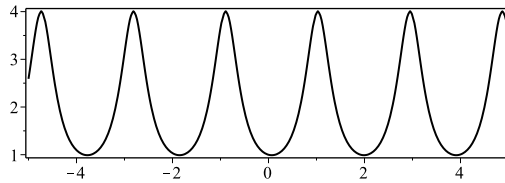


Figure 1: The unit-speed ($c = 1$) travelling wave $v(\theta)$ for $s_1 = 12$, $s_0 = 8$, $\kappa = 0.14$

Many integrable systems have such an invertible point transformation that connects them with their high-frequency limits. So, once a one-phase (or a multi-phase) solution is found, one can construct the so-called κ -deformed solution following our approach.

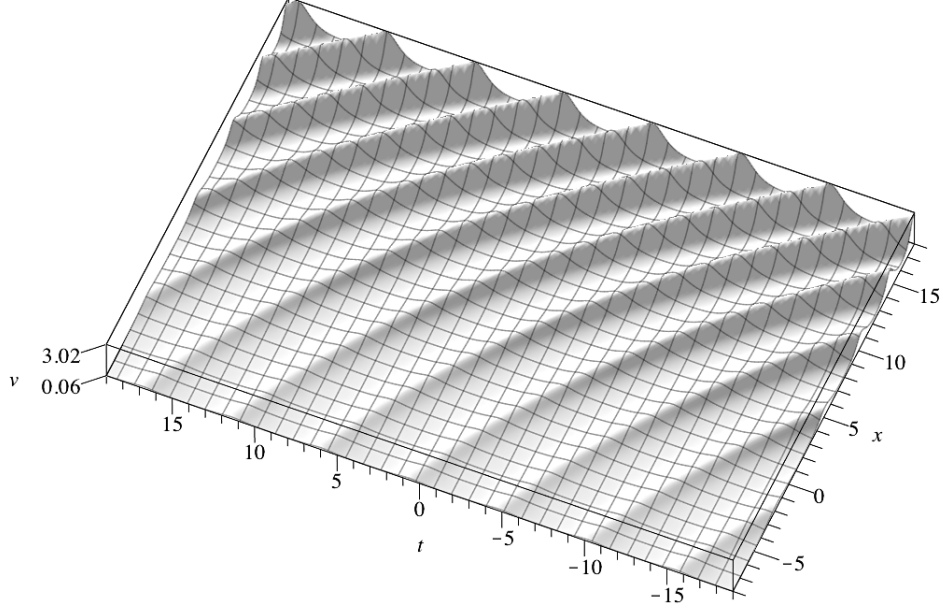


Figure 2: The κ -deformed one-phase solution $v(t, x)$ for $c = \sqrt{2}$, $s_1 = 3$, $s_0 = 1$, $\kappa = 0.05$

Moreover, in the particular case

$$4c^{-2} + s_1\lambda + s_0\lambda^2 = s_0(\lambda - \lambda_1)^2,$$

the second solution can be found in elementary functions, i.e.

$$\frac{e^{\kappa x} - 1}{\kappa} + ct = \vartheta = \frac{1}{\sqrt{s_0}} \int \frac{\sqrt{\lambda} d\lambda}{\lambda - \lambda_1} = \frac{1}{\sqrt{s_0}} \left(2\sqrt{R} - 2\sqrt{\lambda_1} \operatorname{arctanh} \sqrt{\frac{R}{\lambda_1}} \right).$$

In another particular case

$$4c^{-2} + s_1\lambda + s_0\lambda^2 + \kappa^2\lambda^3 = \kappa^2(\lambda - \lambda_2)(\lambda - \lambda_3)^2,$$

the first solution can be found in elementary functions, i.e.

$$\begin{aligned} \theta &= \frac{1}{\kappa} \int \frac{\sqrt{\lambda} d\lambda}{(\lambda - \lambda_3)\sqrt{\lambda - \lambda_2}} \\ &= \frac{1}{\kappa} \left(\ln\left(r - \frac{1}{2}\lambda_2 + \sqrt{r}\sqrt{r - \lambda_2}\right) \right. \\ &\quad \left. - \frac{\sqrt{\lambda_3}}{\sqrt{\lambda_3 - \lambda_2}} \ln\left(\frac{2r\lambda_3 - \lambda_2(r + \lambda_3) + 2\sqrt{\lambda_3}\sqrt{\lambda_3 - \lambda_2}\sqrt{r}\sqrt{r - \lambda_2}}{r - \lambda_3}\right) \right). \end{aligned}$$

Thus, both types of solutions have completely different behaviour.

In this paper we restrict our consideration to the simplest integrable system whose multi-phase solutions are associated with hyperelliptic Riemann surfaces: the multi-component extended Harry Dym equation.

2. A Special Class of Integrable Systems

The energy dependent linear Schrödinger equation

$$\psi_{xx} = U\psi \quad (1)$$

was recently [8] investigated for the special case (with respect to the spectral parameter λ)

$$U(x, t, \lambda) = \sigma + \frac{u^1}{\lambda} + \frac{u^2}{\lambda^2} + \frac{u^3}{\lambda^3} + \dots, \quad (2)$$

where σ is an arbitrary constant. If $\sigma \neq 0$, then the parameter σ can be fixed to 1 by an appropriate scaling of independent variables and dependent functions without loss of generality.

Integrable systems associated with (1) can be obtained from the compatibility condition $(\psi_t)_{xx} = (\psi_{xx})_t$, where

$$\psi_t = a\psi_x - \frac{1}{2}a_x\psi. \quad (3)$$

The compatibility condition $(\psi_t)_{xx} = (\psi_{xx})_t$ yields the relationship

$$U_t = \left(-\frac{1}{2}\partial_x^3 + 2U\partial_x + U_x\right) a,$$

which leads to the dispersive integrable chain (ξ is an integration constant)

$$u_t^k = u_x^{k+1} + a^1 u_x^k + 2u^k a_x^1, \quad k = 1, 2, \dots, \quad u^1 + \xi = \frac{1}{2}a_{1,xx} - 2\sigma a_1, \quad (4)$$

where $a = \lambda + a^1$ and the function U is determined by (2). This dispersive integrable chain can be reduced to M -component integrable dispersive systems by simple reductions $u^{M+1} = 0$ for any natural number M . This means that one should consider the linear problem (1), (3), where

$$U(x, t, \lambda) = \sigma + \frac{u^1}{\lambda} + \frac{u^2}{\lambda^2} + \dots + \frac{u^M}{\lambda^M} \quad (5)$$

instead of (2). If $M = 1$, one obtains the remarkable Camassa–Holm equation

$$u_t^1 = a_1 u_x^1 + 2u^1 a_{1,x}, \quad u^1 + \xi = \frac{1}{2}a_{1,xx} - 2\sigma a_1,$$

if $M > 1$, the multi-component generalisation of the Camassa–Holm equation is

$$u_t^k = u_x^{k+1} + a^1 u_x^k + 2u^k a_x^1, \quad k = 1, 2, \dots, M-1, \quad u_t^M = a^1 u_x^M + 2u^M a_x^1, \quad (6)$$

where again $u^1 + \xi = \frac{1}{2}a_{1,xx} - 2\sigma a_1$.

Below we also investigate the special case $\sigma = 0$ and discuss the relationship between integrable systems determined by both choices $\sigma = 0$ and $\sigma \neq 0$. The corresponding dispersive integrable chain reduces to the form (cf. (4))

$$u_t^k = u_x^{k+1} + a^1 u_x^k + 2u^k a_x^1, \quad k = 1, 2, \dots, \quad u^1 + \xi = \frac{1}{2}a_{1,xx}. \quad (7)$$

So, the main difference between (4) and (7) is a difference between the constraints $u^1 + \xi = \frac{1}{2}a_{1,xx} - 2\sigma a_1$ and $u^1 + \xi = \frac{1}{2}a_{1,xx}$. Again if $M = 1$, one can obtain the Hunter–Saxton equation

$$u_t^1 = a_1 u_x^1 + 2u^1 a_{1,x}, \quad u^1 + \xi = \frac{1}{2}a_{1,xx},$$

which is a high frequency limit of the Camassa–Holm equation (see detail in [7]). If $M > 1$, the multi-component generalisation of the Hunter–Saxton equation is (cf. (6))

$$\begin{aligned} u_t^k &= u_x^{k+1} + a^1 u_x^k + 2u^k a_x^1, \quad k = 1, 2, \dots, M-1, \\ u_t^M &= a^1 u_x^M + 2u^M a_x^1, \end{aligned}$$

where again $u^1 + \xi = \frac{1}{2}a_{1,xx}$. If instead of the choice $a = \lambda + a_1$ we consider the dependence $a = a_{-1}/\lambda$, then

$$\begin{aligned} u_t^1 &= -\frac{1}{2}(a_{-1})_{xxx}, \\ u_t^k &= a_{-1} u_x^{k-1} + 2u^{k-1}(a_{-1})_x, \quad k = 2, \dots, M, \\ a_{-1} &= (u^M)^{-1/2}. \end{aligned} \tag{8}$$

If $M = 1$, then this is well-known Harry Dym equation; if $M > 1$, then this system (8) will be called the multi-component Harry Dym equation.

Below we show that integrable systems (8) associated with the energy dependent linear Schrödinger equation (see (1) and (5) in the limit $\sigma = 0$)

$$\psi_{xx} = \left(\frac{u^1}{\lambda} + \frac{u^2}{\lambda^2} + \dots + \frac{u^M}{\lambda^M} \right) \psi \tag{9}$$

can be interpreted as a high frequency limit of the so called multi-component extended Harry Dym equation (see detail below).

Indeed, one can consider the linear spectral problem (9) written in the form

$$\psi_{zz} = \left(\frac{u^1}{\lambda} + \frac{u^2}{\lambda^2} + \dots + \frac{u^M}{\lambda^M} \right) \psi. \tag{10}$$

Then we apply the point transformation

$$z = \frac{e^{\kappa x} - 1}{\kappa}, \tag{11}$$

where κ is an arbitrary parameter. Then $\partial_z \rightarrow e^{-\kappa x} \partial_x$. If $\kappa \rightarrow 0$, then $z(x, \kappa) \rightarrow x$.

Under transformation (11) the linear spectral problem (10) becomes (see (1) and (2))

$$\varphi_{xx} = \left(\sigma + \frac{v^1}{\lambda} + \frac{v^2}{\lambda^2} + \dots + \frac{v^M}{\lambda^M} \right) \varphi, \tag{12}$$

where $\sigma = \kappa^2/4$, $v^k = u^k e^{2\kappa x}$ and $\psi = \varphi \exp(\kappa x/2)$. The high frequency limit $\kappa \rightarrow 0$ reduces the above linear problem to (9). We illustrate this property for the multi-component extended Harry Dym equation

$$\begin{aligned} v_t^1 &= -\frac{1}{2}(\partial_x^3 - \kappa^2 \partial_x) \tilde{a}_{-1}, \\ v_t^k &= \tilde{a}_{-1} v_x^{k-1} + 2v^{k-1}(\tilde{a}_{-1})_x, \quad k = 2, \dots, M, \\ \tilde{a}_{-1} &= (v^M)^{-1/2}. \end{aligned} \tag{13}$$

This system follows from the compatibility condition $(\varphi_t)_{xx} = (\varphi_{xx})_t$, where the function φ is a common solution of two linear equations, i.e. (12) and (cf. (3))

$$\varphi_t = \frac{1}{\lambda} \left(\tilde{a}_{-1} \varphi_x - \frac{1}{2} (\tilde{a}_{-1})_x \varphi \right).$$

The high frequency limit $\kappa \rightarrow 0$ leads to the system (8). Now we apply point transformation (11) to system (8) written in the form (here we simply replaced x by z)

$$\begin{aligned} u_t^1 &= -\frac{1}{2}(a_{-1})_{zzz}, \\ u_t^k &= a_{-1} u_z^{k-1} + 2u^{k-1}(a_{-1})_z, \quad k = 2, \dots, M, \\ a_{-1} &= (u^M)^{-1/2} \end{aligned} \tag{14}$$

Then we again obtain system (13), where $a_{-1} = \tilde{a}_{-1} e^{\kappa x}$, $v^k = u^k e^{2\kappa x}$. Thus integrable systems (13) and (14) are connected with each other by the point transformation

$$z = \frac{e^{\kappa x} - 1}{\kappa}, \quad u^k = e^{-2\kappa x} v^k \tag{15}$$

and simultaneously system (8) \equiv (14) is a high frequency limit of system (13).

3. Multi-Phase Solutions and a High Frequency Limit

To illustrate a difference between the general case $\kappa \neq 0$ and its high-frequency limit $\kappa = 0$, in this section we consider multi-gap solutions of the multi-component extended Harry Dym equation

$$v_t^1 = -\frac{1}{2}(\partial_x^3 - \kappa^2 \partial_x) \tilde{a}_{-1}, \quad v_t^k = \tilde{a}_{-1} v_x^{k-1} + 2v^{k-1}(\tilde{a}_{-1})_x, \quad k = 2, \dots, M, \tag{16}$$

where $\tilde{a}_{-1} = (v^M)^{-1/2}$.

In this case linear problem (1), (3) reduces to the form

$$\lambda^M (2\phi \phi_{xx} - \phi_x^2) = \left(\kappa^2 \lambda^M + 4 \sum_{m=1}^M v_m \lambda^{M-m} \right) \phi^2 - S(\lambda), \quad \phi_t = a \phi_x - a_x \phi, \tag{17}$$

where $\phi = \psi \psi^+$ (here ψ and ψ^+ are two linearly independent solutions), $a = \tilde{a}_{-1}/\lambda$ and $S(\lambda)$ is a polynomial expression with constant coefficients.

As usual, finite-gap solutions connected with hyperelliptic Riemann surfaces can be constructed in several steps:

1. We seek polynomial solutions (with respect to the spectral parameter λ) for the function ϕ in the factorised form

$$\phi = \prod_{m=1}^N (\lambda - r^m(x, t)), \tag{18}$$

where N is an arbitrary natural number.

2. Since function ϕ is a polynomial of the degree N , the dependence $S(\lambda)$ is a polynomial of the degree $2N + M$, i.e.

$$S(\lambda) = s_{2N+M-1} + s_{2N+M-2}\lambda + \dots + s_1\lambda^{2N+M-2} + s_0\lambda^{2N+M-1} + s_{-1}\lambda^{2N+M}, \quad (19)$$

where $s_{-1} = \kappa^2$, while other s_k are ‘‘integration constants’’.

3. Expanding ϕ by virtue of (18) in the first equation of (17) with respect to the spectral parameter λ , one can find expressions for field variables v_k . Indeed, substituting (18) into (17), one obtains

$$v^k = \frac{1}{4} \sum_{m=0}^{M-k} \frac{s_{2N+k-1+m} B_m}{\left(\prod_{n=1}^N r^n\right)^{m+2}}, \quad k = 1, \dots, M, \quad (20)$$

where

$$B_0 = 1, \quad B_k = \sum_{\substack{k_1 \geq 0, \dots, k_N \geq 0 \\ k_1 + \dots + k_N = k}} \prod_{m=1}^N (k_m + 1) (r^m)^{k - k_m}. \quad (21)$$

4. Following B.A. Dubrovin [5, 6], we consider the limit $\lambda \rightarrow r^i(x, t)$ of the two equations (17). This straightforward computation yields two autonomous systems

$$r_x^i = \frac{1}{\prod_{m \neq i} (r^i - r^m)} \sqrt{\frac{S(r^i)}{(r^i)^M}}, \quad r_t^i = \frac{a^i(\mathbf{r})}{\prod_{m \neq i} (r^i - r^m)} \sqrt{\frac{S(r^i)}{(r^i)^M}}, \quad (22)$$

where $a^i(\mathbf{r}) = a(\lambda, \mathbf{r})|_{\lambda=r^i}$. In our case (see (20), $k = M$)

$$a^i(\lambda, \mathbf{r}) = \frac{\tilde{a}_{-1}}{r^i} = \frac{(v^M)^{-1/2}}{r^i} = \frac{2 \prod_{m=1}^N r^m}{r^i \sqrt{s_{2N+M-1}}}.$$

5. A straightforward integration of (22) implies multi-phase solutions of (13) written in the implicit form²

$$x = \sum_{m=1}^N \int \frac{r^m \lambda^{M/2+N-1} d\lambda}{\sqrt{S(\lambda)}}, \quad t = \frac{\sqrt{s_{2N+M-1}}}{2} \sum_{m=1}^N \int \frac{r^m \lambda^{M/2} d\lambda}{\sqrt{S(\lambda)}}, \quad (23)$$

$$0 = \sum_{m=1}^N \int \frac{r^m \lambda^{M/2+k} d\lambda}{\sqrt{S(\lambda)}}, \quad k = 1, \dots, N-2.$$

Remark: If $N = 1$, then a one-phase solution is parameterised by a single function $r(\theta)$. Namely,

$$v_k = \frac{1}{4} \sum_{m=1}^{M-k+1} m s_{m+k} r^{-m-1},$$

where the function $r(\theta)$ is determined by the relationship (here $s_{M+1} = 4c^{-2}$)

$$x + ct = \theta = \int \frac{\lambda^{M/2} d\lambda}{\sqrt{s_{M+1} + s_M \lambda + \dots + s_1 \lambda^M + s_0 \lambda^{M+1} + \kappa^2 \lambda^{M+2}}}.$$

²Explicit formulae for more wide class of integrable systems, whose multi-phase solutions are associated with hyperelliptic Riemann surfaces, were obtained in [1]

3.1. Finite-Gap Solutions and κ -Transformation

Now we can compare finite-gap solutions for both cases $\kappa = 0$ and $\kappa \neq 0$. So in the case $\kappa = 0$ we have for system (14) multi-phase solutions (cf. (20) and (21))

$$u^k = \frac{1}{4} \sum_{m=0}^{M-k} \frac{s_{2N+k-1+m} \tilde{B}_m}{\left(\prod_{n=1}^N R^n\right)^{m+2}}, \quad k = 1, \dots, M,$$

where

$$\tilde{B}_0 = 1, \quad \tilde{B}_k = \sum_{\substack{k_1 \geq 0, \dots, k_N \geq 0 \\ k_1 + \dots + k_N = k}} \prod_{m=1}^N (k_m + 1) (R^m)^{k - k_m}.$$

The dependencies $R^k(z, t)$ are presented in implicit form (cf. (23))

$$\begin{aligned} z &= \sum_{m=1}^N \int \frac{\lambda^{M/2+N-1} d\lambda}{\sqrt{P(\lambda)}}, \quad t = \frac{\sqrt{s_{2N+M-1}}}{2} \sum_{m=1}^N \int \frac{\lambda^{M/2} d\lambda}{\sqrt{P(\lambda)}}, \\ 0 &= \sum_{m=1}^N \int \frac{\lambda^{M/2+k} d\lambda}{\sqrt{P(\lambda)}}, \quad k = 1, \dots, N-2, \end{aligned} \quad (24)$$

where (cf. (19))

$$P(\lambda) = s_{2N+M-1} + s_{2N+M-2}\lambda + \dots + s_1 \lambda^{2N+M-2} + s_0 \lambda^{2N+M-1}.$$

Under transformation (11) system (14) becomes (13), while multi-phase solutions of system (14) take the form (we remind the reader that $v^k = u^k e^{2\kappa x}$)

$$v^k = \frac{1}{4} e^{2\kappa x} \sum_{m=0}^{M-k} \frac{s_{2N+k-1+m} \tilde{B}_m}{\left(\prod_{n=1}^N R^n\right)^{m+2}}, \quad k = 1, \dots, M,$$

where the dependencies $R^k(x, t)$ are presented in implicit form (cf. (23), (24))

$$\begin{aligned} \frac{e^{\kappa x} - 1}{\kappa} &= \sum_{m=1}^N \int \frac{\lambda^{M/2+N-1} d\lambda}{\sqrt{P(\lambda)}}, \quad t = \frac{\sqrt{s_{2N+M-1}}}{2} \sum_{m=1}^N \int \frac{\lambda^{M/2} d\lambda}{\sqrt{P(\lambda)}}, \\ 0 &= \sum_{m=1}^N \int \frac{\lambda^{M/2+k} d\lambda}{\sqrt{P(\lambda)}}, \quad k = 1, \dots, N-2. \end{aligned}$$

Thus, we found a new type of solutions of multi-component Harry Dym equation (13), which do not coincide with the corresponding multi-phase solutions (23).

3.2. The One-Phase Solution

In the particular case $N = 1$, the multi-component extended Harry Dym equation (16) has the one-phase solution

$$v_k = \frac{1}{4} \sum_{m=1}^{M-k+1} m s_{m+k} r^{-m-1},$$

where the function $r(\theta)$ is determined by the relationship (here $s_{M+1} = 4c^{-2}$)

$$x + ct = \theta = \int^r \frac{\lambda^{M/2} d\lambda}{\sqrt{s_{M+1} + s_M \lambda + \cdots + s_1 \lambda^M + s_0 \lambda^{M+1} + \kappa^2 \lambda^{M+2}}};$$

and the κ -deformed one-phase solution

$$v_k = \frac{1}{4} e^{2\kappa x} \sum_{m=1}^{M-k+1} m s_{m+k} R^{-m-1},$$

where the function $R(\vartheta)$ is determined by the relationship (here $s_{M+1} = 4c^{-2}$)

$$\frac{e^{\kappa x} - 1}{\kappa} + ct = \vartheta = \int^R \frac{\lambda^{M/2} d\lambda}{\sqrt{s_{M+1} + s_M \lambda + \cdots + s_1 \lambda^M + s_0 \lambda^{M+1}}}.$$

3.3. The Extended Harry Dym Equation

Here we consider the particular case $M = 1$, i.e., the extended Harry Dym equation

$$v_t = -\frac{1}{2}(\partial_x^3 - \kappa^2 \partial_x)v^{-1/2}.$$

Its N -phase solutions are determined by³

$$v = \frac{s_{2N}}{4} \left(\prod_{n=1}^N r^n \right)^{-2},$$

where

$$\begin{aligned} x &= \sum_{m=1}^N \int^{r^m} \frac{\lambda^{N-1/2} d\lambda}{\sqrt{S(\lambda)}}, & t &= \frac{\sqrt{s_{2N}}}{2} \sum_{m=1}^N \int^{r^m} \frac{\lambda^{1/2} d\lambda}{\sqrt{S(\lambda)}}, \\ 0 &= \sum_{m=1}^N \int^{r^m} \frac{\lambda^{k+1/2} d\lambda}{\sqrt{S(\lambda)}}, & k &= 1, \dots, N-2, \end{aligned}$$

and

$$S(\lambda) = s_{2N} + s_{2N-1}\lambda + \cdots + s_1 \lambda^{2N-1} + s_0 \lambda^{2N} + \kappa^2 \lambda^{2N+1}.$$

A new class of solutions (κ -deformed N -phase solutions) is determined by

$$v = \frac{s_{2N}}{4} e^{2\kappa x} \left(\prod_{n=1}^N R^n \right)^{-2},$$

where

$$\begin{aligned} \frac{e^{\kappa x} - 1}{\kappa} &= \sum_{m=1}^N \int^{R^m} \frac{\lambda^{N-1/2} d\lambda}{\sqrt{P(\lambda)}}, & t &= \frac{\sqrt{s_{2N}}}{2} \sum_{m=1}^N \int^{R^m} \frac{\lambda^{1/2} d\lambda}{\sqrt{P(\lambda)}}, \\ 0 &= \sum_{m=1}^N \int^{R^m} \frac{\lambda^{k+1/2} d\lambda}{\sqrt{P(\lambda)}}, & k &= 1, \dots, N-2, \end{aligned}$$

and

$$P(\lambda) = s_{2N} + s_{2N-1}\lambda + \cdots + s_1 \lambda^{2N-1} + s_0 \lambda^{2N}.$$

The case $N = 1$ for the extended Harry Dym equation was considered in the Introduction.

³The simplest case $N = 1$ is presented in the Introduction.

4. Conclusion

Using the multi-component extended Harry Dym equation as an example, we studied integrable systems connected with their high-frequency limits ($\kappa = 0$) by an invertible point transformation and obtained a new class of their solutions. Applying transformation (11), the multi-phase solutions of the high-frequency limits could be recalculated into a new kind of solutions for the original systems. As a future perspective, one can apply the κ -transformation to, e.g., multi-peakon solutions of the Extended Harry Dym equation to obtain a new class of solutions for its high-frequency limit, well-known as the Hunter–Saxton equation (see again [7]), etc.

Acknowledgements

MM gratefully acknowledges the support from GAČR under project P201/12/G028. MVP’s work was partially supported by the grant of Presidium of RAS “Fundamental Problems of Nonlinear Dynamics” and by the RFBR grant 14-01-00012. MVP thanks V.E. Adler, L.V. Bogdanov, E.V. Ferapontov, V.G. Marikhin, A.I. Zenchuk for important discussions.

References

- [1] M.S. Alber, Yu.N. Fedorov, Algebraic geometrical solutions for certain evolution equations and Hamiltonian flows on nonlinear subvarieties of generalized Jacobians, *Inverse Problems* **17** (2001) 1–26.
- [2] M. Antonowicz, A. Fordy, A family of completely integrable multi-Hamiltonian systems, *Phys. Letts. A* **122** (1987) 95–99.
- [3] M. Antonowicz, A. Fordy, Coupled KdV equations with multi-Hamiltonian structures, *Physica* **28D** (1987) 345–57.
- [4] M. Antonowicz, A. Fordy, Coupled Harry Dym equations with multi-Hamiltonian structures, *J. Phys. A* **21** (1988) L269–75.
- [5] B.A. Dubrovin, Inverse problem for periodic finite-zoned potentials in the theory of scattering, *Funct. Anal. Appl.*, 9 No. 1 (1975) 61–62.
- [6] B.A. Dubrovin, Periodic problems for the Korteweg-de Vries equation in the class of finite band potentials, *Funct. Anal. Appl.* 9 No. 3 (1975) 215–223.
- [7] H.H. Dai, M.V. Pavlov, Transformations for the Camassa–Holm Equation, its high frequency limit and the sinh-Gordon equation, *Journal of the Physical Society of Japan* *Journal of the Physical Society of Japan* **67** No. 11 (1998) 3655–3657.

- [8] M.V. Pavlov, Integrable dispersive chains and energy dependent Schrödinger operator, J. Phys. A 47 (2014) 295204.