

How to use the resonant states for the pole expansion of the optical scattering matrix

T. Weiss*

*4th Physics Institute and Research Center SCoPE,
University of Stuttgart, Pfaffenwaldring 57, D-70550 Stuttgart, Germany*

E. A. Muljarov

*Cardiff University, School of Physics and Astronomy,
The Parade, CF24 3AA, Cardiff, United Kingdom*

(Dated: April 5, 2022)

We present a formulation for the pole expansion of the scattering matrix of open optical resonators that is not limited to certain geometries or systems with low Ohmic losses. The pole contributions are expressed completely in terms of the resonant states, their wavenumbers, and their electromagnetic fields. As demonstrated for two test systems, our approach provides an accurate description of the optical scattering matrix, including the absorption and related quantities such as the circular dichroism in chiral systems. Owing to the analytic dependence of the scattering matrix on the wavenumber, it is possible to avoid the artificial frequency discretization of conventional frequency-domain solvers of Maxwell's equations and to find, with low computational effort, the optical far- and near-field response, based on the physically meaningful resonant states.

PACS numbers: 78.67.Bf, 07.07.Df, 02.60.Cb

I. INTRODUCTION

Since the pioneering work of Gustav Mie [1], it is known that the scattering of light at small obstacles is governed by the resonant states of that system. Resonant states, also known as quasi-normal modes, are solutions of Maxwell's equations at discrete complex wavenumbers with purely outgoing boundary conditions in the absence of any internal sources. This set of discrete wavenumbers manifests itself as poles in the analytic continuation of any sort of linear optical response function. According to the Mittag-Leffler theorem [2], it is possible to develop a pole expansion for these response functions, including the Green's dyadic as well as the scattering matrix of a system. Knowing the poles and residues of the response function then provides its behavior as a function of wavenumber, which is clearly advantageous compared to conventional numerical calculations, where an artificial discretization in either time- or frequency-domain is introduced [3–9].

Regarding the Green's dyadic, it has been shown that the residues of its pole expansion can be derived from the resonant electric field distributions of the resonant states when normalizing them appropriately [10]. Several approaches have been suggested for the normalization of resonant states [10–26]. This includes approximate formulations for high-quality modes [23–25], the utilization of perfectly matched layers [14] or, equivalently, complex coordinates [11] in the exterior of the system, as well as numerical approaches [20, 22]. A fully analytical form of normalization has been derived in [10] and extended to various geometries and materials [15–17, 19–21, 26, 27].

Existing methods for expanding the scattering matrix in terms of its poles often require fitting procedures or

corrections based on symmetry arguments [28, 29], and have been proven only for single resonant states [28–30]. The approach of Perrin [31] for the pole expansion of a scattered field is more general and has been validated for two poles. In a similar manner, Yang et al. show how to derive the outgoing channels for a known electromagnetic near field [32], but both Perrin's and Yang's approaches do not provide the pole expansion of the scattering matrix. Recently, Alpegiani et al. [33] presented a formulation that is valid for a large number of resonant states. Based on symmetry considerations, a system of equations is derived that is solved in a least-square sense in order to calculate the residues for the pole expansion of the scattering matrix. However, the approach cannot be applied to strongly absorbing systems.

Here, we derive the pole expansion of the scattering matrix from the pole expansion of the Green's dyadic for reciprocal systems. The residues of the pole expansion are directly calculated from the resonant field distributions by projecting them onto basis functions of free space [34]. The derivation is based on selecting basis functions that satisfy appropriate orthogonality relations, and separating the total field into the background and scattered field [6, 31, 33, 35]. The formulation is neither limited with respect to the number of resonant states nor restricted to certain geometries. Moreover, it is valid for strongly absorbing systems and can be implemented in any numerical frequency-domain solver for Maxwell's equations that allows for calculating the resonant states and their field distributions. Thus, it is possible to derive the scattering matrix for arbitrary geometries as a function of wavenumber, which is particularly useful for systems that exhibit resonant states with a narrow linewidth such as Fano resonances [36–38]. In addition, our approach can be applied to systems with resonant phenomena dominated by loss, such as perfect absorbers [39] and chiral nanoantenna arrays [40, 41].

The paper is organized as follows: First, we summa-

* t.weiss@pi4.uni-stuttgart.de

size how to expand the Green's dyadic in terms of the poles and residues. Then, we recapitulate the concept of background field and scattered field and derive the pole expansion of the scattering matrix for arbitrary geometries. In the last part, we focus on planar periodic systems, for which we compare the results of our formulation with full numerical calculations for two test systems: A dielectric grating with quasi-guided modes [42] and a chiral arrangement of gold wire antennas [40]. The full numerical calculations are based on the Fourier modal method with adaptive coordinates [43–47]. The resonant states and their field distributions are calculated by the methods described in [20, 48, 49]. In the Appendix, we sketch how to use our formalism for single scatterers in three-dimensional space and give more details on the planar periodic systems.

II. MAXWELL'S EQUATIONS AND GREEN'S DYADIC

In Ref. [26], a compact matrix-operator formulation of Maxwell's equations has been introduced, which is given in Gaussian units in frequency domain [time dependence $\exp(-i\omega t)$] by

$$\hat{\mathbb{M}}(\mathbf{r}; k)\mathbb{F}(\mathbf{r}; k) = \mathbb{J}(\mathbf{r}; k), \quad (1)$$

where $k = \omega/c$ is the wavenumber and $\hat{\mathbb{M}}(\mathbf{r}; k) = k\hat{\mathbb{P}}(\mathbf{r}; k) - \hat{\mathbb{D}}(\mathbf{r})$ with

$$\hat{\mathbb{P}}(\mathbf{r}; k) = \begin{bmatrix} \varepsilon(\mathbf{r}; k) & -i\xi(\mathbf{r}; k) \\ i\zeta(\mathbf{r}; k) & \mu(\mathbf{r}; k) \end{bmatrix}, \quad (2)$$

$$\hat{\mathbb{D}}(\mathbf{r}) = \begin{pmatrix} 0 & \nabla \times \\ \nabla \times & 0 \end{pmatrix}. \quad (3)$$

In general, ε , μ , ζ , and ξ are 3×3 tensors. For reciprocal materials, the bi-anisotropy tensors ξ and ζ obey $\xi^T = -\zeta$, whereas $\varepsilon^T = \varepsilon$ and $\mu^T = \mu$, with the superscript T denoting the matrix transpose. The electric and magnetic fields as well as the currents form six-dimensional supervectors:

$$\mathbb{F}(\mathbf{r}; k) = \begin{bmatrix} \mathbf{E}(\mathbf{r}; k) \\ i\mathbf{H}(\mathbf{r}; k) \end{bmatrix}, \quad \mathbb{J}(\mathbf{r}; k) = \begin{bmatrix} \mathbf{J}_E(\mathbf{r}; k) \\ i\mathbf{J}_H(\mathbf{r}; k) \end{bmatrix}. \quad (4)$$

Here, $\mathbf{J}_E(\mathbf{r}; k) = -4\pi i\mathbf{j}(\mathbf{r}; k)/c$, and the magnetic currents \mathbf{J}_H have been introduced for symmetry purposes.

Equation (1) presents an inhomogeneous linear differential equation. Its Green's dyadic $\hat{\mathbb{G}}(\mathbf{r}, \mathbf{r}'; k)$ fulfills

$$\hat{\mathbb{M}}(\mathbf{r}; k)\hat{\mathbb{G}}(\mathbf{r}, \mathbf{r}'; k) = \mathbb{1}\delta(\mathbf{r} - \mathbf{r}'), \quad (5)$$

which allows to construct a special solution of Eq. (1) as

$$\mathbb{F}(\mathbf{r}; k) = \int_V dV' \hat{\mathbb{G}}(\mathbf{r}, \mathbf{r}'; k)\mathbb{J}(\mathbf{r}'; k). \quad (6)$$

For later convenience, we define two types of bilinear maps between two six-dimensional field supervectors \mathbb{A}

and \mathbb{B} that are either field vectors \mathbb{F} or current vectors \mathbb{J} :

$$\mathbb{A} = \begin{pmatrix} \mathbf{A}_E \\ i\mathbf{A}_H \end{pmatrix}, \quad \mathbb{B} = \begin{pmatrix} \mathbf{B}_E \\ i\mathbf{B}_H \end{pmatrix}. \quad (7)$$

The first bilinear map is defined as a volume integral over a finite volume V :

$$\langle \mathbb{A} | \mathbb{B} \rangle_V \equiv \int_V dV (\mathbf{A}_E \cdot \mathbf{B}_E - \mathbf{A}_H \cdot \mathbf{B}_H). \quad (8)$$

The second one is defined as a surface integral on the surrounding surface ∂V of V :

$$[\mathbb{A} | \mathbb{B}]_{\partial V} \equiv i \oint_{\partial V} d\mathbf{S} \cdot (\mathbf{A}_E \times \mathbf{B}_H - \mathbf{B}_E \times \mathbf{A}_H). \quad (9)$$

Using vector identities and the divergence theorem, it is straight-forward to show that

$$[\mathbb{A} | \mathbb{B}]_{\partial V} = \langle \mathbb{B} | \hat{\mathbb{D}} | \mathbb{A} \rangle_V - \langle \mathbb{A} | \hat{\mathbb{D}} | \mathbb{B} \rangle_V. \quad (10)$$

III. RESONANT STATES

The homogeneous form of Eq. (1) possesses a countable number of solutions on the complex k plane satisfying outgoing boundary conditions, which are the resonant states. They obey the equation

$$\hat{\mathbb{M}}(\mathbf{r}; k_n)\mathbb{F}_n(\mathbf{r}) = 0. \quad (11)$$

The real part of k_n gives the resonance wavenumber, whereas $-2\text{Im}k_n$ is the resonance linewidth. When normalizing the resonant states appropriately [10, 15–17, 19–21, 26, 27], they can be used together with possible cuts in order to expand the Greens dyadic with outgoing boundary conditions as follows:

$$\hat{\mathbb{G}}(\mathbf{r}, \mathbf{r}'; k) = \sum_n \frac{\mathbb{F}_n(\mathbf{r}) \otimes \mathbb{F}_n^R(\mathbf{r}')}{k - k_n}. \quad (12)$$

Here, the superscript R denotes the reciprocal conjugate resonant states [21], and \otimes is the outer vector product. Note that we do not distinguish explicitly between pole and cut contributions, since they can be formally written in the same way [15, 21]. Furthermore, it has to be emphasized that the pole expansion of the Green's dyadic in Eq. (12) is only valid inside and on a minimal convex volume enclosing the scatterer [21], see Fig. 1.

The analytical normalization condition can be written as [26]

$$1 = \langle \mathbb{F}_n^R | (k\hat{\mathbb{P}})' | \mathbb{F}_n \rangle_{V_N} + [\mathbb{F}_n^R | \mathbb{F}_n']_{\partial V_N}, \quad (13)$$

where V_N is the volume of normalization, and the prime denotes the derivative with respect to k at k_n . Calculating the derivative is trivial for the first term on the right hand side. For the second term, we have to differentiate the analytical continuation of \mathbb{F}_n on the complex k plane, which depends on the geometry of interest [15–17, 20, 21, 27].

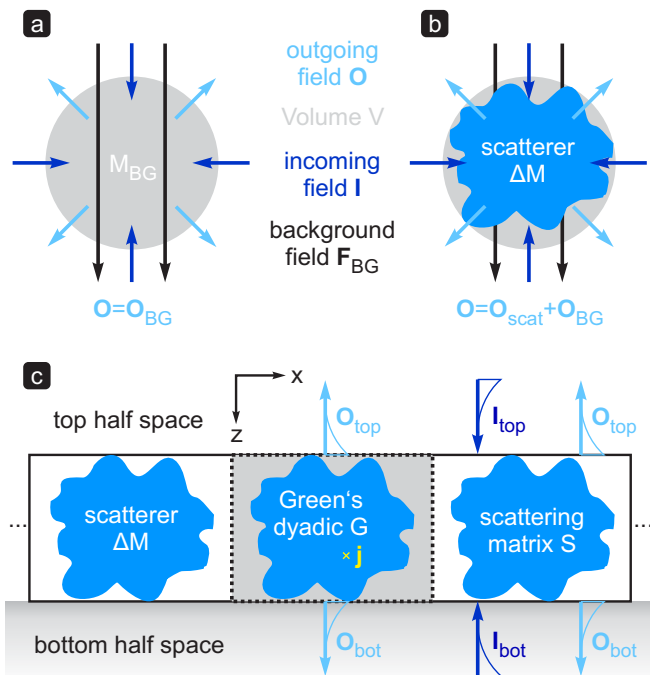


Figure 1. (color online) General concept: (a) We start with a nonscattering material distribution that is described by the Maxwell operator \hat{M}_{BG} , with \mathbb{F}_{BG} being a solution of the corresponding homogeneous Maxwell's equations. On the surface of a given volume V (gray area), we can decompose the background field into an incoming and an outgoing field \mathbb{I} and \mathbb{O}_{BG} , respectively. (b) As a next step, we add a scattering material distribution (blue area) described by the operator $\Delta\hat{M}$. Thus, the incoming field is partially scattered, i.e., the outgoing field becomes $\mathbb{O} = \mathbb{O}_{scat} + \mathbb{O}_{BG}$. The scatterer can be either a single entity in homogeneous and isotropic space (b) or a planar periodic array of scatterers (c). Knowing the pole expansion of the Green's dyadic, it is not only possible to describe the field emitted by a local source (yellow cross) to the exterior, but also to derive the pole expansion of the scattering matrix. The residues for the pole expansion can then be derived solely from the correctly normalized resonant electric field distributions on a minimal convex volume (dark gray region). This volume is spherical for single scatterers (b) and rectangular (denoted by the black dotted line) or a parallelepiped for periodic arrays (c), which warrants the applicability of the pole expansion of the Green's dyadic.

IV. BACKGROUND AND SCATTERED FIELD

For a given system, Maxwell's operator \hat{M} in Eq. (1) can be separated into a background term $\hat{M}_{BG} = k\hat{P}_{BG} - \mathbb{D}$ for a simple material distribution, and a scatterer $\Delta\hat{M} = k(\hat{P} - \hat{P}_{BG})$, which describes a spatial inhomogeneity (see Fig. 1). The field scattered at $\Delta\hat{M}$ can be obtained by separating the total field into a background field \mathbb{F}_{BG} that is a solution of the background Maxwell's equations for a given incoming field,

$$\hat{M}_{BG}(\mathbf{r}; k)\mathbb{F}_{BG}(\mathbf{r}; k) = 0, \quad (14)$$

and the scattered field \mathbb{F}_{scat} [6, 31, 33, 35]:

$$\mathbb{F}(\mathbf{r}; k) = \mathbb{F}_{BG}(\mathbf{r}; k) + \mathbb{F}_{scat}(\mathbf{r}; k). \quad (15)$$

Ideally, \hat{M}_{BG} describes a system without resonances such as homogeneous and isotropic space or a planar interface between two adjacent half spaces of dielectric homogeneous and isotropic materials.

Using Eq. (14) in Maxwell's equations for the full system, it is straight-forward to obtain

$$\hat{M}(\mathbf{r}; k)\mathbb{F}_{scat}(\mathbf{r}; k) = -\Delta\hat{M}(\mathbf{r}; k)\mathbb{F}_{BG}(\mathbf{r}; k). \quad (16)$$

Thus, knowing the pole expansion Eq. (12) for the Green's dyadic of \hat{M} provides via Eq. (6) the scattered field as [31]

$$\mathbb{F}_{scat}(\mathbf{r}; k) = -\sum_n \mathbb{F}_n(\mathbf{r}) \frac{\langle \mathbb{F}_n^R | \Delta\hat{M} | \mathbb{F}_{BG} \rangle_V}{k - k_n}. \quad (17)$$

It has to be mentioned that the background field \mathbb{F}_{BG} possesses a regular behavior inside the scatterer, i.e., it does not diverge at any point, whereas the corresponding incoming and outgoing fields may have singularities such as the incoming and outgoing Hankel functions. For more details, see Appendix A.

V. THE SCATTERING MATRIX

The scattering matrix provides a relation between incoming and outgoing channels of a system. A channel is defined by a solution of Maxwell's equations in the surrounding of the scatterer, which we assume to be homogeneous and isotropic space or two half spaces of homogeneous and isotropic dielectric materials separated by a planar interface (see Fig. 1). For such cases, Maxwell's equations provide complete sets of orthogonal basis functions that can be used to expand an arbitrary solution of Maxwell's equations outside the system and on the surface surrounding the scatterer. The best-suited basis set depends on the geometry: Plane waves for planar systems, vector spherical harmonics for spherical geometries, cylindrical waves for cylindrical geometries.

Each basis function defines one incoming and one outgoing channel. From a mathematical point of view, the definition of incoming and outgoing channels is arbitrary, and more motivated by physical arguments. For real-valued wavenumbers k , an outgoing channel either possesses a time-averaged energy flux that propagates outwards, or the fields are decaying exponentially with distance to the scatterer. The analytical continuation to the complex k plane is more sophisticated [21, 50], but usually defined such that there is a smooth transition from any point on the complex k plane to the real axis. Thus, an arbitrary field in the exterior can be expanded as follows:

$$\mathbb{F}(\mathbf{r}; k) = \sum_N \alpha_N^{\text{in}}(k) \mathbb{I}_N(\mathbf{r}; k) + \alpha_N^{\text{out}}(k) \mathbb{O}_N(\mathbf{r}; k). \quad (18)$$

The index \mathbf{N} denotes a set of quantum numbers that specify the different basis functions $\mathbb{1}_{\mathbf{N}}$ and $\mathbb{0}_{\mathbf{N}}$, respectively, of the incoming and outgoing nature. The scattering matrix \mathcal{S} then relates incoming and outgoing channels as follows:

$$\vec{\mathcal{O}}(k) = \mathcal{S}(k)\vec{\mathcal{I}}(k). \quad (19)$$

Here, $\vec{\mathcal{I}}$ and $\vec{\mathcal{O}}$ are supervectors containing the expansion coefficients $\alpha_{\mathbf{N}}^{\text{in}}$ and $\alpha_{\mathbf{N}}^{\text{out}}$, respectively. The elements of the scattering matrix are labeled as $\mathcal{S}_{\mathbf{N}\mathbf{N}'}$ for an incoming channel with quantum number \mathbf{N}' and an outgoing channel with quantum number \mathbf{N} .

How can we derive the expansion coefficients $\alpha_{\mathbf{N}}^{\text{in}}$ and $\alpha_{\mathbf{N}}^{\text{out}}$? This can be achieved by introducing, following Ref. [34], a set of orthogonal modes in free space. Based on the reciprocity principle, there exist reciprocal conjugate basis functions $\mathbb{1}_{\mathbf{N}}^{\text{R}}$ and $\mathbb{0}_{\mathbf{N}}^{\text{R}}$ such that

$$[\mathbb{1}_{\mathbf{N}}^{\text{R}}|\mathbb{0}_{\mathbf{N}'}]_{\partial V} = -[\mathbb{0}_{\mathbf{N}}^{\text{R}}|\mathbb{1}_{\mathbf{N}'}]_{\partial V} = \delta_{\mathbf{N},\mathbf{N}'}, \quad (20)$$

$$[\mathbb{1}_{\mathbf{N}}^{\text{R}}|\mathbb{1}_{\mathbf{N}'}]_{\partial V} = [\mathbb{0}_{\mathbf{N}}^{\text{R}}|\mathbb{0}_{\mathbf{N}'}]_{\partial V} = 0. \quad (21)$$

Hence,

$$\alpha_{\mathbf{N}}^{\text{in}}(k) = [\mathbb{0}_{\mathbf{N}}^{\text{R}}|\mathbb{F}]_{\partial V}, \quad \alpha_{\mathbf{N}}^{\text{out}}(k) = [\mathbb{1}_{\mathbf{N}}^{\text{R}}|\mathbb{F}]_{\partial V}. \quad (22)$$

The orthogonality given by Eqs. (20) and (21) follows from the fact that the proper choice of the basis functions in free space determining its quantum numbers \mathbf{N} is dictated by the properties of the surface ∂V chosen for the integration, and, in particular, by its symmetry. While we do not provide a general proof for an arbitrary surface, we prove in Appendices A and B the orthonormality Eqs. (20) and (21) in two important cases: A spherical surface ∂V and the surface ∂V of a unit cell of a planar periodic system. For $\mathbf{N} = \mathbf{N}'$, equation (20) determines the normalization of modes in free space.

VI. POLE EXPANSION

Formally, the pole expansion of the scattering matrix yields:

$$\mathcal{S}(k) = \mathcal{S}_{\text{BG}}(k) + \sum_n \frac{\mathcal{R}_n}{k - k_n}. \quad (23)$$

The background term \mathcal{S}_{BG} arises, because even for the vacuum background, its scattering matrix is not zero but a diagonal matrix. Let us now derive expressions for the residue matrices \mathcal{R}_n with elements $\mathcal{R}_{n,\mathbf{N}\mathbf{N}'}$.

Using Eq. (22), it is possible to calculate, for a given incident field, the expansion coefficients of the outgoing field for a scattering geometry as the elements of vector $\vec{\mathcal{O}}$ in Eq. (19):

$$\alpha_{\mathbf{N}}^{\text{out}}(k) = [\mathbb{1}_{\mathbf{N}}^{\text{R}}|\mathbb{F}_{\text{BG}}]_{\partial V} + [\mathbb{1}_{\mathbf{N}}^{\text{R}}|\mathbb{F}_{\text{scat}}]_{\partial V}. \quad (24)$$

For the last term, we can use Eq. (17), which yields:

$$[\mathbb{1}_{\mathbf{N}}^{\text{R}}|\mathbb{F}_{\text{scat}}]_{\partial V} = - \sum_n \frac{[\mathbb{1}_{\mathbf{N}}^{\text{R}}|\mathbb{F}_n]_{\partial V} \langle \mathbb{F}_n^{\text{R}}|\Delta\hat{\mathcal{M}}|\mathbb{F}_{\text{BG}} \rangle_V}{k - k_n}. \quad (25)$$

Let us now consider a background field \mathbb{F}_{BG} that is generated by an incoming field $\mathbb{1}_{\mathbf{N}'}$ and calculate the residue of Eq. (24) at k_n . Since $[\mathbb{1}_{\mathbf{N}}^{\text{R}}|\mathbb{F}_{\text{BG}}]_{\partial V}$ has no poles for a nonresonant background system, this results in

$$\begin{aligned} \mathcal{R}_{n,\mathbf{N}\mathbf{N}'} &= \text{Res}_{k=k_n} \alpha_{\mathbf{N}}^{\text{out}}(k) = \text{Res}_{k=k_n} [\mathbb{1}_{\mathbf{N}}^{\text{R}}|\mathbb{F}_{\text{scat}}]_{\partial V} \\ &= -[\mathbb{1}_{\mathbf{N}}^{\text{R}}(k_n)|\mathbb{F}_n]_{\partial V} \langle \mathbb{F}_n^{\text{R}}|\Delta\hat{\mathcal{M}}(k_n)|\mathbb{F}_{\text{BG}}(k_n) \rangle_V. \end{aligned} \quad (26)$$

In order to derive a more explicit expression for the volume integral in the second line, we take Eq. (11) for the reciprocal conjugate resonant state \mathbb{F}_n^{R} , multiply it from the left with $\mathbb{F}_{\text{BG}}(k_n)$, and integrate over a finite volume V . Then, we subtract a zero in the form $\langle \mathbb{F}_n^{\text{R}}|\hat{\mathcal{M}}_{\text{BG}}(k_n)|\mathbb{F}_{\text{BG}}(k_n) \rangle_V$, which yields

$$\langle \mathbb{F}_{\text{BG}}(k_n)|\hat{\mathcal{M}}(k_n)|\mathbb{F}_n^{\text{R}} \rangle_V - \langle \mathbb{F}_n^{\text{R}}|\hat{\mathcal{M}}_{\text{BG}}(k_n)|\mathbb{F}_{\text{BG}}(k_n) \rangle_V = 0. \quad (27)$$

Using the relation in Eq. (10), we convert, with the help of Eq. (27), the volume integral in Eq. (26) into a surface integral:

$$\langle \mathbb{F}_n^{\text{R}}|\Delta\hat{\mathcal{M}}(k_n)|\mathbb{F}_{\text{BG}}(k_n) \rangle_V = [\mathbb{F}_n^{\text{R}}|\mathbb{F}_{\text{BG}}(k_n)]_{\partial V}. \quad (28)$$

On the surface ∂V , the field \mathbb{F}_n^{R} can be represented by its analytic continuation outside the system [21, 26], which is a superposition of outgoing waves $\mathbb{0}_{\mathbf{N}}(k)$:

$$\mathbb{F}_n^{\text{R}}(\mathbf{r}; k) = \sum_{\mathbf{N}} \alpha_{n,\mathbf{N}}^{\text{R}} \mathbb{0}_{\mathbf{N}}^{\text{R}}(\mathbf{r}; k), \quad (29)$$

with the expansion coefficients

$$\alpha_{n,\mathbf{N}}^{\text{R}} = [\mathbb{1}_{\mathbf{N}}(k_n)|\mathbb{F}_n^{\text{R}}]_{\partial V}. \quad (30)$$

Then, owing to the orthogonality Eq. (21), \mathbb{F}_{BG} in the right hand side of Eq. (28) can be replaced by $\mathbb{1}_{\mathbf{N}'}(k_n)$. Hence, the residues in Eq. (23) are given by

$$\mathcal{R}_{n,\mathbf{N}\mathbf{N}'} = -[\mathbb{1}_{\mathbf{N}}^{\text{R}}(k_n)|\mathbb{F}_n]_{\partial V} [\mathbb{F}_n^{\text{R}}|\mathbb{1}_{\mathbf{N}'}(k_n)]_{\partial V}. \quad (31)$$

As written above, the pole expansion of the Green's dyadic in Eq. (12) is only valid in a minimal convex volume enclosing the scatterer. Consequently, equation (31) has to be evaluated on this minimal volume.

VII. PLANAR PERIODIC SYSTEMS

As test systems, we consider planar periodic systems with a scattering material distribution that is periodic in the xy plane and bound in the z direction. More specifically, $\hat{\mathcal{M}}(\mathbf{r} + \mathbf{R}; k) = \hat{\mathcal{M}}(\mathbf{r}; k)$ for any translation vectors of the form $\mathbf{R} = (n_1 P_1)\mathbf{a}_1 + (n_2 P_2)\mathbf{a}_2$ with P_1 and P_2 being the periods in the directions defined by the unit vectors \mathbf{a}_1 and \mathbf{a}_2 , respectively, and $n_1, n_2 \in \mathbb{Z}$. Without the loss of generality, we assume that \mathbf{a}_1 and \mathbf{a}_2 are normal to the z direction.

The minimal convex volume spans over one unit cell in the periodic directions with a plane on top and bottom that touches the scatterer (see Fig. 1c). The orthogonal basis is given by plane waves of transverse-electric (TE) and transverse-magnetic (TM) polarization. The role of the quantum numbers \mathbf{N} is taken by

the two polarizations and the reciprocal lattice vectors $\mathbf{G} = (n_1 2\pi/P_1)\mathbf{b}_1 + (n_2 2\pi/P_2)\mathbf{b}_2$ with $\mathbf{a}_\alpha \cdot \mathbf{b}_\beta = \delta_{\alpha,\beta}$. Owing to Bloch's theorem, the fields \mathbb{F} as solutions of the scattering at the periodic system can be constructed as a product of a phase factor $\exp(i\mathbf{k}_\parallel \cdot \mathbf{r})$ and vector components that are periodic functions with the same periodicity as $\hat{\mathbb{M}}$. The in-plane momentum \mathbf{k}_\parallel is preserved apart from Umklapp processes throughout the whole system. Solving Maxwell's equations is then reduced to finding the periodic part of the field distributions for periodic sources or incident fields. It is convenient to introduce a Green's dyadic $\hat{\mathbb{G}}_{\mathbf{k}_\parallel}$ for each value of \mathbf{k}_\parallel , which obeys the following constituting equation:

$$\hat{\mathbb{M}}(\mathbf{r}; k) \hat{\mathbb{G}}_{\mathbf{k}_\parallel}(\mathbf{r}; \mathbf{r}'; k) = \sum_{\mathbf{R}} \mathbb{1} e^{i\mathbf{k}_\parallel \cdot \mathbf{R}} \delta(\mathbf{r} - \mathbf{r}' - \mathbf{R}). \quad (32)$$

Thus, it is sufficient to consider only one unit cell for further analysis. For instance, any volume of integration can be restricted to span over one unit cell in the xy plane. If a surface integral contains all boundaries of the unit cell, it reduces for periodic integrands to an integration over the top and bottom surfaces of one unit cell, since the surface integrals to adjacent unit cells cancel out each other due to the periodicity. This implies that we can distinguish the channels of the scattering matrix not only by plane wave orders \mathbf{G} and polarization p , but also by the surface at which the fields enter or leave the minimal convex volume (see Fig. 1c).

Let us define $\mathbf{K} \equiv \mathbf{k}_\parallel + \mathbf{G}$. Then, the orthonormal basis in the top (t) and bottom (b) half space is given by supervectors $\mathbb{F}_{p,\mathbf{K},\pm}^{t/b}(\mathbf{r}; k)$ with all possible \mathbf{K} for the given \mathbf{k}_\parallel and the electric and magnetic fields

$$\mathbf{E}_{p,\mathbf{K},\pm}^{t/b}(\mathbf{r}; k) = N_{\mathbf{K}}^{t/b}(k) \hat{\mathbf{E}}_{p,\mathbf{K},\pm}^{t/b}(k) \psi_{\mathbf{K},\pm}^{t/b}(\mathbf{r}; k), \quad (33)$$

$$\mathbf{H}_{p,\mathbf{K},\pm}^{t/b}(\mathbf{r}; k) = \frac{N_{\mathbf{K}}^{t/b}(k)}{Z^{t/b}(k)} \hat{\mathbf{H}}_{p,\mathbf{K},\pm}^{t/b}(k) \psi_{\mathbf{K},\pm}^{t/b}(\mathbf{r}; k), \quad (34)$$

where $N_{\mathbf{K}}^{t/b}$ is a normalization constant, $\hat{\mathbf{E}}_{p,\mathbf{K},\pm}^{t/b}$ and $\hat{\mathbf{H}}_{p,\mathbf{K},\pm}^{t/b}$ are unit polarization vectors,

$$\psi_{\mathbf{K},\pm}^{t/b}(\mathbf{r}; k) = \frac{1}{\sqrt{S_u}} e^{i\mathbf{K} \cdot \mathbf{r} \pm i\kappa_{\mathbf{K}}^{t/b}(k)(z - z^{t/b})}, \quad (35)$$

p denotes either transverse-electric or transverse-magnetic polarization, $Z^{t/b}(k) = \sqrt{\mu^{t/b}(k)/\varepsilon^{t/b}(k)}$ is the impedance, and $z^{t/b}$ gives the positions of the xy planes as the top and bottom surfaces of the minimal convex volume. In Eq. (35), S_u is the top/bottom area of one unit cell, and

$$\kappa_{\mathbf{K}}^{t/b}(k) = \sqrt{(k^{t/b})^2 - \mathbf{K}^2}, \quad (36)$$

where $k^{t/b} = n^{t/b}(k)k$ with refractive index $n^{t/b}(k) = \sqrt{\varepsilon^{t/b}(k)\mu^{t/b}(k)}$. For lossless $n^{t/b}$ and real wavenumbers k , either $\kappa_{\mathbf{K}}^{t/b}$ or $i\kappa_{\mathbf{K}}^{t/b}$ is purely real. In the case of the former, the channel associated with that plane wave is called open, since the field can propagate in z

direction from and to the far-field region. In the case of the latter, the channel is closed, and the fields grow or decay exponentially. We select the sign for the square root in Eq. (36) such that the fields are either forward-propagating or decaying in positive z direction. For complex k , the sign is chosen to match the sign of the same channel on the real axis. If the channel is open on the real axis, the real part of $\kappa_{\mathbf{K}}^{t/b}$ must specify forward propagation in positive z direction. Otherwise, the field must decay in positive z direction. The sign '±' in Eqs. (33) to (35) thus means forward propagation or decay for '+' and backward propagation or decay for '-'. In the same manner, it is possible to define incoming and outgoing channels for lossy materials in the top and bottom half spaces by making an analytic continuation from real to complex $n^{t/b}$.

The transverse-electric polarization vectors can be written in the top and bottom half spaces as

$$\hat{\mathbf{E}}_{\text{TE},\mathbf{K},\pm}^{t/b}(k) = \frac{1}{|\mathbf{K}|} \begin{pmatrix} -K_y \\ K_x \\ 0 \end{pmatrix}, \quad (37)$$

$$\hat{\mathbf{H}}_{\text{TE},\mathbf{K},\pm}^{t/b}(k) = \frac{1}{k^{t/b}|\mathbf{K}|} \begin{bmatrix} \mp K_x \kappa_{\mathbf{K}}^{t/b}(k) \\ \mp K_y \kappa_{\mathbf{K}}^{t/b}(k) \\ \mathbf{K}^2 \end{bmatrix}, \quad (38)$$

The transverse-magnetic polarization vectors are given by

$$\hat{\mathbf{E}}_{\text{TM},\mathbf{K},\pm}^{t/b}(k) = \mp \hat{\mathbf{H}}_{\text{TE},\mathbf{K},\pm}^{t/b}(k), \quad (39)$$

$$\hat{\mathbf{H}}_{\text{TM},\mathbf{K},\pm}^{t/b}(k) = \pm \hat{\mathbf{E}}_{\text{TE},\mathbf{K},\pm}^{t/b}(k). \quad (40)$$

The normalization constant is

$$N_{\mathbf{K}}^{t/b}(k) = \sqrt{\frac{iZ^{t/b}(k)k^{t/b}}{2\kappa_{\mathbf{K}}^{t/b}(k)}}. \quad (41)$$

We define the outgoing and incoming channels in the top and bottom half spaces as

$$\mathbb{O}_{p,\mathbf{K}}^t(\mathbf{r}; k) = \mathbb{F}_{p,\mathbf{K},-}^t(\mathbf{r}; k), \quad \mathbb{O}_{p,\mathbf{K}}^b(\mathbf{r}; k) = \mathbb{F}_{p,\mathbf{K},+}^b(\mathbf{r}; k), \quad (42)$$

$$\mathbb{I}_{p,\mathbf{K}}^t(\mathbf{r}; k) = \mathbb{F}_{p,\mathbf{K},+}^t(\mathbf{r}; k), \quad \mathbb{I}_{p,\mathbf{K}}^b(\mathbf{r}; k) = \mathbb{F}_{p,\mathbf{K},-}^b(\mathbf{r}; k). \quad (43)$$

The reciprocal conjugate is given by

$$\left(\mathbb{O}_{p,\mathbf{K}}^{t/b}\right)^R = \mathbb{O}_{p,-\mathbf{K}}^{t/b}, \quad \left(\mathbb{I}_{p,\mathbf{K}}^{t/b}\right)^R = \mathbb{I}_{p,-\mathbf{K}}^{t/b}, \quad (44)$$

which warrants together with Eq. (41) the orthonormality relation given by Eqs. (20) and (21). For details, see Appendix B. If \mathbb{F}_n is a solution of Eq. (11) for a fixed \mathbf{k}_\parallel , the reciprocal conjugate resonant state \mathbb{F}_n^R is a solution of Eq. (11) for $-\mathbf{k}_\parallel$ at the same wavenumber k_n .

Combining Refs. [21, 26] (see Appendix C), the normalization of the resonant states of the planar periodic systems can be summarized as

$$I_n + \sum_{\mathbf{K}} \frac{1}{2} (S_{n,\mathbf{K}}^t + S_{n,\mathbf{K}}^b) = 1, \quad (45)$$

with

$$I_n = \langle \mathbb{F}_n^R | \frac{\partial k \mathbb{P}}{\partial k} \Big|_{k_n} | \mathbb{F}_n \rangle_{V_N}, \quad (46)$$

$$S_{n,\mathbf{K}}^{t/b} = \left(\beta_{n,\text{TE},\mathbf{K}}^{t/b} - \beta_{n,\text{TM},\mathbf{K}}^{t/b} \right) \frac{\partial n_{p,\mathbf{K}}^{t/b}}{\partial k} \Big|_{k_n}, \quad (47)$$

where

$$\beta_{n,p,\mathbf{K}}^{t/b} = \alpha_{n,p,\mathbf{K}}^{t/b} \left(\alpha_{n,p,\mathbf{K}}^{t/b} \right)^R e^{2i\kappa_{\mathbf{K}}^{t/b} \Delta z_N^{t/b}}, \quad (48)$$

and

$$n_{\text{TE},\mathbf{K}}^{t/b}(k) = \ln \frac{\kappa_{\mathbf{K}}^{t/b}(k)}{Z^{t/b}(k)k^{t/b}}, \quad (49)$$

$$n_{\text{TM},\mathbf{K}}^{t/b}(k) = \ln \frac{Z^{t/b}(k)\kappa_{\mathbf{K}}^{t/b}(k)}{k^{t/b}}. \quad (50)$$

Here, $\alpha_{n,p,\mathbf{K}}^{t/b} = [\mathbb{F}_{p,-\mathbf{K}}^{t/b}(k_n) | \mathbb{F}_n]_{T/B}$ gives the plane wave expansion of the resonant state at the top and bottom surface T and B , respectively, enclosing the minimal convex volume V . The reciprocal counterpart is $(\alpha_{n,p,\mathbf{K}}^{t/b})^R = [\mathbb{F}_{p,\mathbf{K}}^{t/b}(k_n) | \mathbb{F}_n^R]_{T/B}$. Furthermore, $\Delta z_N^{t/b} \geq 0$ is the distance between the top and bottom planes of the minimal convex volume V and the normalization volume V_N .

VIII. RESULTS

The first test system is a dielectric one-dimensional periodic grating (see Fig. 2) with period 300 nm that consists of a high-index material of refractive index 2.5 with width 200 nm and height 50 nm embedded in air [42]. Without the loss of generality, we consider transverse-magnetic polarization for in-plane wavevector components $k_x = 0.2 \mu\text{m}^{-1}$ and $k_y = 0$. In this case, the far-field spectra exhibit two resonant states in the region between 3650 meV and 3900 meV that are quasi-guided modes [8]. The corresponding poles are located at 3719.2 – 9.7*i* meV (mode A) and 3854.5 – 0.7*i* meV (mode B). The resonant magnetic field can be seen in Fig. 2.

Figure 3 displays the far-field spectra of test system 1, with transmittance (red), reflectance (blue), and absorbance (black). Since the system is nonabsorbing, the absorbance equals zero and is only shown in order to verify that the pole expansion of the scattering matrix fulfills the energy conservation. The filled dots have been calculated by full numerical calculations, whereas the solid lines are derived by using Eqs. (23) and (31). The non-resonant background and the influence of other poles and cuts is taken into account by a quadratic fit to the spectra calculated at three equidistant energy points in the considered energy range.

Note that the number of points for the full numerical calculations has been chosen such that the total calculation time equals that for deriving the resonant states

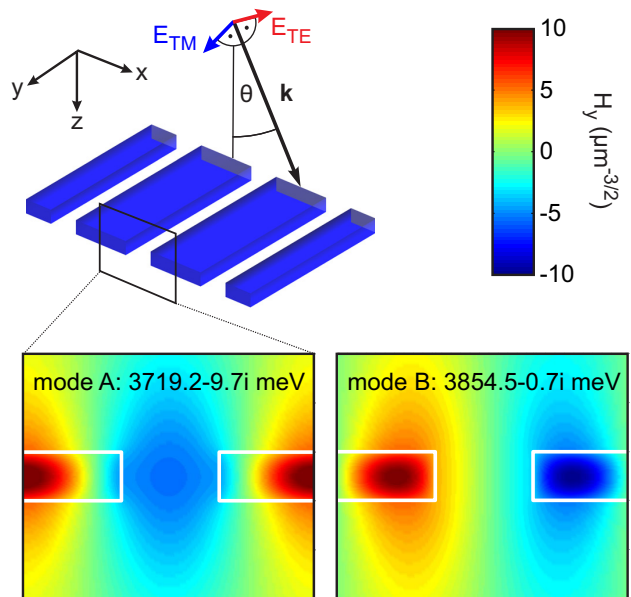


Figure 2. (color online) Test system 1: We consider a dielectric one-dimensional periodic grating with period 300 nm and thickness 50 nm with high-index regions of refractive index 2.5 and width 200 nm embedded in air. For in-plane wavevector components $k_x = 0.2 \mu\text{m}^{-1}$ and $k_y = 0$, the system exhibits two transverse-magnetic (TM) quasi-guided modes at eigenenergies of $E_A = 3719.2 - 9.7i$ meV and $E_B = 3854.5 - 0.7i$ meV, respectively. The field plots at the bottom display the real parts of the y components of the normalized resonant magnetic field distribution of these modes in one unit cell. The material interfaces are indicated by white lines.

and carrying out the quadratic fit for the background. Even though the derivation of the pole expansion is not yet optimized with respect to calculation time – in contrast to our full numerical approach, it can be seen that the full numerical calculations provide much less details than the pole expansion. This is particularly obvious around the narrow mode B, where the full numerical calculations cannot resolve the behavior of transmittance and reflectance accurately. It has to be emphasized that the full oscillation of transmittance and reflectance from one to zero and from zero to one, respectively, is a direct consequence of the symmetry properties of test system 1, as shown in Ref. [29]. Furthermore, note that the absorbance derived by the pole expansion is less than 1% over the entire energy range. This value can be further reduced by making a higher-order fit or by taking more resonances and some cut contributions into account.

Test system 2 consists of a square array of two gold wire antennas of 40 nm width and height and 220 nm length per unit cell, with period 400 nm (see Fig. 4). The two antennas are vertically displaced with a distance of 120 nm and rotated by 90° with respect to each other. The surrounding material has a refractive index of 1.5. The gold permittivity is described by an analytical model [51]. As shown in Ref. [40], this system is

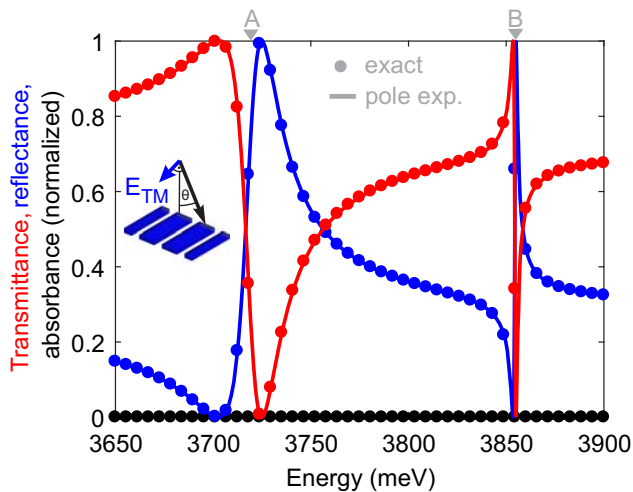


Figure 3. (color online) Transmittance (red), reflectance (blue), and absorbance (black) of test system 1, derived by full numerical calculations (dots) and the pole expansion of the scattering matrix (solid lines) in transverse-magnetic polarization for $k_x = 0.2 \mu\text{m}^{-1}$ and $k_y = 0$. The gray triangles on top indicate the resonance energy of the two transverse-magnetic quasi-guided modes in that energy range (see Fig. 2). Note that the pole expansion provides an accurate description even around the narrow mode B, while the full numerical calculations cannot properly resolve the resonant functional behavior on the given equidistant energy grid.

chiral and exhibits a large circular dichroism as the absorbance difference for left- and right-handed circularly polarized light incidence. Note that we are using here the convention of the point of observer for the definition of the handedness. The circular dichroism originates in the excitation of the bonding and anti-bonding combination of the fundamental plasmon modes in the two wire antennas. Owing to the spatial configuration of the antennas, these modes can be predominately excited by incident light of opposite handedness. Furthermore, they are spectrally shifted. The bonding mode A is located for $\mathbf{k}_{\parallel} = 0$ at $932.3 - 91.1i$ meV, the anti-bonding mode is at $948.1 - 91.5i$ meV. The z component of the corresponding resonant electric field distributions can be seen in Fig. 4.

While the nonabsorbing test system 1 can be treated by the formulation of the pole expansion described in Ref. [33], the second test system is beyond its scope due to the large Ohmic losses. Its absorbance reaches values of nearly 40%, as seen in Fig. 5a. The far-field spectra are displayed for left-handed circularly polarized (LCP, dashed lines and squares) and right-handed circularly polarized (RCP, solid lines and dots) plane waves at normal incidence. The pole expansion (solid and dashed lines) agrees well with the full numerical calculation (dots and squares) and predicts the circular dichroism correctly (see Fig. 5b).

Note that any contributions to the pole expansion beyond modes A and B have been treated in the same way

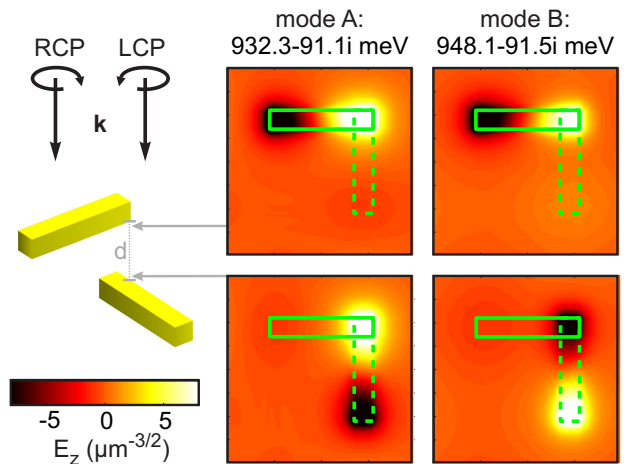


Figure 4. (color online) Test system 2: Chiral arrangement of an array of gold wire pairs with period 400 nm in x and y direction. The wires have a width and height of 40 nm and are 220 nm long. The vertical distance d between the wire pairs is 120 nm. The surrounding material has a refractive index of 1.5. We consider normal incidence, i.e., $k_x = k_y = 0$. The two localized plasmon modes that originate in the hybridization of the fundamental dipolar modes of the single wires exhibit eigenenergies of $E_A = 932.3 - 91.1i$ meV and $E_B = 948.1 - 91.5i$ meV. The field plots on the right display the real parts of the z components of the normalized resonant electric field 10 nm below the top wire (top row) and 10 nm above the bottom wire (bottom row) in one unit cell. Green solid and dashed lines indicate the location of the upper and lower antenna, respectively.

as in test system 1 by carrying out a quadratic fit to three equidistant energy points in the range between 700 meV and 900 meV. Furthermore, the calculation time for deriving the selected number of energy points by the full numerical calculations roughly equals the time for deriving the two modes and the quadratic fit. As in the case of test system 1, it is obvious that the pole expansion provides much more details than the full numerical results within the same calculation time. This is due to the fact that the pole expansion of the scattering matrix in Eq. (23) has an explicit analytic dependence on wavenumber, so that once all relevant resonant states in the wavenumber range of interest are calculated and projected onto the basis functions in free space, the scattering matrix becomes immediately available in the whole wavenumber range.

IX. CONCLUSION

We have developed a formulation of the pole expansion of the scattering matrix that allows for deriving the residues of the pole contributions from the resonant states. The accuracy and efficiency of the formulation is demonstrated for two test systems, where the pole expansion is compared with exact numerical results. The

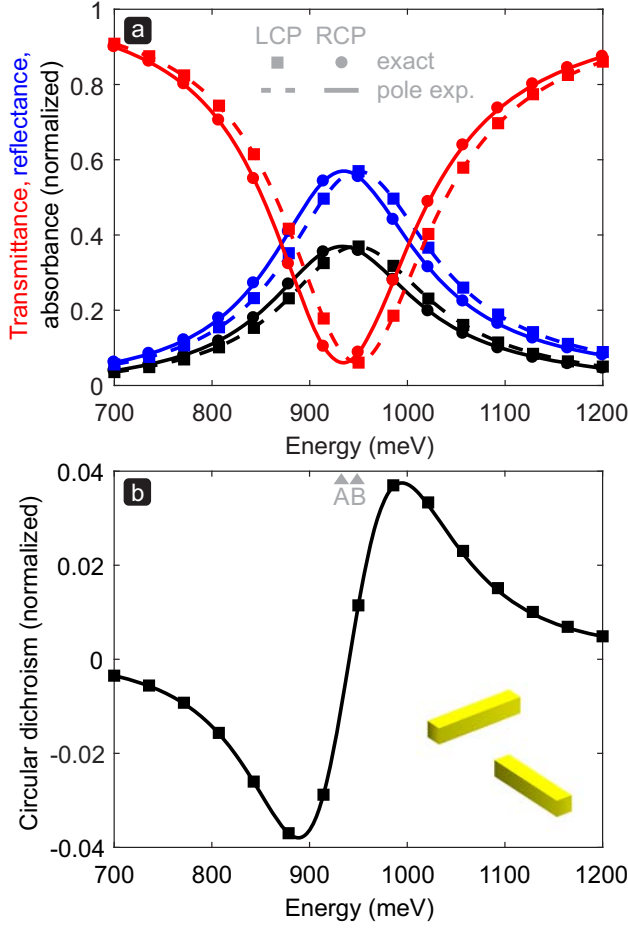


Figure 5. (color online) (a) Transmittance (red), reflectance (blue), and absorbance (black) of test system 2, derived by full numerical calculations (symbols) and the pole expansion of the scattering matrix (lines) at normal incidence. Solid lines and dots correspond to right-handed circular polarized (RCP) light, whereas dashed lines and squares denote the results for left-handed circularly polarized (LCP) light. (b) Circular dichroism as the absorbance difference for incident light with left- and right-handed circular polarization, respectively. The gray triangles on top indicate the resonance energy of the two localized plasmon modes in that energy range (see Fig. 4).

pole expansion agrees well with the full numerical results and provides much more details of the far-field spectra for the same computational time, owing to the analytic wavenumber dependence. This is particularly useful for optimizing certain geometries in order to obtain desired far-field properties. Moreover, the artificial frequency discretization used in conventional frequency-domain solvers is replaced by a natural discretization in terms of the physically meaningful resonant states, which can provide intuitive insights into the underlying physical mechanisms.

ACKNOWLEDGEMENT

E. A. M. acknowledges support by the EPSRC Grant EP/M020479/1 and RBRF Grant 16-29-03283. T. W. acknowledges support from DFG SPP 1838, the VW-Foundation and the MWK Baden-Württemberg.

Appendix A: Single particles

In the case of single particles in three-dimensional space, the minimal convex volume has to be chosen as a sphere. On a unit sphere, the vector spherical harmonics \mathbf{Y}_{lm} , $\mathbf{\Psi}_{lm}$, and $\mathbf{\Phi}_{lm}$ are forming a complete orthogonal basis [52], with

$$\mathbf{Y}_{lm} = \hat{\mathbf{e}}_r Y_{lm}, \quad \mathbf{\Psi}_{lm} = r \nabla Y_{lm}, \quad \mathbf{\Phi}_{lm} = \mathbf{r} \times \nabla Y_{lm}, \quad (\text{A1})$$

where Y_{lm} are scalar orthonormal spherical harmonics, $r = |\mathbf{r}|$, and $\hat{\mathbf{e}}_r$ is the unit vector in the radial direction. The vector spherical harmonics obey the orthogonality relations

$$\oint_{\Omega} d\Omega \mathbf{Y}_{l'm'}^* \cdot \mathbf{Y}_{lm} = \delta_{l,l'} \delta_{m,m'}, \quad (\text{A2})$$

$$\oint_{\Omega} d\Omega \mathbf{\Psi}_{l'm'}^* \cdot \mathbf{\Psi}_{lm} = l(l+1) \delta_{l,l'} \delta_{m,m'}, \quad (\text{A3})$$

$$\oint_{\Omega} d\Omega \mathbf{\Phi}_{l'm'}^* \cdot \mathbf{\Phi}_{lm} = l(l+1) \delta_{l,l'} \delta_{m,m'}, \quad (\text{A4})$$

and

$$\begin{aligned} 0 &= \oint_{\Omega} d\Omega \mathbf{Y}_{l'm'}^* \cdot \mathbf{\Psi}_{lm} \\ &= \oint_{\Omega} d\Omega \mathbf{Y}_{l'm'}^* \cdot \mathbf{\Phi}_{lm} \\ &= \oint_{\Omega} d\Omega \mathbf{\Psi}_{l'm'}^* \cdot \mathbf{\Phi}_{lm}. \end{aligned} \quad (\text{A5})$$

Here, $d\Omega$ is the differential of the solid angle Ω , and the integration is carried out over the whole unit sphere. Furthermore,

$$\mathbf{Y}_{lm}^* = (-1)^m \mathbf{Y}_{l,-m}, \quad (\text{A6})$$

$$\mathbf{\Psi}_{lm}^* = (-1)^m \mathbf{\Psi}_{l,-m}, \quad (\text{A7})$$

$$\mathbf{\Phi}_{lm}^* = (-1)^m \mathbf{\Phi}_{l,-m}. \quad (\text{A8})$$

As in the case of plane waves, the spherical-wave solutions of Maxwell's equations have two orthogonal polarizations in homogeneous and isotropic space, labeled transverse-electric and transverse-magnetic. In this case, transverse-electric and transverse-magnetic means the absence of a radial electric or magnetic field component, respectively. The role of the components of the index

vector \mathbf{N} is taken by the two polarizations and the azimuthal quantum number m and the polar number l of the vector spherical harmonics. The basis functions are given by [53]

$$\mathbf{E}_{\text{TE},lm}(\mathbf{r}; k) = \frac{N_l f_l(kr)}{\sqrt{l(l+1)}} \Phi_{lm}(\Omega), \quad (\text{A9})$$

$$\mathbf{H}_{\text{TE},lm}(\mathbf{r}; k) = \frac{-iN_l}{Z^s k \sqrt{l(l+1)}} \nabla \times f_l(kr) \Phi_{lm}(\Omega), \quad (\text{A10})$$

$$\mathbf{E}_{\text{TM},lm}(\mathbf{r}; k) = \frac{N_l}{k \sqrt{l(l+1)}} \nabla \times f_l(kr) \Phi_{lm}(\Omega), \quad (\text{A11})$$

$$\mathbf{H}_{\text{TM},lm}(\mathbf{r}; k) = \frac{-iN_l f_l(kr)}{Z^s \sqrt{l(l+1)}} \Phi_{lm}(\Omega), \quad (\text{A12})$$

where f_l is the radial dependence, which is given by spherical Bessel and Neumann functions j_l and n_l , respectively, or by outgoing and incoming spherical Hankel functions $h_l^{(+)} = j_l + in_l$ and $h_l^{(-)} = j_l - in_l$, respectively. In addition, N_l is the normalization constant that is determined by Eq. (20), and Z^s is the impedance of the surrounding homogeneous and isotropic space, while k is here the wavenumber in the surrounding medium. Note that the angular dependence of Eqs. (A9) to (A12) is solely given by the vector spherical harmonics, because

$$\nabla \times f_l \Phi_{lm} = -\frac{1}{r} \left[l(l+1) f_l \mathbf{Y}_{lm} + \frac{\partial r f_l}{\partial r} \Psi_{lm} \right]. \quad (\text{A13})$$

While the orthogonality relations of the vector spherical harmonics given by Eqs. (A2) to (A5) contain complex conjugation, the complex conjugation is replaced by a reciprocal conjugation in Eqs. (20) and (21). In order to use the orthogonality properties of the vector spherical harmonics, we chose

$$\mathbb{F}_{p,lm}^{\text{R}}(\mathbf{r}; k) = (-1)^m \mathbb{F}_{p,l,-m}(\mathbf{r}; k), \quad (\text{A14})$$

where $\mathbb{F}_{p,l,-m}$ is the supervector consisting of the electric and magnetic fields given by Eqs. (A9) to (A12). Thus, by using Eq. (A13) as well as

$$\hat{\mathbf{e}}_r \cdot (\Phi_{l'm'}^* \times \mathbf{Y}_{lm}) = 0, \quad (\text{A15})$$

$$\hat{\mathbf{e}}_r \cdot (\Phi_{l'm'}^* \times \Psi_{lm}) = -\Psi_{l'm'}^* \cdot \Psi_{lm}, \quad (\text{A16})$$

we obtain after some algebra that

$$\begin{aligned} i \oint_{\Omega} d\Omega \hat{\mathbf{e}}_r \cdot \left(\tilde{\mathbf{E}}_{p',l',m'}^{\text{R}} \times \mathbf{H}_{p,lm} \right) &= \\ &= \frac{N_l^2}{Z^s} \delta_{l,l'} \delta_{m,m'} \delta_{p,p'} \begin{cases} \frac{\tilde{f}_l}{kr} \frac{\partial r f_l}{\partial r} & \text{for } p = \text{TE}, \\ -\frac{\tilde{f}_l}{kr} \frac{\partial r \tilde{f}_l}{\partial r} & \text{for } p = \text{TM}, \end{cases} \end{aligned} \quad (\text{A17})$$

where the tilde indicates that the first field might have a different radial dependence than the second field.

Let us now define the outgoing and incoming fields $\mathbb{O}_{p,lm}$ and $\mathbb{I}_{p,lm}$, respectively, such that their radial dependence is given by the outgoing and incoming spherical Hankel functions. Thus, the anti-symmetric form of

Eq. (9) results in Eq. (21) for identical Hankel functions. For pairs of fields with incoming and outgoing Hankel functions, respectively, it is proportional to the Wronskian

$$W[h_l^{(+)}, h_l^{(-)}] = h_l^{(+)} \frac{\partial h_l^{(-)}}{\partial x} - h_l^{(-)} \frac{\partial h_l^{(+)}}{\partial x} = \frac{-2i}{x^2}, \quad (\text{A18})$$

with x denoting the argument of the spherical Hankel functions, which yields Eq. (20) for a spherical volume of radius R , provided that

$$N_l = \sqrt{\frac{-Z^s}{R^2 W[h_l^{(+)}(kR), h_l^{(-)}(kR)]}} = k \sqrt{\frac{Z^s}{2i}}. \quad (\text{A19})$$

We note that the background field \mathbb{F}_{BG} that fulfills Eq. (14) is understood to be without singularities. Thus, the radial dependence of the background field must be given by a spherical Bessel function j_l . This means that the superposition of incoming and outgoing fields $\mathbb{I}_{p,lm}$ and $\mathbb{O}_{p,lm}$ removes the diverging contribution of the spherical Hankel function.

For single particles, the reciprocal conjugate \mathbb{F}_n^{R} can be deduced from \mathbb{F}_n by going from azimuthal order m to $-m$. The analytical normalization of the resonant states in Eq. (13) can be simplified by using [26]

$$\mathbb{F}'_n = \frac{1}{k_n} (\mathbf{r} \cdot \nabla) \mathbb{F}_n. \quad (\text{A20})$$

Appendix B: Orthogonality of plane waves

We show here how to derive the reciprocal conjugate basis functions for the plane waves defined in Eqs. (33) and (34) that fulfills the orthonormality relations given by Eqs. (20) and (21). First, note that

$$\int_{S_u} dx dy \psi_{-\mathbf{K}', \pm}^{t/b}(\mathbf{r}; k) \psi_{\mathbf{K}, \pm}^{t/b}(\mathbf{r}; k) = \delta_{\mathbf{K}, \mathbf{K}'}, \quad (\text{B1})$$

from which we identify that the reciprocal conjugate basis functions are solutions for the opposite in-plane momentum $-\mathbf{K}$.

Next, we consider cross products of electric and magnetic components for reciprocal conjugate pairs of basis functions for the same polarization (TE or TM):

$$\hat{\mathbf{E}}_{\text{TE}, -\mathbf{K}, d'}^{t/b} \times \hat{\mathbf{H}}_{\text{TE}, \mathbf{K}, d}^{t/b} = \frac{1}{k^{t/b}} \begin{pmatrix} -K_x \\ -K_y \\ -s_d \kappa_{\mathbf{K}}^{t/b} \end{pmatrix}, \quad (\text{B2})$$

$$\hat{\mathbf{E}}_{\text{TM}, -\mathbf{K}, d'}^{t/b} \times \hat{\mathbf{H}}_{\text{TM}, \mathbf{K}, d}^{t/b} = \frac{1}{k^{t/b}} \begin{pmatrix} s_d s_{d'} K_x \\ s_d s_{d'} K_y \\ -s_d \kappa_{\mathbf{K}}^{t/b} \end{pmatrix}. \quad (\text{B3})$$

Here, $d, d' = \pm$, with $s_{\pm} = \pm 1$, which specifies the direction of propagation or decay. Note that for different polarizations and the same \mathbf{K} , the cross products of the electric and magnetic components vanishes. Therefore,

$$\hat{\mathbf{n}}_z \cdot \hat{\mathbf{E}}_{p', -\mathbf{K}, d'}^{t/b} \times \hat{\mathbf{H}}_{p, \mathbf{K}, d}^{t/b} = \pm \frac{\kappa_{\mathbf{K}}^{t/b}}{k^{t/b}} \delta_{p,p'}. \quad (\text{B4})$$

In the case that the magnetic field corresponds to an outgoing (or decaying) field, the sign on the right hand side of Eq. (B4) is negative. Otherwise, the sign is positive. Hence, for reciprocal pairs of basis functions with identical outgoing or incoming boundary conditions, the anti-symmetric form of Eq. (9) results in a cancelation of the integrands, which provides Eq. (21). For pairs with different boundary conditions, the sign change in Eq. (B4) prohibits the cancelation, resulting in

$$[{}_{p',-\mathbf{K}'}^{\text{t/b}} | {}_{p,\mathbf{K}}^{\text{t/b}}]_{T/B} = N_{\mathbf{K}}^{\text{t/b}} N_{-\mathbf{K}}^{\text{t/b}} \frac{2\kappa_{\mathbf{K}}^{\text{t/b}}}{iZ^{\text{t/b}} k^{\text{t/b}}} \delta_{p',p} \delta_{\mathbf{K}',\mathbf{K}}. \quad (\text{B5})$$

Since none of the quantities in the fraction on the right hand side depends on the sign of \mathbf{K} , we can define $N_{-\mathbf{K}}^{\text{t/b}} = N_{\mathbf{K}}^{\text{t/b}}$. Hence, equations (41) and (44) provide the orthonormality condition required in Eq. (20).

Appendix C: Normalization of resonant states in planar periodic systems

Based on the plane wave expansion of the resonant states in the exterior, it is possible to derive the surface contribution in the normalization condition given by Eq. (13). The analytical continuation of the fields in the top and bottom half space is given by

$$\mathbb{F}_n^{\text{t/b}}(\mathbf{r}; k) = \sum_{p,\mathbf{K}} \alpha_{n,p,\mathbf{K}}^{\text{t/b}} \mathbb{O}_{p,\mathbf{K}}^{\text{t/b}}(\mathbf{r}; k), \quad (\text{C1})$$

$$\left(\mathbb{F}_n^{\text{t/b}}\right)^{\text{R}}(\mathbf{r}; k) = \sum_{p,\mathbf{K}} \left(\alpha_{n,p,\mathbf{K}}^{\text{t/b}}\right)^{\text{R}} \left(\mathbb{O}_{p,\mathbf{K}}^{\text{t/b}}\right)^{\text{R}}(\mathbf{r}; k), \quad (\text{C2})$$

where the expansion coefficients $\alpha_{n,p,\mathbf{K}}^{\text{t/b}}$ and $\left(\alpha_{n,p,\mathbf{K}}^{\text{t/b}}\right)^{\text{R}}$ are calculated at the top and bottom surface of the minimal convex volume V . Owing to the periodicity, the surface integrals to adjacent unit cells in Eq. (13) cancel out each other. For the remaining surface integrals at the top and

bottom of the normalization volume V_N , we obtain:

$$\begin{aligned} & \left[\left(\mathbb{F}_n^{\text{t/b}}\right)^{\text{R}} \middle| \left(\mathbb{F}_n^{\text{t/b}}\right)' \right]_{T_N/B_N} = \\ & = \sum_{p,\mathbf{K}} \alpha_{n,p,\mathbf{K}}^{\text{t/b}} \left(\alpha_{n,p,\mathbf{K}}^{\text{t/b}}\right)^{\text{R}} \left[\left(\mathbb{O}_{p,\mathbf{K}}^{\text{t/b}}\right)^{\text{R}} \middle| \left(\mathbb{O}_{p,\mathbf{K}}^{\text{t/b}}\right)' \right]_{T_N/B_N}. \end{aligned} \quad (\text{C3})$$

The surface integral on the right hand side depends on the polarization, because either the electric or the magnetic polarization vectors, Eqs. (38) and (39), depend on k , while their counterparts Eqs. (37) and (40) vanish after differentiation with respect to k . After some algebra, we end up with

$$\left[\left(\mathbb{O}_{p,\mathbf{K}}^{\text{t/b}}\right)^{\text{R}} \middle| \left(\mathbb{O}_{p,\mathbf{K}}^{\text{t/b}}\right)' \right]_{T_N/B_N} = \pm \frac{1}{2} \frac{\partial n_{p,\mathbf{K}}^{\text{t/b}}}{\partial k} \Bigg|_{k_n} e^{2i\kappa_{\mathbf{K}}^{\text{t/b}} \Delta z_N^{\text{t/b}}}, \quad (\text{C4})$$

where the positive sign has to be taken for transverse-electric polarization and the minus sign corresponds to transverse-magnetic polarization, and $\Delta z_N^{\text{t/b}}$ is the distance between the top and bottom planes of the minimal convex volume V and the normalization volume V_N . This results in the normalization of the resonant states for planar periodic systems given by Eqs. (45) to (50). Equating the explicit form of the derivatives of the terms $n_{p,\mathbf{K}}^{\text{t/b}}$ defined in Eqs. (49) and (50) yields

$$\frac{\partial n_{\text{TE},\mathbf{K}}^{\text{t/b}}}{\partial k} \Bigg|_{k_n} = \left[\frac{|\mathbf{K}|}{\kappa_{\mathbf{K}}^{\text{t/b}}(k_n)} \right]^2 \frac{1}{k_n^{\text{t/b}}} \frac{\partial k^{\text{t/b}}}{\partial k} \Bigg|_{k_n} \quad (\text{C5})$$

$$- \frac{1}{Z^{\text{t/b}}(k_n)} \frac{\partial Z^{\text{t/b}}}{\partial k} \Bigg|_{k_n},$$

$$\begin{aligned} \frac{\partial n_{\text{TM},\mathbf{K}}^{\text{t/b}}}{\partial k} \Bigg|_{k_n} &= \left[\frac{|\mathbf{K}|}{\kappa_{\mathbf{K}}^{\text{t/b}}(k_n)} \right]^2 \frac{1}{k_n^{\text{t/b}}} \frac{\partial k^{\text{t/b}}}{\partial k} \Bigg|_{k_n} \quad (\text{C6}) \\ &+ \frac{1}{Z^{\text{t/b}}(k_n)} \frac{\partial Z^{\text{t/b}}}{\partial k} \Bigg|_{k_n}. \end{aligned}$$

-
- [1] G. Mie, *Ann. Phys.* **25**, 377 (1908).
[2] G. B. Arfken and H. J. Weber, *Mathematical methods for physicists*, 6th ed. (Elsevier, London, 2011).
[3] M. G. Moharam and T. K. Gaylord, *J. Opt. Soc. Am.* **71**, 811 (1981).
[4] B. T. Draine, *Astrophys. J.* **333**, 848 (1988).
[5] C. Hafner, *J. Opt. Soc. Am. A* **12**, 1057 (1995).
[6] O. J. F. Martin and N. B. Piller, *Phys. Rev. E* **58**, 3909 (1998).
[7] D. M. Whittaker and I. S. Culshaw, *Phys. Rev. B* **60**, 2610 (1999).
[8] S. G. Tikhodeev, A. L. Yablonskii, E. A. Muljarov, N. A. Gippius, and T. Ishihara, *Phys. Rev. B* **66**, 045102 (2002).
[9] J. Niegemann, W. Pernice, and K. Busch, *J. Opt. A: Pure Appl. Opt.* **11**, 114015 (2009).
[10] E. A. Muljarov, W. Langbein, and R. Zimmermann, *Europhys. Lett.* **92**, 50010 (2010).
[11] R. Sammut and A. W. Snyder, *Appl. Opt.* **15**, 1040 (1976).
[12] H. M. Lai, P. T. Leung, K. Young, P. W. Barber, and S. C. Hill, *Phys. Rev. A* **41**, 5187 (1990).
[13] L. A. Weinstein, *Open resonators and open waveguides* (Golem Press, Boulder, Col., 1969).
[14] C. Sauvan, J. P. Hugonin, I. S. Maksymov, and P. Lalanne, *Phys. Rev. Lett.* **110**, 237401 (2013).
[15] M. B. Doost, W. Langbein, and E. A. Muljarov, *Phys. Rev. A* **87**, 043827 (2013).
[16] L. J. Armitage, M. B. Doost, W. Langbein, and E. A. Muljarov, *Phys. Rev. A* **89**, 053832 (2014).
[17] M. B. Doost, W. Langbein, and E. A. Muljarov, *Phys. Rev. A* **90**, 013834 (2014).

- [18] E. A. Muljarov and W. Langbein, Phys. Rev. B **93**, 075417 (2016).
- [19] E. A. Muljarov and W. Langbein, Phys. Rev. B **94**, 235438 (2016).
- [20] T. Weiss, M. Mesch, M. Schäferling, H. Giessen, W. Langbein, and E. A. Muljarov, Phys. Rev. Lett. **116**, 237401 (2016).
- [21] T. Weiss, M. Schäferling, H. Giessen, N. A. Gippius, S. G. Tikhodeev, W. Langbein, and E. A. Muljarov, Phys. Rev. B **96**, 045129 (2017).
- [22] Q. Bai, M. Perrin, C. Sauvan, J. P. Hugonin, and P. Lalanne, Opt. Express **21**, 27371 (2013).
- [23] P. T. Kristensen, C. V. Vlack, and S. Hughes, Opt. Lett. **37**, 1649 (2012).
- [24] P. T. Kristensen, R.-C. Ge, and S. Hughes, Phys. Rev. A **92**, 053810 (2015).
- [25] E. A. Muljarov and W. Langbein, Phys. Rev. A **96**, 017801 (2017).
- [26] E. A. Muljarov and T. Weiss, arXiv:1801.08883 (2018).
- [27] M. B. Doost, W. Langbein, and E. A. Muljarov, Phys. Rev. A **85**, 023835 (2012).
- [28] S. Fan and W. Suh, J. Opt. Soc. Am. A **20**, 569 (2003).
- [29] N. A. Gippius, S. G. Tikhodeev, and T. Ishihara, Phys. Rev. B **72**, 45138 (2005).
- [30] Z. Ruan and S. Fan, Phys. Rev. A **85**, 043828 (2012).
- [31] M. Perrin, Opt. Express **24**, 27137 (2016).
- [32] J. Yang, H. Giessen, and P. Lalanne, Nano Lett. **15**, 3439 (2015).
- [33] F. Alpeggiani, N. Parappurath, E. Verhagen, and L. Kuipers, Phys. Rev. X **7**, 021035 (2017).
- [34] J. Yang, J. P. Hugonin, and P. Lalanne, ACS Photonics **3**, 395 (2015).
- [35] J. R. de Lasson, J. Mork, and P. T. Kristensen, J. Opt. Soc. Am. B **30**, 1996 (2013).
- [36] U. Fano, Phys. Rev. **124**, 1866 (1961).
- [37] N. Liu, H. Liu, S. Zhu, and H. Giessen, Nature Photonics **3**, 157 (2009).
- [38] B. Gallinet and O. J. F. Martin, Opt. Express **19**, 22167 (2011).
- [39] N. Liu, M. Mesch, T. Weiss, M. Hentschel, and H. Giessen, Nano Lett. **10**, 2342 (2010).
- [40] X. Yin, M. Schäferling, B. Metzger, and H. Giessen, Nano Lett. **13**, 6238 (2013).
- [41] I. Fernandez-Corbaton, M. Fruhnert, and C. Rockstuhl, Phys. Rev. X **6**, 031013 (2016).
- [42] N. A. Gippius, T. Weiss, S. G. Tikhodeev, and H. Giessen, Opt. Express **18**, 7569 (2010).
- [43] G. Granet, J. Opt. Soc. Am. A **16**, 2510 (1999).
- [44] G. Granet and J. P. Plumey, J. Opt. A: Pure Appl. Opt. **4**, S145 (2002).
- [45] T. Weiss, G. Granet, N. A. Gippius, S. G. Tikhodeev, and H. Giessen, Opt. Express **17**, 8051 (2009).
- [46] T. Weiss, N. A. Gippius, S. G. Tikhodeev, G. Granet, and H. Giessen, J. Opt. A: Pure Appl. Opt. **11**, 114019 (2009).
- [47] S. Essig and K. Busch, Opt. Express **18**, 23258 (2010).
- [48] T. Weiss, N. A. Gippius, S. G. Tikhodeev, G. Granet, and H. Giessen, J. Opt. Soc. Am. A **28**, 238 (2011).
- [49] D. A. Bykov and L. L. Doskolovich, J. Lightwave Technol. **5**, 793 (2012).
- [50] A. B. Akimov, N. A. Gippius, and S. G. Tikhodeev, Pisma ZhETF **93**, 473 (2011).
- [51] P. G. Etchegoin, E. C. Le Ru, and M. Meyer, J. Chem. Phys. **125**, 164705 (2006).
- [52] R. G. Barrera, G. A. Estévez, and J. Giraldo, Eur. J. Phys. **6**, 287 (1985).
- [53] J. D. Jackson, *Classical electrodynamics*, 3rd ed. (John Wiley & Sons, 1999).