

100% Reliable Algorithm for Second-Harmonic-Generation Frequency-Resolved Optical Gating

Rana Jafari,* Travis Jones, and Rick Trebino

School of Physics, Georgia Institute of Technology, 837 State Street, Atlanta, GA 30332, USA

*rjafari7@gatech.edu

Abstract: We demonstrate a novel algorithmic approach for the second-harmonic-generation (SHG) frequency-resolved optical gating (FROG) ultrashort-pulse-measurement technique that always converges and, for complex pulses, is also much faster. It takes advantage of the Paley-Wiener Theorem to retrieve the precise pulse spectrum—half the desired information—directly from the measured trace. It also uses a multi-grid approach, permitting the algorithm to operate on smaller arrays for early iterations and on the complete array for only the final few iterations. We tested this approach on more than 25,000 randomly generated complex pulses, yielding SHG FROG traces to which noise was added, and have achieved convergence to the correct pulse in all cases. Moreover, convergence occurs in less than half the time for extremely large traces corresponding to extremely complex pulses with time-bandwidth products up to 100.

1. Introduction

Ultrashort-laser-pulse measurement has remained challenging since the origin of the field of ultrafast optics. Intensity autocorrelation yields only a blurry black-and-white image of the pulse [1]. Worse, for pulse trains with pulse-shape instability, an ultrashort “coherent artifact” contaminates the autocorrelation trace, often inducing researchers to claim erroneously short pulse lengths [2, 3]. Modern techniques provide the complete temporal intensity and phase but still have serious drawbacks. Some measure *only* the coherent artifact [3-7]. Some can measure only simple pulses. Others are too complex experimentally or have limited applications.

Arguably, the most practical, reliable, and well-developed method is frequency-resolved optical gating (FROG), whose variations generate various types of spectrograms of the pulse, depending on the nonlinear-optical process involved [1]. FROG routinely measures pulses from attoseconds to nanoseconds in length [8, 9], from the XUV to the IR in wavelength [10, 11], and from simple to extremely complex in shape [12, 13]. Also, FROG’s two-dimensional traces significantly overdetermine the pulse, so that discrepancies between measured and retrieved traces indicate (in)stability of a pulse train [5, 7].

The simplest, most sensitive, and most prevalent FROG variation uses second-harmonic generation (SHG). Indeed, the pulse-shaping community routinely uses SHG FROG to measure potentially very complex pulses [14, 15]. Additionally, it has been proven mathematically that all [16] pulses can be uniquely determined by SHG FROG up to well-known trivial ambiguities [17, 18]. SHG FROG’s iterative pulse-retrieval algorithm is, however, the least reliable. While it generally converges quickly (~100ms) and reliably (~100%) for simple pulses, it tends to stagnate for more complex pulses. For pulses with time-bandwidth products (TBPs) of 20, for example, the convergence probability falls to ~70%, and, for TBPs of 100, it falls to ~40% [13]. And the convergence times are long: ~1 minute and ~1/2 hour, respectively, when using code written in MATLAB.

Various alternative SHG FROG algorithms have been proposed. Genetic algorithms are more reliable (although how much so is unknown), but much slower [19]. Neural nets retrieve pulses quickly, but so far only for very simple pulses [20]. Other algorithms address other issues [21, 22]. Ptychographic algorithms address problems like missing data, rather than

speed or reliability [23]. For other FROG geometries [24], simulated-annealing algorithms have been used but are also extremely slow [25]. So far, only the algorithm for XFROG (a simple spectrogram) has achieved 100% convergence [13, 26], but XFROG’s requirement of a known gate pulse severely limits its applicability. In view of the prevalence and importance of SHG FROG for measuring ever more complex pulses and its need for reliable convergence to determine pulse-train stability, the development of a reliable algorithm for it is critical.

We have now solved this long-standing problem. Our solution uses the well-known generalized projections algorithm, but within a novel approach, using the Paley-Wiener Theorem [27] to *directly retrieve the pulse spectrum from the measured trace and hence to generate a vastly improved initial guess*. It also uses multiple grids, in which the algorithm operates initially on smaller arrays—and hence much faster—and on the complete array for only the final few iterations [26, 28].

2. FROG-trace marginals and the direct retrieval of the pulse spectrum

Since the invention of FROG, the delay and frequency marginals (the integrals of the trace over all frequencies or delays, respectively) have been used as self-consistency checks for measurements or correction techniques for traces with systematic error. The delay marginal is easily seen to be the pulse temporal intensity’s autocorrelation, and a comparison of it and an independently measured autocorrelation provides confidence that the SHG FROG trace was correctly measured. Little else can be gleaned from the delay marginal, however, as retrieving the temporal intensity $I(t)$ from it, for example, is mathematically equivalent to the highly ill-posed one-dimensional phase-retrieval problem. Specifically, by the autocorrelation theorem, the Fourier transform of the delay marginal is the squared magnitude of the Fourier transform of the temporal intensity. In other words, all the phase information needed for this inverse Fourier transform is lost. Finding the correct phase information for this quantity is hopeless, as infinitely many ambiguous values—all possible values from 0 to 2π —are possible at every delay point, and no method exists, or is likely to exist, for finding it.

The frequency marginal in SHG FROG, $M^{SHG}(\omega)$, which is analogously related to the pulse spectrum, $S(\omega)$, appeared to have similar ambiguity issues and so has also not been considered useful for pulse retrieval. Unlike the delay marginal, however, it corresponds to the *autoconvolution*, not the autocorrelation, of the spectrum of the pulse [1]. As a result, the (inverse) Fourier-transform of the frequency marginal is simply the square—not the *mag* square—of the inverse Fourier-transform of the spectrum $s(t)$:

$$\mathcal{F}^{-1}\{M^{SHG}(\omega)\} = \left(\mathcal{F}^{-1}\{S(\omega)\}\right)^2 \equiv s(t)^2. \quad (1)$$

This inversion problem is actually significantly simpler and much less ill-posed. The function $s(t)$ can then be trivially found in terms of the frequency marginal, $M^{SHG}(\omega)$:

$$s_{\pm}(t) = \pm \sqrt{\mathcal{F}^{-1}\{M^{SHG}(\omega)\}}, \quad (2)$$

where, of course, at every point in time, t , the square root has two complex roots, $s_{\pm}(t)$, where we define $s_+(t)$ to be the root with positive real component, and $s_-(t)$ to be the root with negative real component, corresponding to phase values of $\varphi(t)$ and $\varphi(t) + \pi$, respectively. This yields 2^N possible solutions, where N is the number of temporal points, which is clearly infinitely less problematic than the problem of retrieving the intensity from the delay marginal with its infinite number of possible solutions at every point. But this still seems a difficult and ill-posed inversion problem.

Fortunately, the spectral-inversion problem enjoys several strong constraints. First is the fact that the spectrum is always square integrable, which follows from the facts that the pulse

has finite energy and the spectrum is always positive. This implies, by the Paley-Wiener Theorem, that its inverse Fourier transform $s(t)$ is a C^∞ function, that is, is continuous and has infinitely many continuous derivatives at every time point [27]. See Fig. 1. Even better, additional information is provided by the obvious fact that the spectrum is real, so its inverse Fourier-transform's real and imaginary parts must be even and odd, respectively. Furthermore, the always-positive nature of the spectrum can also be used to eliminate any remaining ambiguities, although this only proves necessary in the presence of noise and even then perhaps not.

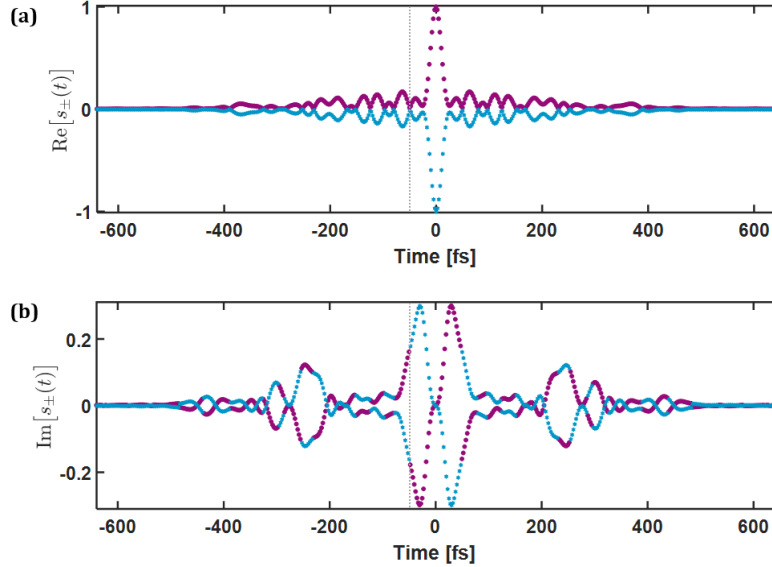


Fig. 1. Plots of (a) real, and (b) imaginary parts of $s_{\pm}(t) = \pm \sqrt{\mathcal{F}^{-1}\{M(\omega)\}}$ for a randomly generated complex pulse. The root with positive (negative) real component is shown in purple (blue), respectively. Note that the imaginary components of the roots can have either positive or negative values. As a result, the real part is always continuous, but the imaginary part may not be. But both components of the actual complex function $s(t)$ must be continuous. Therefore, the discontinuity of the imaginary part almost always determines sign of the correct roots when the real values are close to zero. Conversely, the continuity of real values can be applied when the imaginary points are close to zero. The gray dotted lines in the two plots pass in between temporal points $t = -50$ fs and $t = -47.5$ fs. If one begins at $t = 0$ and moves in the decreasing time direction on purple curves, when transitioning from $t = -47.5$ fs to $t = -50$ fs, the correct sign of the root must change to satisfy the C^∞ condition. Analogous arguments apply to all of the derivatives of $s(t)$, and such higher order discontinuities are also apparent in the plots.

In practice, we find that simple continuity of $s(t)$ eliminates most, if not all, ambiguities. We simply begin at some point t_i , and choose one root, $s(t_i)$. Then we find the two possible roots for the next temporal point, t_{i+1} . If $|s(t_i)|$ and $|s(t_{i+1})|$ are both nonzero, one of the roots $s_{\pm}(t_{i+1})$ will necessarily be considerably closer to $s(t_i)$ than its additive inverse. So we eliminate the more distant root, and it is then on to the next temporal point. Only when the real and imaginary components of the roots are both near zero does this approach fail, and, in the wings of the pulse, such failure is irrelevant.

When $s(t_i)$ and $s(t_{i+1})$ are both near zero, continuity of $s(t)$'s first derivative is implemented analogously. And if this fails, continuity of the second derivative can then be used. While this procedure can be continued ad infinitum, we have only gone as far as the second derivative.

More quantitatively, we define the finite differences:

$$\Delta_{0\pm} = s_{\pm}(t_{i+1}) - s(t_i),$$

$$\Delta_{1\pm} = [s_{\pm}(t_{i+1}) - s(t_i)] - [s(t_i) - s(t_{i-1})],$$

and,

$$\Delta_{2\pm} = \{[s_{\pm}(t_{i+1}) - s(t_i)] - [s(t_i) - s(t_{i-1})]\} - \{[s(t_i) - s(t_{i-1})] - [s(t_{i-1}) - s(t_{i-2})]\}. \quad (3)$$

For $s(t)$ to be C^∞ , these quantities should all be as close to zero as possible. One could implement them sequentially, as described above, but we have instead defined weighted sums of the mag-squared differences $\Delta_{0\pm}$, $\Delta_{1\pm}$, and $\Delta_{2\pm}$ for both signs of root. We then compare their values at t_{i+1} and choose the sign of $s_{\pm}(t_{i+1})$ that yields the lesser value of the mag-squared sums:

$$\varepsilon_{\pm} \equiv \alpha |\Delta_{0\pm}|^2 + \beta |\Delta_{1\pm}|^2 + \gamma |\Delta_{2\pm}|^2, \quad (4)$$

where we determined the weighting coefficients α , β , and γ empirically by optimizing the accuracy of the spectral amplitude retrieval on a sample set of simulated SHG FROG traces with scaled peak intensity of 1. The resulting values of these coefficients are 0.09, 0.425, and 1, respectively.

In implementing the above approach, we zero-padded the frequency marginal from length N to $2N$ in order to improve the temporal resolution of $s(t)$. In addition, we only used half of the temporal range and implemented the required symmetry conditions for $s(t)$ to find the other half of $s(t)$. We used the other half of the temporal range for an additional, perhaps slightly different (in the presence of noise), estimate of $s(t)$. Finally, in the presence of noise, it is possible that this process will fail slightly, yielding one or more small negative regions in the spectrum $S(\omega)$. In this case, the magnitude of the resulting $S(\omega)$ can be used. Alternatively, one could re-evaluate some of the decisions made by the above algorithm and choose alternative solutions for $s_{\pm}(t_{i+1})$ for cases with the most similar values of $\varepsilon_{\pm}(t_{i+1})$ and choose instead the solution with the most positive-definite spectrum. In view of the fact that two slightly different spectra were retrieved (as discussed above), when negative values appeared, we simply chose the spectrum with fewer negative values (rejecting the other) and took the absolute value of that spectrum, but we mention the latter approach here for future possible consideration.

We find that retrieving the correct spectrum directly from the SHG FROG trace is easy and reliable: the only spectral ambiguities that occur are the trivial spectral ambiguities already known to be present in SHG FROG itself (e.g., spectra due to well-separated pulses). In the absence of noise, the above process always succeeded perfectly. And in the presence of noise, it yielded the correct spectrum more than 99% of the time. And when it failed, it still yielded a spectrum very close to the correct one, thus yielding an excellent initial guess for the iteration in all cases. As a result, this means that half of the pulse information can be found immediately, before the iterative phase-retrieval algorithm even begins its task, and *only the spectral phase remains to be found*.

3. Multi-grid iterative algorithm

Next, we take a cue from genetic algorithms, which begin with multiple initial guesses and systematically modify and cull them. In particular, all initial guesses that we use, use the above-retrieved spectrum, but with random spectral phases, and we simultaneously improve them using the standard generalized projections (GP) algorithm [1]. We also cull them, keeping only the best solutions as we proceed.

In addition, the use of multiple guesses naturally takes advantage of parallel processing, which has already found its way into phase-retrieval algorithms [29]. MATLAB provides an

easy implementation of explicit parallelism, in which a single MATLAB command or M-function runs simultaneously on the available multiple cores even in current laptops. In this work, we used a four-core processor and MATLAB’s parallel processing by simply executing a “par-for” (parallel for loop), and by doing so, four initial guesses are tried simultaneously.

Finally, our approach further takes advantage of multiple grids, in which we interpolate the trace to smaller sizes ($N/4 \times N/4$ and $N/2 \times N/2$) for the early iterations. If $N \times N$ is the size of the SHG FROG-trace array, the number of operations in an iteration scales as N^2 . Thus, we test multiple guesses much more quickly on these smaller arrays and only retain the pulses whose traces best match the measured one. Also, we re-apply the retrieved spectrum from the frequency marginal if it provides a trace with a better delay marginal than the one obtained from the trace of the retained field. By comparing these autocorrelations, not only can we check whether the guess’s current spectrum is a better one to be used, but we also ensure that the spectral phase matches the spectrum for a given value of ω , as the first-order temporal phase ambiguity yields a shift in the spectral domain. By the time the algorithm reaches the full array, only the few best pulses remain. There, they are tried one by one, and, nearly always, the first one converges to the correct trace in only a few iterations.

We call this approach the Retrieved-Amplitude N-grid Algorithmic (RANA) approach. The RANA approach implemented here uses the parameters presented in Table 1 for the number of initial guesses (IGs) and iterations on each grid for seven sets of pulses with different complexities.

Table 1. Parameters of the RANA approach used here. The value of the G error (rms difference between the measured and retrieved traces) for determining convergence, number of initial guesses (IGs), and number of iterations that are used on each grid in RANA approach for pulses with TBP of 2.5 to 100.

Pulse TBP_{rms}	Array size, N	$N/4 \times N/4$		$N/2 \times N/2$		$N \times N$		Maximum G error	# of sample pulses
		# of IGs	# of iterations	# of IGs	# of iterations	# of IGs	# of iterations		
2.5	64	12	25	8	20	4	NA	9.0e-3	5000
5	128	16	25	12	20	4	NA	6.4e-3	5000
10	256	32	25	16	25	4	NA	4.5e-3	5000
20	512	36	25	16	25	4	NA	3.2e-3	5000
40	1024	44	30	20	25	8	NA	2.2e-3	5000
80	2048	48	30	24	25	8	NA	1.6e-3	500
100	4096	60	30	32	25	8	NA	1.1e-3	200

4. Results

We tested the RANA approach on simulated sets of pulses with rms TBP of 2.5, 5, 10, 20, 40, 80, and 100. To generate the simulated fields, we began with a random complex array in the time domain and multiplied it by a Gaussian temporal intensity profile. Then, we multiplied it in the frequency domain by a Gaussian spectrum. To obtain the desired TBP, we adjusted the widths of the temporal and spectral Gaussian intensities. The SHG FROG trace sizes of these pulses were chosen such that the intensity at the perimeter of the trace falls to 0.0001 of the peak intensity of the trace. The rms TBP of a pulse can be found directly from the SHG trace, but here we use the following more traditional expression to determine the rms TBP:

$$TBP_{rms} = \frac{\left(\int_{-\infty}^{+\infty} t^2 I(t) dt \right) - \left(\int_{-\infty}^{+\infty} t I(t) dt \right)^2}{\int_{-\infty}^{+\infty} I(t) dt} \times \frac{\left(\int_{-\infty}^{+\infty} (\omega - \omega_0)^2 S(\omega - \omega_0) d\omega \right) - \left(\int_{-\infty}^{+\infty} (\omega - \omega_0) S(\omega - \omega_0) d\omega \right)^2}{\int_{-\infty}^{+\infty} S(\omega - \omega_0) d\omega}.$$

Because SHG FROG traces are usually contaminated with multiplicative noise, 0.5% multiplicative noise was applied to the simulated traces for the pulse-retrieval. We reiterate here that noise in the trace could, in principle, and can, in practice, interfere with the direct retrieval of the spectrum from the frequency marginal. The spectral intensity retrieved from these noisy traces was actually incorrect for a small fraction (<1%) of the traces (see Table 2 and Fig. 2). But the resulting spectrum, even when wrong, differed only slightly from the actual spectrum and still provided an excellent initial guess and yielded rapid convergence.

Table 2. Performance of spectrum retrieval from the frequency marginal of the FROG traces with 0.5% multiplicative noise.

# of sample pulses	Pulse TBP_{rms}	Array size, N	Average rms error, $\sqrt{\frac{1}{N} \sum_{i=1}^N S_i^{simulated} - S_i^{retrived}^2}$	# of pulses with rms error > 0.12
5000	2.5	64	0.0056	3 out of 5000
5000	5	128	0.0080	16 out of 5000
5000	10	256	0.0110	17 out of 5000
5000	20	512	0.0151	25 out of 5000
5000	40	1024	0.0180	43 out of 5000
500	80	2048	0.0227	2 out of 500
200	100	4096	0.0226	1 out of 200

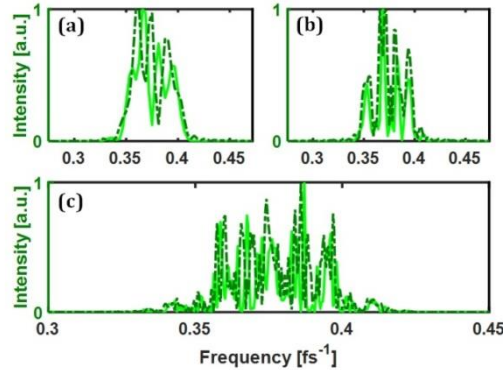


Fig. 2. Examples of incorrect spectra retrieved directly from noisy SHG FROG trace frequency marginals in our study. The simulated spectrum and the retrieved spectrum from the frequency marginal are shown in solid light green and dashed dark green lines, respectively. (a) $TBP = 2.5$, the rms error = 0.21, (b) $TBP = 5$, rms error = 0.16, and (c) $TBP = 20$, rms error = 0.17. Note, however, that these “incorrect spectra” still retain the rough structure of the spectrum and still provided excellent initial guesses for the iteration.

It should also be noted, as mentioned earlier, that the same spectral ambiguities that appear in SHG FROG measurement will also be present in the process of retrieving the spectral amplitude from $M(\omega)$. For instance, the ambiguity in the relative phase of sub-pulses in a double pulse results in different spectral intensities having the same FROG trace, and hence, the same spectrum autoconvolution [1]. This issue also appeared in a number of cases in our study, and hence the retrieval procedure generated the other possible spectrum. These cases cannot, of course, be considered algorithm stagnations, and we dealt with this issue by using a convergence condition involving the G error (the rms difference between retrieved

traces). We also confirmed that the retrieved pulses also agreed with the generated ones up to this ambiguity, but this was probably not necessary in view of the SHG FROG uniqueness proof.

Figure 3 shows a typical complex theoretical pulse with a TBP of 20 retrieved by the RANA approach.

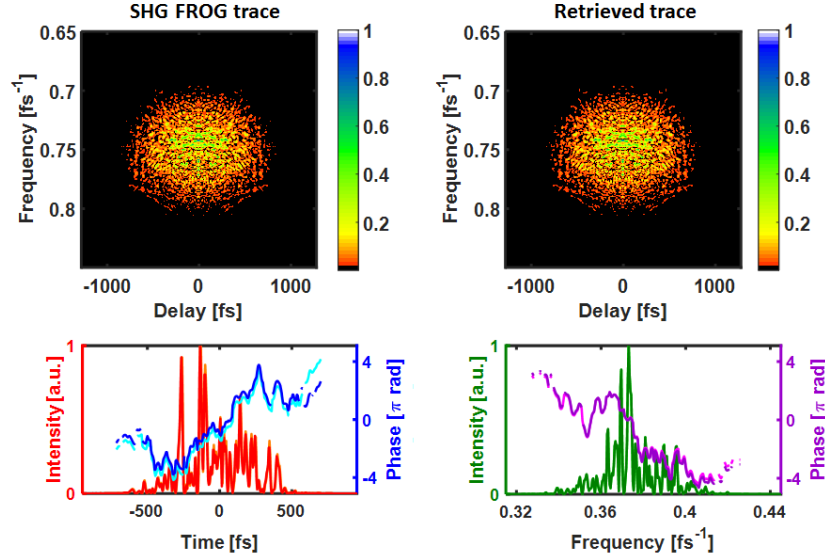


Fig. 3. Typical SHG FROG pulse-retrieval result with a G error = 0.0014 and a trace size of 512×512 for a pulse with $TBP = 20$. The simulated temporal/spectral intensity and phase are shown in orange/light green and cyan/magenta, respectively. The retrieved temporal/spectral intensity and phase are shown in red/dark green and blue/purple, respectively.

Table 3 shows the results of running the RANA approach for thousands of pulses with TBPs as high as 100. For the statistical analysis of the convergence for pulses with $TBP = 80$ and 100, smaller samples of pulses were used for the sake of time. But, in view of the fact that convergence was nearly always achieved for the first pulse on the final $N \times N$ array even for these very complex pulses, the results are likely not impacted by this fact.

Table 3. Performance of GP algorithm and RANA approach on SHG traces with different complexity and size.

Pulse TBP_{rms}	Array size, N	Average retrieval time for converging initial guess	GP algorithm percentage of convergence on first initial guess	# of sample pulses	Average retrieval time	RANA approach percentage of convergence on first initial guess
2.5	64	0.051 s	75%	5000	0.150 s	(5000/5000) 100%
5	128	0.30 s	74%	5000	0.289 s	(5000/5000) 100%
10	256	1.29 s	70%	5000	1.25 s	(5000/5000) 100%
20	512	6.03 s	63%	5000	4.49 s	(5000/5000) 100%
40	1024	45.7 s	56%	5000	28.6 s	(5000/5000) 100%
80	2048	315 s	51%	500	146 s	(500/500) 100%
100	4096	31 min	54%	200	14 min	(200/200) 100%

The RANA approach never stagnated.

5. Experimental results

To test the RANA approach with a relatively challenging *experimental* trace, we measured a SHG FROG trace of a chirped double-pulse using a Swamp Optics GRENOUILLE (model 8-50). See Fig. 4. We used the standard GP algorithm and also the RANA approach to retrieve the pulse for ten different sets of initial guesses. We found that the standard GP algorithm converged to the lowest G error = 0.014 in only five of the ten attempts, while the RANA approach converged to this minimum error in all the tries.

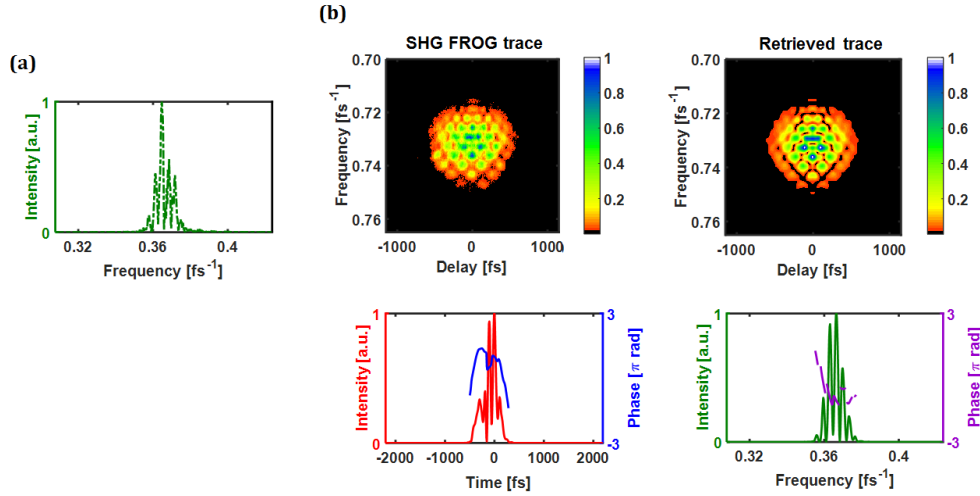


Fig. 4. Experimental SHG FROG trace used to study the performance of RANA approach. (a) The spectrum retrieved directly from the SHG trace. Note that this spectrum actually differs slightly from the correct spectrum, but this does not affect the results. (b) Retrieval results. A 512×512 trace is used to obtain better temporal and spectral resolutions for this complex pulse. Both approaches converge to a G error = 0.014 and G' error = 0.29 (G' is normalized by the trace area, rather than the number of points and so can be compared to the trace noise). Both G values indicate excellent agreement, as does visual inspection of the traces.

6. Discussion

The RANA approach involves directly retrieving the pulse spectrum from the SHG FROG trace, defining multiple initial guesses with that retrieved spectrum and random spectral phases, and using multiple grids. In our study, this approach converged for every single one of the more than 25,000 pulses we tried, including those with extremely large TBPs of 100. For extremely complex pulses, the RANA approach also converged much faster than the standard generalized projections algorithm—which we continue to use in the RANA approach, but within the framework of the multiple initial guesses, essentially all having the correct spectra, and the multiple grids.

The high reliability of the RANA approach is due mainly to the use of vastly improved initial guesses involving the correct (or nearly correct) spectrum. This was evident because, if the retrieved spectrum from the frequency marginal was used as the initial guess, the standard GP algorithm’s convergence performance for only one initial guess on the full grids increases to well above 90% (especially for the large TBPs, interestingly). See Table 4, which compares the performance of the GP algorithm with a random complex initial guess and an initial guess with spectral amplitude obtained from the frequency marginal and random spectral phase. The effect of the improved initial guess can be seen by the significant improvement in the percentage of convergence of GP algorithm.

Table 4. Performance of GP algorithm with an initial guess with the spectral intensity obtained from the frequency marginal of SHG FROG trace.

Initial guess	Pulse <i>TBP</i>	Percentage of convergence	Average retrieval time
Random complex array	2.5	75%	0.051s
Retrieved spectrum and random phase		92%	0.041s
Random complex array	5	74%	0.30s
Retrieved spectrum and random phase		95%	0.20s
Random complex array	10	70%	1.29s
Retrieved spectrum and random phase		98%	0.85s
Random complex array	20	63%	6.03s
Retrieved spectrum and random phase		98%	4.37s
Random complex array as initial guess	40	56%	45.7s
Retrieved spectrum and random phase		97%	27.1s

The multiple initial guesses increase reliability as well but only occasionally prove necessary.

The multiple (that is, smaller) grids serve mainly to speed convergence.

The use of parallel processing is so trivially implemented that multiple initial guesses would seem obviously useful to all FROG algorithms. Parallelism also speeds convergence, of course. For example, for pulses with $TBP = 5$, in the absence of the implementation of parallelism, the average retrieval time approximately doubled. Of course, MATLAB’s fast Fourier transform also uses parallel processing, so the standard GP algorithm with only one guess benefits from it as well, but some steps in it do not naturally lend themselves to parallel processing. The RANA approach, on the other hand, does so more completely and at every step and so operated more rapidly for complex pulses.

As the four or eight remaining guesses were considered consecutively for the final few iterations in the final grid (the full $N \times N$ trace), and convergence was nearly always achieved for the first initial guess tried, it is likely that fewer initial guesses are in fact necessary. For

example, because the mere use of the correct (or nearly correct) spectrum for the initial guess yields a >90% probability of convergence in the standard GP approach, use of twenty initial guesses would yield a probability of stagnation of 10^{-20} if independent trials can be assumed. This implies that the RANA approach is vastly more powerful than is actually necessary for the problem and hence includes much flexibility in the trade-off between reliability and speed. We have not optimized all the approach's parameters, and it would seem that increased speed beyond our results is likely without sacrificing robustness.

It is interesting that the RANA approach works so well even in the presence of noise, when the spectrum-retrieval process occasionally failed. This is likely because the retrieved spectrum, even in these cases, is much closer to the correct spectrum than currently used initial guesses consisting entirely of random noise or random temporal phase noise in conjunction with the autocorrelation approximating the temporal intensity. It should also be mentioned that we have not fully taken advantage of the positivity of spectrum, as the occasional spectral negativity can be used for the elimination of the incorrect sign of $s_{\pm}(t)$ when the values of ε_{\pm} are close to zero and close to each other. In our study, we have only used the symmetry properties of the real and imaginary parts and obtained the spectrum from two halves of data (by considering evenness and oddness of real and imaginary parts, respectively) and rejected the one that yields the larger number of negative points. Furthermore, as mentioned in the text, there are alternative approaches that could be implemented to directly retrieve the spectrum rather than the weighted sums; for example, a sequential comparison of first continuity, then the first derivative, then the second order derivative, etc.

Finally, we used MATLAB for this comparative study, but much faster programming languages are available, and convergence should be considerably faster using such a language.

7. Conclusion

In this work, we implemented an algorithmic approach for SHG FROG phase-retrieval algorithm that benefits from significantly better initial guesses that are obtained directly from the SHG trace. These initial guesses contain the spectral intensity of the pulse that are obtained from the frequency marginal of SHG trace based on Paley-Wiener Theorem. Furthermore, by implementation of the multi-grid scheme and multi-initial guesses we achieved 100% convergence which was also faster for more complicated pulses. Overall, the RANA approach is quite general: if an improved (at least as reliable, but faster) single-guess, single-grid algorithm emerges someday, it could also be used within the RANA approach in place of the current standard generalized projections algorithm, thus achieving even faster convergence. With the RANA approach, ultrahigh reliability in SHG FROG pulse retrieval has finally arrived.

Acknowledgments

We would like to thank Esmerando Escoto for the helpful discussions.

Disclosures

Rick Trebino owns a company that sells pulse-measurement devices.

Funding

National Science Foundation (#ECCS- 1307817) and the Georgia Research Alliance.

References

1. R. Trebino, *Frequency-Resolved Optical Gating: The Measurement of Ultrashort Laser Pulses* (Kluwer Academic Publishers, Boston, 2002).

2. R. A. Fisher and J. J. A. Fleck, "On the Phase Characteristics and Compression of Picosecond Pulses," *Applied Physics Letters* **15**, 287-290 (1969).
3. J. Ratner, G. Steinmeyer, T. C. Wong, R. Bartels, and R. Trebino, "The coherent artifact in modern pulse measurements," *Opt. Lett.* **37**, 2874-2876 (2012).
4. M. Rhodes and R. Trebino, "Coherent Artifact Study of Multiphoton Intrapulse Interference Phase Scan," in *CLEO: 2015*, OSA Technical Digest (online) (Optical Society of America, 2015), JTU5A.15.
5. M. Rhodes, Z. Guang, and R. Trebino, "Unstable and Multiple Pulsing Can Be Invisible to Ultrashort Pulse Measurement Techniques," *Applied Sciences* **7**, 40 (2017).
6. M. Rhodes, M. Mukhopadhyay, J. Birge, and R. Trebino, "Coherent artifact study of two-dimensional spectral shearing interferometry," *JOSA B* **32**, 1881-1888 (2015).
7. M. Rhodes, G. Steinmeyer, J. Ratner, and R. Trebino, "Pulse - shape instabilities and their measurement," *Laser & Photonics Reviews* **7**, 557-565 (2013).
8. V. S. Yakovlev, J. Gagnon, N. Karpowicz, and F. Krausz, "Attosecond Streaking Enables the Measurement of Quantum Phase," *Physical Review Letters* **105**, 073001 (2010).
9. P. Bownan and R. Trebino, "Complete single-shot measurement of arbitrary nanosecond laser pulses in time," *Opt. Express* **19**, 1367-1377 (2011).
10. B. A. Richman, M. A. Krumbügel, and R. Trebino, "Temporal characterization of mid-IR free-electron-laser pulses by frequency-resolved optical gating," *Opt. Lett.* **22**, 721-723 (1997).
11. F. Quere, Y. Mairesse, and J. Itatani, "Temporal Characterization of Attosecond XUV Fields," *Journal of Modern Optics* **52**, 339-361 (2005).
12. X. Gu, L. Xu, M. Kimmel, E. Zeek, P. O'Shea, A. P. Shreenath, R. Trebino, and R. S. Windeler, "Frequency-resolved optical gating and single-shot spectral measurements reveal fine structure in microstructure-fiber continuum," *Opt. Lett.* **27**, 1174-1176 (2002).
13. L. Xu, E. Zeek, and R. Trebino, "Simulations of frequency-resolved optical gating for measuring very complex pulses," *J. Opt. Soc. Am. B* **25**, A70-A80 (2008).
14. G. Stobrawa, M. Hacker, T. Feurer, D. Zeidler, M. Motzkus, and F. Reichel, "A new high-resolution femtosecond pulse shaper," *Applied Physics B* **72**, 627-630 (2001).
15. B. von Vacano, W. Wohlleben, and M. Motzkus, "Actively shaped supercontinuum from a photonic crystal fiber for nonlinear coherent microspectroscopy," *Optics Letters* **31**, 413-415 (2006).
16. D. Keusters, H.-S. Tan, P. O'Shea, E. Zeek, R. Trebino, and W. S. Warren, "Relative-phase ambiguities in measurements of ultrashort pulses with well-separated multiple frequency components," *JOSA B* **20**, 2226-2237 (2003).
17. T. Bendory, P. Sidorenko, and Y. C. Eldar, "On the Uniqueness of FROG Methods," *IEEE Signal Processing Letters* **24**, 722-726 (2017).
18. R. Trebino, K. W. DeLong, D. N. Fittinghoff, J. N. Sweetser, M. A. Krumbügel, and D. J. Kane, "Measuring Ultrashort Laser Pulses in the Time-Frequency Domain Using Frequency-Resolved Optical Gating," *Review of Scientific Instruments* **68**, 3277-3295 (1997).
19. S. F. Shu, "Evolving ultrafast laser information by a learning genetic algorithm combined with a knowledge base," *IEEE Photonics Technology Letters* **18**, 379-381 (2006).
20. T. Zahavy, A. Dikopoltsev, D. Moss, G. I. Haham, O. Cohen, S. Mannor, and M. Segev, "Deep learning reconstruction of ultrashort pulses," *Optica* **5**, 666-673 (2018).
21. P. D. Keathley, S. Bhardwaj, J. Moses, G. Laurent, and F. X. Kärtner, "Volkov transform generalized projection algorithm for attosecond pulse characterization," *New Journal of Physics* **18**, 073009 (2016).
22. P.-Y. Wu, H.-H. Lu, C.-Z. Weng, Y.-H. Chen, and S.-D. Yang, "Dispersion-corrected frequency-resolved optical gating," *Opt. Lett.* **41**, 4538-4541 (2016).
23. P. Sidorenko, O. Lahav, Z. Avnat, and O. Cohen, "Ptychographic reconstruction algorithm for frequency-resolved optical gating: super-resolution and supreme robustness," *Optica* **3**, 1320-1330 (2016).
24. J. M. Dudley, L. P. Barry, J. D. Harvey, M. D. Thomson, B. C. Thomsen, P. G. Bollond, and R. Leonhardt, "Complete characterization of ultrashort pulse sources at 1550 nm," *IEEE Journal of Quantum Electronics* **35**, 441-450 (1999).
25. P. Honzatko, J. Kanka, and B. Vrány, "Retrieval of the pulse amplitude and phase from cross-phase modulation spectrograms using the simulated annealing method," *Optics Express* **12**, 6046-6052 (2004).
26. R. Jafari and R. Trebino, "High-speed "multi-grid" pulse-retrieval algorithm for frequency-resolved optical gating," *Opt. Express* **26**, 2643-2649 (2018).
27. R. S. Strichartz, *A guide to distribution theory and Fourier transforms* (World Scientific Publishing Company, 2003).
28. C. W. Siders, J. L. W. Siders, F. G. Omenetto, and A. J. Taylor, "Multipulse interferometric frequency-resolved optical gating," *IEEE Journal of Quantum Electronics* **35**, 432-440 (1999).
29. Y. S. G. Nashed, D. J. Vine, T. Peterka, J. Deng, R. Ross, and C. Jacobsen, "Parallel ptychographic reconstruction," *Opt. Express* **22**, 32082-32097 (2014).