

Data Imputation by Pursuing Better Classification: A Supervised Kernel-Based Method

Ruikai Yang¹, Fan He², Mingzhen He¹, Kaijie Wang¹, Xiaolin Huang¹

¹Institute of Image Processing and Pattern Recognition, Department of Automation, Shanghai Jiao Tong University, China.

²Department of Electrical Engineering (ESAT), STADIUS Center for Dynamical Systems, Signal Processing and Data Analytics, KU Leuven, Belgium.

Keywords: data imputation, supervised learning, kernel methods, SVM

Abstract

Data imputation, the process of filling in missing feature elements for incomplete data sets, plays a crucial role in data-driven learning. A fundamental belief is that data imputation is helpful for learning performance, and it follows that the pursuit of better classification can guide the data imputation process. While some works consider using label information to assist in this task, their simplistic utilization of labels lacks flexi-

bility and may rely on strict assumptions. In this paper, we propose a new framework that effectively leverages supervision information to complete missing data in a manner conducive to classification. Specifically, this framework operates in two stages. Firstly, it leverages labels to supervise the optimization of similarity relationships among data, represented by the kernel matrix, with the goal of enhancing classification accuracy. To mitigate overfitting that may occur during this process, a perturbation variable is introduced to improve the robustness of the framework. Secondly, the learned kernel matrix serves as additional supervision information to guide data imputation through regression, utilizing the block coordinate descent method. The superiority of the proposed method is evaluated on four real-world data sets by comparing it with state-of-the-art imputation methods. Remarkably, our algorithm significantly outperforms other methods when the data is missing more than 60% of the features.

1 Introduction

The presence of missing data poses significant challenges in machine learning and data analysis (Tresp & Hofmann., 1998; Chan et al., 2003; García-Laencina et al., 2010; Little & Rubin., 2019; Emmanuel et al., 2021). In many real-world application scenarios, ensuring that all entries in the data are complete is a difficult task, and this can be attributed to various reasons. Firstly, it may occur due to limitations in data collection, such as time constraints or limited resources, resulting in certain observations being omitted. Secondly, data can be intentionally designed to have missing values, for instance, in survey studies where participants may choose not to answer certain ques-

tions, thereby introducing missing values into the data set. By completing missing data, researchers can uncover the underlying structure and relationships within the data set, optimizing the utilization of the complete data set to enhance the performance and efficiency of subsequent analyses. Therefore, the significance of filling in missing data becomes self-evident.

The existing data imputation methods primarily focus on the relationships among features. For example, mean imputation (MI, (Schafer, 1997)) considers the mean value of the feature, while other methods consider the low-rank property of the imputed matrix (Candès & Tao., 2010; Cai & Zhou., 2013; Sheikholesalmi et al., 2014; Xu et al., 2020) or incorporate similarity information (Troyanskaya et al., 2001; Batista & Monard., 2002; Śmieja et al., 2019). Some methods also utilize label information, with some performing different operations on data from different classes (Smola et al., 2005; Allison., 2009), while others treat labels as additional features and then complete the matrix (Goldberg et al., 2010). However, these utilizations of label information in imputation models lack flexibility and are insufficient to depict the complex relationship between data and labels. Considering a fundamental observation that *data are helpful for distinguishing the labels*, we can derive an imputation criterion:

data imputation should lead to improved classification performance.

Thus we expect imputation results that can perform better on subsequent tasks. Let us consider a toy example illustrated in Figure 1. In the synthetic two moons data set, we have a positive data with a missing value in the x_1 dimension and a negative data with

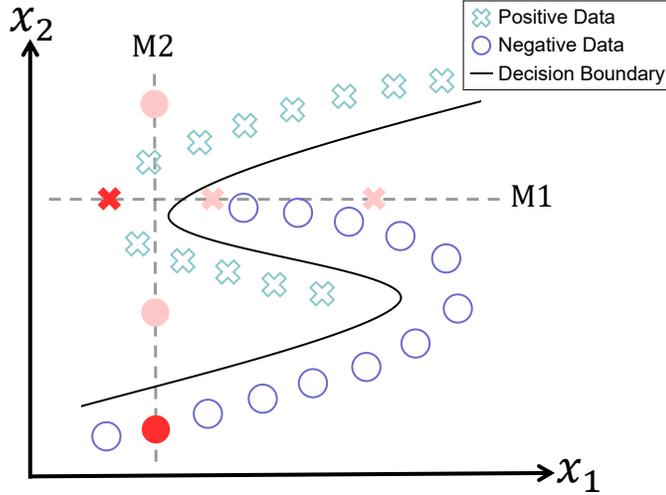


Figure 1: Imputation of the two moons data set. Positive and negative data are denoted by X and O, while the solid curve denotes the ideal decision boundary of the classifier. The gray dashed lines M1 and M2 represent all possible imputations for a positive data with a missing x_1 dimension and a negative data with a missing x_2 dimension, respectively. Among them, the red results are more likely to lead to better outcomes in the subsequent classification task compared to the pink results, making them more desirable.

a missing value in the x_2 dimension. All possible imputations for these two data are represented by gray dashed lines, labeled as M1 and M2. By applying the proposed imputation criterion, we prioritize selecting the red results over the pink results to improve the subsequent classification task.

In a given sequence of triplets $\{(\mathbf{x}_i, \mathbf{o}_i, y_i)\}_{i=1}^N$, where $\mathbf{x}_i \in \mathbb{R}^d$ and $y_i \in \mathbb{R}$, we typically use the set of observable features $\mathbf{o}_i \subseteq 2^{\{1, \dots, d\}}$ and missing features $*$ to represent the missing data $\mathbf{x}_{\mathbf{o}_i}^i \in (\mathbb{R} \cup \{*\})^d$. This sequence is then consolidated into an incomplete data set $\mathcal{D} = \{\mathbf{x}_{\mathbf{o}_i}^i, y_i\}_{i=1}^N$. The task now becomes to find suitable missing values that aid in classification. For kernel-based methods widely applied in machine learning, such as support vector machine (SVM, (Vapnik., 1999; Schölkopf & Smola., 2002; Steinwart & Christmann., 2008; Lee & Lin., 2013)), a significant characteristic

is that classifiers can be explicitly written as functions of the relationship between data and labels. The relationship between data will be defined by a kernel function, and different kernel functions provide distinct measures of similarity. Specifically, a kernel matrix or Gram matrix, denoted as $\mathbf{K} \in \mathbb{R}^{N \times N}$, is constructed, where $K_{i,j} = k(\mathbf{x}_i, \mathbf{x}_j)$ represents the similarity between data \mathbf{x}_i and \mathbf{x}_j using a proper positive definite kernel function $k(\cdot, \cdot) : \mathbb{R}^d \times \mathbb{R}^d \rightarrow \mathbb{R}$. A classifier is then trained based on this kernel matrix \mathbf{K} . When handling missing data, represented as $\mathbf{x}_{o_i}^i$, the value of $K_{i,\cdot} \in \mathbb{R}^N$ is unknown. Thus, it is necessary to find $\tilde{K}_{i,j}$ for data with missing features in order to establish appropriate relationships with other data. In SVM, this process can be seamlessly integrated with supervised information, leading to enhanced prediction accuracy in subsequent classification tasks. By considering prior knowledge of missing values and imposing constraints on the adjustment of the kernel matrix, we can effectively incorporate this information into the modeling process. The next step is to recover the missing values from the imputed matrix $\tilde{\mathbf{K}}$. This step is relatively easy, particularly in the traditional scenario where $N \gg d$. Because for each data, there is $N-1$ available supervised information stored in the kernel matrix to guide the imputation of d or fewer elements. In this paper, we propose a two-stage learning framework for data imputation: I) the kernel matrix is completed by pursuing high classification accuracy; II) the missing features are reconstructed to approximate the optimized kernel matrix. With the proposed method, we can find good estimates for missing values that lead to better classification performance in the subsequent task. Therefore, when faced with situations depicted in Figure 1, we are able to obtain the imputation results indicated by the red crosses and circles.

In the first stage, specifically, we begin by computing the initial kernel matrix based on the observed features. This matrix is then further modified through a process referred to as *kernel matrix imputation* throughout this paper. Recent studies (Liu et al., 2020; Wang et al., 2023) have demonstrated that integrating kernel learning and classifier optimization tasks, and alternating between them, can improve classification performance and naturally lead to a fine-tuned kernel matrix. The effectiveness of such joint learning ideas has recently been also confirmed in neural network-based methods as well (Le Morvan et al., 2021). Inspired by these ideas, we adopt a similar approach by combining the tasks of kernel matrix imputation and classifier training into a maximum-minimum optimization problem. However, for such joint optimization objectives, we need to ensure that the kernel matrix is optimized to achieve high classification accuracy while also making the classifier sufficiently robust. Otherwise, the flexibility of modifying the similarity relationships between data can make the classifier susceptible to overfitting. To prevent this situation, we introduce an additional perturbation matrix during the optimization of the kernel matrix. In the second stage, we utilize the block coordinate descent (BCD, (Tseng., 2001)) method to solve a non-convex problem. Although finding the global optimal solution is challenging, our numerical experiments demonstrate that when the data size is much larger than the feature dimension, the abundant supervisory information from the kernel matrix effectively guides the imputation process. As a result, we can still achieve highly accurate solutions. The main contributions of this paper are summarized as follows:

- To fully leverage label information, we propose a novel two-stage data imputation framework. This framework optimizes the similarity relationships between

data by utilizing supervision information and guides the data imputation process accordingly.

- We have developed a nonparametric method to impute the kernel matrix, which is performed alternately with the training of the classifier. By introducing a perturbation variable, we enhance the robustness of the classifier.
- We provide a solving algorithm based on the BCD to accurately recover missing data from a given kernel matrix. This algorithm effectively utilizes the learned similarity information among the training data.
- Experimental results on real data sets indicate that the imputed data generated by our framework exhibits excellent performance in classification tasks. Notably, when the missing ratio exceeds 60%, our algorithm outperforms other imputation methods significantly.

2 Related Work

The task of learning a classifier from missing data has been extensively studied in the past few decades, leading to the development of three main approaches as below.

Filling data before classification. A large portion of the research focuses on filling in the data before using it in the subsequent classification task. For instance, Ghahramani & Jordan. (1993) introduces a framework based on maximum likelihood density estimation for coping with missing data, utilizing mixture models and the expectation-maximization principle. And Bhattacharyya et al. (2004) modeled the missing values as Gaussian random variables and estimated their mean and covariance from the ob-

served data and labels, which were then used in a modified SVM. Later, Williams et al. (2007) used a Gaussian mixture model to estimate the conditional probability of missing values given the observed data and imputed them using expectations. Additionally, some work estimated complete data by computing the corresponding marginal distributions of the missing data (Smola et al., 2005) or assumed a low-rank subspace for the data and treated labels as an additional feature to handle missing values (Goldberg et al., 2010). In recent years, Rabin. (2020) proposed a kernel-based multi-scale data imputation method, and López. (2023) utilized the known matrix structure in terms of subspaces to assist in matrix imputation. But these methods separate the imputation process from the classification task, which may not necessarily lead to improved performance with their imputation outcomes.

Filling the kernel matrix before classification. Another research direction focuses on kernel-based machine learning algorithms. In this approach, classification or regression tasks only require the kernel matrix based on the training data. Therefore, methods have been explored to compute kernel function values between data with missing values instead of directly imputing the missing data. Hazan et al. (2015) proposed a parameterized kernel function based on the low-rank assumption of data, which allows for input vectors with missing values. However, when computing similarities, only the dimensions present in both data are considered, and the rest are discarded. There is also work that modeled the squared distance between two missing data as a random variable following a gamma distribution and computed the expectation of the Gaussian kernel function under missing data (Mesquita et al., 2019). Similarly, Śmieja et al. (2019) modeled possible outcomes of missing values with the data distribution and computed

the expectation of similarity between two missing data. Still, these methods have limitations in flexibly utilizing the supervision information from labels during the imputation process, which consequently restricts their performance in practical tasks.

Direct classification of incomplete data. Researchers have also explored methods for directly classifying missing data. In the study by Pelckmans et al. (2005), they defined a modified risk to address the uncertainty in prediction results caused by missing data. And in (Chechik et al., 2008), they maximized the margin of the subspace correlated with the observed data. However, when computing kernel values, they encounter similar issues of incomplete information utilization as in (Hazan et al., 2015). In a different approach, Dekel et al. (2010) treated missing values as a specific type of noise and developed a linear programming problem that resembled SVM formulation in order to learn a robust binary classifier. And some works optimize the nonlinear classifier while seeking the linear subspace where the data might lie (Sheikholesalmi et al., 2014; Xu et al., 2020). Due to the necessity of predefining the dimension of the subspace in these methods, they may fail to fully capture the intrinsic structure of the data, thus constraining its flexibility in practical applications. In addition to the aforementioned kernel-based methods, there are also numerous works in the field of neural networks that focus on classifying missing data. Recently, Śmieja et al. (2018) replaced the responses of neurons in the first hidden layer with their expected values, thereby minimizing the extent of modifications when adapting to various networks. Later, a neural network architecture called NeuMiss was introduced (Le Morvan et al., 2020). It utilized a Neumann-series approximation of the optimal predictor and demonstrated robustness against various missing data mechanisms. However, as it essentially learns

a linear model, its capability may be limited in complex scenarios. It is worth noting that neural network-based methods typically do not perform data imputation. On the one hand, training neural networks typically requires a large amount of data, making it difficult to impute missing values for small-scale data. And in fact, imputing small-scale data is even more critical and meaningful. This is because they inherently provide limited information, and imputation can be used to uncover the underlying structure. On the other hand, it may be challenging to control the outcome of data imputation due to the high degree of freedom during network optimization. Furthermore, apart from explorations in algorithmic applications, there are also dedicated efforts focused on theoretical derivations related to missing data. For example, Bullins et al. (2016) provided the information-theoretic upper and lower bounds of precision limits for vanilla SVM in the context of learning with missing data. Josse et al. (2019) proved that a predictor designed for complete observations can achieve optimal predictions on incomplete data by utilizing multiple imputation.

3 Two-stage Data Imputation

3.1 Preliminaries

Notations. The set of real numbers is written as \mathbb{R} . The set of integers from 1 to N is written as $[N]$. The cardinality of the set \mathcal{A} is written as $|\mathcal{A}|$ denotes. We take a , \mathbf{a} , and \mathbf{A} to be a scalar, a vector, and a matrix, respectively. Let $\mathbf{0}$ and $\mathbf{1}$ denote vectors consisting of all zeros and all ones with the appropriate size. The inner product of two vectors in the given space is written as $\langle \cdot, \cdot \rangle$. We take $\text{diag}(\mathbf{a})$ to be an operator

that extends a vector to a diagonal matrix and $\text{vec}(\mathbf{A})$ to be an operator that converts a matrix into a vector by stacking the columns of \mathbf{A} on top of one another. The Frobenius norm of a matrix is written as $\|\cdot\|_F$. The set of symmetric matrices is denoted as \mathcal{S} , while the set of positive semi-definite (PSD) matrices is denoted as \mathcal{S}_+ . The Hadamard product is written as \odot .

We begin by introducing the vanilla SVM and then demonstrate how to fill in missing data to achieve improved classification performance. In the hard-margin SVM, the objective is to find a hyperplane $\mathbf{w}^\top \mathbf{x} + b = 0$ that maximally separates the data $\mathbf{x} \in \mathbb{R}^d$ of different classes with zero training errors. When the data is not linearly separable, the soft-margin SVM is proposed, which allows for some training errors by introducing slack variables denoted as $\xi_i \geq 0$ for each training sample. Meanwhile, in order to find a more flexible decision boundary, a nonlinear mapping $\phi(\cdot)$ from the \mathbb{R}^d to a reproducing kernel Hilbert space \mathcal{H}_k is introduced, yielding the decision function $f(\mathbf{x}) = \text{sign}(\mathbf{w}^\top \phi(\mathbf{x}) + b)$. With the completed data, the optimization problem can be formulated as

$$\begin{aligned} \min_{\mathbf{w}, b, \{\xi_i\}} \quad & \frac{1}{2} \|\mathbf{w}\|_2^2 + C \sum_{i=1}^N \xi_i \\ \text{s.t.} \quad & y_i(\mathbf{w}^\top \phi(\mathbf{x}_i) + b) \geq 1 - \xi_i, \\ & \xi_i \geq 0, \forall i \in [N], \end{aligned} \tag{1}$$

where $C \geq 0$ is a hyperparameter that controls the balance between maximizing the margin and minimizing the training errors. For problem (1), previous researchers have

proven that we only need to solve its corresponding dual problem:

$$\begin{aligned} \max_{\boldsymbol{\alpha} \in \mathbb{R}^N} \quad & \mathbf{1}^\top \boldsymbol{\alpha} - \frac{1}{2} \boldsymbol{\alpha}^\top \text{diag}(\mathbf{y}) \mathbf{K} \text{diag}(\mathbf{y}) \boldsymbol{\alpha} \\ \text{s.t.} \quad & \mathbf{y}^\top \boldsymbol{\alpha} = 0, \mathbf{0} \leq \boldsymbol{\alpha} \leq C \mathbf{1}, \end{aligned} \tag{2}$$

where $\mathbf{y} = [y_1; y_2; \dots; y_N] \in \mathbb{R}^N$ and each entry $K_{i,j} = \langle \phi(\mathbf{x}_i), \phi(\mathbf{x}_j) \rangle_{\mathcal{H}_k}$ of the kernel matrix $\mathbf{K} \in \mathbb{R}^{N \times N}$ represents the similarity between two data. Through a technique known as the kernel trick, this similarity can be computed using a predefined positive definite kernel function $k(\mathbf{x}_i, \mathbf{x}_j) : \mathbb{R}^d \times \mathbb{R}^d \rightarrow \mathbb{R}$, allowing us to calculate it without knowing the explicit expressions of ϕ . And the resulting kernel matrix \mathbf{K} is guaranteed to be PSD.

3.2 Stage I: Kernel Matrix Imputation with SVM

In this stage, our goal is to find a new kernel matrix $\tilde{\mathbf{K}}$ that further reduces the objective function value in (2), aiming to improve the classification accuracy of the trained classifier. We propose a novel algorithm that integrates kernel matrix imputation with the classification task. Initially, we compute the observed kernel matrix \mathbf{K}_o , and then optimize an adjustment matrix \mathbf{K}_Δ with the same dimension to derive $\tilde{\mathbf{K}} = \mathbf{K}_o \odot \mathbf{K}_\Delta$ as the optimized kernel matrix. This approach distinguishes itself from previous algorithms by effectively utilizing each observed feature value. Considering the Gaussian kernel function $k_\gamma(\mathbf{x}, \mathbf{y}) = \exp(-\gamma \|\mathbf{x} - \mathbf{y}\|_2^2)$ as an example and recalling the definition of the incomplete data set $\mathcal{D} = \{\mathbf{x}_{o_i}^i, y_i\}_{i=1}^N$, we can decompose $K_{i,j}$ into an observed

part and unknown parts:

$$\begin{aligned}
K_{i,j} &= \exp(-\gamma D_{i,j}) \text{ where} \\
D_{i,j} &= \|\mathbf{x}_{\mathbf{o}_i}^i - \mathbf{x}_{\mathbf{o}_j}^j\|_2^2 \\
&= \sum_{p \in \mathbf{o}_i \cap \mathbf{o}_j} (x_p^i - x_p^j)^2 + \sum_{p \in \mathbf{o}_i \setminus \mathbf{o}_j} (x_p^i - *)^2 + \sum_{p \in \mathbf{o}_j \setminus \mathbf{o}_i} (* - x_p^j)^2 + \sum_{p \notin \mathbf{o}_i \cup \mathbf{o}_j} (* - *)^2.
\end{aligned} \tag{3}$$

Recall that $*$ represents an unknown real number. Methods in (Chechik et al., 2008; Hazan et al., 2015) only consider the similarity between the intersecting observed features of two data, i.e., the part related to $p \in \mathbf{o}_i \cap \mathbf{o}_j$. In doing so, they disregard the features that are observed in one data but missing in the other, namely x_p^i ($p \in \mathbf{o}_i \setminus \mathbf{o}_j$) and x_p^j ($p \in \mathbf{o}_j \setminus \mathbf{o}_i$). In contrast, our algorithm calculates \mathbf{K}_o using the first term in the last line of (3) and implicitly incorporates the remaining terms by constraining the potential ranges for \mathbf{K}_Δ . Assuming \mathbf{x} is min-max normalized within the range of $[0, 1]$, the ranges of the second, third, and fourth terms in (3) are denoted as $[0, \sum_{p \in \mathbf{o}_i \setminus \mathbf{o}_j} \max\{(x_p^i)^2, (1 - x_p^i)^2\}]$, $[0, \sum_{p \in \mathbf{o}_j \setminus \mathbf{o}_i} \max\{(x_p^j)^2, (1 - x_p^j)^2\}]$, and $[0, d - |\mathbf{o}_i \cup \mathbf{o}_j|]$, respectively. By computing the range of each entry $K_{i,j} = (K_o)_{i,j} \cdot (K_\Delta)_{i,j}$, we can determine the feasible domain of the optimization variable \mathbf{K}_Δ , denoted as $\mathbf{B}_l \preceq \mathbf{K}_\Delta \preceq \mathbf{B}_u$. In Stage II and the experimental sections, we will continue to use the Gaussian kernel as an example. However, it is important to emphasize that our algorithm can be applied to various kernel functions, as long as their computations can be decoupled for each feature. This decoupling can be expressed as

$$k(\mathbf{x}, \mathbf{y}) = f\left(\sum_{p=1}^d g(x_i, y_i)\right), \tag{4}$$

where the range of the binary function $g(\cdot, \cdot)$ needs to be bounded when both inputs in the range $[0, 1]$, and $f(\cdot)$ needs to be a monotonic function on the range of $\sum_{p=1}^d g(x_i, y_i)$. Many commonly used kernels exhibit this property, including the polynomial kernel, Laplacian kernel, sigmoid kernel, χ^2 kernel, and more. For a detailed derivation of the decoupling for these kernels, please refer to the attached Appendix.

By leveraging the supervision information of the labels and performing alternating optimization between the kernel matrix and the classifier, we will obtain a kernel matrix that yields better classification performance. Meanwhile, due to the flexibility of this approach, we aim to ensure the robustness of the classifier concurrently, thus mitigating the risk of overfitting. Therefore, based on the concept of robust optimization (Xu et al., 2009; Takeda et al., 2013), we introduce a perturbation variable denoted as \mathcal{E} in the space of $\mathbb{R}^{N \times N}$ to guarantee that the classifier performs well not only on $\tilde{\mathbf{K}}$ but also on all possible outcomes within a norm sphere surrounding $\tilde{\mathbf{K}}$. Finally, we formulate the following optimization problem for Stage I:

$$\begin{aligned}
\min_{\mathbf{K}_\Delta} \max_{\boldsymbol{\alpha}, \mathcal{E}} \quad & \mathbf{1}^\top \boldsymbol{\alpha} - \frac{1}{2} \boldsymbol{\alpha}^\top \text{diag}(\mathbf{y}) (\mathbf{K}_o \odot \mathbf{K}_\Delta \odot \mathcal{E}) \text{diag}(\mathbf{y}) \boldsymbol{\alpha} + \eta \|\mathbf{K}_\Delta - \mathbf{1}\mathbf{1}^\top\|_{\text{F}}^2 \\
\text{s.t.} \quad & \mathbf{B}_l \preceq \mathbf{K}_\Delta \preceq \mathbf{B}_u, \mathbf{K}_\Delta \in \mathcal{S}_+, \\
& \|\mathcal{E} - \mathbf{1}\mathbf{1}^\top\|_{\text{F}}^2 \leq r^2, \mathcal{E} \in \mathcal{S}_+, \\
& \mathbf{y}^\top \boldsymbol{\alpha} = 0, \mathbf{0} \leq \boldsymbol{\alpha} \leq C\mathbf{1},
\end{aligned} \tag{5}$$

where the regularization parameters η and r are introduced to control the range of modification for the observed kernel matrix \mathbf{K}_o and the intensity of the perturbation, respectively. By imposing PSD constraints on the variables \mathbf{K}_Δ and \mathcal{E} , it is ensured that the optimized kernel matrix remains PSD. As the value of η increases, \mathbf{K}_Δ tends to

approach the all-one matrix. In this scenario, the model approximates a state where the missing values are filled with zeros. To solve the optimization problem outlined in (5), we propose an alternating optimization algorithm consisting of three steps.

Step 1. Optimizing \mathbf{K}_Δ with fixed \mathcal{E} and $\boldsymbol{\alpha}$. In this step, problem (5) with respect to \mathbf{K}_Δ is equivalent to

$$\begin{aligned} \min_{\mathbf{K}_\Delta} \quad & -\frac{1}{2}\boldsymbol{\alpha}^\top \text{diag}(\mathbf{y}) (\mathbf{K}_o \odot \mathbf{K}_\Delta \odot \mathcal{E}) \text{diag}(\mathbf{y})\boldsymbol{\alpha} + \eta\|\mathbf{K}_\Delta - \mathbf{1}\mathbf{1}^\top\|_F^2 \\ \text{s.t.} \quad & \mathbf{B}_l \preceq \mathbf{K}_\Delta \preceq \mathbf{B}_u, \mathbf{K}_\Delta \in \mathcal{S}_+. \end{aligned} \quad (6)$$

The problem mentioned above is a semi-definite program, with inequality constraints imposed on each element of the matrix \mathbf{K}_Δ , making it generally computationally expensive to solve. To alleviate the computational burden, we instead propose a strategy for finding an approximate solution to the optimal solution of the problem (6). Firstly, we disregard the inequality constraints and the PSD constraint and solve the problem using the following formulation:

$$\begin{aligned} \hat{\mathbf{K}}_\Delta &:= \arg \min_{\mathbf{K}_\Delta} \left\{ -\frac{1}{2}\boldsymbol{\alpha}^\top \text{diag}(\mathbf{y}) (\mathbf{K}_o \odot \mathbf{K}_\Delta \odot \mathcal{E}) \text{diag}(\mathbf{y})\boldsymbol{\alpha} + \eta\|\mathbf{K}_\Delta - \mathbf{1}\mathbf{1}^\top\|_F^2 \right\} \\ &= \mathbf{1}\mathbf{1}^\top + \frac{1}{4\eta} \text{diag}(\boldsymbol{\alpha} \odot \mathbf{y}) (\mathbf{K}_k \odot \mathcal{E}) \text{diag}(\boldsymbol{\alpha} \odot \mathbf{y}). \end{aligned} \quad (7)$$

Since $\hat{\mathbf{K}}_\Delta$ is a real symmetric matrix, we can perform eigenvalue decomposition on the matrix as $\hat{\mathbf{K}}_\Delta := \mathbf{U}\boldsymbol{\Sigma}\mathbf{U}^\top$. Subsequently, within the feasible domain defined by $\mathbf{B}_l \preceq \mathbf{K}_\Delta \preceq \mathbf{B}_u, \mathbf{K}_\Delta \in \mathcal{S}_+$, we adjust the eigenvalues of the matrix to find a solution

that is closest to $\hat{\mathbf{K}}_\Delta$, i.e.,

$$\begin{aligned} \min_{\mathbf{d} \in \mathbb{R}^N} \quad & \left\| \mathbf{U} \text{diag}(\mathbf{d}) \mathbf{U}^\top - \hat{\mathbf{K}}_\Delta \right\|_F^2 \\ \text{s.t.} \quad & \mathbf{B}_l \preceq \mathbf{U} \text{diag}(\mathbf{d}) \mathbf{U}^\top \preceq \mathbf{B}_u, \mathbf{d} \succeq \mathbf{0}. \end{aligned} \quad (8)$$

We define $\mathbf{U} = [\mathbf{u}_1 \ \mathbf{u}_2 \ \dots \ \mathbf{u}_N]$ and the (i, j) -th entry of $\mathbf{u}_k \mathbf{u}_k^\top \in \mathbb{R}^{N \times N}$ as $(\mathbf{u}_k \mathbf{u}_k^\top)_{i,j} := u_{i,j}^k$ ($k \in [N]$). By doing so, we can reformulate the problem (8) as below,

$$\begin{aligned} \min_{\mathbf{d} \in \mathbb{R}^N} \quad & \left\| \mathbf{V}^\top \mathbf{d} - \text{vec}(\hat{\mathbf{K}}_\Delta) \right\|_2^2 \\ \text{s.t.} \quad & \text{vec}(\mathbf{B}_l) \preceq \mathbf{V}^\top \mathbf{d} \preceq \text{vec}(\mathbf{B}_u), \mathbf{d} \succeq \mathbf{0}, \end{aligned} \quad (9)$$

where $\mathbf{V} = [\mathbf{v}_{1,1} \ \mathbf{v}_{2,1} \ \dots \ \mathbf{v}_{N,1} \ \mathbf{v}_{1,2} \ \mathbf{v}_{2,2} \ \dots \ \mathbf{v}_{N,N}] \in \mathbb{R}^{N \times N^2}$ and for each $\mathbf{v}_{i,j} = [u_{i,j}^1; u_{i,j}^2; \dots; u_{i,j}^N] \in \mathbb{R}^N$. To further simplify the optimization problem mentioned above, we introduce an auxiliary matrix $\mathbf{G} := [\mathbf{V}; \mathbf{V}; -\mathbf{I}] \in \mathbb{R}^{N \times (2N^2 + N)}$ and an auxiliary vector $\mathbf{h} := [\text{vec}(\mathbf{B}_u); -\text{vec}(\mathbf{B}_l); \mathbf{0}] \in \mathbb{R}^{2N^2 + N}$, resulting in the following problem:

$$\begin{aligned} \min_{\mathbf{d} \in \mathbb{R}^N} \quad & \mathbf{d}^\top \mathbf{V} \mathbf{V}^\top \mathbf{d} - 2 \left[\mathbf{V} \text{vec}(\hat{\mathbf{K}}_\Delta) \right]^\top \mathbf{d} \\ \text{s.t.} \quad & \mathbf{G}^\top \mathbf{d} \preceq \mathbf{h}. \end{aligned} \quad (10)$$

Therefore, we need to solve a convex linear constrained quadratic programming problem, which can be efficiently accomplished using existing convex optimization toolboxes, such as the quadprog function in MATLAB. After obtaining the optimal solution \mathbf{d}^* , we can then derive the final approximate solution for the problem (6):

$$\mathbf{K}_\Delta^* = \mathbf{U} \text{diag}(\mathbf{d}^*) \mathbf{U}^\top. \quad (11)$$

Step 2. Optimizing \mathcal{E} with fixed \mathbf{K}_Δ and $\boldsymbol{\alpha}$. In this step, we aim to perturb the optimization variables within a small range and maximize the objective function value in the problem (5). For this problem, similarly, to avoid directly solving the semi-definite program, we disregard the PSD constraint and propose an approximate optimization approach for \mathcal{E} as follows,

$$\begin{aligned} \min_{\mathcal{E}} \quad & \frac{1}{2} \boldsymbol{\alpha}^\top \text{diag}(\mathbf{y}) (\mathbf{K}_k \odot \mathbf{K}_\Delta \odot \mathcal{E}) \text{diag}(\mathbf{y}) \boldsymbol{\alpha} \\ \text{s.t.} \quad & \|\mathcal{E} - \mathbf{1}\mathbf{1}^\top\|_{\text{F}}^2 \leq r^2. \end{aligned} \quad (12)$$

Due to the linearity of the objective function with respect to \mathcal{E} and the fact that the constraint defines a compact convex set, it can be inferred that the optimal solution will lie on the boundary of the constraint. Accordingly, we can relax the constrained optimization problem stated in (12) to an unconstrained problem:

$$\min_{\mathcal{E}} \quad \frac{1}{2} \boldsymbol{\alpha}^\top \text{diag}(\mathbf{y}) (\mathbf{K}_k \odot \mathbf{K}_\Delta \odot \mathcal{E}) \text{diag}(\mathbf{y}) \boldsymbol{\alpha} + \rho \|\mathcal{E} - \mathbf{1}\mathbf{1}^\top\|_{\text{F}}^2. \quad (13)$$

After deriving the closed-form solution for this problem, we utilize a non-expansive operator $\mathcal{P}_+(\cdot) : \mathcal{S}^N \rightarrow \mathcal{S}_+^N$ to project the solution onto the space of PSD matrices (Cai et al., 2010; Ma et al., 2011; Liu et al., 2019). The operator $\mathcal{P}_+(\mathbf{X})$ performs eigenvalue decomposition on $\mathbf{X} = \mathbf{V}\boldsymbol{\Sigma}\mathbf{V}^\top$ and sets any negative eigenvalues to 0, resulting in the new matrix $\hat{\mathbf{X}} = \mathbf{V}\boldsymbol{\Sigma}_+\mathbf{V}^\top$. By defining $\boldsymbol{\Gamma} := \text{diag}(\boldsymbol{\alpha} \odot \mathbf{y}) (\mathbf{K}_k \odot \mathbf{K}_\Delta) \text{diag}(\boldsymbol{\alpha} \odot \mathbf{y})$, we obtain the optimal PSD approximation solution for the problem (12):

$$\mathcal{E}^* = \mathcal{P}_+ \left(\mathbf{1}\mathbf{1}^\top - \frac{1}{4\rho} \boldsymbol{\Gamma} \right). \quad (14)$$

Step 3. Optimizing α with fixed \mathbf{K}_Δ and \mathcal{E} . Given \mathbf{K}_Δ and \mathcal{E} , the optimization problem is reduced to the standard SVM problem, which can be solved using various methods. In this case, we employ the gradient descent method to update α in each iteration and utilize the Adam optimizer (Kingma & Ba., 2014) to adjust the learning rate dynamically. After obtaining the updated variable $\hat{\alpha}$, we proceed to project it onto the feasible set. This is done by first clipping it to the range $[0, C]$ and then calculating $\alpha^* = \hat{\alpha} - \frac{\mathbf{y}^\top \hat{\alpha}}{N} \mathbf{y}$ as the final solution for this step.

3.3 Stage II: Data Imputation with The Given Matrix

In the previous stage, we obtained the optimized kernel matrix $\tilde{\mathbf{K}} = \mathbf{K}_o \odot \mathbf{K}_\Delta$ by incorporating supervised information of the data during SVM training. In this stage, we will utilize the matrix $\tilde{\mathbf{K}}$ to perform data imputation. We redefine the incomplete data set $\mathcal{D} = \{\mathbf{x}_{o_i}^i, y_i\}_{i=1}^N$ as $\mathcal{D} = \{\mathbf{X}_o, \mathbf{Y}, \mathbf{O}\}$, where $\mathbf{X}_o := [\mathbf{x}_{o_1}^1 \ \mathbf{x}_{o_2}^2 \ \dots \ \mathbf{x}_{o_N}^N] \in \mathbb{R}^{d \times N}$, $\mathbf{Y} \in \mathbb{R}^N$ and $\mathbf{O} \in \{0, 1\}^{d \times N}$ is used to indicate which features are missing (represented by 0) and which features are observed (represented by 1). Next, we will compute $\Delta \mathbf{X} := [\Delta \mathbf{x}_1 \ \Delta \mathbf{x}_2 \ \dots \ \Delta \mathbf{x}_N] \in \mathbb{R}^{d \times N}$ by using the entries of the trained kernel matrix $\tilde{K}_{i,j}$ as supervisory information. The goal is to minimize the discrepancy between the optimized kernel matrix calculated from the imputed data $\tilde{\mathbf{X}} = \mathbf{X}_o + \Delta \mathbf{X}$ and the original kernel matrix $\tilde{\mathbf{K}}$ through regression, i.e,

$$\min_{\{\Delta \mathbf{x}_i\}_{i=1}^N} \sum_i \sum_j \left[\exp \left(-\gamma \left\| \mathbf{x}_{o_i}^i - \mathbf{x}_{o_j}^j + \Delta \mathbf{x}_i - \Delta \mathbf{x}_j \right\|_2^2 \right) - \tilde{K}_{i,j} \right]^2. \quad (15)$$

By equivalently replacing the objective function and imposing location and range constraints on the imputation results, we obtain the following optimization problem for Stage II:

$$\begin{aligned}
& \min_{\Delta \mathbf{X}} \sum_i \sum_j \left[\left\| \mathbf{x}_{o_i}^i - \mathbf{x}_{o_j}^j + \Delta \mathbf{x}_i - \Delta \mathbf{x}_j \right\|_2^2 + \frac{1}{\gamma} \ln \left(\tilde{K}_{i,j} \right) \right]^2 \\
& \text{s.t. } \Delta \mathbf{X} \odot \mathbf{O} = \mathbf{0}, \\
& \mathbf{0} \preceq \mathbf{X}_o + \Delta \mathbf{X} \preceq \mathbf{1}.
\end{aligned} \tag{16}$$

The essence of this task involves solving a nonlinear system of equations. Additionally, by defining the missing ratio of data features as m , the aforementioned system consists of $N(N - 1)/2$ equations and Ndm variables. Although the objective function in (16) is non-convex with respect to $\Delta \mathbf{X}$, the entries $\{K_{i,j}\}_{i,j=1}^N$ still provide abundant supervision information for the data imputation process in scenarios where the number of observed features (d) is significantly smaller than the total number of data (N) and the missing ratio (m) ranges between 0 and 1. To address this, we employ the BCD method to solve the optimization problem mentioned above. In each iteration, we select a specific column from $\Delta \mathbf{X}$ as a variable while keeping the remaining columns constant. We update the variable iteratively until the maximum number of iterations is reached or the change in the objective function is smaller than the predefined threshold. The accuracy of this solution is further validated by the experimental results presented later in this paper. The complete two-stage data imputation framework is summarized in Algorithm 1.

Algorithm 1 Two-Stage Data Imputation Based on Support Vector Machine

Input: the incomplete data set $\mathcal{D} = \{\mathbf{X}_o, \mathbf{Y}, \mathbf{O}\}$, the parameters C, γ, η , and ρ .

Output: the imputed data $\tilde{\mathbf{X}}$ and the combination coefficient α .

1: **Stage I:**

2: Compute $\mathbf{K}_o, \mathbf{B}_l$, and \mathbf{B}_u . Initialize $\mathbf{K}_\Delta^{(0)} = \mathcal{E}^{(0)} = \mathbf{1}\mathbf{1}^\top$, $\alpha^{(0)} = \frac{C}{2}\mathbf{1}$, and $t_1 = t_2 = 0$.

3: **repeat**

4: Solve problem (10) to obtain d^* and update $\mathbf{K}_\Delta^{(t_1)}$ by (11).

5: Update $\mathcal{E}^{(t_1)}$ by (14).

6: Update α using gradient descent and project it onto the feasible set.

7: $t_1 = t_1 + 1$.

8: **until** the stop criterion is satisfied.

9: Compute $\tilde{\mathbf{K}} = \mathbf{K}_o \odot \mathbf{K}_\Delta$.

10: **Stage II:**

11: Initialize $\Delta\mathbf{x}_i^{(0)} = \frac{1}{2}\mathbf{1}$.

12: **repeat**

13: **for** $i = 1$ to N **do**

14: Fix $\{\Delta\mathbf{x}_j^{(t_2-1)} : j \neq i\}$ and update $\Delta\mathbf{x}_i^{(t_2)}$ in (16).

15: **end for**

16: $t_2 = t_2 + 1$.

17: **until** the stop criterion is satisfied.

4 Numerical Experiments

4.1 Experimental Settings

Data sets and preprocessing. We chose six real-world data sets from libsvm (Chang & Lin., 2011) and UCI (Kelly et al., 2023), namely *australian*, *german*, *heart*, *pima (a.k.a. diabetes)*, *cylinder*, and *horse*. The details of these data sets are shown in Table 1. The data sets were then divided into three subsets: a training set, a complete holdout set for parameter selection, and a complete test set for evaluating and comparing the final results of the algorithms. The split was performed in a 4:3:3 ratio. Additionally, for the training set of the first four complete data sets, we constructed the missing data by randomly removing a given percentage of the features to evaluate the performance of various algorithms under different levels of missingness. The missing ratio of a data set

was defined as

$$m := \frac{\# \text{ The missing features}}{\# \text{ The total features}}.$$

For the last two data sets that have missing values, we directly utilized their inherent missing patterns to test the performance of algorithms in the absence of prior knowledge about the distribution of missing values. For preprocessing, we scaled x_i to $[0, 1]$ using the observed features and scaled y_i to $\{-1, 1\}$.

Table 1: Details of the six libsvm and UCI data sets.

Data Sets	# Features (d)	# Instances (N)
Australian	14	690
German	21	1000
Heart	13	270
Pima	8	768
Cylinder	35	512
Horse	25	368

Compared methods and parameters settings. We selected a basic method along with three advanced methods for comparison with our proposed framework. To quantify the performance of the individual methods, we compared their classification accuracy on the test data set. All experiments were repeated 10 times, and the average accuracy of each method was reported. The implementation was carried out using MATLAB on a machine with an Intel[®] Core[™] i7-11700KF CPU (3.60 GHz) and 32GB RAM. The source code is available in <https://github.com/Yruikk/TwoStageDataImputation>.

- **MI:** The missing values are imputed by replacing them with the mean value of the corresponding features in the training set. We chose the penalty parameter $C \in \{2^{-5}, 2^{-4}, \dots, 2^5\}$ and the bandwidth in the Gaussian kernel $\gamma \in$

$\{2^{-5}, 2^{-4}, \dots, 2^5\}$ using the holdout set.

- **GEOM** (Chechik et al., 2008): An iterative framework for optimizing a non-convex problem was introduced in this work. The main objective is to maximize the margin within the relevant subspace of the observed data. The parameters C and γ are chosen the same as in MI, and the iteration round t is chosen from the set $\{2, 3, 4, 5\}$.
- **KARMA** (Hazan et al., 2015): This method proposed a new kernel function for the missing data $k_\beta(\cdot, \cdot) : (\mathbb{R} \cup \{*\})^d \times (\mathbb{R} \cup \{*\})^d \rightarrow \mathbb{R}$. We chose $C \in \{2^{-5}, 2^{-4}, \dots, 2^5\}$ and $\beta \in \{1, 2, 3, 4\}$ using the holdout set.
- **genRBF** (Śmieja et al., 2019): It derived an analytical formula for the expected value of the radial basis function kernel over all possible imputations. The parameters C and γ were chosen the same as in MI.
- **Ours**: To avoid excessive parameter tuning, we utilized the parameters C_{MI} and γ_{MI} from MI and further selected $C \in \{C_{\text{MI}} \cdot 2^i, i = -1, 0, 1\}$ and $\gamma \in \{\gamma_{\text{MI}} \cdot 2^i, i = -1, 0, 1\}$. Additionally, we empirically set $\eta = \|\alpha_{\text{MI}}\|_2$ and $\rho = 5C/m$ during each iteration.

4.2 Experimental Results

4.1 Results of Data Imputation from Given Kernel Matrix

In order to ensure the operation of the entire framework, we first evaluated the performance of Stage II. We conducted experiments on the *heart* data set, considering various

bandwidths of the Gaussian kernel and different missing ratios. We computed the complete kernel matrix \mathbf{K}_{gt} based on the complete data \mathbf{X}_{gt} and the chosen bandwidth γ . Subsequently, we randomly removed Ndm features from the complete data, resulting in \mathbf{X}_{miss} . Next, utilizing the algorithm from Stage II in our framework, we performed data imputation on \mathbf{X}_{miss} using the complete kernel matrix \mathbf{K}_{gt} , which yielded $\tilde{\mathbf{X}}$. In addition to caring about the quality of data imputation, we also focus on the quality of the kernel matrix used in predicting the class of new data. Therefore, we defined four evaluation metrics to assess the error between $\tilde{\mathbf{X}}$ and \mathbf{X}_{gt} , as well as the error between $\tilde{\mathbf{K}}$ and \mathbf{K}_{gt} : $(e_{\mathbf{X}})_{\text{max}}$, $(e_{\mathbf{X}})_{\text{mean}}$, $(e_{\mathbf{K}})_{\text{max}}$, and $(e_{\mathbf{K}})_{\text{mean}}$. We then conducted tests on our data imputation algorithm using different bandwidths of the Gaussian kernel and missing ratios. The results of these tests were reported in Table 2. We observed that at a low missing ratio ($m = 10\%$), both the imputed data and kernel matrix closely matched the ground truth. Even at a high missing ratio ($m = 90\%$), although there were some imputed features that deviated significantly from the true values, the overall performance of the algorithm in terms of average imputation remained highly accurate. Additionally, we found that when the Gaussian kernel parameter was particularly small ($\gamma = 1/32$) or large ($\gamma = 32$), the true kernel matrix tended to be a matrix of all ones or an identity matrix. In these scenarios, although there may be larger errors in the imputed data compared to when $\gamma = 1$, the kernel matrix used for actual predictions still maintained a good level of accuracy.

Table 2: Results of data imputation performance using a given kernel matrix with different Gaussian kernel bandwidths and missing ratios.

Parameter	m	$(e_{\mathbf{X}})_{\max}$	$(e_{\mathbf{X}})_{\text{mean}}$	$(e_{\mathbf{K}})_{\max}$	$(e_{\mathbf{K}})_{\text{mean}}$
$\gamma = 1$	10%	3.46e-4	3.00e-7	5.95e-5	8.85e-8
	90%	1.27e-1	6.71e-4	5.57e-2	8.28e-5
$\gamma = \frac{1}{32}$	10%	2.75e-4	2.88e-7	1.32e-5	4.52e-8
	90%	1.52e-1	1.56e-3	3.70e-3	5.83e-5
$\gamma = 32$	10%	7.30e-4	4.74e-7	3.08e-5	6.81e-9
	90%	3.81e-1	3.75e-3	1.03e-1	2.44e-5

4.2 Classification Results on Real-world Data Sets

In this section, we compared different data imputation approaches using six real-world data sets. Since all imputation algorithms ultimately serve subsequent tasks, we evaluated their performance by calculating the mean and variance of their classification accuracy on the test data.

We first mimicked the missing completely at random (MCAR) mechanism by randomly removing some values on the four complete data sets, and the results were presented in Table 3. For situations with a relatively low missing data ratio, such as $m = 20\%$, the differences between the methods are not significant. Even using a simple method like MI can achieve decent predictive performance. When $m = 40\%$, our proposed method achieves the highest average accuracy and the lowest standard deviation on the *australian*, *heart*, and *pima* data sets, demonstrating the superior stability of our method. On the *german* data set, our algorithm’s performance is second only to genRBF. When dealing with high missing data ratios, the prediction accuracy of the GEOM, KARMA, and genRBF methods fluctuates across different data sets. However, our method demonstrates even more significant advancements in such scenarios. For

Table 3: Comparison of classification accuracy (mean \pm std) with a baseline and three state-of-the-art methods on four real data sets. We conducted testing on the scenarios with different missing ratios of the data. The best performance is highlighted in bold and the “•” indicates its statistical significance compared to other methods via paired t-test at the 5% significance level.

Data Sets	Methods	m			
		20%	40%	60%	80%
Australian	MI	0.864 \pm 0.021	0.851 \pm 0.028	0.807 \pm 0.047	0.678 \pm 0.049
	GEOM	0.849 \pm 0.025	0.831 \pm 0.037	0.754 \pm 0.050	0.632 \pm 0.043
	KARMA	0.861 \pm 0.020	0.848 \pm 0.022	0.831 \pm 0.045	0.712 \pm 0.046
	genRBF	0.867 \pm 0.016	0.864 \pm 0.023	0.796 \pm 0.041	0.704 \pm 0.058
	Ours	0.867 \pm 0.023	0.867 \pm 0.021	0.849 \pm 0.024 •	0.857 \pm 0.025 •
German	MI	0.716 \pm 0.014	0.719 \pm 0.025	0.693 \pm 0.044	0.635 \pm 0.060
	GEOM	0.723 \pm 0.028	0.704 \pm 0.031	0.695 \pm 0.024	0.679 \pm 0.029
	KARMA	0.731 \pm 0.019	0.723 \pm 0.019	0.706 \pm 0.036	0.714 \pm 0.025
	genRBF	0.747 \pm 0.011	0.743 \pm 0.021	0.705 \pm 0.026	0.687 \pm 0.045
	Ours	0.743 \pm 0.024	0.733 \pm 0.021	0.723 \pm 0.024 •	0.710 \pm 0.019
Heart	MI	0.813 \pm 0.029	0.801 \pm 0.033	0.762 \pm 0.046	0.724 \pm 0.040
	GEOM	0.806 \pm 0.021	0.752 \pm 0.073	0.758 \pm 0.053	0.679 \pm 0.077
	KARMA	0.784 \pm 0.040	0.755 \pm 0.038	0.756 \pm 0.031	0.687 \pm 0.083
	genRBF	0.813 \pm 0.031	0.779 \pm 0.087	0.737 \pm 0.032	0.732 \pm 0.037
	Ours	0.821 \pm 0.033	0.816 \pm 0.026 •	0.813 \pm 0.027 •	0.806 \pm 0.020 •
Pima	MI	0.751 \pm 0.021	0.735 \pm 0.027	0.710 \pm 0.023	0.642 \pm 0.046
	GEOM	0.721 \pm 0.031	0.695 \pm 0.028	0.680 \pm 0.058	0.666 \pm 0.042
	KARMA	0.747 \pm 0.034	0.693 \pm 0.026	0.668 \pm 0.034	0.648 \pm 0.036
	genRBF	0.781 \pm 0.011	0.755 \pm 0.017	0.725 \pm 0.022	0.659 \pm 0.029
	Ours	0.756 \pm 0.026	0.759 \pm 0.022	0.744 \pm 0.027 •	0.709 \pm 0.037 •

instance, at $m = 60\%$, our approach outperforms the second-ranking method by an additional accuracy improvement of approximately 2.6%. This significant improvement has also been confirmed through a paired t-test conducted at the 5% significance level. This performance is further reflected in the case of $m = 80\%$, where our algorithm achieves precise and stable classification tasks.

Next, we evaluated the performance of each method on two data sets with missing values. In these two data sets, the missing values are not manually removed and the data collection process is not known to the user, so the missing mechanism may not

Table 4: Comparison of classification accuracy (mean \pm std) with a baseline and three state-of-the-art methods on two real data sets with missing values. The best performance is highlighted in bold.

Data Sets	m	Methods	Accuracy
Cylinder	$\approx 10\%$	MI	0.648 ± 0.014
		GEOM	0.620 ± 0.021
		KARMA	0.678 ± 0.018
		genRBF	0.620 ± 0.021
		Ours	0.672 ± 0.020
Horse	$\approx 30\%$	MI	0.844 ± 0.027
		GEOM	0.848 ± 0.021
		KARMA	0.842 ± 0.020
		genRBF	0.836 ± 0.028
		Ours	0.862 ± 0.029

be MCAR. Moreover, roughly speaking, the missing values tend to be more concentrated in a few features. The results are presented in Table 4. For the *cylinder* data set, predicting for this data set is challenging for all algorithms. However, our algorithm demonstrates comparable performance to KARMA and significantly outperforms other methods. For the *horse* data set, the proportion of missing values is even higher, which provides our algorithm with greater freedom to learn the relationships between the samples. According to the paired t-test at the 5% significance level, our algorithm statistically performs better than other methods in multiple experiments.

Conclusion

This paper proposed a novel two-stage data imputation framework, aiming to optimize the similarity relationships between data in order to guide the completion of missing features by pursuing better classification accuracy. In the first stage, we unify the tasks

of kernel matrix imputation and classification within a single framework, enabling mutual guidance between the two tasks in an alternating optimization process to improve similarity relationships. The introduction of a perturbation variable enhances the robustness of the algorithm’s predictions. In the second stage, we achieve, for the first time, the recovery of data features from a given kernel matrix, effectively utilizing the optimized information obtained in the first stage. By leveraging the supervision information through two stages, we have obtained a more flexible approach for data imputation, which provides significant advantages when dealing with high missing data rates. Numerical experiments have validated that our algorithm achieves higher prediction accuracy and demonstrates more stable performance compared to other methods on the test data. In future research, extending the ideas of this study to neural networks would be a fascinating endeavor. This expansion would provide us with a way to handle even larger-scale data. It is important to note that neural networks typically operate in over-parameterized regimes, leveraging their high model complexity to estimate labels effectively. However, this also makes it challenging to control the impact of supervised information on the results of data imputation in the absence of appropriate regularization terms.

Acknowledgments

This work was partially supported by National Key Research and Development Project (2023YFF1104202) and National Natural Science Foundation of China (62376155).

Appendix

Below, we have provided a list of commonly used kernel functions that are decoupled. By separating the observed and unknown components, we compute the observed kernel matrix and establish an upper limit for the adjustment matrix. This approach allows us to fully leverage all the observed features in the data (assuming $\mathbf{x} \in [0, 1]^d$). Recall that an incomplete data set is defined as $\mathcal{D} = \{\mathbf{x}_{\mathbf{o}_i}^i, y_i\}_{i=1}^N$, where \mathbf{o}_i represents the set of observable features, $\mathbf{x}_{\mathbf{o}_i}^i \in (\mathbb{R} \cup \{*\})^d$, and $*$ represents an unknown real number within the range $[0, 1]$. For the following kernel functions, the computation formula for the (i, j) -th element of the kernel matrix \mathbf{K} can be represented as:

1. Linear Kernel: $k(\mathbf{x}, \mathbf{y}) = \mathbf{x}^\top \mathbf{y}$,

$$\begin{aligned} K_{i,j} &= (\mathbf{x}_{\mathbf{o}_i}^i)^\top \mathbf{x}_{\mathbf{o}_j}^j \\ &= \sum_{p \in \mathbf{o}_i \cap \mathbf{o}_j} (x_p^i \cdot x_p^j) + \sum_{p \in \mathbf{o}_i \setminus \mathbf{o}_j} (x_p^i \cdot *) + \sum_{p \in \mathbf{o}_j \setminus \mathbf{o}_i} (* \cdot x_p^j) + \sum_{p \notin \mathbf{o}_i \cup \mathbf{o}_j} (* \cdot *) . \end{aligned}$$

2. Polynomial Kernel: $k(\mathbf{x}, \mathbf{y}) = (\mathbf{x}^\top \mathbf{y} + r)^d$ ($r \geq 0$ and $d \geq 1$),

$$\begin{aligned} K_{i,j} &= (D_{i,j} + r)^d \text{ where} \\ D_{i,j} &= (\mathbf{x}_{\mathbf{o}_i}^i)^\top \mathbf{x}_{\mathbf{o}_j}^j \\ &= \sum_{p \in \mathbf{o}_i \cap \mathbf{o}_j} (x_p^i \cdot x_p^j) + \sum_{p \in \mathbf{o}_i \setminus \mathbf{o}_j} (x_p^i \cdot *) + \sum_{p \in \mathbf{o}_j \setminus \mathbf{o}_i} (* \cdot x_p^j) + \sum_{p \notin \mathbf{o}_i \cup \mathbf{o}_j} (* \cdot *) . \end{aligned}$$

3. Gaussian Kernel: $k(\mathbf{x}, \mathbf{y}) = \exp(-\gamma\|\mathbf{x} - \mathbf{y}\|_2^2)$,

$K_{i,j} = \exp(-\gamma D_{i,j})$ where

$$\begin{aligned} D_{i,j} &= \|\mathbf{x}_{\mathbf{o}_i}^i - \mathbf{x}_{\mathbf{o}_j}^j\|_2^2 \\ &= \sum_{p \in \mathbf{o}_i \cap \mathbf{o}_j} (x_p^i - x_p^j)^2 + \sum_{p \in \mathbf{o}_i \setminus \mathbf{o}_j} (x_p^i - *)^2 + \sum_{p \in \mathbf{o}_j \setminus \mathbf{o}_i} (* - x_p^j)^2 + \sum_{p \notin \mathbf{o}_i \cup \mathbf{o}_j} (* - *)^2. \end{aligned}$$

4. Laplacian Kernel: $k(\mathbf{x}, \mathbf{y}) = \exp(-\gamma\|\mathbf{x} - \mathbf{y}\|_1)$,

$K_{i,j} = \exp(-\gamma D_{i,j})$ where

$$\begin{aligned} D_{i,j} &= \|\mathbf{x}_{\mathbf{o}_i}^i - \mathbf{x}_{\mathbf{o}_j}^j\|_1 \\ &= \sum_{p \in \mathbf{o}_i \cap \mathbf{o}_j} |x_p^i - x_p^j| + \sum_{p \in \mathbf{o}_i \setminus \mathbf{o}_j} |x_p^i - *| + \sum_{p \in \mathbf{o}_j \setminus \mathbf{o}_i} |* - x_p^j| + \sum_{p \notin \mathbf{o}_i \cup \mathbf{o}_j} |* - *|. \end{aligned}$$

5. Sigmoid Kernel: $k(\mathbf{x}, \mathbf{y}) = \tanh(\gamma \mathbf{x}^\top \mathbf{y} + r)$ ($\gamma > 0$ and $r \geq 0$),

$K_{i,j} = \tanh(\gamma D_{i,j} + r)$ where

$$\begin{aligned} D_{i,j} &= (\mathbf{x}_{\mathbf{o}_i}^i)^\top \mathbf{x}_{\mathbf{o}_j}^j \\ &= \sum_{p \in \mathbf{o}_i \cap \mathbf{o}_j} (x_p^i \cdot x_p^j) + \sum_{p \in \mathbf{o}_i \setminus \mathbf{o}_j} (x_p^i \cdot *) + \sum_{p \in \mathbf{o}_j \setminus \mathbf{o}_i} (* \cdot x_p^j) + \sum_{p \notin \mathbf{o}_i \cup \mathbf{o}_j} (* \cdot *). \end{aligned}$$

6. χ^2 Kernel: $k(\mathbf{x}, \mathbf{y}) = \sum_{p=1}^d \frac{2x_p y_p}{x_p + y_p}$,

$$\begin{aligned} K_{i,j} &= \sum_{p=1}^d \frac{2x_p^i x_p^j}{x_p^i + x_p^j} \\ &= \sum_{p \in \mathbf{o}_i \cap \mathbf{o}_j} \frac{2x_p^i x_p^j}{x_p^i + x_p^j} + \sum_{p \in \mathbf{o}_i \setminus \mathbf{o}_j} \frac{2(x_p^i \cdot *)}{x_p^i + *} + \sum_{p \in \mathbf{o}_j \setminus \mathbf{o}_i} \frac{2(* \cdot x_p^j)}{* + x_p^j} + \sum_{p \notin \mathbf{o}_i \cup \mathbf{o}_j} \frac{2(* \cdot *)}{* + *}. \end{aligned}$$

The range of the second term depends on x_p^i , while the range of the third term depends on x_p^j . The range of the fourth term is $[0, d - |\mathcal{O}_i \cup \mathcal{O}_j|]$. Moreover, these kernel functions can all be adapted to the algorithm utilized in Stage II of our framework.

References

- Allison, P. D. (2009). Missing data. *The SAGE handbook of quantitative methods in psychology*, 72-89.
- Batista, G. E., & Monard, M. C. (2002). A study of K-nearest neighbour as an imputation method. *HIS*, 87(251-260), 48.
- Bhattacharyya, C., Shivaswamy, P., & Smola, A. (2004). A second order cone programming formulation for classifying missing data. *Advances in Neural Information Processing Systems*, 17.
- Bullins, B., Hazan, E., & Koren, T. (2016). The limits of learning with missing data. *Advances in Neural Information Processing Systems*, 29.
- Cai, T., & Zhou, W. X. (2013). A max-norm constrained minimization approach to 1-bit matrix completion. *Journal of Machine Learning Research*, 14(1), 3619-3647.
- Cai, J. F., Candès, E. J., & Shen, Z. (2010). A singular value thresholding algorithm for matrix completion. *SIAM Journal on Optimization*, 20(4), 1956-1982.
- Candès, E. J., & Tao, T. (2010). The power of convex relaxation: Near-optimal matrix completion. *IEEE Transactions on Information Theory*, 56(5), 2053-2080.

- Chan, K., Lee, T. W., & Sejnowski, T. J. (2003). Variational Bayesian learning of ICA with missing data. *Neural Computation*, 15(8), 1991-2011.
- Chang, C. C., & Lin, C. J. (2011). LIBSVM: A library for support vector machines. *ACM Transactions on Intelligent Systems and Technology (TIST)*, 2(3), 1-27. Software available at <http://www.csie.ntu.edu.tw/~cjlin/libsvm>
- Chechik, G., Heitz, G., Elidan, G., Abbeel, P., & Koller, D. (2008). Max-margin classification of data with absent features. *Journal of Machine Learning Research*, 9(1).
- Dekel, O., Shamir, O., & Xiao, L. (2010). Learning to classify with missing and corrupted features. *Machine Learning*, 81, 149-178.
- Emmanuel, T., Maupong, T., Mpoeleng, D., Semong, T., Mphago, B., & Tabona, O. (2021). A survey on missing data in machine learning. *Journal of Big Data*, 8(1), 1-37.
- García-Laencina, P. J., Sancho-Gómez, J. L., & Figueiras-Vidal, A. R. (2010). Pattern classification with missing data: A review. *Neural Computing and Applications*, 19, 263-282.
- Ghahramani, Z., & Jordan, M. (1993). Supervised learning from incomplete data via an EM approach. *Advances in Neural Information Processing Systems*, 6.
- Goldberg, A., Recht, B., Xu, J., Nowak, R., & Zhu, J. (2010). Transduction with matrix completion: Three birds with one stone. *Advances in Neural Information Processing Systems*, 23.

- Hazan, E., Livni, R., & Mansour, Y. (2015, June). Classification with low rank and missing data. In *International Conference on Machine Learning* (pp. 257-266). PMLR.
- Josse, J., Prost, N., Scornet, E., & Varoquaux, G. (2019). On the consistency of supervised learning with missing values. *arXiv preprint arXiv:1902.06931*.
- Kelly, M., Longjohn, R., & Nottingham, K. (2023). The UCI Machine Learning Repository, <https://archive.ics.uci.edu>
- Kingma, D. P., & Ba, J. (2014). Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*.
- Lee, C. P., & Lin, C. J. (2013). A study on L2-loss (squared hinge-loss) multiclass SVM. *Neural Computation*, 25(5), 1302-1323.
- Le Morvan, M., Josse, J., Moreau, T., Scornet, E., & Varoquaux, G. (2020). NeuMiss networks: Differentiable programming for supervised learning with missing values. *Advances in Neural Information Processing Systems*, 33, 5980-5990.
- Le Morvan, M., Josse, J., Scornet, E., & Varoquaux, G. (2021). What's a good imputation to predict with missing values?. *Advances in Neural Information Processing Systems*, 34, 11530-11540.
- Little, R. J., & Rubin, D. B. (2019). *Statistical analysis with missing data* (Vol. 793). John Wiley & Sons.
- Liu, F., Huang, X., Gong, C., Yang, J., & Li, L. (2020). Learning data-adaptive non-parametric kernels. *Journal of Machine Learning Research*, 21(1), 8590-8628.

- Liu, X., Zhu, X., Li, M., Wang, L., Zhu, E., Liu, T., ... & Gao, W. (2019). Multiple kernel k k-means with incomplete kernels. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 42(5), 1191-1204.
- López, O. (2023). Near-optimal weighted matrix completion. *Journal of Machine Learning Research*, 24(283), 1-40.
- Ma, S., Goldfarb, D., & Chen, L. (2011). Fixed point and Bregman iterative methods for matrix rank minimization. *Mathematical Programming*, 128(1-2), 321-353.
- Mesquita, D. P., Gomes, J. P., Corona, F., Junior, A. H. S., & Nobre, J. S. (2019). Gaussian kernels for incomplete data. *Applied Soft Computing*, 77, 356-365.
- Pelckmans, K., De Brabanter, J., Suykens, J. A., & De Moor, B. (2005). Handling missing values in support vector machine classifiers. *Neural Networks*, 18(5-6), 684-692.
- Rabin, N. (2020). Multi-directional Laplacian pyramids for completion of missing data entries. In *ESANN* (pp. 709-714).
- Schafer, J. L. (1997). *Analysis of incomplete multivariate data*. CRC press.
- Schölkopf, B., & Smola, A. J. (2002). *Learning with kernels: Support vector machines, regularization, optimization, and beyond*. MIT press.
- Sheikholesalmi, F., Mardani, M., & Giannakis, G. B. (2014, November). Classification of streaming big data with misses. In *2014 48th Asilomar Conference on Signals, Systems and Computers*, (pp. 1051-1055). IEEE.

- Śmieja, M., Struski, Ł., Tabor, J., Zieliński, B., & Spurek, P. (2018). Processing of missing data by neural networks. *Advances in Neural Information Processing Systems*, 31.
- Śmieja, M., Struski, Ł., Tabor, J., & Marzec, M. (2019). Generalized RBF kernel for incomplete data. *Knowledge-Based Systems*, 173, 150-162.
- Smola, A. J., Vishwanathan, S. V. N., & Hofmann, T. (2005, January). Kernel methods for missing variables. In *International Workshop on Artificial Intelligence and Statistics* (pp. 325-332). PMLR.
- Steinwart, I., & Christmann, A. (2008). *Support vector machines*. Springer Science & Business Media.
- Takeda, A., Mitsugi, H., & Kanamori, T. (2013). A unified classification model based on robust optimization. *Neural Computation*, 25(3), 759-804.
- Tresp, V., & Hofmann, R. (1998). Nonlinear time-series prediction with missing and noisy data. *Neural Computation*, 10(3), 731-747.
- Troyanskaya, O., Cantor, M., Sherlock, G., Brown, P., Hastie, T., Tibshirani, R., ... & Altman, R. B. (2001). Missing value estimation methods for DNA microarrays. *Bioinformatics*, 17(6), 520-525.
- Tseng, P. (2001). Convergence of a block coordinate descent method for nondifferentiable minimization. *Journal of Optimization Theory and Applications*, 109, 475-494.
- Vapnik, V. (1999). *The nature of statistical learning theory*. Springer Science & Business Media.

- Wang, K., He, F., He, M., & Huang, X. (2023). Learning non-parametric kernel via matrix decomposition for logistic regression. *Pattern Recognition Letters*, 171, 177-183.
- Williams, D., Liao, X., Xue, Y., Carin, L., & Krishnapuram, B. (2007). On classification with incomplete data. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 29(3), 427-436.
- Xu, H., Caramanis, C., & Mannor, S. (2009). Robustness and regularization of support vector machines. *Journal of Machine Learning Research*, 10(7).
- Xu, Z., Liu, Y., & Li, C. (2020). Distributed semi-supervised learning with missing data. *IEEE Transactions on Cybernetics*, 51(12), 6165-6178.