In silico network topology-based prediction of gene essentiality

João Paulo Müller da Silva, Marcio Luis Acencio, and Ney Lemke Department of Physics and Biophysics, Institute of Biosciences, São Paulo State University, UNESP, 18618-000, Botucatu, SP, Brazil

José Carlos Merino Mombach Centro de Ciências Rurais, Unipampa/São Gabriel - Pós-Graduação em Física, Prédio 13, Universidade Federal de Santa Maria, Santa Maria 97105-900, Brazil

Renata Vieira, José Camargo da Silva, and Marialva Sinigaglia

Laboratório de Bioinformática e Biologia Computacional Programa Interdisciplinar de Computação Aplicada,

Universidade do Vale do Rio dos Sinos, 93022-000 São Leopoldo, RS, Brazil

(Dated: October 30, 2018)

The identification of genes essential for survival is important for the understanding of the minimal requirements for cellular life and for drug design. As experimental studies with the purpose of building a catalog of essential genes for a given organism are time-consuming and laborious, a computational approach which could predict gene essentiality with high accuracy would be of great value. We present here a novel computational approach, called NTPGE (Network Topology-based Prediction of Gene Essentiality), that relies on network topology features of a gene to estimate its essentiality. The first step of NTPGE is to construct the integrated molecular network for a given organism comprising protein physical, metabolic and transcriptional regulation interactions. The second step consists in training a decision tree-based machine learning algorithm on known essential and non-essential genes of the organism of interest, considering as learning attributes the network topology information for each of these genes. Finally, the decision tree classifier generated is applied to the set of genes of this organism to estimate essentiality for each gene. We applied the NTPGE approach for discovering essential genes in Escherichia coli and then assessed its performance.

PACS numbers: 87.10.+e, 87.17.Aa

I. INTRODUCTION

Essential genes are genes that are indispensable to support cellular life. These genes constitute a minimal set of genes required for a living cell. Therefore, the functions encoded by this gene set are essential and could be considered as a foundation of life itself [1, 2]. The identification of genes which are essential for survival is important not only for the understanding of the minimal requirements for cellular life, but also for practical purposes. For example, since most antibiotics target essential cellular processes, essential gene products of microbial cells are promising new targets for such drugs [3]. The prediction and discovery of essential genes has been performed by experimental procedures such as single gene knockouts [4], RNA interference [5] and conditional knockouts [6], but each of these techniques require a large investment of time and resources and they are not always feasible.

Considering these experimental constraints, a computational or *in silico* approach capable of accurately predicting gene essentiality would be of great value. Some of such predictors have been already developed in which sequence features of genes and proteins with or without homology comparison have been utilized as parameters for training machine learning classifiers for gene essentiality prediction [7, 8]. In addition, predictors of gene essentiality based on network topology features, as the physical interactions of a protein [9] or the number of biochemical species that are knocked out from the metabolic network following a gene deletion [10, 11] have also been developed.

The currently available network topology-based methodologies of gene essentiality prediction use only one type of network topology feature, i.e. protein physical interactions or metabolic interactions, for performing such predictions. Actual molecular interaction networks, however, are composed by entities that are intricately connected with diverse types of interactions, such as protein physical, metabolic and transcriptional regulation interactions.

We therefore propose here a novel machine-learning based in silico approach, called NTPGE (Network Topology-based Prediction of Gene Essentiality), that relies on multiple topological network features of a given gene to estimate its essentiality. For the generation of the decision tree classifier, NTPGE employs the following network topological features as learning attributes: number of physical interactions for the corresponding encoded protein, number of target genes transcriptionally regulated by the corresponding encoded transcription factor, number of transcription factors that regulate it, number of enzymes that use metabolites produced by the corresponding encoded enzyme as reactants and number of enzymes that produce metabolites used as reactants by the corresponding encoded enzyme. To assess the performance of the NTPGE approach, we used it for the discovery of essential genes in the bacterium

Escherichia coli, a model organism whose most of genes have already been characterized experimentally as essential or non-essential.

II. CONSTRUCTION OF THE IMN OF E. COLI

As NTPGE relies on topological features of molecular network, the first step was to construct the $Escherichia\ coli$ integrated molecular network (IMN) comprising protein physical, metabolic and transcriptional regulation interactions. For this purpose, we used MONET (MOlecular NETwork) ontology, a tool developed by our group that facilitates the construction of IMNs of organisms via integration of information from metabolic pathways, protein-protein interaction networks and transcriptional regulation interactions through a model able to minimize data redundancy and inconsistency [12]. As previously described, two genes of a given organism, g_1 and g_2 , coding for proteins p_1 and p_2 are linked if:

- p_1 and p_2 interact physically,
- g_1 regulates the transcription of gene g_2 ,
- or one metabolite generated by a reaction catalyzed by p_1 is consumed in a reaction catalyzed by p_2 (we may exclude from this analysis the most used compounds such as ATP, NAD, H2O, etc.).

The data sources present in MONET ontology used for the construction of the *E. coli* IMN were KEGG (Kyoto Encyclopedia of Genes and Genomes [13] for metabolic interactions, RegulonDB [14] for transcriptional regulation interactions, and Butland et al [15] for protein physical interactions.

Using MONET, we constructed two directed IMNs of E. coli, G_a and G_p . G_a contained all possible interactions among genes with 1,998 genes and 51,642 interactions. G_p was similar to G_a , except that the connections through the ten most frequently used compounds on the metabolism were deleted producing a network with 1,987 genes and 21,338 interactions, since connections via these common compounds is not likely to be important for the determination of gene essentiality due to their promiscuity.

III. BRIEF ANALYSIS OF THE ESCHERICHIA COLI IMNS

Prior to use the *Escherichia coli* IMNs for the validation of the *NTPGE* approach, we present here a brief analysis of the most common network measures, i.e. degree distribution and clustering coefficient, of these IMNs. The degree distribution, P(k), gives the probability that a selected node has exactly k links. P(k) is obtained by counting the number of nodes N(k) with k = 1, 2,... links and dividing by the total number of nodes N. The clustering coefficient, C_i , gives the density of triangles we can construct in the network having the node i as a vertex. The clusterization coefficient is defined as:

$$C_i = \frac{2n_i}{k_i(k_i - 1)} \,, \tag{1}$$

where n_i is the number of links connecting the k_i neighbors of the node i. The average clustering coefficient C is the clustering coefficient for the whole network and characterizes the overall tendency of nodes to form clusters or groups. In Figure 1 we show the histogram of degree distribution for G_a and G_p . The curves are well approximated by a power law function, $P(k) = Ak^{-\gamma}$ for both IMNs, suggesting that G_a and G_p are scale-free networks.

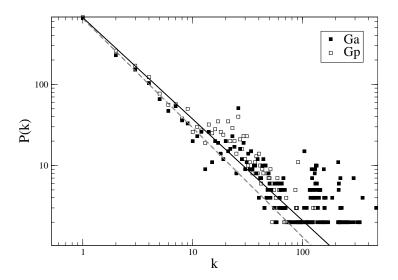


FIG. 1: Histogram of the degree distribution for G_a and G_p used in this work. Both G_a (solid line) and G_p (dashed line) are well described by a power law function $P(k) = Ak^{-\gamma}$ that characterizes them as scale-free networks

We also analyzed the dependence of the average clusterization coefficient, C, on the connectivity k, defined as C(k). For a traditional scale-free network, we expect C(k) not to depend on k, while for hierarchical networks we expect $C(k) \sim k^{-\alpha}$. Figure 2 shows the C(k) for G_a and G_p . These results point to a C(k) not dependent on k for G_a and a C(k) dependent on k for G_p , thus indicating that G_a is a non-hierarchical IMN and G_p is an hierarchical IMN. This shift from a non-hierarchical topology for G_a to an hierarchical topology for G_p seems to be caused by the deletion of the connections through the ten most frequently used compounds in the metabolism on the construction of G_p . Such compounds induce a strongly connected IMN due to their promiscuity.

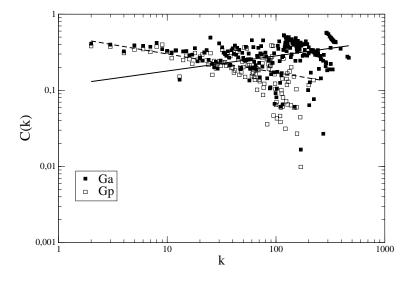


FIG. 2: The dependence of the average clusterization coefficient C on the connectivity k. The best-fit regression line for G_a (solid line) has a regression slope of -0.03 with a confidence interval of [-0.08, 0.01], while the best-fit regression line for G_p (dashed line) has a regression slope of 0.28 with a confidence interval of [0.22, 0.33]. The results show that G_a is a non-hierarchical scale-free network, whereas G_p is an hierarchical scale-free network.

IV. DESCRIPTION OF THE NTPGE APPROACH

The NTPGE approach was performed using WEKA (Waikato Environment for Knowledge Analysis) system [16]. WEKA is a collection of machine learning algorithms for data mining tasks. It also provides means for data preprocessing, classification, regression, clustering, association rules, and visualization [16]. Among these algorithms, we used the J48 [16], which is the Weka's implementation of the well known C4.5 [17] that uses the greedy technique to induce decision trees for classification. A decision-tree model is built by analyzing training data, which is then used to classify unseen data.

We trained the J48 algorithm on four different training configurations (t_1 , t_2 , t_3 and t_4). In all configurations, the training data was a set of known essential and non-essential genes of *Escherichia coli* taken from the PEC database (*Profiling of Escherichia coli chromosome*, http://www.shigen.nig.ac.jp/ecoli/pec/). The PEC database has been compiled experimental information on *Escherichia coli* strains from research reports and deletion mutation studies prior to 1998, including gene essentiality for cell growth. Based on these reports about gene essentiality for cell growth, the *E, coli* genes are classified in essential, non-essential and unknown. http://www.shigen.nig.ac.jp/ecoli/pec In all training configurations, for a given gene, the learning attributes used were as follows:

- number of physical interactions for the corresponding encoded protein;
- number of target genes transcriptionally regulated by the corresponding encoded transcription factor (regulation_out);
- number of transcription factors that regulate it; (regulation_in);
- number of enzymes that use metabolites produced by the corresponding encoded enzyme as reactants (metabolism_out);
- number of enzymes that produce metabolites used as reactants by the corresponding encoded enzyme (metabolism_in);

In t_1 and t_2 , the above mentioned attributes were extracted from G_a , whereas these same attributes were extracted from G_p in t_3 and t_4 . Moreover, the attribute damage, which was not originally present in G_a and G_p , was included in t_2 and t_4 . The damage d is defined as the number of metabolites whose production was prevented by the deletion of the enzyme. For a given enzyme, its damage d has been shown to be strongly correlated to its essentiality.[18].

The J48 algorithm was trained with the parameters presented in Table I. As it has been known that data imbalance is one of the causes that degrade the performance of machine learning algorithms [19], we replicated the data related to the essential genes in order to correct data imbalance as the number of non-essential genes is much larger than the number of essential genes.

V. PERFORMANCE OF THE NTPGE APPROACH AND RELATED DISCUSSION

The performance of the NTPGE approach was evaluated by testing the classifiers created by the J48 algorithm, as described above, on the training data itself. The selection of the best training configuration to be considered as default by the NTPGE approach was performed based on the F-measure of the corresponding generated classifier. The F-measure provides an harmonic mean of precision and recall and is defined as:

$$F = \frac{2 \times \text{precision} \times \text{recall}}{\text{precision} + \text{recall}},$$
 (2)

Precision (the percentage of correctly classified instances) and recall (the percentage of positive labeled instances that were classified as such) were calculated from the confusion matrices of the classifiers obtained from the training configurations t_1 , t_2 , t_3 and t_4 (Tables II) and are shown on Table III. Table III also shows the *F-measure* as well as the features of the training configurations, as the number of instances (genes plus metabolites) and presence or absence of the learning attribute damage d on training.

According to Table III, the best training configuration was t_1 (all genes and metabolites with the attribute damage). Its corresponding generated classifier had a F-measure of 83.4% for essential genes and 79.7% for non-essential genes. In fact, all generated classifiers yielded similar results, suggesting that the presence or absence of the ten most used compounds in metabolism or the presence or absence of the attribute damage d did not affect the classification of genes as essential or non-essential by the NTPGE approach. Therefore, any training configuration could be selected as default by NTPGE.

TABLE I: Parameters used to run the J48 algorithm on training data.

Parameter	Value
binarySplit	False
confidenceFactor	0.25
debug	False
minNumObj	100
numFolds	3
reduceErrorPruning	False
saveInstanceData	False
seed	1
subtreeRaising	True
unpruned	False
useLaplace	False

TABLE II: Confusion matrices of the classifiers generated from $t_1,\,t_2,\,t_3$ and t_4

t_1	
ed	
Essential	Actual
397	Non-essential
1,780	$Essential^a$
t_2	
:ed	
Essential	Actual
405	Non-essential
1,777	$Essential^a$
t_3	
:ed	
Essential	Actual
432	Non-essential
1,792	$Essential^a$
t_4	
ed	
Essential	Actual
430	Non-essential
1,790	$Essential^a$
	Essential 397 $1,780$ t_2 ed Essential 405 $1,777$ t_3 eed Essential 432 $1,792$ t_4 eed Essential 430

 $[^]a$ The number of essential genes were replicated to avoid data imbalance. Actually, the number of essential genes is 209

TABLE III: Features of the training configurations and performance measures of their corresponding generated classifiers.

Features and Performance Measures	Training configurations			
	t_1	t_2	t_3	t_4
Number of Genes ^a	3,879	3,879	3,868	3,868
$Damage\ d$	no	yes	no	yes
Correctly Predicted Genes (%)	81.8	81.5	81.1	81.1
Incorrectly Predicted Genes (%)	18.2	18.5	18.9	18.9
F-measure (N) (%)	79.7	79.4	78.7	78.7
F-measure (E) (%)	83.4	83.2	83.1	83.1
Recall (N) (%)	77.8	77.4	75.7	75.8
Recall (E) (%)	85.2	85.0	85.7	85.6
Precision (N) $(\%)$	81.8	81.6	81.9	81.8
Precision (E) (%)	81.8	81.4	80.6	80.6

^aThe number of essential genes were replicated to avoid data imbalance; number of non-essential genes remained unchanged. Actually, the number of essential genes is 209 and non-essential genes is 1,789 for G_a and the number of essential genes is 209 and non-essential genes is 1,778 for G_p

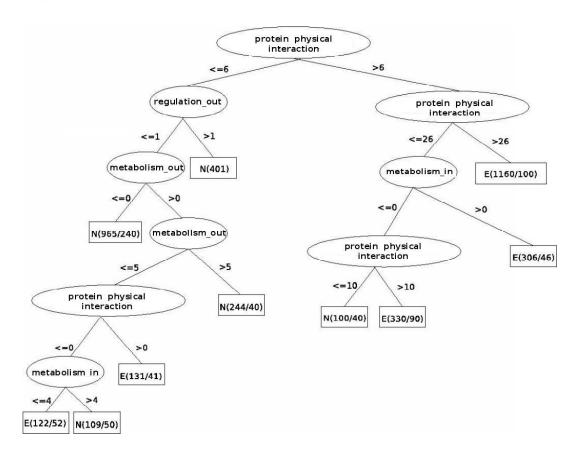


FIG. 3: Decision tree generated from t_1 with a *F-measure* of 83.4% for essential genes (E) and 79.7% for non-essential genes (N). The (x/y) inside rectangles denotes the number of correctly classified genes (x) and the number of incorrectly classified genes (y).

Figure 3 shows the set of rules of the decision tree generated from t_1 . The top node of the tree corresponds to the attribute protein physical interaction. This means that the classification tree algorithm concluded that the main factor to define essentiality in E. coli was the protein physical interaction. In fact, the degree of a protein has been documented in the literature as being indicative of essentiality in various organisms [9, 20, 21]. In our approach, a combination of intermediate number of protein physical interactions with at least one interaction of the type metabolism_in, i.e. number of enzymes that produce metabolites used as reactants by the corresponding encoded enzyme, was also indicative of essentiality. Transcriptional regulation interactions seems not to be a good predictor

for gene essentiality, since genes with at least one interaction of the type regulation_out, i.e. number of target genes transcriptionally regulated by the corresponding encoded transcription factor, were classified as non-essential. Moreover, the attribute (regulation_in, i.e. the number of transcription factors that regulate a given gene, was not even included in the decision tree. These results regarding gene essentiality and transcriptionall regulation are not surprising, since transcription factors are usually not essential under the conditions in which the knockout experiments for determining gene essentiality are performed (PEC database, http://www.shigen.nig.ac.jp/ecoli/pec/)

VI. CONCLUDING REMARKS

We proposed here a novel machine learning-based computational approach, called *NTPGE* (Network Topology-based Prediction of Gene Essentiality), that relies on network topology features of a gene to estimate its essentiality. Distinct from previous network topology-based gene essentiality predictors, *NTPGE* employs multiple topological network features of a given gene to estimate its essentiality, namely physical interactions for the corresponding encoded protein, number of target genes transcriptionally regulated by the corresponding encoded transcription factor, number of transcription factors that regulate it, number of enzymes that use metabolites produced by the corresponding encoded enzyme as reactants and number of enzymes that produce metabolites used as reactants by the corresponding encoded enzyme.

We verified the performance of NTPGE by applying it for the discovery of essential genes in the bacterium Escherichia coli, a model organism whose most of genes have already been characterized experimentally as essential or
non-essential. Among the interactions considered as learning attributes, NTPGE relied mostly in protein physical
and metabolic interactions for gene essentiality prediction. In addition, the presence or absence of the ten most used
compounds in metabolism or the presence or absence of the attribute damage d did not likely influence the classification of genes as essential or non-essential by NTPGE. This can be concluded because the F-measure values of all
generated decision trees were similar. Anyway, the best classifier was generated from t_1 (all genes and metabolites
with the attribute damage) with a F-measure of 83.4% for essential genes and 79.7% for non-essential genes.

In conclusion, the *NTPGE* seems to be a reliable method of gene essentiality discovery that may be applied to the gene set of other organisms. However, *NTPGE* is limited to organisms whose corresponding IMN has already been constructed. The construction of the IMN of a given organism involves the gathering of experimentally determined data that are not always available, particularly for a newly sequenced organism. To overcome this limitation, future developments would be the integration of *NTPGE* with sequence-based methods of IMN construction, thus creating a purely *in silico* network topology information-based methodology of gene essentiality discovery.

ACKNOWLEDGEMENTS

We would like to thank CNPq (research grants 474278/2006-9 and 506414/2004-3), FAPESP (research grant 2007/02827-9) and FAPERGS (05600005-BRD) for supporting this work. We would also like to thank HP Brazil R&D for the collaboration.

^[1] K. K., S. Ehrlich, A. Albertini, G. Amati, K. Andersen, M. Arnaud, K. Asai, S. Ashikaga, S. Aymerich, P. Bessieres, and et al, Proc. Natl Acad. Sci. USA 100, 4678 (2003).

^[2] I. M., FEBS Lett. **362**, 257 (1995).

^[3] J. N. and J. Mekalanos, Nat. Biotechnol. 18, 740 (2000).

^[4] G. Giaever, A. M. Chu, L. Ni, C. Connelly, L. Riles, S. Véronneau, S. Dow, A. Lucau-Danila, K. Anderson, B. André, A. P. Arkin, A. Astromoff, M. El-Bakkoury, R. Bangham, R. Benito, S. Brachat, S. Campanaro, M. Curtiss, K. Davis, A. Deutschbauer, K.-D. Entian, P. Flaherty, F. Foury, D. J. Garfinkel, M. Gerstein, D. Gotte, U. Güldener, J. H. Hegemann, S. Hempel, Z. Herman, D. F. Jaramillo, D. E. Kelly, S. L. Kelly, P. Kötter, D. LaBonte, D. C. Lamb, N. Lan, H. Liang, H. Liao, L. Liu, C. Luo, M. Lussier, R. Mao, P. Menard, S. L. Ooi, J. L. Revuelta, C. J. Roberts, M. Rose, P. Ross-Macdonald, B. Scherens, G. Schimmack, B. Shafer, D. D. Shoemaker, S. Sookhai-Mahadeo, R. K. Storms, J. N. Strathern, G. Valle, M. Voet, G. Volckaert, C. yun Wang, T. R. Ward, J. Wilhelmy, E. A. Winzeler, Y. Yang, G. Yen, E. Youngman, K. Yu, H. Bussey, J. D. Boeke, M. Snyder, P. Philippsen, R. W. Davis, and M. Johnston, Nature 418, 387 (2002).

^[5] L. M. Cullen and G. M. Arndt, Immunol Cell Biol 83, 217 (2005).

^[6] T. Roemer, B. Jiang, J. Davison, T. Ketela, K. Veillette, A. Breton, F. Tandia, A. Linteau, S. Sillaots, C. Marta, N. Martel, S. Veronneau, S. Lemieux, S. Kauffman, J. Becker, R. Storms, C. Boone, and H. Bussey, Mol Microbiol 50, 167 (2003).

- [7] M. Seringhaus, A. Paccanaro, A. Borneman, M. Snyder, and M. Gerstein, Genome Res 16, 1126 (2006).
- [8] A. M. Gustafson, E. S. Snitkin, S. C. J. Parker, C. DeLisi, and S. Kasif, BMC Genomics 7, 265 (2006).
- [9] H. Jeong, S. P. Mason, A. L. Barabási, and Z. N. Oltvai, Nature **411**, 41 (2001).
- [10] M. Imieliński, C. Belta, A. Halász, and H. Rubin, Bioinformatics 21, 2008 (2005).
- [11] M. C. Palumbo, A. Colosimo, A. Giuliani, and L. Farina, FEBS Lett 579, 4642 (2005).
- [12] J. P. M. da Silva, N. Lemke, J. C. Mombach, J. G. C. de Souza, M. Sinigaglia, and R. Vieira, Genet Mol Res 5, 182 (2006).
- [13] M. Kanehisa, S. Goto, M. Hattori, K. F. Aoki-Kinoshita, M. Itoh, S. Kawashima, T. Katayama, M. Araki, and M. Hirakawa, Nucleic Acids Res 34, D354 (2006).
- [14] H. Salgado, S. Gama-Castro, M. Peralta-Gil, E. Díaz-Peredo, F. Sánchez-Solano, A. Santos-Zavaleta, I. Martínez-Flores, V. Jiménez-Jacinto, C. Bonavides-Martínez, J. Segura-Salazar, A. Martínez-Antonio, and J. Collado-Vides, Nucleic Acids Res 34, D394 (2006).
- [15] G. Butland, J. M. Peregrín-Alvarez, J. Li, W. Yang, X. Yang, V. Canadien, A. Starostine, D. Richards, B. Beattie, N. Krogan, M. Davey, J. Parkinson, J. Greenblatt, and A. Emili, Nature 433, 531 (2005).
- [16] I. H. Witten and E. Frank, Data Mining: Pratical Machine Learning Tools and Techniques with Java Implementations (Morgan Kaufmann, San Francisco, 2000).
- [17] J. R. Quinlan, C4.5: programs for machine learning (Morgan Kaufmann, San Francisco, 1993).
- [18] N. Lemke, F. Herédia, C. K. Barcellos, A. N. D. Reis, and J. C. M. Mombach, Bioinformatics 20, 115 (2004).
- [19] P. Kang and S. Cho, Lecture Notes in Computer Science 4232, 837 (2006).
- [20] E. Estrada, Proteomics 6, 35 (2006).
- [21] S. Wuchty, Genome Res 14, 1310 (2004).