

Constructing Functional Braids for Topological Quantum Computing

Haitan Xu and Xin Wan*

Zhejiang Institute of Modern Physics, Zhejiang University, Hangzhou, 310027, China

In the Fibonacci anyon model for topological quantum computing, we discuss the *construction* of controlled-rotation gates using an *arbitrary* member in a family of single-qubit phase gates (2×2 diagonal matrices). We demonstrate the existence of a phase gate that can be approximated by a braid of no more than 100 interchanges of Fibonacci anyons with off-diagonal matrix elements $\sim 10^{-10}$. Using a hit-and-save algorithm, we show that a generic two-qubit gate, e.g. the CNOT gate, can be approximated to a distance $\sim 10^{-6}$ even without the help of the Solovay-Kitaev algorithm.

Introduction. Topological quantum computing is a novel concept aiming at preventing quantum decoherence in quantum computation on a hardware level [1, 2, 3]. The prototype of a topological quantum computer is a two-dimensional system of topological order with a collection of non-Abelian anyons, which can be created, braided, fused, and detected. Quantum information is stored globally and thus affected only by global operations like the braidings of anyons, but not by local perturbations like noises. The leading candidates for topological states of matter that support topological quantum computing are fractional quantum Hall liquids, in particular at filling fraction $5/2$ [4]. There are many theoretical proposals [5, 6, 7, 8, 9] on how to search for non-Abelian anyons. However, the existence of these exotic particles with non-Abelian statistics has yet to be confirmed by experiments up to now. There are, nevertheless, numerical evidence for their existence and non-Abelian properties in a realistic microscopic model [10]. Recent works [11, 12] suggest that a short dephasing length might be crucial in interference experiments.

Nevertheless, the great potential of fault-tolerant quantum computers, the profound connection between topology and quantum phases of matter, as well as the advances in materials and technologies have kept us optimistic about the eventual confirmation of the existence of non-Abelian anyons. It also drives us to think one step further about the architectures and algorithms for topological quantum computers, which are fundamentally different from classical computers and to a large extent different from conventional quantum computers such as ion-trap quantum computers.

Topological quantum computers are based on a completely different computing model, which has been shown to be equivalent to a quantum circuit model [2]. Due to its intrinsic connection to the unitary representation of the braid groups, the perfect problem for it is naturally the evaluation of the Jones polynomial [13, 14], which has been shown to be intimately connected to topological quantum field theories (TQFTs) [15]. TQFTs are low-energy effective theories for topological phases of matter, in which non-Abelian anyons might exist. The world-lines of anyons braiding in (2+1)-dimensional space-time (with proper closure) can be regarded as knots or links.

To construct a universal topological quantum computer, one might want to construct a universal set of quantum gates, which are certain braids in (2+1)-dimensional space-time. However, to solve an apparently easier problem such as the realization of a CNOT gate is nontrivial for a concrete anyon model [16, 17].

Let us focus specifically on the Fibonacci model (equivalent to the $SU(2)_3$ Chern-Simons-Witten theory for our purpose), which supports universal topological quantum computation. Bonesteel *et al.* [16] explicitly showed a CNOT gate can be approximated (to a distance $\sim 10^{-3}$ [18]) by the composite braid of an injection weave, an iX weave, and the inverse injection weave (up to a single-qubit rotation). The divide-and-conquer approach overcomes the difficulties of a direct search in the space of braids with at least six anyons. Later, Hormozi *et al.* [17] also proposed that a CNOT gate can be alternatively approximated (to a distance $\sim 10^{-3}$) by the composite braid of an F weave, a π -phase weave, and the inverse F weave (up to two single-qubit rotations). These three-anyon weaves (a subset of braids in which only one of the three anyons moves) are constructed by brute-force search [16] and the accuracy of the CNOT gate can be systematically improved by the Solovay-Kitaev algorithm [16, 17]. The injection weave and the F weave, which approximate the identity matrix and the F matrix, respectively, are examples of *functional braids* that might play important roles in future topological quantum computer architecture.

In this letter, we discuss a promising high-accuracy construction of generic controlled-rotation gates in the Fibonacci anyon model, which uses a braid that approximates an *arbitrary* single-qubit phase gate. Unlike earlier constructions, the value of the phase is *irrelevant* to the construction. This freedom helps us find one functional braid (dubbed *the exchange braid*) of no more than 100 interchanges of neighboring anyons that approaches a certain phase gate to a distance $\sim 10^{-10}$. We develop a hit-and-save algorithm for the search, which allows us to approximate a generic single-qubit gate to a distance $\sim 10^{-6}$ by a braid of similar length. By assembling these braids, we can construct generic controlled-rotation gates to a distance $\sim 10^{-6}$ without the help of the Solovay-Kitaev algorithm. The exchange braid, which may also facilitate topological quantum computing with very few

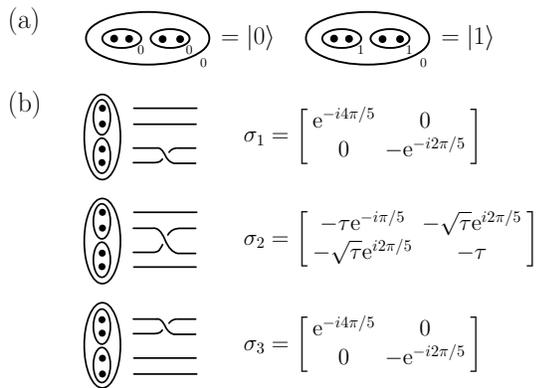


FIG. 1: (a) Basis states for the two-dimensional Hilbert space (a qubit) spanned by two pairs of anyons with total topological charge 0, where the black dots denote the nontrivial anyons in the Fibonacci model. (b) Braiding matrices for the qubit, where $\tau = (\sqrt{5} - 1)/2$. The anyons are labeled 1 to 4 from left to right in (a) and from bottom to top in (b).

mobile anyons, can also be understood in the mathematical language of tangles.

Fibonacci anyons. The Fibonacci anyons emerge from the Yang-Lee model in conformal field theories and is also speculated to exist in the $\nu = 12/5$ fractional quantum Hall liquid [19, 20]. The Fibonacci anyon model contains two types of anyons with topological charges 0 and 1 with a nontrivial fusion rule $1 \times 1 = 0 + 1$. We denote $|(ab)_c\rangle$ for the state in which anyons a and b fuse into c . As in a generic anyon model, the braiding rules for two nontrivial anyons can be described by the R -matrix and the associativity of fusion (satisfying a pentagon relation) can be described by the F -matrix [21].

We use two pairs of the nontrivial anyons with total charge 0 to encode one qubit of information. As illustrated in Fig. 1 (a), the two pairs must have the same total charge 0 or 1, spanning a two-dimensional Hilbert space, or a qubit. We can write down the basis as $|0\rangle = |((11)_0(11)_0)_0\rangle$ and $|1\rangle = |((11)_1(11)_1)_0\rangle$. The braiding of neighboring anyons in the qubit can be represented by 2×2 matrices, as shown in Fig. 1 (b), obtained from F - and R -matrices. There are only two independent matrices, since $\sigma_1 = \sigma_3$. Therefore in practice we can leave, e.g., the bottom anyon intact. In other words, we can use four matrices $\sigma_{2,3}$ and $\sigma_{2,3}^{-1}$ (elementary braids) to construct any single-qubit gate, since the Fibonacci anyon model supports universal topological quantum computation.

Single-qubit gates. An arbitrary single-qubit gate can be represented by a 2×2 unitary matrix, which can be written in the form

$$e^{i\alpha} \begin{bmatrix} \sqrt{1-b^2}e^{-i\beta} & be^{i\gamma} \\ -be^{-i\gamma} & \sqrt{1-b^2}e^{i\beta} \end{bmatrix}, \quad (1)$$

where b , α , β and γ are all real parameters. Apart from

the overall phase factor, one needs three parameters b , β and γ to specify the matrix. With a hit-and-save algorithm to be explained later in this letter, single-qubit gates can be generically realized by braids within a distance of the order of 10^{-6} , sufficiently small for the application of quantum error-correcting code.

One may notice that when $b = 0$, γ drops out automatically. The resulting diagonal matrix is a phase gate in the quantum computing language. Intuitively, with only one parameter to target, some diagonal matrices may be approximated with higher accuracy within a certain braid length. This is, indeed, true. (The argument is equally true for off-diagonal matrices, which are also useful in facilitating topological quantum computation [22]). As an example, we show in Fig. 2(a) a sequence of 99 elementary braids (or a braid of length 99) can approach a phase gate with off-diagonal matrix elements of order of 10^{-10} . Note the braid exchanges the positions of the two center anyons. In the following, we show this highly accurate braid can be used toward constructing two-qubit controlled-rotation gates.

From braid to tangle. Let us create an auxiliary pair of nontrivial anyons with total charge 0 next to the two pairs that encode a qubit. The whole Hilbert space of 6 nontrivial anyons with total charge 0 is 5-dimensional. The additional three basis states have a total charge 1 for the first four anyons, thus are noncomputational basis states. In the enlarged space, we note the computational basis states for the six anyons can be rewritten as $|(((11)_a(11)_a)_0(11)_0)_0\rangle = |(((11)_a1)_1(1(11)_0)_1)_0\rangle$. Recall a set of three nontrivial anyons with total charge 1 is equivalent to a set of four with total charge 0 in terms of computing basis and corresponding braiding rules. The six-anyon system can thus be regarded as two qubits (with total charge 0), except that the second (right) qubit is in the definite state of $|((1(11)_0)_1)\rangle$. Suppose we now implement the braid in Fig. 2(a) to the second qubit, as shown in Fig. 2(b). We obtain just a phase factor since the braid is represented by a diagonal matrix in the single-qubit representation. As a result, the positions of the fourth and fifth anyons are exchanged, but the quantum information stored in the qubit remains intact.

In the full 5-dimensional space, the braiding of the second set of anyons leads to a 2×2 (computational) and a 3×3 (noncomputational) matrices. They are uncoupled (block-diagonal) to the order of 10^{-10} , the same order as the off-diagonal matrix elements of the single-qubit phase gate in Fig. 2(a). Not surprisingly, the 2×2 submatrix corresponding to the encoded qubit is an exact identical matrix except for an overall phase factor. The braid in the 6-anyon system shown in Fig. 2(b) is thus dubbed *the exchange braid*, since its sole function is to exchange the two neighboring anyons (one in the encoded qubit and another in the auxiliary pair) without distorting the quantum information encoded in the qubit (albeit with a 6.2×10^{-10} potential leakage, which is detectable [22]).

