

Establishing EPR-channels between Nanomechanics and Atomic Ensembles

K. Hammerer^{1,2}, M. Aspelmeyer², E.S. Polzik³, P. Zoller^{1,2}

¹*Institut für Theoretische Physik, Universität Innsbruck, A-6020 Innsbruck, Austria*

²*Institute for Quantum Optics and Quantum Information (IQOQI) of the Austrian Academy of Sciences, A-6020 Innsbruck and A-1090 Vienna, Austria*

³*Niels Bohr Institute, QUANTOP, Danish Research Foundation Center for Quantum Optics, Blegdamsvej, DK-2100 Copenhagen, Denmark*

We suggest to interface nanomechanical systems via an optical quantum bus to atomic ensembles, for which means of high precision state preparation, manipulation and measurement are available. This allows in particular for a Quantum Non-Demolition Bell measurement, projecting the coupled system, atomic ensemble - nanomechanical resonator, into an entangled EPR-state. The entanglement is observable even for nanoresonators initially well above their ground states and can be utilized for teleportation of states from an atomic ensemble to the mechanical system.

PACS numbers: 03.67.-a,03.65.Ud

Opto- and electro-nanomechanical systems [1], representing cold high-Q oscillators coupled to optical cavities or electrical circuits, are rapidly approaching the regime where quantum aspects are important [2, 3, 4, 5, 6]. It remains one of the key challenges of nanomechanics to develop both the tools for preparing and manipulating quantum states as superposition and entangled states, and to implement quantum measurements. Motivated by the remarkable achievements in the quantum control of atomic ensembles [8, 9, 10, 11, 12, 13], which allow for high-fidelity preparation, readout, and laser manipulation of atomic states as long-lived quantum memory, we propose a quantum interface between atomic ensembles and opto-mechanical systems, where light plays the role of a quantum bus. This effort should be seen in the context of developing hybrid systems and interfaces where the goal is to combine the advantages of solid state and atomic systems in compatible experimental setups.

Our goal is the creation of robust Einstein-Podolsky-Rosen (EPR) type of entanglement [14] between collective spin variables of the atomic medium and a nanomechanical resonator. EPR entanglement is a key resource in many quantum information protocols, and in particular enables the manipulation and transfer of quantum states, e.g. by quantum teleportation. EPR states involve two systems, each described by a pair of continuous variables, say $[X_m, P_m] = i$ and $[X_a, P_a] = i$, and exhibit a reduced so-called EPR variance in their correlations

$$\Delta_{\text{EPR}} = \Delta(X_m + X_a)^2 + \Delta(P_m - P_a)^2 < 2. \quad (1)$$

The value of 2 refers to uncorrelated systems in their ground states and any value below 2 proves entanglement [15]. In the present case canonical variables X_m, P_m refer to (dimensionless) position and momentum of the mechanical oscillator, while X_a, P_a describe collective spin excitations in an atomic ensemble as follows: The fully polarized state of an ensemble of atoms, each with two stable ground states $|\pm\rangle$, is identified with the ground state of a harmonic oscillator, $|+\dots+\rangle = |0\rangle$ and excited states are given by $|1\rangle = a_a^\dagger|0\rangle$ etc., where $a_a^\dagger = N_{\text{at}}^{-1/2}J_+$, N_{at} is the number of atoms and $J_+ = \sum_i |-\rangle_i \langle +|$ is a collective step up operator. Accordingly, canonical operators correspond to

scaled collective spin components $X_a = (N_{\text{at}}/2)^{-1/2}J_x$ and $P_a = (N_{\text{at}}/2)^{-1/2}J_y$. This is an excellent approximation for the high degree of polarization routinely achieved in current experiments [8, 9, 10, 11, 12].

The method to generate EPR correlations suggested here is based on a Quantum Non-Demolition (QND) measurement [16] of commuting EPR observables $X_m + X_a$ and $P_m - P_a$. Using light as a meter system, as was demonstrated for two atomic ensembles by Julsgaard et al. [11], the QND measurement projects the hybrid nanomechanical-atomic system into a state with reduced variances in the EPR observables that obey (1). The method relies on the fact that both systems can be coupled to a cavity mode $[x_c, p_c] = i$ via structurally similar Hamiltonians

$$H_{\text{mc}} = \frac{\omega_m}{2} (X_m^2 + P_m^2) + gX_mx_c, \quad (2)$$

$$H_{\text{ac}} = \frac{\Omega}{2} (X_a^2 + P_a^2) + GX_ax_c, \quad (3)$$

where ω_m is the mechanical frequency, Ω denotes the energy splitting of the two atomic levels and g and G are coupling constants. The physical basis of (2) and (3) are, respectively, radiation pressure [1] and Faraday interaction [7] as will be detailed further below. The basic principle underlying the QND measurement is best explained by assuming for the moment that both systems are coupled to the same cavity mode, and that we tune $G = g$ and $\Omega = -\omega_m$. The Hamiltonian is then the sum of (2) and (3), and in an interaction picture with respect to the harmonic oscillator terms the resulting Hamiltonian is

$$H_I = g [\cos(\omega_m t)x_c(X_m + X_a) + \sin(\omega_m t)x_c(P_m - P_a)].$$

Evidently, the relevant EPR observables are conserved quantities and – given the cavity decay happens fast on a time scale of g – cosine and sine components of light coupled out of the cavity will read out these EPR observables, making them detectable in a homodyne measurement of light. Note that it is vital to choose $\Omega = -\omega_m$, i.e. to let the atomic ensemble realize a harmonic oscillator with *negative mass*, in order to have *commuting* EPR observables appearing in H_I and, therefore, a

QND interaction, a situation whose realization is not obvious for two nanomechanical oscillators.

As will be detailed below, the QND measurement and EPR state preparation can actually be achieved in a *cascaded quantum system* according to Fig. 1, where the output light of the laser driven optomechanical system is coupled to an atomic ensemble at a (possibly) distant location, followed by a homodyne measurement. This setup has three remarkable features: First, this establishes *distant* EPR correlations, as is familiar from quantum communications with continuous variables systems, and avoids the requirement of holding the cloud of atoms close to the opto-nanomechanical system. Second, the present protocol remarkably does *not* require ground state cooling of the nanomechanical resonator. In the limit of strong coupling a QND measurement realizes a projective von Neumann measurement, collapsing the systems into a pure, entangled state irrespective of initial conditions. Surprisingly, this takes effect already for a QND measurement of moderate and well feasible strength. Third, this setup also provides measurement and verification of a reduced EPR variance by simply repeating the protocol.

Recently two proposals for hybrid quantum systems involving atoms and nano-systems were put forward [17, 18]. Our proposal is distinctly different from the one by Treutlein et al. [18], which suggests direct coupling of a Bose Einstein condensate to a magnetic island on a cantilever. Entanglement between short-lived electronically excited states of an atomic ensemble and a nanomechanical system, *both* being placed inside a cavity, has been very recently studied theoretically by Genes et al. [17].

The detailed treatment of light propagation, losses, as well as realistic conditions for the matching of time scales will be the main content of the remaining parts of this letter. We start with a brief derivation of the fundamental Hamiltonians (2) and (3), which are both well established models in their respective fields, see [2, 3, 4, 5, 6] and [11, 12, 13] respectively. In the opto-mechanical system the fundamental interaction is based on radiation pressure [6, 19] described by $V = g_0 a_c^\dagger a_c X_m$, where $g_0 = (x_0/L)\omega_c$ and x_0 is the mechanical oscillator ground state spread, L the cavity length and ω_c its frequency. If the cavity is driven by a resonant pulse of duration $\tau \gg 1/\gamma_c$, where γ_c is the cavity decay rate, and power $P = N_{\text{ph}}\hbar\omega_c/\tau$ containing a total number N_{ph} of photons, a steady state amplitude $\alpha = \sqrt{N_{\text{ph}}/\tau\gamma_c}$ builds up and the dynamics can be linearized giving an effective interaction $V_{\text{eff}} = g x_c X_m$ as in (2), where x_c, p_c describe fluctuations of the cavity field, see e.g. [4]. From Hamiltonian (2) the evolution is given by

$$\dot{x}_c = -\gamma_c x_c - \sqrt{2\gamma_c} x_{\text{in}}, \quad \dot{p}_c = -\gamma_c p_c - \sqrt{2\gamma_c} p_{\text{in}} - g X_m,$$

where $[x_{\text{in}}(t), p_{\text{in}}(t')] = i\delta(t - t')$ denotes vacuum noise. Assuming $\gamma_c \gg g, \omega_m$ we adiabatically eliminate the cavity mode and arrive at the cavity input-output relations [20]

$$x_{\text{out}} = -x_{\text{in}}, \quad p_{\text{out}} = -p_{\text{in}} - g\sqrt{2/\gamma_c} X_m, \quad (4)$$

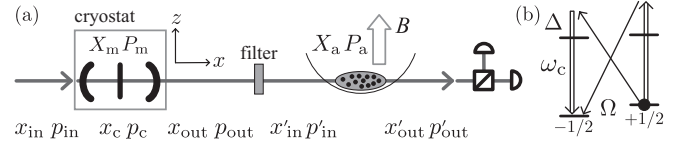


FIG. 1: (a) Schematic of setup: A pulse of light described by canonical operators $(x_{\text{in}}, p_{\text{in}})$ interacts first with a micromechanical oscillator (X_m, P_m) , realized by e.g. a membrane coupled to a Fabry-Perot cavity mode (x_c, p_c) . Light leaving the cavity $(x_{\text{out}}, p_{\text{out}})$ is phase modulated by the membrane. A filter turns these phase- into polarization-modulation. Subsequently the pulse $(x'_{\text{in}}, p'_{\text{in}})$ interacts with the collective spin of an atomic ensemble, effectively described by canonical operators X_a, P_a , and Larmor precessing in a magnetic field B . Light $(x'_{\text{out}}, p'_{\text{out}})$ leaving the ensemble is subject to homodyne detection. (b) Atomic level scheme with quantization axis along z : Atoms are prepared in the state $+1/2$ of a spin $j = 1/2$ ground state, Zeeman split by Ω . Light propagates along x with a classical field polarized along z driving the $\pm 1/2 \leftrightarrow \pm 1/2$ transitions (double arrows) and the y polarized quantum sidebands entangled with the nanosystem coupling to the $\pm 1/2 \leftrightarrow \mp 1/2$ transitions (thin arrows).

These expressions refer to field quadratures slowly varying around ω_c . According to the second equation in (4), the phase quadrature variance will be above shot noise due to correlations to the mechanical quadrature X_m carried by Stokes- and Antistokes-sideband photons at $\omega_c \pm \omega_m$.

As indicated in Fig.1a the beam leaving the cavity interacts with an ensemble of N_{at} atoms in free space, with a relevant level scheme shown in Fig.1b. For simplicity we will give a derivation of (3) for atoms inside a low Finesse cavity and derive from it input-output relations, as was done above. The same input-output relations can be shown to hold in free space [13] and provide an excellent description of experiments [11, 12]. The level configuration in Fig.1b gives rise to the Hamiltonian $H \propto J_x S_z$, where $S_z = -i(a_y^\dagger a_z - a_z^\dagger a_y)/2$ is a Stokes vector defined for two polarization modes $[a_i, a_j^\dagger] = \delta_{i,j}$ ($i, j = y, z$). This so-called Faraday interaction describes mutual polarization rotation of the atomic spins and the cavity field. If the z -polarized cavity mode is coherently driven, such that $\langle a_z \rangle = i|\alpha|$, one can approximate $S_z \simeq |\alpha|(a_y + a_y^\dagger)/2 \propto x_c$. Using canonical variables X_a, P_a for collective spin components J_x, J_y as explained above results in an interaction $H \propto X_a x_c$. For non-degenerate ground states there will in addition be a free Hamiltonian $H_0 = \Omega J_z = -(\Omega/2)(X_a^2 + P_a^2)$, where the minus sign is due to the fact that atoms are pumped to the energetically higher lying state cf. Fig.1b. Overall, we arrive at a Hamiltonian (3) with $\Omega \rightarrow -\Omega$. Adiabatic elimination of the cavity mode, just as for the mechanical system, will yield input-output relations

$$x'_{\text{out}} = -x'_{\text{in}}, \quad p'_{\text{out}} = -p'_{\text{in}} - \kappa\sqrt{2/\tau} X_a.$$

In free space τ is the pulse length and $\kappa^2 = (\sigma\Gamma/A\Delta)^2 N_{\text{at}} N_{\text{ph}}$, where Γ is the spontaneous decay rate, Δ the detuning, σ the scattering- and A the beam cross section [13].

We now assume that the cavity output provides the input to the light-atoms interaction such that $x'_{\text{in}} = -x_{\text{out}}$ and $p'_{\text{in}} = -p_{\text{out}}$. This requires that the coherent pulse at frequency ω_c is rotated in polarization by 90° and phase shifted by $\pi/2$ relative to its sideband components at $\omega_c \pm \omega_m$, which can be achieved by separating the optical carrier and the sidebands with an auxiliary cavity and then performing the required rotations and shifts. Note that because the sidebands will be measured by homodyning with the carrier, an well feasible extinction ratio for the carrier at the percent level is sufficient [21]. We now assume a matching of time scales by requiring

$$\kappa/\sqrt{\tau} = g/\sqrt{\gamma_c}, \quad (5)$$

which can be fulfilled experimentally as indicated below. Under these conditions the overall input-output relations become

$$x'_{\text{out}} = -x_{\text{in}}, \quad p'_{\text{out}} = -p_{\text{in}} - \kappa\sqrt{2/\tau}(X_m + X_a). \quad (6)$$

In order to achieve a QND measurement of EPR variables $X_m + X_a$ and $P_m - P_a$, these variables have to be free of back action of light and light has to read out both. This is indeed the case. From the discussion above it follows straight forwardly that the mechanical oscillator evolves as,

$$\dot{X}_m = \omega_m P_m, \quad \dot{P}_m = -\omega_m X_m - g x_c = -\omega_m X_m + g\sqrt{2/\gamma_c} x_{\text{in}},$$

where in the last equality the cavity mode was again adiabatically eliminated. In these equations we neglect the decay of the oscillator, which is justified if the whole protocol happens on a time scale $\sim \tau$ such that $\tau\gamma_m\bar{n}_{\text{th}} \ll 1$. Here γ_m is the mechanical damping rate and $\bar{n}_{\text{th}} = k_B T/\hbar\omega_m$ is the mean occupation in thermal equilibrium at temperature T . If this condition is met, decay can be treated perturbatively, as will be done below. Transverse atomic spin components evolve as

$$\dot{X}_a = -\Omega P_a, \quad \dot{P}_a = \Omega X_a + \frac{\kappa}{\sqrt{\tau}} x'_{\text{in}} = \Omega X_a + \kappa\sqrt{\frac{2}{\tau}} x_{\text{in}}.$$

Decoherence due to spontaneous emission can be kept small for sufficient optical depth [13] and will be included perturbatively further below. Using again condition (5) and taking in addition $\omega_m = \Omega$, we finally arrive at

$$\frac{d}{dt}(X_m + X_a) = \Omega(P_m - P_a), \quad \frac{d}{dt}(P_m - P_a) = -\Omega(X_m + X_a).$$

In this closed set of equations of motion for commuting EPR observables $X_m + X_a$ and $P_m + P_a$ back action effects of light cancel out by interference. This establishes the QND character of the present interactions.

The QND signal lies essentially in the Fourier components at frequency Ω of the in-quadrature component p'_{out} . For the normalized observables $p_{\text{out}}^{\text{cos}} = -\sqrt{2/\tau} \int_0^\tau dt \cos(\Omega t) p'_{\text{out}}(t)$ and $p_{\text{out}}^{\text{sin}} = -\sqrt{2/\tau} \int_0^\tau dt \sin(\Omega t) p'_{\text{out}}(t)$ one readily derives from (6) the input-output relations,

$$p_{\text{out}}^{\text{cos}} = p_{\text{in}}^{\text{cos}} + \kappa(X_m + X_a)_{\text{in}}, \quad p_{\text{out}}^{\text{sin}} = p_{\text{in}}^{\text{sin}} + \kappa(P_m - P_a)_{\text{in}}, \quad (7)$$

with appropriate definitions for the in-components $x_{\text{cos}(\text{sin})}^{\text{in}}$. We assume here $\Omega\tau \gg 1$ such that cosine and sine components can be taken as independent variables.

A measurement of $x_{\text{out}}^{\text{cos}(\text{sin})}$ leaves the mechanical resonator and the collective spin in a state with reduced EPR variance (1), *conditioned* on the respective measurement results $\xi_{\text{cos}(\text{sin})}$ of $x_{\text{out}}^{\text{cos}(\text{sin})}$. An unconditionally reduced variance can be achieved by a feedback operation on the atomic spin, e.g. via fast rf pulses causing appropriate tilt of the spin, generating a displacement $X_a \rightarrow X_a - g\xi_{\text{cos}}$, $P_a \rightarrow P_a - g\xi_{\text{sin}}$ with a suitable gain g . In the ensemble average this generates a state, whose statistics is described by the input-output relations [22]

$$\begin{aligned} (X_m + X_a)_{\text{out}} &= (X_m + X_a)_{\text{in}} - g p_{\text{out}}^{\text{cos}} \\ &= (1 - g\kappa)(X_m + X_a)_{\text{in}} - g p_{\text{in}}^{\text{cos}}, \\ (P_m - P_a)_{\text{out}} &= (1 - g\kappa)(P_m - P_a)_{\text{in}} - g p_{\text{in}}^{\text{sin}}. \end{aligned} \quad (8)$$

Our aim is to minimize this variance with respect to the feedback gain g . As initial state of the systems we assume vacuum for light modes, the ground (fully polarized) state for the collective spin and an initial thermal occupation \bar{n}_i for the mechanical resonator. In thermal equilibrium $\bar{n}_i = \bar{n}_{\text{th}}$, but in principle \bar{n}_i can be reduced by initial laser cooling [2, 3]. For optimal gain the minimal EPR variance is

$$\Delta_{\text{EPR}} = \frac{2}{\frac{1}{(1+\bar{n}_i)} + 2\kappa^2}, \quad (9)$$

which is the main result of this paper.

According to Eq. (1) this is an entangled state if the right hand side of (9) falls below 2. As $2[(1+\bar{n}_i)^{-1} + 2\kappa^2]^{-1} \leq \kappa^{-2}$ *there is no fundamental limit on observable entanglement due to initial thermal occupation \bar{n}_i of the mechanical system.* Thus, even for moderate values of $\kappa \gtrsim 0.5$, achievable as outlined below, the present protocol produces an entangled state independent of the initial thermal occupation of the nanomechanical resonator.

We turn to the discussion of losses and decoherence. The dominant impairing effects are (i) number mismatch in Eq.(5), (ii) loss of light, detection inefficiency and spontaneous emission in light-atom interactions, and (iii) thermalization of the mechanical oscillator. Ad (i), it is straight forward to derive that a nonzero mismatch $\epsilon = (\kappa - \lambda\sqrt{\gamma_c\tau})/(\kappa + \lambda\sqrt{\gamma_c\tau})$ will give rise to additional terms in the variance of EPR variables (9) scaling in leading order as $[\epsilon\kappa(\bar{n}_i + 2)]^2$. For $\kappa \gtrsim 1$ a mismatch of $\epsilon \simeq 1/10\bar{n}_i$ is tolerable. This poses a practical limit to the initial thermal occupation of the nanomechanical resonator. Effects due to processes (ii) and (iii) can be treated perturbatively as linear losses, as we exemplify for damping of the resonator: During the interaction the state of the resonator will undergo damping at a rate γ_m and provided $\gamma_m\tau \ll 1$ e.g. Eq.(8) will generalize to

$$(X_m + X_a)_{\text{out}} = (\sqrt{1 - \gamma_m\tau} X_m + X_a)_{\text{in}} + \sqrt{\gamma_m\tau} f_{X_m} - g p_{\text{out}}^{\text{cos}},$$

where f_{X_m} is a Langevin operator for thermal noise, $\langle f_{X_m}^2 \rangle = (\bar{n}_{\text{th}} + 1)$. The variance will thus receive an additional term

$\gamma_m \tau (\bar{n}_{\text{th}} + 1)$, such that we have to require $\tau \ll 1/\gamma_m \bar{n}_{\text{th}} = Q_m \hbar / k_B T$ for a quality factor $Q_m = \omega_m / \gamma_m$. In a similar vein one can treat losses (ii), which have the advantageous property that the corresponding noise is, to a good approximation, vacuum noise. That is, a photon loss by a fraction ε will cause the final EPR variance to be $\Delta_{\text{EPR}} \rightarrow (1 - \varepsilon)\Delta_{\text{EPR}} + 2\varepsilon$. This will reduce but not remove the entanglement created by this protocol.

The suggested protocol can be realized with current technology. We consider two possible setups, in which the nanomechanical resonator is used either as one of the mirrors of a Fabry-Perot cavity [2] or as a dispersive element in a rigid cavity [6]. Assuming that $\kappa \simeq 1$ and that condition (5) can be matched within an error of $\epsilon = 0.01$ we need $\bar{n}_i \lesssim 30$. This can be achieved for high ω_m at dilution refrigerator temperatures, cf. Naik et al. [2] or, in case of lower ω_m or higher bath temperatures, by applying additional laser cooling. As an example for the two cases we assume a moving micromirror with $\omega_m/2\pi = 5$ MHz, mass $m = 10^{-12}$ kg and quality factor $Q_m \geq 5 \times 10^5$ operated at $T = 0.2$ K (resulting in $\bar{n}_i \approx 850$, which requires modest laser cooling by a factor of 30), and a small (dispersively coupled) nanomembrane with $\omega_m/2\pi = 30$ MHz, $m = 10^{-14}$ kg and $Q_m \geq 10^5$ operated at $T = 0.04$ K ($\bar{n}_i \approx 30$). Mechanical quality and temperature limit the interaction time to $\tau \ll 20$ μs , which is in principle sufficient for entanglement of room temperature atoms and certainly enough in the case of cold atoms. For the laser-cooled micromirror (5) can be achieved with a finesse $F = 4500$ and power $P = 100$ μW . Adiabatic elimination of the cavity mode finally poses an upper bound $L \leq 300$ μm on the cavity length. For the nanomembrane a modest finesse $F = 1100$ is already sufficient at a pump power $P = 100$ μW and cavity length $L \leq 250$ μm .

Finally, the generated entanglement can serve as a basis for teleporting quantum states of a collective spin onto a nanomechanical system. The protocol proceeds in three steps. First, an entangled state characterized by Eq. (9) is created and a second, additional atomic ensemble is prepared in a coherent state with amplitudes $\langle X_{a2} \rangle$, $\langle P_{a2} \rangle$. Second, following the approach of [11] a QND Bell measurement of $(X_{a2} + X_a)$ and $(P_{a2} - P_a)$ is performed on the two atomic ensembles. Third, the measurement result is used in a feedback on the mechanical system, via e.g. piezo-electric or radiation pressure displacement. This completes the teleportation and generates a state,

$$X_m^{\text{fin}} = X_m + g[p_{\text{in}}^{\text{cos}} + \kappa_{\text{QND}}(X_{a2} + X_a)] = X_m + X_a + X_{a2},$$

$$P_m^{\text{fin}} = P_m + g[p_{\text{in}}^{\text{sin}} + \kappa_{\text{QND}}(P_{a2} - P_a)] = P_m - P_a + P_{a2}.$$

Here κ_{QND} and g denote strength of QND interaction and feedback gain in the Bell measurement on the two atomic ensembles. The second equalities of both lines are valid in the asymptotic limit $\kappa_{\text{QND}} \rightarrow \infty$, $g \rightarrow 0$ while $\kappa_{\text{QND}}g = 1$, which essentially requires a large optical depth [7, 13]. Amplitudes are thus transmitted correctly, $\langle X_m \rangle = \langle X_{a2} \rangle$ and $\langle P_m \rangle = \langle P_{a2} \rangle$, and the amount of added noise is given by

$\Delta_{\text{EPR}}/2$ in Eq. (9), as e.g. $\Delta(X_m^{\text{fin}})^2 = \Delta(X_{a2})^2 + \Delta(X_m + X_a)^2$ and equivalently for $\Delta(P_m^{\text{fin}})^2$. For $\kappa \simeq 1$ this is approximately one unit of vacuum noise in each variable, corresponding to a fidelity of $2/3$. We note that this implies the intriguing possibility to cool a mechanical resonator by teleporting the ground state onto it. More details of the proposed protocols will be presented in a forthcoming publication.

We acknowledge support by the FWF under SFB F15, doctoral program W1210 and project P15939, by the Foundational Questions Institute (grant RFP1-06-14), and by EU projects QAP, COMPAS, EuroSQIP and EMALI.

-
- [1] H. G. Craighead, *Science* **290**, 1532 (2000); K. L. Ekinci and M. L. Roukes, *Rev. Sci. Instr.* **76**, 061101 (2005); K. C. Schwab and M. L. Roukes, *Physics Today* **58**, 36 (2005); T. J. Kippenberg and K. J. Vahala, *Opt. Exp.* **15**, 17172 (2007)
 - [2] S. Gigan et al., *Nature* **444**, 67 (2006); O. Arcizet et al., *Nature* **444**, 71 (2006); A. Naik et al., *Nature* **443**, 193 (2006); T. Corbitt et al., *Phys. Rev. Lett.* **98**, 150802 (2007); A. Schliesser et al., *Nature Physics* **4**, 415 (2008); P. F. Cohadon et al., *Phys. Rev. Lett.* **83**, 3174 (1999)
 - [3] F. Marquardt et al., *Phys. Rev. Lett.* **99**, 093902 (2007); I. Wilson-Rae et al., *Phys. Rev. Lett.* **99**, 093901 (2007); C. Genes et al., *Phys. Rev. A* **77**, 033804 (2008)
 - [4] S. Mancini et al., *Phys. Rev. Lett.* **90**, 137901 (2003); D. Vitali et al., *Phys. Rev. Lett.* **98**, 030405 (2007); M. Bhattacharya et al., arXiv:0712.1657v1 (2007)
 - [5] K. R. Brown and et.al, *Phys. Rev. Lett.* **99**, 137205 (2007)
 - [6] J. D. Thompson et al., *Nature* **452**, 72 (2008)
 - [7] K. Hammerer et al., arXiv:0807.3358 (2008)
 - [8] T. Chaneliere et al., *Nature* **438**, 833 (2005); M. Eisaman et al., *Nature* **438**, 837 (2005); K. S. Choi et al., *Nature* **452**, 67 (2008)
 - [9] C. W. Chou et al., *Nature* **438**, 828 (2005); J. K. Thompson et al., *Science* **313**, 74 (2006); Z. S. Yuan et al., arXiv:0803.1810v1 (2008)
 - [10] A. Kuzmich, L. Mandel, and N. P. Bigelow, *Phys. Rev. Lett.* **85**, 1594 (2000)
 - [11] B. Julsgaard et al., *Nature* **413**, 400 (2001)
 - [12] B. Julsgaard et al., *Nature* **432**, 482 (2004); J. F. Sherson et al., *Nature* **443**, 557 (2006)
 - [13] A. Kuzmich et al., *Europhys. Lett.* **42**, 481 (1998); L.-M. Duan et al., *Phys. Rev. Lett.* **85**, 5643 (2000); J. Sherson et al., *Adv. At., Mol. Opt. Phys.* **54**, 81 (2007)
 - [14] S. Braunstein and A. Pati, *Quantum Information with Continuous Variables* (Kluwer, New York, 2003); S. L. Braunstein and P. van Loock, *Rev. Mod. Phys.* **77**, 513 (2005)
 - [15] L.-M. Duan et al., *Phys. Rev. Lett.* **84**, 2722 (2000); R. Simon, *Phys. Rev. Lett.* **84**, 2726 (2000)
 - [16] V. B. Braginsky and F. Y. Khalili, *Rev. Mod. Phys.* **68**, 1 (1996); V. B. Braginsky et al., *Science* **209**, 547 (1980)
 - [17] C. Genes et al., arXiv:0801.2266v1 (2008)
 - [18] P. Treutlein et al., *Phys. Rev. Lett.* **99**, 140403 (2007)
 - [19] C. K. Law, *Phys. Rev. A* **51**, 2537 (1995)
 - [20] C. Gardiner and P. Zoller, *Quantum Noise* (Springer, Berlin, 2000)
 - [21] J. S. Neergaard-Nielsen et al., *Phys. Rev. Lett.* **97**, 083604 (2006)
 - [22] K. Hammerer et al., *Phys. Rev. A* **72**, 052313 (2005)