

Evaluation of phase shifts for non-relativistic elastic scattering using quantum computers

Francesco Turro ^{1,*}, Kyle A. Wendt ², Sofia Quaglioni ², Francesco Pederiva ^{3,4} and Alessandro Roggero ^{3,4}

¹*InQubator for Quantum Simulation (IQUS), Department of*

Physics, University of Washington, Seattle, Washington 98195, USA

²*Lawrence Livermore National Laboratory, P.O. Box 808, L-414, Livermore, California 94551, USA*

³*Physics Department, University of Trento, Via Sommarive 14, I-38123 Trento, Italy*

⁴*INFN-TIFPA Trento Institute of Fundamental Physics and Applications, Trento, Italy*

Simulations of scattering processes are essential in understanding the physics of our universe. Computing relevant scattering quantities from ab initio methods is extremely difficult on classical devices because of the substantial computational resources needed. This work reports the development of an algorithm that makes it possible to obtain phase shifts for generic non-relativistic elastic scattering processes on a quantum computer. This algorithm is based on extracting phase shifts from the direct implementation of the real-time evolution. The algorithm is improved by a variational procedure, making it more accurate and resistant to the quantum noise. The reliability of the algorithm is first demonstrated by means of classical numerical simulations for different potentials, and later tested on existing quantum hardware, specifically on IBM quantum processors.

I. INTRODUCTION

Many-body scattering processes play a key role in a large variety of physics phenomena ranging from nuclear reactions and decays that drive stellar evolution [1–3] to electron-phonon scattering underlying superconductivity in materials [4, 5]. Performing accurate simulations of scattering experiments for a generic quantum many-body system remains a challenging problem in theoretical physics. These simulations are extremely computationally demanding when the interactions between the constituents are non-perturbative, as in the case of nuclear physics. Typically, the classical computational resources required to perform such simulations grow exponentially with the number of particles. Moreover, many scattering processes involve fermions, which in classical methods often leads to the notorious fermion sign problem [6], increasing the computational time needed to perform the simulations. Classical first principles (i.e., ab initio) simulations of nuclear reactions are currently limited to processes involving light elements such as those occurring during the Big Bang or in the proton-proton (pp) reaction chain in our Sun [7–9] and, even in the exascale computing era, may remain limited to the description of α capture reactions [10].

Since Feynman’s original proposal in the 80’s [11], quantum computers have emerged as an interesting alternative to simulate quantum systems efficiently, in part thanks to the possibility to encode an exponential Hilbert space using a linear number of qubits. In particular, the simulation of real-time dynamics, and thus scattering processes, of locally interacting many-body systems was recognized early on as a promising application of digital

quantum technologies [12]. Recent years have witnessed a dramatic growth in the capabilities of quantum devices and multiple calculations have now been demonstrated on more than 100 qubits [13–18], using different architectures ranging from trapped ions [19] to superconducting devices [20–24] and neutral atom arrays [25–28]. It is therefore timely and desirable to develop digital quantum algorithms for simulating scattering processes.

A variety of quantum algorithms have been proposed in the past for the simulation of generic scattering processes, among which is the pioneering work by Jordan-Lee-Preskill (JPL) [29, 30] for simulation of inelastic processes in scalar quantum field theory. In the context of nuclear physics, other quantum algorithms for dynamical simulations have been proposed, including the calculations of the inclusive and semi-exclusive scattering cross sections of nuclei to electroweak probes functions [31–37], radiative processes [38], calculations of Green’s functions [39–41], applications of Rodeo algorithm [42], hybrid quantum-classical methods to simulate semi-classical dynamics [43] and inelastic scattering [44, 45] among others (see [46–49] for recent reviews).

This work presents a quantum algorithm for a direct evaluation of phase shifts for a generic elastic scattering process, allowing the calculations of angular and total cross section. A variety of classical methods are available to simulate many-body scattering, from the famous Lüsher’s formula [50–53], R-matrix theory [54, 55], Monte-Carlo based methods [56–58], optical potentials [59–62] to Non-Core Shell Models with Continuum [63, 64]. For two body scattering one can also apply direct integration schemes such as the Numerov method [65]. Quantum algorithms for this problem have already been proposed recently [66, 67]. Our method provides an alternative scheme that might prove useful in certain scenarios.

We describe the main steps of the proposed algorithm

* fturro@uw.edu

in Sec. II together with classical benchmark calculations showing its validity. In Sec. III we describe a variational variant of the approach which could be useful for implementation on near term noisy devices. Moreover, we also make the quantum algorithm noise-resistant to the decoherence of the processors with the variational method. We present results of simulations on classical computers of the proposed algorithm in Sec. IV using a variety of Hamiltonians and basis sets. In Sec. V we report the results obtained from a direct implementation of our scheme on superconducting quantum processors from IBM [68, 69] showing the impact of error mitigation techniques. Finally, we present our summary and conclusions in Sec. VI.

II. THE GENERAL REAL-TIME ALGORITHM

Generically speaking, the theoretical description of a time-dependent scattering process formally consists of three essential steps. First, the system is prepared in a given initial state. Next, the system is evolved in time guided by the many-body Hamiltonian. Finally the system is measured, potentially after contraction with a target state, to extract the physical observables. In this work, we follow this archtypical approach to scattering, performing each of these steps as operations on a quantum device.

For this first exploratory work, we make two simplifications. First, we work with a system of relative coordinates \vec{r} between the particles. Second, we only consider central potentials $V(r)$ that depend on the magnitude r of the relative coordinates \vec{r} . Under these conditions, the wave function can be cast an expansion of partial waves defined by their angular momentum L

$$\Psi(\vec{r}) = \sum_{L=0}^{\infty} \sum_{m=-L}^L A_{L,m} \frac{u_L(r)}{r} Y_L^m(\theta, \phi), \quad (1)$$

where the Y_L^m are the standard spherical harmonics and the radial functions u_L are the solutions of the radial Schrödinger equation,

$$\left\{ \frac{\hbar^2}{2\mu} \frac{d^2}{dr^2} + \left[E - V(r) - \frac{\hbar^2}{2\mu} \frac{L(L+1)}{r^2} \right] \right\} u_L(r) = 0, \quad (2)$$

where μ is the reduced mass of the system. Since our goal is to extract the scattering phase shifts, it is advantageous to initialize the system in a state as close as possible to an incident plane wave. For instance, taking a plane wave of momentum

$$k_{\text{in}} = \sqrt{\frac{2\mu E}{\hbar^2}} \quad (3)$$

traveling in the z direction, we have

$$\begin{aligned} \Psi_{\text{in}}(\vec{r}) &= e^{ik_{\text{in}}r \cos(\theta)} \\ &= \sum_{L=0}^{\infty} a_L i^L (2L+1) j_L(k_{\text{in}}r) P_L(\cos(\theta)), \end{aligned} \quad (4)$$

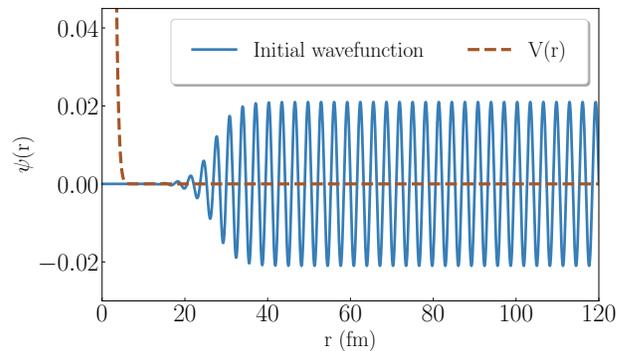


FIG. 1: Example of an initial state of the real-time approach. The blue line represent the initial wavefunction, given by $\psi(r) = \frac{1}{1+e^{-\frac{r-r_0}{\Gamma}}} \sin(k_{\text{in}}r)$ with $k_{\text{in}} = 2.12 \text{ fm}^{-1}$, $\Gamma = 2.5 \text{ fm}$, and $r_0 = 28 \text{ fm}$. The dashed line represents the Gaussian potential $V(r) = V_0 e^{-\frac{r^2}{\sigma^2}}$ with $V_0 = 1 \text{ MeV}$ and $\sigma = 2 \text{ fm}$.

where j_L are the spherical Bessel functions of the first kind, P_L the Legendre polynomials, and θ indicates the polar angle. We work in a finite volume, and therefore we find it convenient to modify an initial wave packet by multiplying the plane wave by a suitable filter function designed to suppress the amplitude in the interaction area, where the potential $V(r) \neq 0$. For example, a possible choice of the filter function can be the following,

$$f(r) = \frac{1}{1 + e^{-\frac{(r-r_0)}{\Gamma}}}, \quad (5)$$

where r_0 corresponds to the boundary of the interaction region, and the parameter Γ controls the width of the filter. An example of such a state for a central potential, with momentum $k_{\text{in}} = 2.12 \text{ fm}^{-1}$ and angular momentum $L = 0$, is shown as the blue line in Fig. 1. The brown dashed line instead corresponds to a central Gaussian potential.

After preparing the truncated plane wave, the real-time evolution is implemented by applying the propagator $e^{-it\hat{H}}$, where \hat{H} is the radial Hamiltonian:

$$\hat{H} = -\frac{\hbar^2}{2\mu} \frac{d^2}{dr^2} + V(r) + \frac{\hbar^2}{2\mu} \frac{L(L+1)}{r^2}. \quad (6)$$

When the propagation is implemented for a sufficiently long time t , we expect the evolved wave function to converge to the solution of the Lippmann–Schwinger equation [70, 71] that, for r larger than the range of the potential, can be written as:

$$\lim_{t \rightarrow \infty} u_L(r, t) \propto kr [\cos(\delta_L) j_L(k_{\text{in}}r) - \sin(\delta_L) n_L(k_{\text{in}}r)], \quad (7)$$

where n_L is spherical Bessel functions of the 2nd kind, and δ_L is the phase shift. In the $r \rightarrow \infty$ limit, the

Bessel functions can be further approximated by sines and cosines, giving the asymptotic expression for the radial solution,

$$\lim_{t \rightarrow \infty} \lim_{r \rightarrow \infty} u_L(r, t) = A_L \sin\left(k_{\text{in}} r + \frac{\pi L}{2} + \delta_L\right). \quad (8)$$

Furthermore, the energy conservation given by the unitarity of the propagator also guarantees that the momentum of the asymptotic solution is still equal to k_{in} at the time of detection.

In order to extract information about the phase shifts δ_L on a quantum device, we can measure the overlap between the evolved state $\psi_L(t)$ and a detector state, defined as the initial plane wave in an interval $r \in [r_1, r_2]$ in the asymptotic region, where we set

$$r_2 = r_1 + \frac{2\pi}{k_{\text{in}}} n_d \quad (9)$$

with n_d an integer number. Hence, we define the detector state as

$$|\phi_D\rangle = c_D \text{Box}(r, r_1, r_2) j_L(k_{\text{in}} r), \quad (10)$$

where c_D indicates a normalization constant, and $\text{Box}(r_1, r_2)$ the Box function between r_1 and r_2

$$\text{Box}(r, r_1, r_2) = \theta(r - r_1) - \theta(r - r_2), \quad (11)$$

with $\theta(x)$ the Heavyside theta function, and we consider asymptotically large values for r_1 .

Therefore, we can write the overlap between ϕ_D and $\psi_L(t)$ as,

$$\begin{aligned} O(t) &= \langle \phi_D | \psi_L(t) \rangle \\ &\approx \alpha_L \int_{r_1}^{r_2} dr \sin\left(k_{\text{in}} r + \frac{\pi L}{2}\right) \\ &\quad \times \sin\left(k_{\text{in}} r + \frac{\pi L}{2} + \delta_L\right) \\ &= \frac{r_2 - r_1}{2} \alpha_L \cos(\delta_L) \\ &\quad + \frac{\sin(k_{\text{in}}(r_1 - r_2))}{2k_{\text{in}}} \alpha_L \cos(k_{\text{in}}(r_1 + r_2) + \delta_L) \\ &= \frac{r_2 - r_1}{2} \alpha_L \cos(\delta_L), \end{aligned} \quad (12)$$

where in the second line we used Eq. (8) and introduced $\alpha_L = c_D A_L$. In the last line, we use the definition of r_2 from Eq. (9). As a consequence, the phase shift δ_L can be obtained from the overlap probability $P = |O(t)|^2$.

We can initialize the system in a state corresponding to a single component of $|\Psi_{\text{in}}\rangle$ with a fixed angular momentum L by representing only the radial part on a spatial grid with 2^M points,

$$|\Phi_L(0)\rangle = \mathcal{N} \sum_{m=0}^{2^M} (k_{\text{in}} r_m) j_L(k_{\text{in}} r_m) |m\rangle, \quad (13)$$

where \mathcal{N} is the appropriate normalization factor. The value of initial plane wave momentum k_{in} (see Eq. (3)) is chosen to be an eigenvalue of the kinetic energy operator in order to reduce numerical noise during the real-time evolution (the initial wavefunction is close to the kinetic eigenstate).

We then perform the time evolution with only the radial Hamiltonian \hat{H}_{eff} from Eq. (6) and we compute the overlap probability with the detector state $|\phi_D\rangle$,

$$P = \lim_{t \rightarrow \infty} |\langle \Phi_D | \psi_L(t) \rangle|^2 = c_L^2 \cos^2(\delta_L), \quad (14)$$

with c_L being a proportionality constant that depends on the choice of r_1 and r_2 in the detector. We stress that we can obtain only the absolute value of δ_L because $\pm\delta_L$ has the same overlap probability value. Sec. III presents an improvement of the quantum algorithm that allows to also learn the correct sign of the phase shift.

The coefficient c_L indicates the change in normalization from the detector volume and it can be approximated by the overlap probability between the initial state and the detector state (considering it far away). Its value is obtained from

$$c_L^2 = \int_{r_1}^{r_2} dr r^2 \frac{1}{c_{\text{init}}} j_L(k_{\text{in}} r) \frac{1}{c_{\text{dect}}} j_L(k_{\text{in}} r) = \frac{c_{\text{dect}}}{c_{\text{init}}} \quad (15)$$

where c_{init} and c_{dect} parameters indicate the normalization of the initial and detector states, respectively. They are given by

$$\begin{aligned} c_{\text{dect}} &= \sqrt{\int_{r_1}^{r_2} dr r^2 j_L^2(k_{\text{in}} r)} \\ c_{\text{init}} &= \sqrt{\int_0^{R_{\text{max}}} dr r^2 f^2(r) j_L^2(k_{\text{in}} r)}, \end{aligned} \quad (16)$$

where R_{max} is the size of the simulation box.

In this work, we choose to use a uniform spatial grid where one can naturally find locations r_1 and r_2 in the asymptotic limit trivially. Using the formal tools of a discrete variable representation, this entire analysis can be generalized to any basis representation where the basis follows a typical three term recurrence relationship [72, 73]. In this work, we calculate phase shifts for a central potential and for the angular momentum $L = 0$. However, the same quantum algorithm can be applied for couple-channel scattering, where the Hamiltonian mixes different angular momenta.

The SWAP test [74] can easily evaluate the overlap probability of Eq. (14) on a quantum processor. It requires $2n_s + 1$ qubits, where n_s qubits are needed to map the evolved state, n_s more to describe the free plane wave, and an extra qubit serves as an ancillary one. Nevertheless, this implementation might be hard in today's processors with few available qubits. Computationally cheaper alternatives are possible, either by using more sophisticated implementations of the SWAP test [75] or

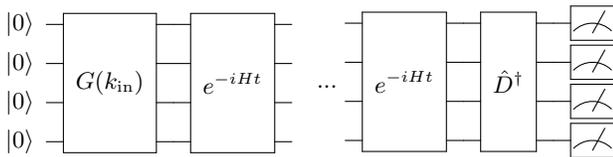


FIG. 2: Scheme of the quantum circuits for computing phase shift. The gates $G(k_{\text{in}})$ and \hat{D}^\dagger are the gate that prepare and unprepare the initial and detector state, respectively. See the main text for details.

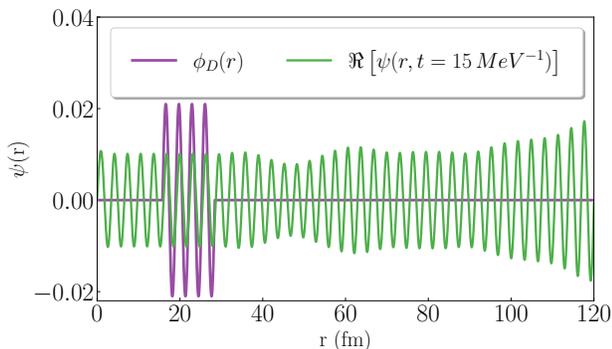


FIG. 3: Plot of the real part of the evolved wave function (green line) at $t = 15 \text{ MeV}^{-1}$ for a scattering with a Gaussian potential. The purple line indicates the detector state.

using randomized measurements [76]. We adopt an alternative approach where we implement an operator \hat{D}^\dagger , where \hat{D} is defined as the operator that reinitializes the detector state of Eq. (10). Indeed, after applying the \hat{D}^\dagger operator, the probability that all the qubits are in the $|0\rangle$ state is equal to the overlap probability $P = |\langle \phi_D | \psi(t) \rangle|^2$. In this formula, we can write

$$P = |\langle \phi_D | \psi(t) \rangle|^2 = \left| \langle 0 \dots 0 | \hat{D}^\dagger | \psi(t) \rangle \right|^2 \quad (17)$$

where in the last step we use the definition of the \hat{D} operator.

At the end, we can summarize the general scheme of the quantum circuit in Fig. 2. We implement a gate, called $G(k_{\text{in}})$, that prepares the quantum processor in the truncated wave function. After that, we apply the real-time evolution, generally using the Trotter decomposition. At the end, we implement the detector gate, D^\dagger . We note that the quantum compilation of \hat{D} operator can be obtained from the same quantum circuit for the $G(k_{\text{in}})$ operator. Indeed, it can be obtained from flipping the sign of the angle of single-qubit rotations and implementing the gate starting from right side to left side. After these implementations, the probability of measuring $|0 \dots 0\rangle$ state is equal to the $c_L^2 \cos(\delta_L)^2$ for the elastic scattering. We call the presented quantum algorithm method Time Evolution Phase Shift (TEPS).

A. Classical Tests

The validity of the TEPS algorithm was tested by expanding the Hamiltonian with the Gaussian and H-Ar Lennard-Jones potentials in a spatial lattice for $L = 0$. The details of the adopted Hamiltonians can be found in Appendix A.

We test the TEPS algorithm with a Gaussian potential ($V_0 = 1$, $\sigma = 2$ and $\frac{\hbar^2}{2\mu} = 1$) with an initial momentum $k_{\text{in}} = 1.99 \text{ fm}^{-1}$. We use a finite box with $R_p = 6000$ lattice points and a lattice spacing $a = 0.02 \text{ fm}$. Fig. 3 shows the obtained snapshot for the evolution at time 15 MeV^{-1} with the green line. The purple line represent the used detector state to compute the overlap probability.

Figure 4 shows the results for the phase shift results as a function of time. The dashed horizontal line indicates the exact phase shift calculated from the Numerov algorithm [65]. We can observe that between $t = 24 \text{ MeV}^{-1}$ and $t = 34 \text{ MeV}^{-1}$ (shown with vertical dotted lines), the phase shift values are constant. Averaging over this interval, we obtain $\delta_L = 0.46(3)$. Such result is compatible within two standard deviations with the exact one, $\delta_L^{ex} = -0.47$.

We can also observe that after $t = 40 \text{ MeV}^{-1}$, the phase shift starts changing. This is due to border effects. Part of an evolved wave bounces on the infinite wall at the right end of the box, $R_{\text{max}} = 120 \text{ fm}$, and re-enters in the detector area. The plateau interval can be extended by increasing the lattice points. Moreover, the initial time of the plateau (named τ) can be empirically estimated by the passing time for a free wave with momentum k_{in} starting from r_0 position goes to 0 and bounces back to the middle of the detector position r_d ($r_d = \frac{r_1}{2} + \frac{r_2}{2}$). This initial plateau time is then given by,

$$\tau \simeq \frac{1}{k_{\text{in}}} (r_0 + r_d) . \quad (18)$$

Table I illustrates the results obtained for different potentials and momenta. In all present lattice simulations, the number of lattice points is set to $R_p = 6000$, the lattice spacing is $a = 0.02 \text{ fm}$ for the Gaussian potential and $a = 0.02 \text{ \AA}$ for the Lennard-Jones potentials.

Appendix B discusses the effects of the truncation and lattice parameters in the phase shift results. From our analysis, the truncation effects can be mainly mitigated by increasing the lattice and increasing the Γ value (filter function width) in the initial state.

III. IMPROVEMENT WITH A VARIATIONAL APPROACH

In the previous section, we found a good compatibility between the TEPS phase shift results and the exact ones for general Hamiltonians. However, this agreement depends on the initial set-up of our simulation. Figure 5 shows the phase shift computed for the scattering with

Gaussian $V_0 = 1$ MeV $\sigma = 2$ fm		
	$ \delta_L^{ex} $	δ_L^{TEPS}
$k_{in} = 1.466$ fm $^{-1}$	0.646	0.65(3)
$k_{in} = 1.73$ fm $^{-1}$	0.540	0.54(3)
$k_{in} = 2.252$ fm $^{-1}$	0.4599	0.40(3)
H-Ar Lennard-Jones		
	$ \delta_L^{ex} $	δ_L^{TEPS}
$k_{in} = 0.602$ Å $^{-1}$	0.753	0.76(3)
$k_{in} = 0.8639$ Å $^{-1}$	0.543	0.54(3)
$k_{in} = 0.995$ Å $^{-1}$	1.148	1.14(3)

TABLE I: Phase shifts δ_L^{TEPS} computed by the TEPS algorithm, tabulated along the absolute value of exact phase shift δ_L^{ex} for the H-Ar scattering. The parameters of the Lennard-Jones potential used can be found in Ref. [77]

a Gaussian potential ($V_0 = 1$ MeV, $\sigma = 2$ fm.) starting with a filter width $\Gamma = 0.0001$ fm 1 . With this small value, we pick contributions from many undesired momenta, causing a large variance of the phase shift results around the plateaus region. If we take a snapshot of the evolution, as shown in Fig. 5a, we observe that the peak amplitudes are not stable, causing a big variance of the overlap probability. The green line shows the absolute value of the evolved wave function at time $t = 20$ MeV $^{-1}$ and the purple line the used absolute value of the detector. This causes a big variance of the phase shift results shown in Fig. 5b. Moreover, from the analysis in Appendix B, we observe the wrong lattice spacing, the

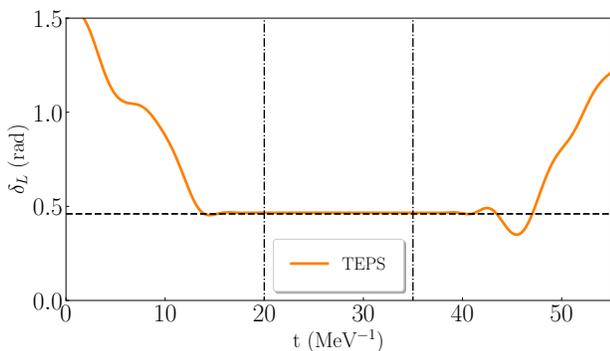


FIG. 4: Estimation of the phase shift as a function of time t for the scattering with a Gaussian potential. The dashed horizontal line corresponds to the exact phase shift. The vertical dotted-dashed lines delimit a possible interval for averaging the phase shift results. Numerical results are shown in Table I.

¹ In Fig. 4 we use $\Gamma = 2.5$ fm

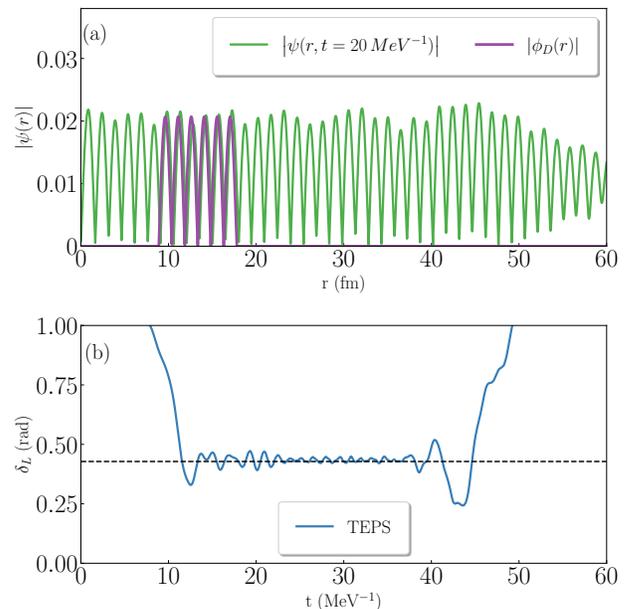


FIG. 5: TEPS results for the phase shift of H-Ar scattering modeled by a Lennard Jones potential. Panel (a): Wavefunction computed at $t = 20$ MeV $^{-1}$ for $k_{in} = 2.12$ fm $^{-1}$. Panel (b): Value of the Phase Shift as a function of time.

r_{free} [fm]	r_{full} [fm]	$ \delta_L $ [rad]	r_{free} [fm]	r_{full} [fm]	$ \delta_L $ [rad]
11.30	9.64	0.378(13)	26.14	24.46	0.420(13)
12.80	11.12	0.420(13)	27.64	25.94	0.463(13)
14.30	12.60	0.463(13)	29.12	27.42	0.463(13)
15.76	14.08	0.420(13)	30.56	28.90	0.378(13)
17.24	15.56	0.420(13)	32.04	30.38	0.378(13)
18.74	17.04	0.463(13)	33.54	31.86	0.420(13)
20.22	18.52	0.463(13)	35.02	33.34	0.420(13)
21.68	20.00	0.420(13)	36.50	34.82	0.420(13)
23.16	21.48	0.420(13)	38.02	36.30	0.505(13)
24.64	22.96	0.420(13)	39.52	37.78	0.547(13)

TABLE II: Obtained results of the absolute value of Phase Shifts (δ_L) computed by the difference between the peaks of the scattered wavefunction (r_{full}) and the free plane waves (r_{free}) for the scattering with a Gaussian potential for momentum $k_{in} = 2.12$ fm $^{-1}$. The exact phase shift is -0.428.

lattice points or the initial width filter Γ can contribute mostly on errors and variance of phase shift results.

Nevertheless, in many cases, we can obtain the correct phase shift by looking at the difference between the peaks of the evolved state and the free plane wave. The phase differences of Fig. 5 are reported in Table II. We can notice that these phase results are close to the exact value inside three sigma.

In order to reduce the TEPS sensitivity on noisy wave functions, we introduced a variational method that improves the algorithm. We found that such variational method makes the TEPS algorithm resistant to some noise sources of quantum processors, as discussed in Sec. V.

We modify Eq. (12), adding a fictitious phase δ_V to the free plane wave. In particular, the detector target wavefunction becomes $\sin(k_{\text{in}} r + \frac{L\pi}{2} + \delta_V)$. The new overlap probability becomes

$$\begin{aligned} P(\delta_V) &= \int_{r_1}^{r_2} dr \sin\left(k_{\text{in}} r + \frac{\pi L}{2} + \delta_V\right) \\ &\times \sin\left(k_{\text{in}} r + \frac{\pi L}{2} + \delta_L\right) \quad (19) \\ &= b_0 \cos(\delta_V - \delta_L)^2, \end{aligned}$$

where $r_1 = \frac{(2\pi n_i + \delta_V)}{k_{\text{in}}}$ and $r_2 = \frac{(2\pi n_f + \delta_V)}{k_{\text{in}}}$ and $n_i, n_f \in \mathbb{Z}$.

From Eq. (19), the correct phase shift δ_L is computed by the value $\delta_V = \delta_V^{\text{max}}$ that maximizes $P(\delta_V)$. Moreover, we also recover the correct sign of the phase shift. Using this procedure, $P(\delta_V)$ does not depend on the wave function amplitudes. Therefore, even in the case of the evolution of noisy wave functions (Fig. 5), we obtain the correct phase shift value. An analytic proof is presented in Appendix C. We named this variational approach the Variational Time Evolution Phase Shift (V-TEPS) algorithm.

IV. CLASSICAL RESULTS FOR THE VARIATIONAL METHOD

In this section we show how the V-TEPS algorithm can be used in a classical calculation using different basis sets: a spatial lattice and a momentum basis set. Once again the results are given for scattering on a Gaussian and on a Lennard-Jones potentials.

A. Spatial Lattice calculations

Figure 6 shows the phase shift computed for $k_{\text{in}} = 2.67 \text{ fm}^{-1}$ and the Gaussian potential ($V_0 = 1 \text{ MeV}$, $\sigma = 2 \text{ fm}$). Figure 7 shows instead the results for $k_{\text{in}} = 0.66 \text{ \AA}^{-1}$ and the Lennard-Jones potential. In both plots, the blue lines represent the phase shift results as a function of time obtained with TEPS (see Sec. II), while the orange line indicates the phase shift computed when we apply the variational method. The plotted results are obtained from the values of the parameter δ_V that maximizes the overlap probability. Figures show that the variational method gives a more stable estimate for the phase shift. Also, the interval over which the phase shift is constant becomes longer with the variational method.

Table III reports the numerical values of the V-TEPS phase shift for both the Gaussian and Hydrogen-Argon

(H-Ar) Lennard Jones potentials and for different momenta.

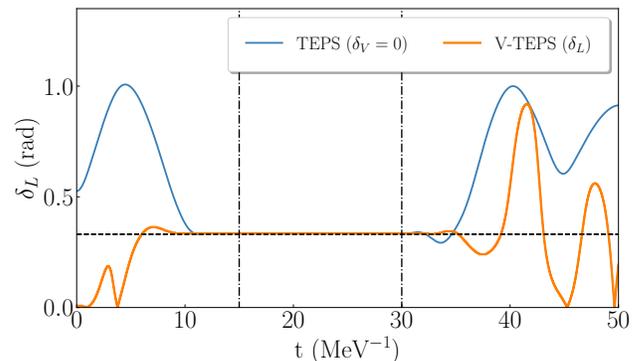


FIG. 6: Phase shift results for the Gaussian potential at $k_{\text{in}} = 2.67 \text{ fm}^{-1}$. The blue line represents the results computed from the TEPS method (case $\delta_V = 0$). The orange and blue line indicate the absolute value of the V-TEPS and TEPS results, respectively. The vertical dashed line represent the interval used to average the phase shift. The obtained result is reported in Table III

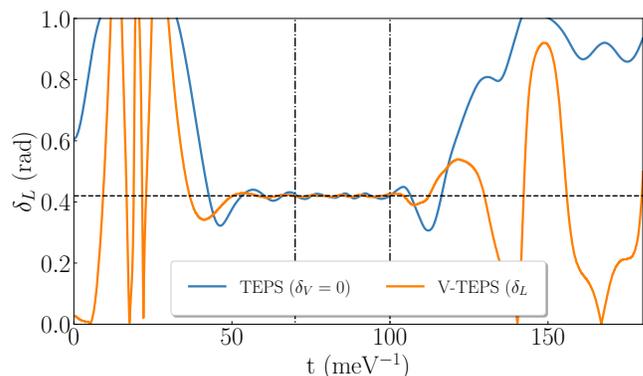


FIG. 7: Phase shift results for the Lennard-Jones potential at $k_{\text{in}} = 0.66 \text{ \AA}^{-1}$. The orange and blue line indicate the absolute value of the V-TEPS and TEPS results, respectively. The vertical dashed line represent the interval used to average the phase shift. The obtained result is reported in Tab. III.

It is also interesting to look at the overlap probability dependence on δ_L for different times. The lines in Fig. 8 illustrate the obtained overlap probability as a function of δ_V for the same system in Fig. 6 for different times. We can observe that from time $t = 18 \text{ MeV}^{-1}$ to $t = 36 \text{ MeV}^{-1}$ the curves are identical. Therefore, we can choose at time $18 < t < 36 \text{ MeV}^{-1}$ and sample the overlap probability for some value δ_V and interpolate the obtained data with a cosine function $A \cos^2(\delta_V - B)$. The maximum value of the function corresponds the exact phase shift δ_L .

Gaussian $V_0 = 1$ MeV $\sigma = 2$ fm			
k_{in}	Exact δ_L	TEPS	V-TEPS
1.72 fm^{-1}	-0.54	0.54(3)	-0.54(2)
2.12 fm^{-1}	-0.43	0.43(3)	-0.43(2)
2.67 fm^{-1}	-0.33	0.33(3)	-0.33(2)
Gaussian $V_0 = 2$ MeV $\sigma = 4$ fm			
k_{in}	Exact δ_L	TEPS	V-TEPS
1.334 fm^{-1}	-0.16	0.16(4)	-0.19(3)
1.86 fm^{-1}	0.98	0.97(3)	0.98(2)
2.51 fm^{-1}	-1.49	1.50(3)	-1.50(2)
H-Ar Lennard-Jones			
k_{in}	Exact δ_L	TEPS	V-TEPS
0.67 \AA^{-1}	0.42	0.42(3)	0.42(2)
1.19 \AA^{-1}	1.13	1.13(3)	1.13 (2)
1.58 \AA^{-1}	-0.49	0.48(3)	-0.48(2)

TABLE III: Phase shift (PS) results for the Gaussian and Lennard-Jones potential for different momenta.

The TEPS column results are obtained using the original algorithm of Sec. II. The V-TEPS results are obtained by implementing the algorithm of Sec. III.

We apply this idea considering a noiseless quantum processor. We sample the overlap probability at time $t = 20 \text{ MeV}^{-1}$ for different numbers of shots. We obtain the results shown in Fig. 9. The lines represent the fitting results whose phase parameters are reported in Table IV. The obtained phase shifts are compatible inside two sigma with the exact one.

The proposed algorithm can be implemented in two steps in order to obtain the phase shift of a generic unknown quantum system:

1. Apply the TEPS method to obtain the time interval when the overlap probability becomes flat.
2. Choose a time t inside this interval. Compute the overlap probability $P(\delta_V)$ as a function of some points δ_V . Then, interpolate them with a cosine square function and extract the phase shift value.

N_{shots}	Fitted B	Exact δ_L
1000	-0.358(5)	-0.33
2000	-0.34 (1)	-0.33

TABLE IV: Results of the fit of Fig. 9.

B. Expansion in Spherical Bessel functions

We implement the V-TEPS algorithm of Sec. III when we expand the Hamiltonian in the momentum basis. The basis set for each momentum is given by the 1st and 2nd

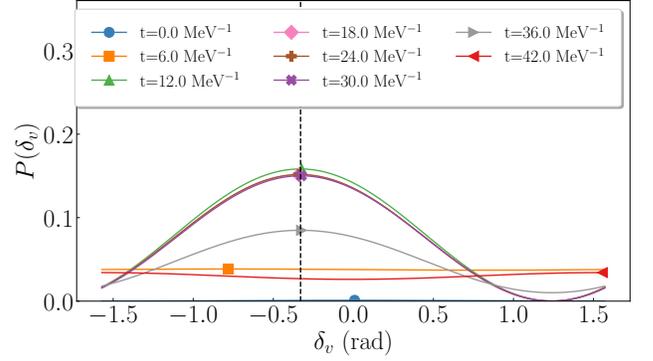


FIG. 8: Probability as a function of the detector phase δ_V for different time steps. The dashed vertical line indicates the exact phase shift value. Each symbol indicates the position of the maximum value. The vertical dashed line shows the exact phase shift.

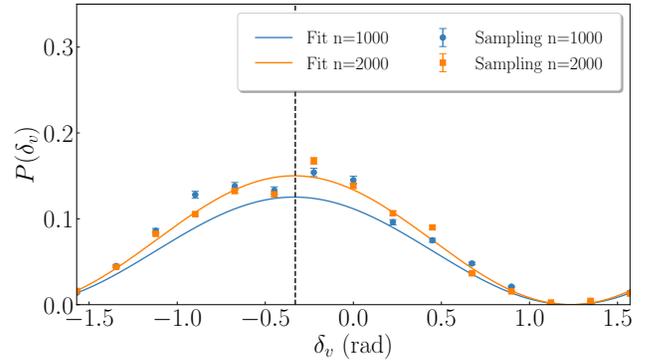


FIG. 9: Sampled probability as a function of δ_V for different shots at time $t = 20 \text{ MeV}^{-1}$. The points correspond to the obtained results, and lines indicate the obtained fit. The vertical dashed line shows the exact phase shift.

kind spherical Bessel functions for the non-relativistic case.

As described in Sec. II, we have to start from a truncated version of the plane wave. Figures 10a and 10b show an example for the obtained initial wave functions with $k_{in} = 0.351 \text{ fm}^{-1}$ using different momentum basis sets using Eq. (5) as filter function. Panel (a) shows its spatial distribution, and panel (b) shows its momenta composition. In the plots, N_q indicates the number of qubits, given by the double of the used momenta², n_{k_0} the lowest momentum in the basis set, and $\Delta k = \frac{2\pi}{R_{max}}$, with $R_{max} = 750 \text{ fm}$. We can observe wrong behaviors of the initial wave function in Fig. 10a for $r \rightarrow 0$. This is explained by the asymmetry of the filter function. Indeed,

² For each momentum k_i , we have two spherical Bessel functions.

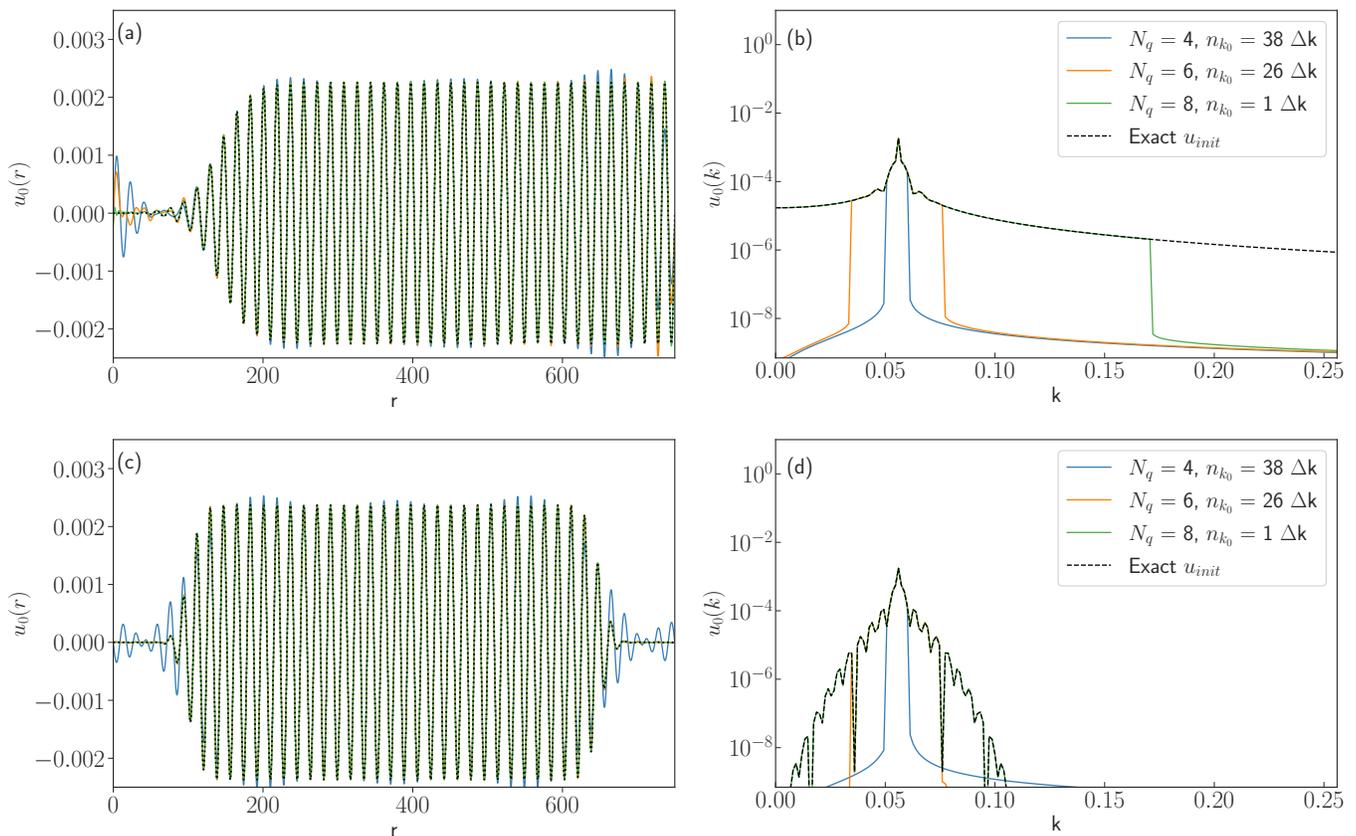


FIG. 10: The obtained initial wave functions for different Bessel basis set for a truncated plane wave with momentum $k_{\text{in}} = 0.351 \text{ fm}^{-1}$. Panel (a) and Panel (b) show their spatial and momentum distribution when we filter with Eq. (5). Instead, Panel (c) and Panel (d) shows the obtained spatial and momentum distribution when we filter with Eq. (20). The legend reports the number of qubits and the lower momentum of the expansion with $\Delta k = 0.0084$.

for a finite Box, we can also pick contributions from y_l (for $L = 0$ this is described by $y_0 = \frac{\cos(kr)}{r}$)³. Expanding with higher momenta mitigates this contribution.

Therefore, our implemented filter function for the initial state and detectors is given by

$$f(r) = \frac{A}{2} \left(\text{erf} \left(\frac{r-r_1}{\Gamma} \right) + \text{erf} \left(\frac{r_2-r}{\Gamma} \right) \right), \quad (20)$$

where $\text{erf}(t)$ is defined as

$$\text{erf}(t) = \frac{2}{\sqrt{\pi}} \int_0^t dx e^{-x^2}, \quad (21)$$

r_1 and r_2 describe the region where the wavefunction is not 0, and Γ represents the width of the filter.

Figures 10c and d show the spatial distribution and their Fourier transform, respectively, for the initial plane with $k_{\text{in}} = 0.351 \text{ fm}^{-1}$ using Eq. (20) as filter. We observe

a good compatibility between the obtained initial wave function and the exact one (black dashed line). Using the momentum basis set, we get an advantage. Only a few momenta mainly contribute to the initial wave function and, hence, this state can be easily prepared on a quantum processor.

We implement the V-TEPS algorithm for a Gaussian potential with $V_0 = 1 \text{ MeV}$ and $\sigma = 2 \text{ fm}$. Figure 11 shows the obtained results for a different number of expanded momenta (we used the same basis set of Fig. 10). All the different lines converge to the exact phase shift value, which is indicated by the horizontal dashed black line. The increased number of expanded momenta in the basis set shows that the phase shift values become flatter and last longer time. We highlight the blue line simulation because, using four qubits, we can obtain a good estimation of the phase shift. Indeed, we implement this simulation on the IBM processors. The next section discusses this implementation in detail.

Figure 11b shows how the phase shift results depend on different detector positions. We observe that all the lines reach the exact phase shift value. If the detector gets farther away from $r = 0$, there is a longer delay in reaching the exact result interval, as shown with the

³ We have also expanded the initial wave function only with j_0 functions but the obtained results are not correct.

green line behaviors. Moreover, the detector for the green line is far away, and it is closer to the right infinite wall ($R_{max} = 750$ fm). Therefore, the plateau interval is shorter and noisier due to boundary effects.

V-TEPS results for different Gaussian potentials and for H-Kr Lennard-Jones potential are reported in Table V for different initial momenta. In the table, we specify the set-up of the simulations, reporting the number of used momenta (N_b), the starting momentum of the basis set (k_0), and the momentum spacing (Δk). These results are compatible with the exact ones within two standard deviations. We can also observe that by enlarging the momentum basis set, the phase shift results converge to the exact value.

Gaussian $V_0 = 1$ MeV $\sigma = 2$ fm					
k_{in} (fm $^{-1}$)	N_k	Δk	k_0	Result	Exact
0.351	8	0.0084	0.315	-0.48(2)	-0.50
0.351	32	0.0084	0.224	-0.492(12)	-0.499
0.351	128	0.0084	0.0084	-0.53(1)	-0.50
0.545	128	0.0084	0.0084	-0.723(1)	-0.704
Gaussian $V_0 = 2$ MeV $\sigma = 4$ fm					
k_{in} (fm $^{-1}$)	N_k	Δk	k_0	Result	Exact
0.415	128	0.0084	0.0084	1.00(1)	1.00
0.662	128	0.0084	0.0084	0.13(1)	0.11
1.014	256	0.0084	0.0084	-0.457(12)	-0.47
Lennard Jones H-Kr					
k_{in} (\AA^{-1})	N_k	Δk	k_0	Result	Exact
0.408	256	0.013	0.0157	-1.45(5)	-1.33
0.408	512	0.013	0.013	-1.33(3)	-1.33
0.537	600	0.013	0.0157	1.09(4)	1.10
1.06	600	0.013	0.0157	-1.44(3)	-1.44

TABLE V: Results of the phase shift obtained applying the V-TEPS method for the Bessel expansion. In the Table, we report the number of expanded momenta (N_k), the momentum spacing (Δk), and the lower expanded momentum (k_0).

V. RESULTS FROM IBM DEVICE

We simulate the four qubit case of Fig. 11 on the free-access IBM quantum processors [68, 69] to diagnose the contribution of the quantum noise on the proposed V-TEPS algorithm. We only changed the filter function for the initial state, using the one in Eq. (5) because in this case it gives cleaner data. Its implementation was done in two steps. First, we evaluate the time dependence of the overlap probability with the free plane wave (setting $\delta_V = 0$) to search when the probability is flat. Second, we fix the time t inside this interval, and we compute the overlap probability as a function of the detector phase δ_V . The phase shift of the scattering process is obtained from the maximum position.

The coherence time of noisy intermediate-scale quantum era superconducting devices is too short to study the application of Trotter decomposition. For this reason, we implement the full real-time evolution with a single-time step.

We map the state in the computational basis with Bessel functions. Applying the python *OpenQL* package [78] for compiling the quantum circuit, it requires 196 CNOT gates. With such large number of CNOT gates, we reach the decoherence of the quantum processors, where the probability falls to the decoherence line (1/16 in this case). To overcome this problem, we map the computational basis into the eigenstate of the Hamiltonian. This choice of mapping shrinks the depth of the quantum circuit (63 CNOT gates) because the real-time evolution operator is diagonal.

Implementing this simple quantum circuit on the *ibm_perth* device, we obtain the orange circles and blue squares shown in Fig. 12. In both results, we implement the readout error correction and Pauli twirling [79]. The blue circles, were obtained by also applying the decoherence renormalization (DR) method [80–82] that mitigates the decoherence effect.

In particular, we used Eq. (29) of Ref. [82], setting all the single qubit rotation angles equal to 0 for the mitigation circuits. We observe that the probability has a plateau, providing a good interval to apply the second step of the V-TEPS algorithm. The solid black line represents the exact results. We also report the exact case when we use 6 qubits (using 32 momenta), showing that the probability gets flatter when enlarging the number of momenta.

Inside the plateau, we choose the time $t = 600$ MeV $^{-1}$ to implement the second step of the variational method. Figure 13 shows the obtained results from the *ibm_brisbane* device, where we obtain the overlap probability as a function of the shifted phase δ_V in the detector plane wave. Circles and squares represent the results, implementing the DR method for only the blue squares. The classical noiseless result is indicated with the solid black line. We interpolate the two set of points with two functions,

$$f_1(\delta_V) = c_1 + a_1 \cos^2(\delta_V + b_1) \quad (22)$$

and

$$f_2(\delta_V) = a_2 \cos^2(\delta_V + b_2), \quad (23)$$

where in f_1 we use the constant c_1 to describe the effect of decoherence line.

The two dashed and dotted lines in Fig. 13 represent the interpolated results where the obtained fitting parameters are reported in Tab. VI. The color areas represent the one-sigma uncertainties of interpolations. If we compute from the fit curve the position of the decoherence line, we obtain $D_L = 0.094(6)$, that is close to the expect value of $1/16 = 0.0625$.

Table VII shows maximum position for each fits. All the results are two sigma compatible with the exact phase

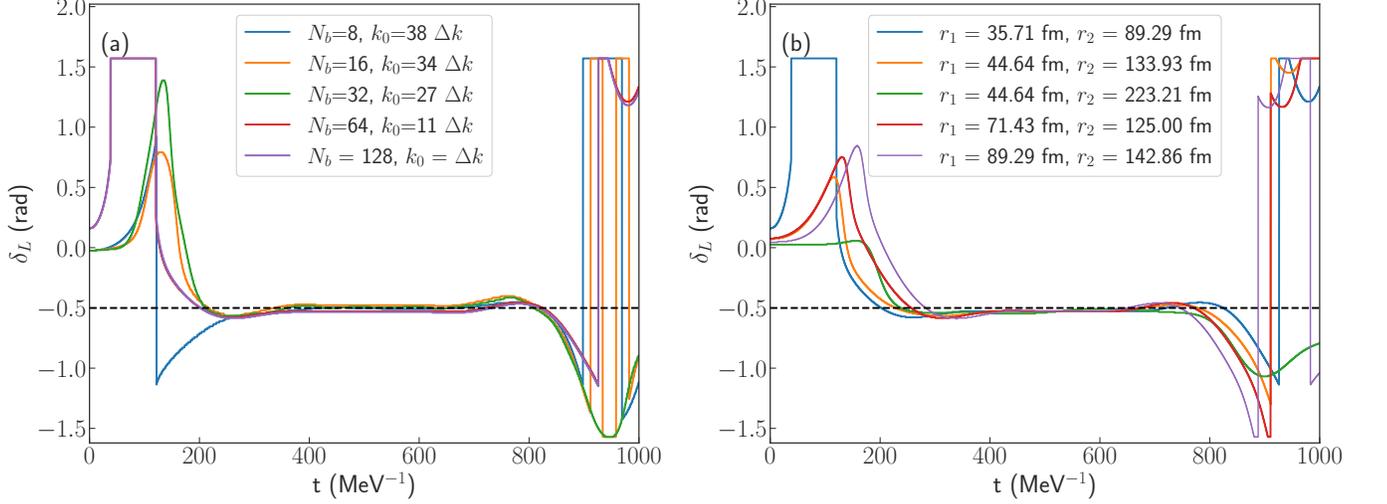


FIG. 11: In Panel (a), phase shift results for different used numbers of qubits. In the legend, N_b indicates the number of momenta and k_0 the used initial momentum. The spacing of the phase shift grid is $\frac{\pi}{100}$, and the momentum spacing is $\Delta k = 0.0084$. Panel (b), phase shift results for different detector positions, changing the interval $[r_1, r_2]$ of the box functions.

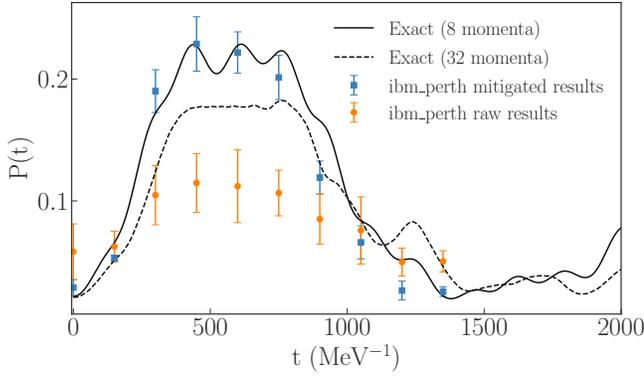


FIG. 12: Obtained detector probability as a function of time. Circles and squares indicates the raw and error-mitigated results obtained from the `ibm_perth`, respectively. The solid black line represents the noiseless result. The dashed line reports the exact case when we expand with more momenta (32).

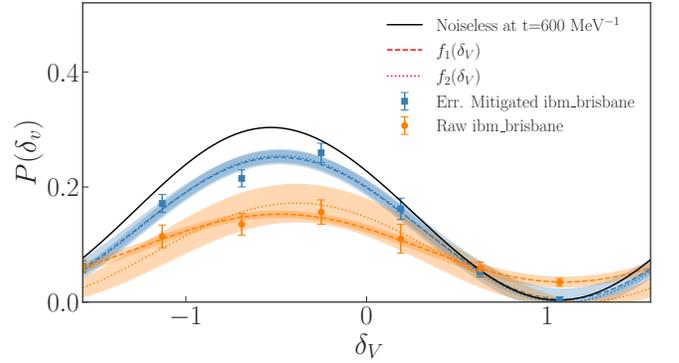


FIG. 13: Obtained probability as a function of δ_v . Circles and squares indicates the raw and error-mitigated results obtained from the `ibm_brisbane`, respectively. The obtained fitted curves are shown with dashed lines. Black solid line corresponds to the noiseless values.

shift. We observe that the effect of noise is to level the probability down to the decoherence line (given by $\frac{1}{2^n}$ with n number of qubits). If we do not reach the full decoherence time, the proposed quantum algorithm is capable of estimating the correct phase shift because the noise contribution does not change the maximum position.

VI. CONCLUSIONS

We present a quantum algorithm that evaluates the phase shift for non-relativistic elastic scattering processes for a generic Hamiltonian.

	a_1	b_1	c_1
Raw f_1	-0.118(7)	1.09(3)	0.153(5)
Err. mitigated f_1	-0.247(14)	1.09(3)	0.252(11)
	a_2	b_2	
Err. mitigated f_2	0.254(11)	-0.48(3)	
Raw f_2	0.17(3)	-0.39(12)	

TABLE VI: Fitting results of Fig. 13 for f_1 and f_2

We start from a truncated plane wave, which goes to zero close to the potential. Then, we evolve the wave function in real-time. The phase shift is computed from

	Phase shift (rad)
Exacts (from Numerov)	-0.500
Noiseless at $t = 600 \text{ MeV}^{-1}$	-0.49(3)
Fitting $f_1(\delta_V)$ mitigated results	-0.48(3)
Fitting $f_2(\delta_V)$ mitigated results	-0.48(3)
Fitting $f_1(\delta_V)$ raw results	-0.48(3)
Fitting $f_2(\delta_V)$ raw results	-0.39(12)

TABLE VII: Phase shift results obtained from the maximum position of the interpolation curves.

the overlap probability with a target plane wave (detector) that is localized in a small region far away from the interaction. After some time, the phase shift evolution converges to a plateau whose value is the exact phase shift. Numerical classical results are reported and discussed for different Hamiltonians.

We also present an improved version of the proposed algorithm with a variational approach, shifting the phase of the detector plane wave with a fictitious parameter δ_V . The exact phase shift is recovered by the value of δ_V that maximizes the overlap probability. This variational approach improves the phase shift results, reducing their variance.

Implementing the proposed quantum algorithm for general complex scattering processes, one may apply the real-time evolution algorithm to scan the time interval to find the plateaus in the phase shift. Then, fixing a time t where the phase shift is constant, one should implement the variational method for evaluating precisely the phase shift. For the variational approach, numerical results and discussions are reported for different Hamiltonians and basis sets (spatial lattice, momentum basis sets).

All the classical simulations show the reliability of the proposed quantum algorithms. We also presented quantum simulations implemented on IBM quantum processors, where we expanded the Hamiltonian in a smaller momentum basis set. We demonstrate that we can obtain the exact phase shift result by interpolating a few values. Indeed, searching just the position of the maximum, the noise source from quantum processors does not affect the phase shift results because it only flats the probability, not the maximum position.

This algorithm is guided in two main different processes, a state preparation and real-time evolution. In the momentum expansion, the state preparation for the initial plane wave and detector can be done with a shallow local quantum circuit. Indeed, only the momenta

close to the initial value of the plane wave k_{in} contributes to the expansion of the state. Therefore, the scaling of the proposed quantum algorithm is mainly due to the scaling of the real-time evolution.

The presented quantum algorithms are a step forward in simulating non-relativistic scattering processes with quantum computers. Indeed, this algorithm can be implemented to compute phase shifts and cross sections for elastic scattering both in single and multi-channel problems. This variational algorithm may be extended to the inelastic scattering case. In practice, inelastic scattering can be treated, in approximation, by including numerous reaction outcomes (e.g. channels, states, reaction products, etc.) in the simulation while only measuring the outcome of interest. Including all, the proposed quantum algorithm can be implemented to obtain the result of reactions because the variational approach can be implemented in a generic scattering experiment, where the momentum is coupled to recover the correct phase shifts.

VII. ACKNOWLEDGMENTS

We thank the IQuS group for useful discussions. In particular, in the IQuS group, we are grateful to Marc Illa Subiñà, Saurabh Vasant Kadam, Xiaojun Yao, Anthony Ciavarella, Rolland Farrell and Martin Savage for the useful discussions. Also, we thank Marc Illa and Rolland Farrell for the explanation of the decoherence renormalization method.

This work was supported in part by the U.S. Department of Energy, Office of Science, Office of Nuclear Physics, InQubator for Quantum Simulation (IQuS) (<https://iqus.uw.edu>) under Award Number DOE (NP) Award DE-SC0020970 via the program on Quantum Horizons: QIS Research and Innovation for Nuclear Science. This work was prepared in part by LLNL under Contract No. DE-AC52-07NA27344 with support from the U.S. Department of Energy, Office of Science, Office of Nuclear Physics (under Work Proposal No. SCW1730).

This work was enabled by the use of advanced computational, storage, and networking infrastructure provided by the Hyak supercomputer system at the University of Washington (<https://hyak.uw.edu/>).

We acknowledge the IBM Quantum services for this work. The views expressed are those of the authors, and do not reflect the official policy or position of IBM or the IBM Quantum team.

-
- [1] F. Nunes, G. Potel, T. Poxon-Pearson, and J. Cizewski, *Annual Review of Nuclear and Particle Science* **70**, 147 (2020).
 [2] M. Wiescher, F. Käppeler, and K. Langanke, *Annual Re-*

view of Astronomy and Astrophysics **50**, 165 (2012).

- [3] E. G. Adelberger, A. García, R. Robertson, K. A. Snover, A. B. Balantekin, K. Heeger, M. J. Ramsey-Musolf, D. Bemmerer, A. Junghans, C. A. Bertulani, J. W. Chen,

- H. Costantini, P. Prati, M. Couder, E. Uberseder, M. Wiescher, R. Cyburt, B. Davids, S. J. Freedman, M. Gai, D. Gazit, L. Gialanella, G. Imbriani, U. Greife, M. Hass, W. C. Haxton, T. Itahashi, K. Kubodera, K. Langanke, D. Leitner, M. Leitner, P. Vetter, L. Winslow, L. E. Marcucci, T. Motobayashi, A. Mukhamedzhanov, R. E. Tribble, K. M. Nollett, F. M. Nunes, T.-S. Park, P. D. Parker, R. Schiavilla, E. C. Simpson, C. Spitaleri, F. Strieder, H.-P. Trautvetter, K. Suemmerer, and S. Typel, *Rev. Mod. Phys.* **83**, 195 (2011).
- [4] F. Giustino, *Rev. Mod. Phys.* **89**, 015003 (2017).
- [5] Y. Quan, S. Yue, and B. Liao, *Nanoscale and Microscale Thermophysical Engineering* **25**, 73 (2021).
- [6] M. Troyer and U.-J. Wiese, *Phys. Rev. Lett.* **94**, 170201 (2005).
- [7] G. Hupin, S. Quaglioni, and P. Navrátil, *Nature Communications* **10**, 351 (2019).
- [8] C. Hebborn, G. Hupin, K. Kravvaris, S. Quaglioni, P. Navrátil, and P. Gysbers, *Phys. Rev. Lett.* **129**, 042503 (2022).
- [9] K. Kravvaris, P. Navrátil, S. Quaglioni, C. Hebborn, and G. Hupin, *Physics Letters B* **845**, 138156 (2023).
- [10] J. Carlson, M. J. Savage, R. Gerber, K. Antypas, D. Bard, R. Coffey, E. Dart, S. Dosanjh, J. Hack, I. Monga, M. E. Papka, K. Riley, J. Rotman, T. Straatsma, J. Wells, H. Avakian, Y. Ayyad, S. A. Bass, D. Bazin, A. Boehnlein, G. Bollen, L. J. Brousard, A. Calder, S. Couch, A. Couture, M. Cromaz, W. Detmold, J. Detwiler, H. Duan, R. Edwards, J. Engel, C. Fryer, G. M. Fuller, S. Gandolfi, G. Galiani, D. Georgobiani, R. Gupta, V. Gyurjyan, M. Hausmann, G. Heyes, W. R. Hix, M. Ito, G. Jansen, R. Jones, B. Joo, O. Kaczmarek, D. Kasen, M. Kostin, T. Kurth, J. Lauret, D. Lawrence, H.-W. Lin, M. Lin, P. Mantica, P. Maris, B. Messer, W. Mittig, S. Mosby, S. Mukherjee, H. A. Nam, P. Navrátil, W. Nazarewicz, E. Ng, T. O'Donnell, K. Orginos, F. Pellemoine, P. Petreczky, S. C. Pieper, C. H. Pinkenburg, B. Plaster, R. J. Porter, M. Portillo, S. Pratt, M. L. Purschke, J. Qiang, S. Quaglioni, D. Richards, Y. Roblin, B. Schenke, R. Schiavilla, S. Schlichting, N. Schunck, P. Steinbrecher, M. Strickland, S. Syritsyn, B. Terzic, R. Varner, J. Vary, S. Wild, F. Winter, R. Zegers, H. Zhang, V. Ziegler, and M. Zingale, *Nuclear physics exascale requirements review: An office of science review sponsored jointly by advanced scientific computing research and nuclear physics, june 15 - 17, 2016, gaithersburg, maryland* (2017).
- [11] R. P. Feynman, in *Feynman and computation* (CRC Press, 2018) pp. 133–153.
- [12] S. Lloyd, *Science* **273**, 1073 (1996).
- [13] Y. Kim, A. Eddins, S. Anand, K. X. Wei, E. Van Den Berg, S. Rosenblatt, H. Nayfeh, Y. Wu, M. Zaletel, K. Temme, *et al.*, *Nature* **618**, 500 (2023).
- [14] H. Yu, Y. Zhao, and T.-C. Wei, *Phys. Rev. Res.* **5**, 013183 (2023).
- [15] E. H. Chen, G.-Y. Zhu, R. Verresen, A. Seif, E. Bäumer, D. Layden, N. Tantivasadakarn, G. Zhu, S. Sheldon, A. Vishwanath, S. Trebst, and A. Kandala, Realizing the nishimori transition across the error threshold for constant-depth quantum circuits (2023), [arXiv:2309.02863 \[quant-ph\]](https://arxiv.org/abs/2309.02863).
- [16] R. C. Farrell, M. Illa, A. N. Ciavarella, and M. J. Savage, *Scalable circuits for preparing ground states on digital quantum computers: The schwinger model vacuum on 100 qubits* (2024).
- [17] O. Shtanko, D. S. Wang, H. Zhang, N. Harle, A. Seif, R. Movassagh, and Z. Mineev, Uncovering local integrability in quantum many-body dynamics (2023), [arXiv:2307.07552 \[quant-ph\]](https://arxiv.org/abs/2307.07552).
- [18] R. C. Farrell, M. Illa, A. N. Ciavarella, and M. J. Savage, *Quantum simulations of hadron dynamics in the schwinger model using 112 qubits* (2024).
- [19] C. D. Bruzewicz, J. Chiaverini, R. McConnell, and J. M. Sage, *Applied Physics Reviews* **6**, 10.1063/1.5088164 (2019), 021314.
- [20] H.-L. Huang, D. Wu, D. Fan, and X. Zhu, *Sci. China Inf. Sci.* **63**, 1 (2020).
- [21] R. Bianchetti, S. Filipp, M. Baur, J. M. Fink, C. Lang, L. Steffen, M. Boissonneault, A. Blais, and A. Wallraff, *Phys. Rev. Lett.* **105**, 223601 (2010).
- [22] C. Wang, I. Gonin, A. Grassellino, S. Kazakov, A. Romanenko, V. P. Yakovlev, and S. Zorzetti, *npj Quantum Inf* **8**, 149 (2022).
- [23] A. Wallraff, D. I. Schuster, A. Blais, L. Frunzio, R.-S. Huang, J. Majer, S. Kumar, S. M. Girvin, and R. J. Schoelkopf, *Nature* **431**, 162 (2004).
- [24] I. Chiorescu, P. Bertet, K. Semba, Y. Nakamura, C. Harmans, and J. Mooij, *Nature* **431**, 159 (2004).
- [25] L. Henriot, L. Beguin, A. Signoles, T. Lahaye, A. Browaeys, G.-O. Reymond, and C. Jurczak, *Quantum* **4**, 327 (2020).
- [26] A. Browaeys and T. Lahaye, *Nature Physics* **16**, 132 (2020).
- [27] D. Barredo, V. Lienhard, P. Scholl, S. de Léséleuc, T. Boulier, A. Browaeys, and T. Lahaye, *Phys. Rev. Lett.* **124**, 023201 (2020).
- [28] D. Bluvstein, H. Levine, G. Semeghini, T. T. Wang, S. Ebadi, M. Kalinowski, A. Keesling, N. Maskara, H. Pichler, M. Greiner, *et al.*, *Nature* **604**, 451 (2022).
- [29] S. P. Jordan, K. S. M. Lee, and J. Preskill, *Science* **336**, 1130 (2012).
- [30] S. P. Jordan, K. S. M. Lee, and J. Preskill, Quantum computation of scattering in scalar quantum field theories (2019), [arXiv:1112.4833 \[hep-th\]](https://arxiv.org/abs/1112.4833).
- [31] A. Roggero and J. Carlson, *Phys. Rev. C* **100**, 034610 (2019).
- [32] A. Roggero, A. C. Y. Li, J. Carlson, R. Gupta, and G. N. Perdue, *Phys. Rev. D* **101**, 074038 (2020).
- [33] A. Roggero, *Phys. Rev. A* **102**, 022409 (2020).
- [34] W. Du, J. P. Vary, X. Zhao, and W. Zuo, *Phys. Rev. A* **104**, 012611 (2021).
- [35] A. Baroni, J. Carlson, R. Gupta, A. C. Y. Li, G. N. Perdue, and A. Roggero, *Phys. Rev. D* **105**, 074503 (2022).
- [36] J. Hartse and A. Roggero, *Eur. Phys. J. A* **59**, 10.1140/epja/s10050-023-00952-6 (2023).
- [37] O. Kiss, M. Grossi, and A. Roggero, Quantum error mitigation for fourier moment computation (2024), [arXiv:2401.13048 \[quant-ph\]](https://arxiv.org/abs/2401.13048).
- [38] P. F. Bedaque, R. Khadka, G. Rupak, and M. Yusuf, Radiative processes on a quantum computer (2022), [arXiv:2209.09962 \[nucl-th\]](https://arxiv.org/abs/2209.09962).
- [39] S. Endo, I. Kurata, and Y. O. Nakagawa, *Phys. Rev. Res.* **2**, 033281 (2020).
- [40] A. Ciavarella, *Phys. Rev. D* **102**, 094505 (2020).
- [41] Y. Tong, D. An, N. Wiebe, and L. Lin, *Phys. Rev. A* **104**, 032422 (2021).
- [42] P. Wang, W. Du, W. Zuo, and J. P. Vary, Nuclear scattering via quantum computing (2024), [arXiv:2401.17138](https://arxiv.org/abs/2401.17138)

- [nucl-th].
- [43] F. Turro, T. Chistolini, A. Hashim, Y. Kim, W. Livingston, J. M. Kreikebaum, K. A. Wendt, J. L. Dubois, F. Pederiva, S. Quaglioni, D. I. Santiago, and I. Siddiqi, *Demonstration of a quantum-classical coprocessing protocol for simulating nuclear reactions* (2023).
- [44] W. Du, J. P. Vary, X. Zhao, and W. Zuo, *Phys. Rev. A* **104**, 012611 (2021).
- [45] N. Mueller, A. Tarasov, and R. Venugopalan, *Phys. Rev. D* **102**, 016007 (2020).
- [46] N. Klco, A. Roggero, and M. J. Savage, *Reports on Progress in Physics* **85**, 064301 (2022).
- [47] A. Miessen, P. J. Ollitrault, F. Tacchino, and I. Tavernelli, *Nat. Comput. Sci.* **3**, 25 (2023).
- [48] C. W. Bauer, Z. Davoudi, A. B. Balantekin, T. Bhattacharya, M. Carena, W. A. de Jong, P. Draper, A. El-Khadra, N. Gemelke, M. Hanada, D. Kharzeev, H. Lamm, Y.-Y. Li, J. Liu, M. Lukin, Y. Meurice, C. Monroe, B. Nachman, G. Pagano, J. Preskill, E. Rinaldi, A. Roggero, D. I. Santiago, M. J. Savage, I. Siddiqi, G. Siopsis, D. Van Zanten, N. Wiebe, Y. Yamauchi, K. Yeter-Aydeniz, and S. Zorzetti, *PRX Quantum* **4**, 027001 (2023).
- [49] C. W. Bauer, Z. Davoudi, N. Klco, and M. J. Savage, *Nat. Rev. Phys.* **5**, 420 (2023).
- [50] M. Lüscher, *Commun.Math. Phys.* **104**, 177 (1986).
- [51] M. Lüscher and U. Wolff, *Nuclear Physics B* **339**, 222 (1990).
- [52] M. Lüscher, *Nuclear Physics B* **354**, 531 (1991).
- [53] M. Lüscher, *Nuclear Physics B* **364**, 237 (1991).
- [54] P. Descouvemont and D. Baye, *Rep. Prog. Phys.* **73**, 036301 (2010).
- [55] A. M. Lane and R. G. Thomas, *Rev. Mod. Phys.* **30**, 257 (1958).
- [56] K. M. Nollett, S. C. Pieper, R. B. Wiringa, J. Carlson, and G. M. Hale, *Phys. Rev. Lett.* **99**, 022502 (2007).
- [57] J. E. Lynn, I. Tews, J. Carlson, S. Gandolfi, A. Gezerlis, K. E. Schmidt, and A. Schwenk, *Phys. Rev. Lett.* **116**, 062501 (2016).
- [58] S. Elhatisari, D. Lee, G. Rupak, E. Epelbaum, H. Krebs, T. A. Lähde, T. Luu, and U.-G. Meißner, *Nature* **528**, 111 (2015).
- [59] M. Vorabbi, P. Finelli, and C. Giusti, *Phys. Rev. C* **93**, 034619 (2016).
- [60] M. Gennari, M. Vorabbi, A. Calci, and P. Navrátil, *Phys. Rev. C* **97**, 034619 (2018).
- [61] J. Rotureau, P. Danielewicz, G. Hagen, G. R. Jansen, and F. M. Nunes, *Phys. Rev. C* **98**, 044625 (2018).
- [62] A. Idini, C. Barbieri, and P. Navrátil, *Phys. Rev. Lett.* **123**, 092501 (2019).
- [63] S. Baroni, P. Navrátil, and S. Quaglioni, *Phys. Rev. C* **87**, 034326 (2013).
- [64] S. Baroni, P. Navrátil, and S. Quaglioni, *Phys. Rev. Lett.* **110**, 022505 (2013).
- [65] B. Numerov, *Astronomische Nachrichten*, volume 230, Issue 19, p. 359 **230**, 359 (1927).
- [66] E. Gustafson, Y. Zhu, P. Dreher, N. M. Linke, and Y. Meurice, *Phys. Rev. D* **104**, 054507 (2021).
- [67] S. Sharma, T. Papenbrock, and L. Platter, *Scattering phase shifts from a quantum computer* (2023), [arXiv:2311.09298](https://arxiv.org/abs/2311.09298) [nucl-th].
- [68] *Quantum experience ibm website*: <https://quantum-computing.ibm.com/> (2021).
- [69] Qiskit contributors, *Qiskit: An open-source framework for quantum computing* (2023).
- [70] D. J. Griffiths and D. F. Schroeter, *Introduction to Quantum Mechanics*, 3rd ed. (Cambridge University Press, 2018).
- [71] S. Weinberg, *Lectures on Quantum Mechanics* (Cambridge University Press, 2015).
- [72] A. Bulgac and M. M. Forbes, *Phys. Rev. C* **87**, 051301 (2013).
- [73] S. Binder, A. Ekström, G. Hagen, T. Papenbrock, and K. A. Wendt, *Phys. Rev. C* **93**, 044332 (2016).
- [74] A. Barenco, A. Berthiaume, D. Deutsch, A. Ekert, R. Jozsa, and C. Macchiavello, *SIAM Journal on Computing* **26**, 1541 (1997).
- [75] L. Cincio, Y. Subaşı, A. T. Sornborger, and P. J. Coles, *New Journal of Physics* **20**, 113022 (2018).
- [76] A. Elben, S. T. Flammia, H.-Y. Huang, R. Kueng, J. Preskill, B. Vermersch, and P. Zoller, *Nature Reviews Physics* **5**, 9–24 (2022).
- [77] J. P. Toennies, W. Welz, and G. Wolf, *The Journal of Chemical Physics* **71**, 614 (1979).
- [78] N. Khammassi, I. Ashraf, J. v. Someren, R. Nane, A. M. Krol, M. A. Rol, L. Lao, K. Bertels, and C. G. Almudever, *Openql : A portable quantum programming framework for quantum accelerators* (2020), [arXiv:2005.13283](https://arxiv.org/abs/2005.13283) [quant-ph].
- [79] J. J. Wallman and J. Emerson, *Phys. Rev. A* **94**, 052325 (2016).
- [80] M. Urbanek, B. Nachman, V. R. Pascuzzi, A. He, C. W. Bauer, and W. A. de Jong, *Phys. Rev. Lett.* **127**, 270502 (2021).
- [81] S. A. Rahman, R. Lewis, E. Mendicelli, and S. Powell, *Phys. Rev. D* **106**, 074502 (2022).
- [82] R. C. Farrell, I. A. Chernyshev, S. J. M. Powell, N. A. Zemel'skiy, M. Illa, and M. J. Savage, *Phys. Rev. D* **107**, 054512 (2023).

APPENDIX A: Overview of used Hamiltonians

This section illustrates the used potentials. The Gaussian potential is given by,

$$V(r) = V_0 e^{-\frac{r^2}{\sigma^2}}, \quad (\text{A1})$$

where $V_0 = 1$ MeV and $\sigma = 2$ fm. We set the reduced mass μ of the system such that $\frac{\hbar^2}{2\mu} = 1$ MeV fm².

The Lennard-Jones potential is given by

$$V(r) = 4\epsilon \left[\left(\frac{\sigma}{r} \right)^{12} - \left(\frac{\sigma}{r} \right)^6 \right], \quad (\text{A2})$$

where $\sigma = 3.57$ Å and $\epsilon = 5.9$ meV. These values are obtained from the Hydrogen-Krypton scattering of Ref. [77]. In our simulation, we modify Eq. (A2) as it follows,

$$V(r) = \begin{cases} 4\epsilon \left[\left(\frac{\sigma}{r} \right)^{12} - \left(\frac{\sigma}{r} \right)^6 \right] & \text{for } r > r_C, \\ 4\epsilon \left[\left(\frac{\sigma}{r_C} \right)^{12} - \left(\frac{\sigma}{r_C} \right)^6 \right] & \text{for } r < r_C, \end{cases} \quad (\text{A3})$$

where $r_C = 0.4\sigma$ indicates a spatial cutoff in order to avoid numerical issues for the hard-core potential. The used parameters can be found in Ref. [77]

APPENDIX B: Phase shift dependence on real-time parameters

This section reports how the TEPS parameters contribute to the phase shift results for the Gaussian potential with $V_0 = 2$ MeV and $\sigma = 4$ fm with an initial momentum $k_{\text{in}} = 1.9107 \text{ fm}^{-1}$ using the spatial finite box. In particular, these parameters are given by the number of lattice points R_p , lattice spacing a , filter parameters Γ and r_0 , and position and width of the detector, r_1 and $r_2 - r_1$. In order to find how errors depend from these parameters, for each simulation we only vary one, the others are fixed. The standard parameters value are $R_p = 6000$, $a = 0.02$ fm, $r_0 = 26$ fm, $\Gamma = 2$ fm, $r_1 = 16.44$ fm, $r_2 - r_1 = 23.02$ fm.

We found that significant errors comes from finite volume and discretization effects (R_p and a). Figure 14a shows how the phase shift depend on the R_p value. We can observe that increasing R_p , the time where the phase shift is constant gets longer. Instead, Fig. 14b illustrates the obtained phase shift results when we vary a . We observe the same behavior in the case of the variation of R_p . However, we start to observe some errors due to the discretization. Moreover, if the lattice is small, we obtain a weird behavior of the phase shift results, as in the case of $a = 0.01$. Figure 14c shows the dependence of the phase shift on a value when we fix the volume $R_p a = 120$ fm. We can notice that the time when the phase shift is constant is the same, but we start to have some errors when we have fewer lattice points or bigger lattice spacing.

Figure 15a shows the phase shift dependence on the r_0 parameter. We can observe that our results are essentially independent of r_0 . Instead, Fig. 15b show the dependence on Γ parameter. The Γ parameter is connected to the momentum truncation. For different Γ values, we observe the variance growth in the phase shift results lowering Γ because we start picking undesired momenta.

The last parameters to be discussed are the detector parameters, r_1 and $r_2 - r_1$. Figure 15c shows that the obtained phase shift is independent of the initial position of the detector if we set it far away from the interaction zone. The only effect is just a time delay of the plateaus. Figure 15d reports the dependence of the phase shift from the width of the window. We obtain that the

phase shift is independent from the width up to a certain value (around 35 fm). Indeed, this value is 1/3 of the full box, therefore, we pick the contribution from the propagation of the first part of the filter and boundary errors. However, one has to consider that the success probability depends linearly from the detector width, and the overlap probability is more sensitive to the different amplitude of the evolved wavefunction.

We can conclude that for the lattice expansion, a good variance of the method presented in Sec. II might be 0.03, counting the discretization effects. However, in many cases, looking only at the phase shift results, the variance of the phase shift results is very small. Table VIII reports the obtained results for the phase shifts.

APPENDIX C: Proof of the variational algorithm

As we discussed in the main text, the original TEPS algorithm is sensitive to the initial set-up of the simulations. In particular, when we have unstable peak height in the evolved wavefunction (see Fig. 5), we may obtain a huge variance in the phase shifts or even wrong values. In many cases, we notice the phase shifts computed by the difference between the free plane wave and the evolved wavefunction are correct, as shown in Table I.

Applying the variational method of Sec. III allows us to obtain the correct phase shift even with noisy wavefunction. To prove it, we approximate that each front of the evolved wavefunction has a different amplitude $\{A_i\}$, but with the same phase δ_L and momentum k_{in} . As discussed in the main text, this was the case of Fig. 5. Under this approximation, we write the evolved wavefunction as

$$\psi(t, r) = \sum_i A_i \text{Box}(r_1^i < r < r_2^i) \sin\left(k_{\text{in}} r + \frac{L\pi}{2} + \delta_L\right) \quad (\text{C1})$$

where Box indicates the box function from $r_1^i = \frac{2\pi n_i + \delta_L}{k}$ to $r_2^i = \frac{2\pi(n_i+1) + \delta_L}{k}$.

Using Eq. (8), we obtain

$$\begin{aligned} P(\delta_V) &= \left| \int dr \sin\left(k_{\text{in}} r + \delta_V + \frac{L\pi}{2}\right) \psi(t, r) \right|^2 \\ &= \left| \int dr \sin\left(k_{\text{in}} r + \delta_V + \frac{L\pi}{2}\right) \sum_i A_i \text{rect}(r_1^i < r < r_2^i) \sin\left(k_{\text{in}} r + \delta_L + \frac{L\pi}{2}\right) \right|^2 \\ &= \sum_i A_i^2 \cos^2(\delta_V - \delta_L). \end{aligned} \quad (\text{C2})$$

We can see that, applying the TEPS algorithm (see

Sec. II), we may have some errors due to the different A_i

R_p a fixed (a)	δ_L	R_p	δ_L	a	δ_L	Γ	δ_L	r_0	δ_L	r_1	δ_L	$r_2 - r_1$	δ_L
0.02	0.9658(2)	4000	1.04(3)	0.01	0.95(6)	5	0.9657(2)	20	0.9658(1)	0.0	1.1079(2)	9.87	0.9651(1)
0.03	0.9695(2)	6000	0.9651(3)	0.02	0.9658(2)	2	0.9657(2)	30	0.9657(5)	9.87	0.9646(5)	19.73	0.9657(2)
0.04	0.9748(2)	7000	0.9652(3)	0.03	0.9628(2)	1	0.9656(8)	40	0.9668(2)	19.73	0.9657(2)	29.60	0.9663(4)
				0.04	0.9648(2)	0.5	0.965(2)	50	0.96(1)	29.60	0.9668(6)	39.46	0.9671(9)
				0.05	0.9696(2)	0.001	0.965(4)			39.46	0.968(2)	65.77	0.98(2)

TABLE VIII: The raw obtained phase shift results varying the TEPS parameters using a spatial finite box. The phase shift are computed for a Gaussian potential with $V_0 = 2$ MeV and $\sigma = 4$ fm with a initial momentum $k_{\text{in}} = 1.9107 \text{ fm}^{-1}$. The TEPS parameters are lattice spacing, number of lattice points, filter parameters and position and width of detector. Each column reports the obtained phase shift changing the parameter and the other are kept fixed. In the column Ra we vary both R and a but fixing $Ra = 120$. The standard parameters are $\{R = 6000, a = 0.02, r_0 = 26., \Gamma = 2., r_1 = 16.44, r_2 - r_1 = 23.02\}$. The exact phase shift is $\|\delta_L^{\text{ex}}\| = 0.964$.

values. Indeed, the TEPS phase shift is given by:

$$\delta_L^0 = \arccos \left(c_0 \sqrt{\sum_i A_i(t)^2 \cos^2(\delta_L)} \right). \quad (\text{C3})$$

Usually, when all the amplitudes are constant, c_0 , the

ratio of normalizations, cancels the A contribution. Otherwise, with different amplitudes $\{A_i(t)\}$, we can obtain an uncorrected overlap probability, $\frac{\sum_i |A_i(t)|^2}{N A^2} \cos^2(\delta_L)$. Hence, our phase shift result has a big variance in time, or in the worst case, it may be even wrong.

In the variational method, the maximum position is $\delta_V = \delta_L$ because it is independent of the amplitudes but only from the cosine argument.



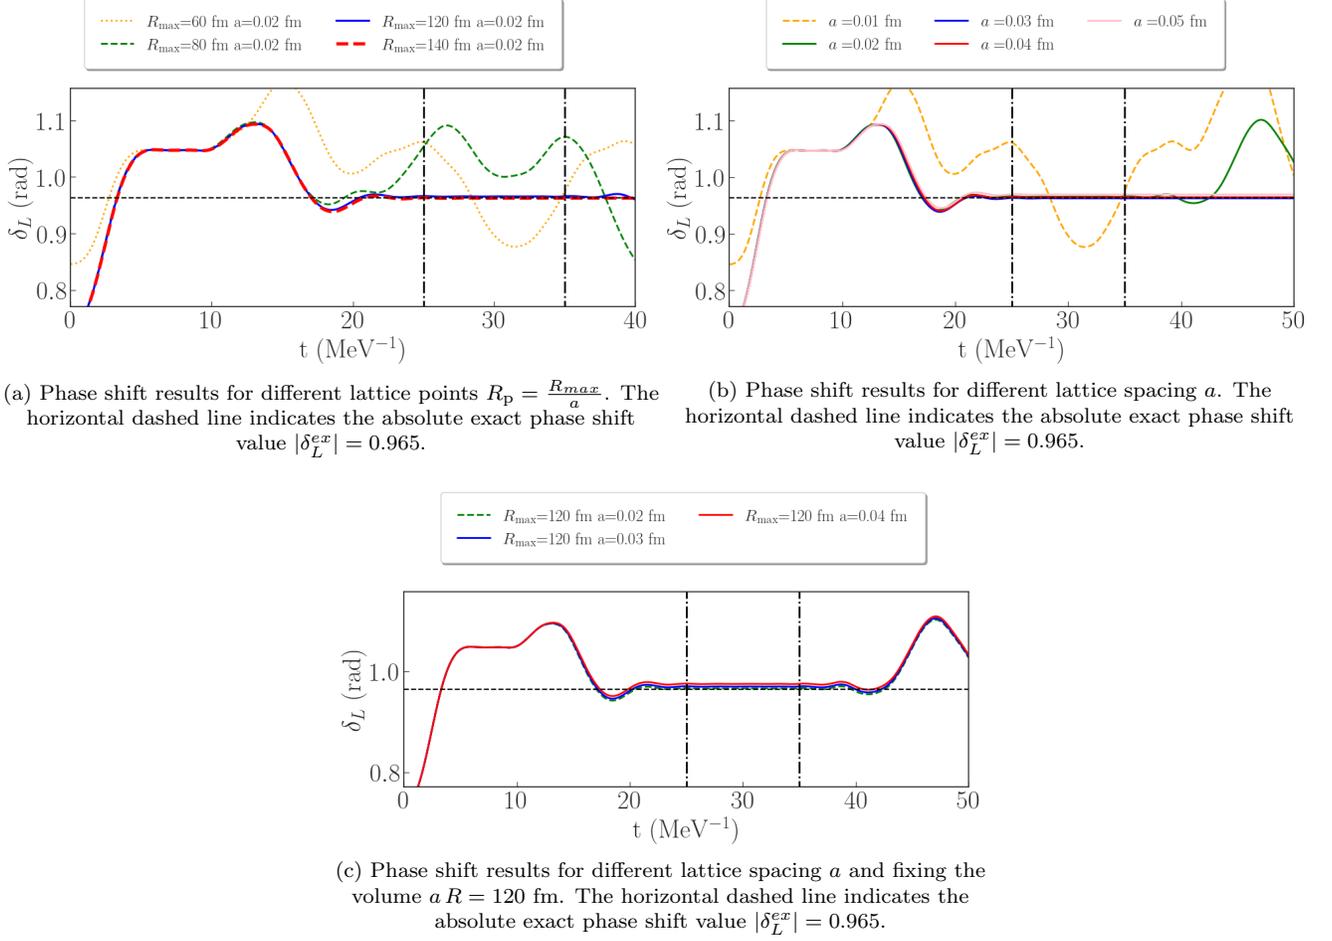



FIG. 14

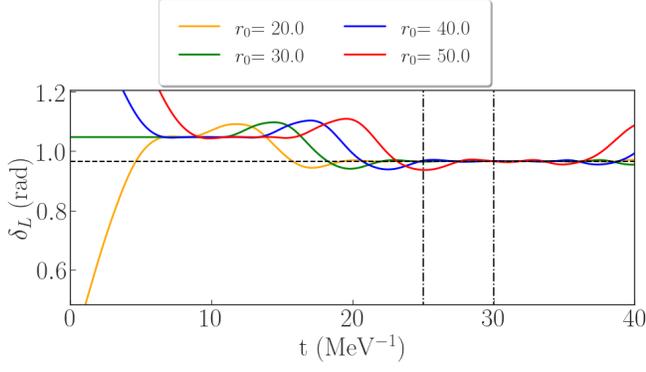


(a) Phase shift results for different position of the initial filter r_0 . The used filter is shown in Eq. (5). The horizontal dashed line indicates the absolute exact phase shift value $|\delta_L^{ex}| = 0.965$.

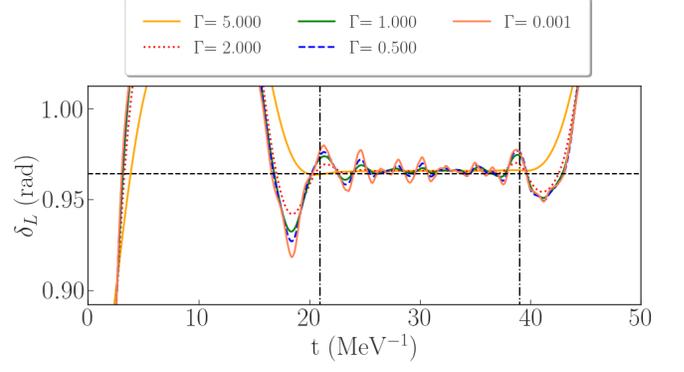

(b) Phase shift results for different position of the width filter Γ . The used filter is shown in Eq. (5). The horizontal dashed line indicates the absolute exact phase shift value $|\delta_L^{ex}| = 0.965$.

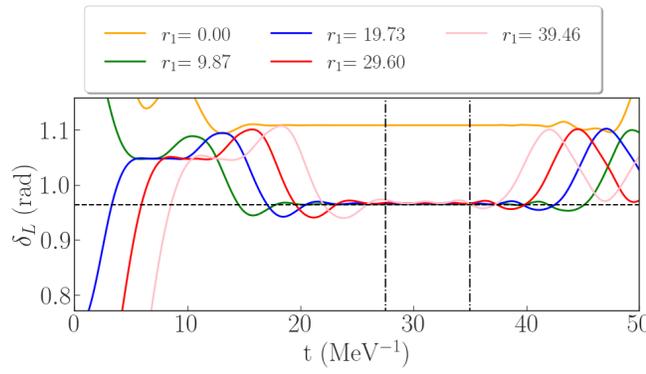

(c) Phase shift results for different position of detector r_1 . The horizontal dashed line indicates the absolute exact phase shift value $|\delta_L^{ex}| = 0.965$.

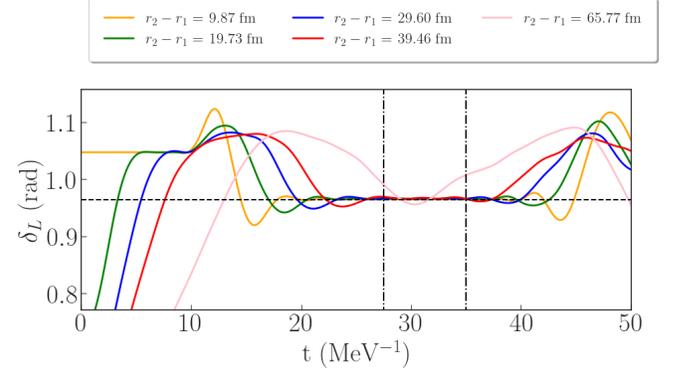

(d) Phase shift results for different position of the area of detector $r_2 - r_1$. The horizontal dashed line indicates the absolute exact phase shift value $|\delta_L^{ex}| = 0.965$.

FIG. 15