

# Efficient Framework for Solving Plasma Waves with Arbitrary Distributions

Huasheng Xie<sup>1, 2, \*</sup>

<sup>1</sup>*Hebei Key Laboratory of Compact Fusion, Langfang 065001, China*

<sup>2</sup>*ENN Science and Technology Development Co., Ltd., Langfang 065001, China*

(Dated: January 14, 2025)

Plasma, which constitutes 99% of the visible matter in the universe, is characterized by a wide range of waves and instabilities that play a pivotal role in space physics, astrophysics, laser-plasma interactions, fusion research, and laboratory experiments. The linear physics of these phenomena is described by kinetic dispersion relations (KDR). However, solving KDRs for arbitrary velocity distributions remains a significant challenge, particularly for non-Maxwellian distributions frequently observed in various plasma environments. This work introduces a novel, efficient, and unified numerical framework to address this challenge. The proposed method rapidly and accurately yields all significant solutions of KDRs for nearly arbitrary velocity distributions, supporting both unstable and damped modes across all frequencies and wavevectors. The approach expands plasma species' velocity distribution functions using a series of carefully chosen orthogonal basis functions and employs a highly accurate rational approximation to transform the problem into an equivalent matrix eigenvalue problem, eliminating the need for initial guesses. The efficiency and versatility of this framework are demonstrated, enabling simplified studies of plasma waves with arbitrary distributions. This advancement paves the way for uncovering new physics in natural plasma environments, such as spacecraft observations in space plasmas, and applications like wave heating in fusion research.

The vast majority—99%—of the visible matter in the universe exists in the plasma state, which is characterized by charged particles interacting with electromagnetic fields. These interactions give rise to numerous waves and instabilities. Since the 1950s, kinetic theory has provided a framework to describe these phenomena [1], the linear physics of which are well understood through dispersion relations (DR). However, solving the theoretical models is challenging due to mathematical complexities such as singularities and infinite double integrals. Analytical solutions are only feasible for limited cases, and numerical methods have primarily focused on specific distributions (e.g., Maxwellian).

An efficient numerical solver for plasma waves could significantly advance the field, akin to how traditional approaches revolutionized condensed matter physics [2] or how artificial intelligence (AI) transformed protein structure prediction [3]. Non-Maxwellian distributions, frequently observed in both space and laboratory plasmas, demand an effective and general solution framework (several typical distributions are illustrated in Figure 1). Since the 1990s, several attempts have been made to address this challenge [4], with notable progress in recent years [5–8]. However, the high computational cost (e.g., hours of CPU time) and the reliance on initial guesses to locate suitable solutions have limited the widespread use of these tools for practical analyses. While faster solvers are available for Maxwellian-based [9–11] and kappa distributions [12–14], a general solver for arbitrary distributions remains elusive.

In this work, we introduce a groundbreaking numerical method that, for the first time, meets nearly all five key requirements for an ideal kinetic dispersion relation (KDR) solver: (1) Fast; (2) Accurate; (3) Capable of re-

solving damped modes; (4) Able to reliably find solutions or obtain all solutions; (5) Compatible with arbitrary distributions. Notably, the fourth requirement is achieved seamlessly in conjunction with the fifth, representing a major breakthrough. We demonstrate in this work how these challenges are resolved with this novel approach.

Though a wide range of scenarios can be addressed, we focus on the electromagnetic magnetized model, limiting our discussion to linear plasma waves in an infinite, uniform, and homogeneous system. We assume a background magnetic field  $\mathbf{B}_0 = (0, 0, B_0)$  and a wave vector  $\mathbf{k} = (k_x, 0, k_z) = (k \sin \theta, 0, k \cos \theta)$ , where  $k_{\parallel} = k_z$  and  $k_{\perp} = k_x$ . The system consists of  $S$  species, indexed by  $s = 1, 2, \dots, S$ , with each species characterized by an electric charge  $q_s$ , mass  $m_s$ , and density  $n_{s0}$ . The dispersion relation is given by [10, 15, 16]:

$$\bar{D}(\omega, \mathbf{k}) = |\mathbf{K}(\omega, \mathbf{k}) + (\mathbf{k}\mathbf{k} - k^2 \mathbf{I}) \frac{c^2}{\omega^2}| = 0, \quad (1)$$

where  $\mathbf{K} = \mathbf{I} + \mathbf{Q} = \mathbf{I} - \frac{\sigma}{i\omega\epsilon_0}$ ,  $\mathbf{Q} = -\frac{\sigma}{i\omega\epsilon_0}$ , and

$$\sigma = -i \sum_s \frac{q_s^2 n_{s0}}{m_s} \sum_{n=-\infty}^{\infty} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - n\omega_{cs} - k_{\parallel} v_{\parallel}} \boldsymbol{\Pi}_s, \quad (2)$$

with

$$\boldsymbol{\Pi}_s = \begin{bmatrix} A_s \frac{n^2 v_{\perp}}{\mu_s^2} J_n^2 & iA_s \frac{nv_{\perp}}{\mu_s} J_n J'_n & B_s \frac{nv_{\perp}}{\mu_s} J_n^2 \\ -iA_s \frac{nv_{\perp}}{\mu_s} J_n J'_n & A_s v_{\perp} J_n'^2 & -iB_s v_{\perp} J_n J'_n \\ A_s \frac{nv_{\parallel}}{\mu_s} J_n^2 & iA_s v_{\parallel} J_n J'_n & B_s v_{\parallel} J_n^2 \end{bmatrix}, \quad (3)$$

where  $\mu_s = \frac{k_{\perp} v_{\perp}}{\omega_{cs}}$ ,  $A_s = \left(1 - \frac{k_{\parallel} v_{\parallel}}{\omega}\right) \frac{\partial f_{s0}}{\partial v_{\perp}} + \frac{k_{\parallel} v_{\perp}}{\omega} \frac{\partial f_{s0}}{\partial v_{\parallel}}$ , and  $B_s = \frac{n\omega_{cs} v_{\parallel}}{\omega v_{\perp}} \frac{\partial f_{s0}}{\partial v_{\perp}} + \left(1 - \frac{n\omega_{cs}}{\omega}\right) \frac{\partial f_{s0}}{\partial v_{\parallel}}$ . Eq. (2) is valid for non-relativistic, arbitrary gyrotropic distributions. Here,

Distribution $f_0(v_{\parallel}, v_{\perp})$	Drift bi-Maxwellian Ring Beam	Drift bi-Kappa	Drift product bi-kappa	Shell
Form $(v_{\parallel} = v_z, v_{\perp} = \sqrt{v_x^2 + v_y^2}, v = \sqrt{v_{\parallel}^2 + v_{\perp}^2})$	$c_0 \exp \left[ -\frac{(v_{\parallel} - v_{dz})^2}{v_{tz}^2} - \frac{(v_{\perp} - v_{dr})^2}{v_{tp}^2} \right]$	$c_0 \left[ 1 + \frac{(v_{\parallel} - v_{dz})^2}{\kappa v_{tz}^2} + \frac{v_{\perp}^2}{\kappa v_{tp}^2} \right]^{-\kappa-1}$	$c_0 \left[ 1 + \frac{(v_{\parallel} - v_{dz})^2}{\kappa_{\parallel} v_{tz}^2} \right]^{-\kappa_{\parallel}-1} \left[ 1 + \frac{v_{\perp}^2}{\kappa_{\perp} v_{tp}^2} \right]^{-\kappa_{\perp}-1}$	$c_0 \exp \left[ -\frac{(v - v_d)^2}{v_t^2} \right]$
Coefficient	$c_0 = \frac{1}{\pi^2 v_{tz} v_{tp}^2 A},$ $A = e^{\frac{v_{dr}^2}{v_{tp}^2}} + \frac{\sqrt{\pi} v_{dr}}{v_{tp}} \operatorname{erfc} \left( -\frac{v_{dr}}{v_{tp}} \right),$ $v_{tz,p} = \sqrt{\frac{2k_B T_{zp}}{m}}$	$c_0 = \frac{1}{\pi^2 v_{tz} v_{tp}^2 A},$ $A = \frac{\Gamma(\kappa+1)}{\kappa^{3/2} \Gamma(\kappa - \frac{1}{2})},$ $v_{tz,p} = \sqrt{\frac{2k_B T_{zp}}{m} (1 - \frac{3}{2\kappa})}$	$c_0 = \frac{1}{\pi^2 v_{tz} v_{tp}^2 A}, A = \frac{\Gamma(\kappa_{\parallel}+1)}{\kappa_{\parallel}^{1/2} \Gamma(\kappa_{\parallel} + \frac{1}{2})},$ $v_{tz} = \sqrt{\frac{2k_B T_z}{m} (1 - \frac{1}{2\kappa_{\parallel}})},$ $v_{tp} = \sqrt{\frac{2k_B T_p}{m} (1 - \frac{1}{\kappa_{\perp}})}$	$c_0 = \frac{1}{\pi^2 v_t^3 A},$ $A = \frac{2}{\sqrt{\pi}} \frac{v_d}{v_t} e^{-\frac{v_d^2}{v_t^2}} + \left( 2 \frac{v_d^2}{v_t^2} + 1 \right) \operatorname{erfc} \left( -\frac{v_d}{v_t} \right)$

FIG. 1: Typical non-Maxwellian velocity distributions encountered in space and laboratory plasmas.

$J_n = J_n(\mu_s)$  is the Bessel function of the first kind of order  $n$ , with its derivative  $J'_n = dJ_n(\mu_s)/d\mu_s$ . Additional terms are defined as  $\mathbf{n} = \frac{\mathbf{k}_c}{\omega}$ ,  $\omega_{cs} = \frac{q_s B_0}{m_s}$ ,  $\omega_{ps} = \sqrt{\frac{n_s q_s^2}{\epsilon_0 m_s}}$ , and  $c = \frac{1}{\sqrt{\mu_0 \epsilon_0}}$ , where  $\omega_{ps}$  and  $\omega_{cs}$  represent the plasma and cyclotron frequencies, respectively,  $c$  is the speed of light,  $\epsilon_0$  is the permittivity of free space,  $\mu_0$  is the permeability of free space, and  $\mathbf{n}$  is the refractive index vector.

We express the normalized distribution function of species  $s$  as a series expansion in basis functions  $f_{s0} = \sum_{l=-\infty}^{\infty} \sum_{m=-\infty}^{\infty} a_{s0,lm} \rho_{sz,l}(v_{\parallel}) u_{sx,m}(v_{\perp})$ , where  $-\infty < v_{\parallel} < \infty$  and  $0 \leq v_{\perp} < \infty$ . Here,  $\rho_{sz,l}$  and  $u_{sx,m}$  are basis functions for the parallel and perpendicular directions, respectively, which decouple the velocity integrals in Eq. (2). The choice of basis functions significantly impacts performance. Early attempts for the 1D case used orthogonal basis functions such as Hermite, Legendre, or Chebyshev polynomials [17], as well as Fourier-based rational functions [18–20] for the parallel integral. Other approaches, such as using fitted/interpolated functions for the parallel direction and Legendre basis functions for the perpendicular direction, have been applied to study wave heating in the ion cyclotron range of frequencies (ICRF) [21, 22].

Our goal is to solve the DR for arbitrary distributions accurately and to obtain all important solutions without requiring an initial guess. To achieve this, we expand the DR into a rational form of the wave frequency  $\omega = \omega_r + i\omega_i$  [9, 10, 23], where  $\omega_i > 0$  corresponds to instability and  $\omega_i < 0$  corresponds to a damped mode. Direct integration on grids [4, 5, 7] or spline function fitting [6, 8] cannot yield a rational dispersion function with respect to  $\omega$ . We identify two types of expansions that meet our requirements. The first is the GPDF basis [18], which is related to Fourier bases and thus offers exponential convergence with high accuracy and efficiency. This approach can be transformed into a matrix method sim-

ilar to the  $\kappa$ -distribution case [14, 24]. The second is the Hermite basis, which is closely related to the Maxwellian distribution. The Hermite basis yields a form suitable for J-pole expansion and facilitates a matrix approach [9, 10] with a smaller matrix dimension, making it possible to obtain all solutions without requiring an initial guess. In this work, we demonstrate results using the Hermite-Hermite (HH) basis for both parallel and perpendicular directions. Detailed derivations of the equations, along with results using GPDF-Hermite (GH) and GPDF-GPDF (GG) bases, are provided in the supplementary material.

For the HH expansion, we use the following form:

$$f_{s0}(v_{\parallel}, v_{\perp}) = c_{s0} \sum_{l=0}^{\infty} \sum_{m=0}^{\infty} a_{s,lm} \cdot g_{sz,l}(v_{\parallel}) \cdot g_{sx,m}(v_{\perp}), \quad (4)$$

where  $g_{sz,l}(v_{\parallel}) = \left( \frac{v_{\parallel} - d_{sz}}{L_{sz}} \right)^l e^{-\left( \frac{v_{\parallel} - d_{sz}}{L_{sz}} \right)^2}$ ,  $g_{sx,m}(v_{\perp}) = \left( \frac{v_{\perp} - d_{sx}}{L_{sx}} \right)^m e^{-\left( \frac{v_{\perp} - d_{sx}}{L_{sx}} \right)^2}$ . Here,  $L_{sz}$  and  $L_{sx}$  are the velocity widths, while  $d_{sz}$  and  $d_{sx}$  are the drift velocities. The normalization coefficient is given by  $c_{s0} = \frac{1}{\pi^{3/2} L_{sz} L_{sx}^2 R_s}$ , where  $R_s = \exp \left( -\frac{d_{sx}^2}{L_{sx}^2} \right) + \frac{\sqrt{\pi} d_{sx}}{L_{sx}} \operatorname{erfc} \left( -\frac{d_{sx}}{L_{sx}} \right)$ , and  $\operatorname{erfc}(-x) = 1 - \operatorname{erf}(-x) = 1 + \operatorname{erf}(x)$  is the complementary error function. The coefficients  $a_{s,lm}$  can be readily calculated using orthogonal Hermite basis functions.

The benefits of this choice of basis functions include: (1) It naturally reduces to the drift bi-Maxwellian ring-beam case [10] by retaining only the lowest-order term with  $a_{s,00} = 1 \neq 0$ . (2) The parallel integral can be simplified to involve only a single Maxwellian  $Z$  function, and the perpendicular integral can also be reduced to a single term initially. The second benefit allows the J-pole matrix method from BO [10] to be directly applied here,

with the matrix dimension remaining unchanged, though large values of  $J$  may be required for accurate computation. Thus, a slight modification of the Maxwellian-based BO code can be used for generalized arbitrary distributions.

We define  $f_{s0,l,m}(v_{\parallel}, v_{\perp}) \equiv a_{s,l,m} g_{sz,l}(v_{\parallel}) g_{sx,m}(v_{\perp})$ ,  $f_{s0z,l}(v_{\parallel}) \equiv g_{sz,l}(v_{\parallel})$ ,  $f_{s0x,m}(v_{\perp}) \equiv g_{sx,m}(v_{\perp})$ . Hence, we have  $\frac{\partial f_{s0z,l}(v_{\parallel})}{\partial v_{\parallel}} = -\frac{1}{L_{sz}} [2f_{s0z,l+1} - lf_{s0z,l-1}]$ ,  $\frac{\partial f_{s0x,m}(v_{\perp})}{\partial v_{\perp}} = -\frac{1}{L_{sx}} [2f_{s0x,m+1} - mf_{s0x,m-1}]$ . Here, we set  $f_{s0z,l} = f_{s0x,m} = 0$  for all  $l, m < 0$ . The above derivatives equations are valid for all  $l, m = 0, 1, 2, \dots$ .

For parallel integral [ $\text{Im}(\zeta_{sn}) > 0$ ], we define

$$Z_{l,p}(\zeta_{sn}) \equiv -\frac{k_{\parallel}}{L_{sz}^p \sqrt{\pi}} \int_{-\infty}^{\infty} \frac{v_{\parallel}^p (\frac{v_{\parallel}-d_{sz}}{L_{sz}})^l e^{-(\frac{v_{\parallel}-d_{sz}}{L_{sz}})^2}}{\omega - k_{\parallel} v_{\parallel} - n\omega_{cs}} dv_{\parallel}$$

$$= \frac{1}{\sqrt{\pi}} \int_{-\infty}^{\infty} \frac{g_{l,p}(z)}{z - \zeta_{sn}} dz, \quad g_{l,p}(z) \equiv (z + d)^p z^l e^{-z^2}. \quad (5)$$

We have  $Z_{0,0}(\zeta) = Z(\zeta)$  and redefine  $Z_{l,0} \equiv Z_l$  and  $I_l \equiv \pi^{-1/2} \int_{-\infty}^{\infty} x^l e^{-x^2} dx$ , with  $\zeta_{sn} = \frac{\omega - k_{\parallel} d_{sz} - n\omega_{cs}}{k_{\parallel} L_{sz}}$ ,  $d = \frac{d_{sz}}{L_{sz}}$ ,  $p = 0, 1, 2$ . These plasma dispersion functions can be computed efficiently to high accuracy and are also analytically continuous for  $\text{Im}(\zeta_{sn}) \leq 0$  [18]. For the perpendicular integral, we define

$$\Gamma_{\{a,b,c\}n,m,p}(a_s, d_s) \equiv \frac{1}{L_{sx}^{p+1}} \int_0^{\infty} v_{\perp}^p \{ J_n^2(\frac{k_{\perp} v_{\perp}}{\omega_{cs}}), J_n(\frac{k_{\perp} v_{\perp}}{\omega_{cs}}) J'_n(\frac{k_{\perp} v_{\perp}}{\omega_{cs}}),$$

$$J'_n{}^2(\frac{k_{\perp} v_{\perp}}{\omega_{cs}}) \} (\frac{v_{\perp} - d_{sx}}{L_{sx}})^m e^{-(\frac{v_{\perp} - d_{sx}}{L_{sx}})^2} dv_{\perp}$$

$$= \int_0^{\infty} x^p \{ J_n^2(a_s x), J_n(a_s x) J'_n(a_s x), J'_n{}^2(a_s x) \} (x - d_s)^m e^{-(x - d_s)^2} dx, \quad (6)$$

with  $a_s = k_{\perp} \rho_{cs}$ ,  $\rho_{cs} = L_{sx}/\omega_{cs}$ ,  $d_s = d_{sx}/L_{sx}$ ,  $p = 0, 1, 2, 3$ . These integrals can be computed numerically [10].

For the Maxwellian  $Z$  function J-pole expansion, we have[10]

$$Z_l(\zeta) \simeq \sum_{j=1}^J \frac{b_j c_j^l}{\zeta - c_j}. \quad (7)$$

Here, we have used[23]  $\sum_j b_j = -1$ ,  $\sum_j b_j c_j = 0$ ,  $\sum_j b_j c_j^2 = -1/2$ ,  $\sum_j b_j c_j^3 = 0, \dots$ . This also means that if we need a higher-order Hermite fitting of the distribution function, the corresponding coefficients should also be kept to a similar order. Typically, we need to set  $J \geq l_{\max} + 4$ . To ensure double precision, we have calculated up to  $J = 24$ . Hence, the present solver can support  $l_{\max} \simeq 20$ . While higher values of  $l_{\max}$  can also be computed, the accuracy would decrease.

To seek an equivalent linear system, Maxwell's equations are

$$\partial_t \mathbf{E} = c^2 \nabla \times \mathbf{B} - \mathbf{J}/\epsilon_0, \quad (8a)$$

$$\partial_t \mathbf{B} = -\nabla \times \mathbf{E}, \quad (8b)$$

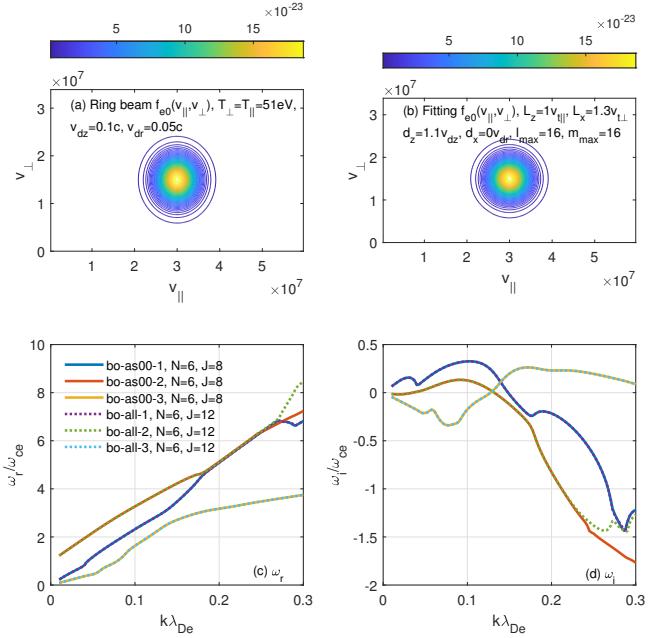


FIG. 2: Comparison of unstable wave solutions under a ring beam electron distribution at  $\theta = 40^\circ$ , using both analytical and fitted distributions, reveals good agreement except in regions with strong damping. Here, "as00" represents the analytical distribution, and "all" denotes the use of Hermite expansion. Solving for 120 wave vector points and obtaining all solutions requires approximately 33 seconds for the analytical case ( $N=6, J=8$ ), 64 seconds for the fitted case ( $N=6, J=8$ ), and 200 seconds for the fitted case ( $N=6, J=12$ ).

which do not need to be changed. We only need to seek a new linear system for  $\mathbf{J} = \boldsymbol{\sigma} \cdot \mathbf{E}$ .

Considering the definition  $\boldsymbol{\sigma}_s = -i\epsilon_0 \omega \mathbf{Q}_s = -i\epsilon_0 \frac{\omega_{ps}^2}{\omega} \mathbf{P}_s$ , after the J-pole expansion, we have  $P_{s11} = \sum_n \frac{2}{R_s} \frac{n^2 \omega_{cs}^2}{k_{\perp}^2 L_{sx}^2} \sum_{l,m} a_{s,l,m} \left\{ \left( \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_l - I_l \right) (2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}) + \Gamma_{an,m,1} \frac{L_{sx}^2}{L_{sz}^2} (2Z_{l+1} - lZ_{l-1}) \right\} \simeq \sum_{n,j} \frac{2}{R_s} \frac{n^2 \omega_{cs}^2}{k_{\perp}^2 L_{sx}^2} \frac{k_z L_{sz} b_j}{\omega - c_{snj}} \sum_{l,m} a_{s,l,m} \left\{ \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} c_j^l (2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}) + \Gamma_{an,m,1} \frac{L_{sx}^2}{L_{sz}^2} [2c_j^{l+1} - lc_j^{l-1}] \right\} - \frac{2}{R_s} \frac{\omega_{cs}^2}{k_{\perp}^2 L_{sx}^2} \sum_{l,m} a_{s,l,m} \left\{ I_l \sum_n n^2 (2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}) \right\} = \sum_{n,j} \frac{p_{11snj}}{\omega - c_{snj}} - 1, \quad \text{where} \quad p_{11snj} = \frac{2}{R_s} \frac{n^2 \omega_{cs}^2}{k_{\perp}^2 L_{sx}^2} k_z L_{sz} b_j \sum_{l,m} a_{s,l,m} \left\{ \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} c_j^l (2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}) + \Gamma_{an,m,1} \frac{L_{sx}^2}{L_{sz}^2} [2c_j^{l+1} - lc_j^{l-1}] \right\}. \quad \text{Other terms are similar.}$

It is thus easy to find that after the J-pole expansion, the relations between  $\mathbf{J}$  and  $\mathbf{E}$  have the following form

$$\frac{\boldsymbol{\sigma}}{-i\epsilon_0} = \begin{pmatrix} \frac{b_{11}}{\omega} + \sum_{snj} \frac{b_{snj11}}{\omega - c_{snj}} & \frac{b_{12}}{\omega} + \sum_{snj} \frac{b_{snj12}}{\omega - c_{snj}} & \frac{b_{13}}{\omega} + \sum_{snj} \frac{b_{snj13}}{\omega - c_{snj}} \\ \frac{b_{21}}{\omega} + \sum_{snj} \frac{b_{snj21}}{\omega - c_{snj}} & \frac{b_{22}}{\omega} + \sum_{snj} \frac{b_{snj22}}{\omega - c_{snj}} & \frac{b_{23}}{\omega} + \sum_{snj} \frac{b_{snj23}}{\omega - c_{snj}} \\ \frac{b_{31}}{\omega} + \sum_{snj} \frac{b_{snj31}}{\omega - c_{snj}} & \frac{b_{32}}{\omega} + \sum_{snj} \frac{b_{snj32}}{\omega - c_{snj}} & \frac{b_{33}}{\omega} + \sum_{snj} \frac{b_{snj33}}{\omega - c_{snj}} \end{pmatrix}. \quad (9)$$

Combining Eqs. (8) and (9), the equivalent linear sys-

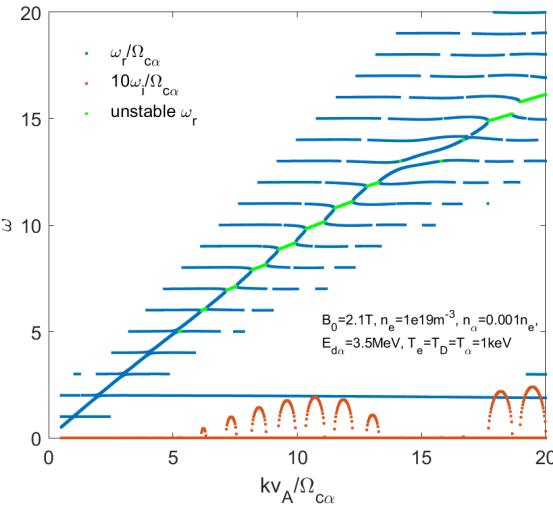


FIG. 3: Ion cyclotron emission in magnetically confined fusion plasma with drift ring ion beam distributions at  $\theta = 89.5^\circ$ .

tem for the electromagnetic DR can be obtained as

$$\left\{ \begin{array}{lcl} \omega v_{snjx} &= & c_{snj} v_{snjx} + b_{snj11} E_x + b_{snj12} E_y + b_{snj13} E_z, \\ \omega j_x &= & b_{11} E_x + b_{12} E_y + b_{13} E_z, \\ iJ_x \epsilon_0 &= & j_x + \sum_{snj} v_{snjx}, \\ \omega v_{snjy} &= & c_{snj} v_{snjy} + b_{snj21} E_x + b_{snj22} E_y + b_{snj23} E_z, \\ \omega j_y &= & b_{21} E_x + b_{22} E_y + b_{23} E_z, \\ iJ_y / \epsilon_0 &= & j_y + \sum_{snj} v_{snjy}, \\ \omega v_{snjz} &= & c_{snj} v_{snjz} + b_{snj31} E_x + b_{snj32} E_y + b_{snj33} E_z, \\ \omega j_z &= & b_{31} E_x + b_{32} E_y + b_{33} E_z, \\ iJ_z / \epsilon_0 &= & j_z + \sum_{snj} v_{snjz}, \\ \omega E_x &= & c^2 k_z B_y - iJ_x / \epsilon_0, \\ \omega E_y &= & -c^2 k_z B_x + c^2 k_x B_z - iJ_y / \epsilon_0, \\ \omega E_z &= & -c^2 k_x B_y - iJ_z / \epsilon_0, \\ \omega B_x &= & -k_z E_y, \\ \omega B_y &= & k_z E_x - k_x E_z, \\ \omega B_z &= & k_x E_y, \end{array} \right. \quad (10)$$

which yields a sparse matrix eigenvalue problem that can be readily solved using standard eigenvalue libraries. The symbols such as  $v_{snjx}$ ,  $j_{x,y,z}$ , and  $J_{x,y,z}$  do not have direct physical meanings but are analogous to the perturbed velocity and current density in the fluid-based derivations of plasma waves [25]. However, the elements of the eigenvector ( $E_x, E_y, E_z, B_x, B_y, B_z$ ) still represent the original perturbed electric and magnetic fields. Thus, the polarization of the solutions can also be obtained in a straightforward manner. The dimension of the matrix is  $N_N = 3 \times (N_{SNJ} + 1) + 6 = 3 \times \{[S \times (2 \times N + 1)] \times J + 1\} + 6$ , where  $N$  is the number of harmonics retained for magnetized species, and  $J$  is the order of the J-pole expansion for the  $Z$  function. A surprising and unexpected feature of the above HH expansion is that the matrix structure and dimension are identical to the Maxwellian distribution case. Thus, the computation time remains

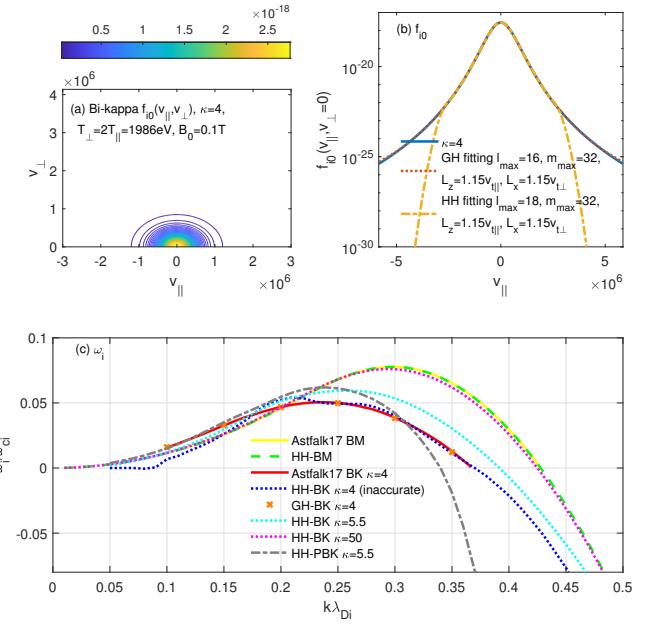


FIG. 4: Firehose instability for bi-Maxwellian (BM), bi-kappa (BK), and product bi-kappa (PBK) distributions at  $\theta = 45^\circ$ .

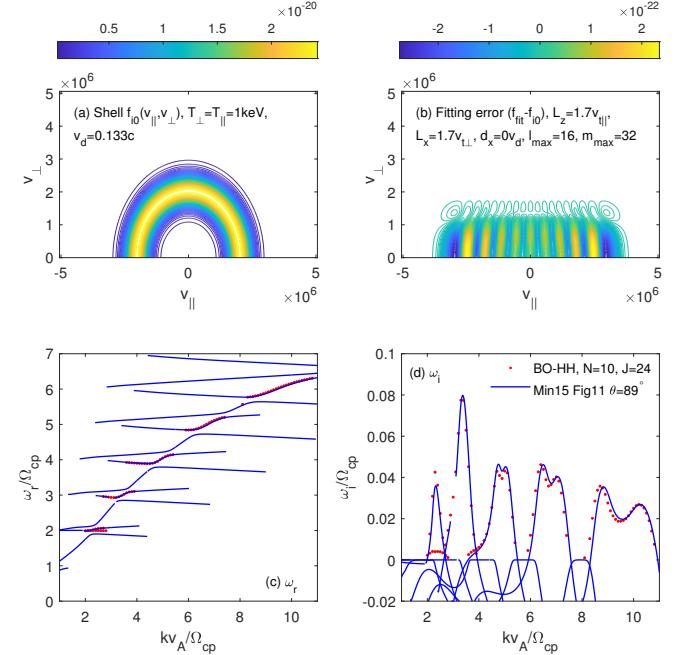


FIG. 5: Instabilities for shell ion distributions at  $\theta = 89^\circ$ . The total CPU time to compute all 100 wave vector points is approximately 70 minutes for  $S = 3$ ,  $J = 24$ , and  $N = 10$ .

the same, except for the time required to calculate the initial matrix coefficients. Other existing solvers for arbitrary distribution KDRs (e.g., [7, 8]) incur significantly higher computational costs compared to the Maxwellian case. Similar to Maxwellian-based cases [9, 10], the above approach avoids the singularity in the DR.

We apply the above framework to solve several special examples to demonstrate its performance. The first example involves the ring-beam electron instabilities, using parameters from Fig. 1 of Ref. [10]. The results for  $\theta = 40^\circ$  are shown in Fig. 2. These results agree well with the Maxwellian-based solvers [10, 26] and show that different expansion parameters, such as  $L_{sz}$ ,  $L_{sx}$ ,  $d_z$ , and  $d_x$ , can yield consistent solutions, even for damped modes (excluding strongly damped modes). For all 120 wave vector points, the total computation time is less than one minute to obtain all solutions (only the three unstable solutions are plotted here). The second example, shown in Fig. 3, uses parameters from Fig. 3.8 in Ref. [8] to study ion cyclotron emission (ICE) driven by a ring ion beam distribution in a magnetized fusion device. The results show good agreement with Ref. [8]. Our approach calculates all solutions in one step, ensuring no solutions are missed. This is a significant advantage over conventional solvers, which require testing different initial guesses to obtain solutions one-by-one.

Superthermal distributions are commonly observed in space plasmas and in ICRF heating in laboratory plasmas. Thus, we present a third example using the kappa distribution. The parameters are taken from Fig. 2 in Ref. [6] for the firehose instability, with results shown in Fig. 4. We find that the HH expansion is accurate for  $\kappa \geq 5$  and can handle non-integer values (e.g.,  $\kappa = 5.5$ ) as well as very large values (e.g.,  $\kappa = 50$ ) with  $l_{max} = 16$ . For  $\kappa = 4$ , the GH expansion yields good agreement with Ref. [6]. Results for the product bi-kappa distribution are also shown. The CPU time for each calculation is less than one minute. Notably, our approach supports damped solutions naturally, which are not supported by the solver in Ref. [6]. A more complex example is the shell distribution, as shown in Fig. 5, with parameters taken from Fig. 11 of Ref. [26]. The results agree well with Ref. [26]. Slight differences may arise due to the limited significant digits provided for input parameters in Ref. [26] or differences in the accuracy of the expansion.

In summary, we demonstrate that the new framework performs well for a wide range of nearly arbitrary distributions, covering all frequency ranges and wave vectors. We also find that the fitting accuracy of the distribution function significantly affects the results[6, 7], highlighting the importance of precise distribution function data for obtaining accurate solutions. The most significant innovation of this work is the development of a method that does not require initial guesses, which simplifies root-finding for nearly arbitrary distributions. It should also be noted that achieving high-accuracy calculations for non-smooth distributions may require more than double precision due to round-off errors in high-order coefficients [22]. This framework is particularly useful for studying instabilities. While we have tested only a limited number of cases for damped modes, it performs well

for weakly damped modes but less effectively for strongly damped modes. This limitation arises from the analytical continuation from real functions  $f_{so}(v_{\parallel}, v_{\perp})$  to fitting functions of complex  $v_{\parallel}$ , which are sensitive to the fitting parameters. The present approach can be seen as a major extension of the Maxwellian distribution-based KDR solver BO [10] to handle arbitrary distributions. Further extensions to relativistic and nonuniform plasmas are also anticipated.

The source code for this work is available at: <https://github.com/hxie/boarbitrary>.

*Acknowledgments* We would like to thank Kyungguk Min for providing the benchmark data used in Figs. 2 and 5.

---

\* Email: huashengxie@gmail.com, xiehuasheng@enn.cn

- [1] T. Stix, *Waves in Plasmas*, AIP Press, 1992.
- [2] R. Car and M. Parrinello, Unified Approach for Molecular Dynamics and Density-Functional Theory, *Phys. Rev. Lett.*, 55, 22, 2471 (1985).
- [3] J. Jumper et al, Highly accurate protein structure prediction with AlphaFold, *Nature* volume 596, pages583–589 (2021).
- [4] Y. Matsuda and G. R. Smith, A microinstability code for a uniform magnetized plasma with an arbitrary distribution function, *Journal of Computational Physics*, 1992, 100, 229-235.
- [5] P. Hellinger and P. M. Travnicek, Proton core-beam system in the expanding solar wind: Hybrid simulations, *Journal of Geophysical Research: Space Physics*, 2011, 116, A11101 .
- [6] P. Astfalk and F. Jenko, LEOPARD: A grid-based dispersion relation solver for arbitrary gyrotropic distributions, *J. Geophys. Res. Space Physics*, 122, 89-101 (2017).
- [7] Daniel Verscharen, Kristopher G. Klein, Benjamin D. G. Chandran, Michael L. Stevens, Chadi S. Salem and Stuart D. Bale, ALPS: The Arbitrary Linear Plasma Solver, *J. Plasma Phys.*, 84 (2018) 905840403.
- [8] S. W. A. Irvine, Collective instability and physics of the anomalous Doppler resonance in fusion plasmas, University of Warwick, PhD thesis, 2018.
- [9] H. S. Xie and Y. Xiao, PDRK: A General Kinetic Dispersion Relation Solver for Magnetized Plasma, *Plasma Science and Technology*, 18, 2, 97 (2016). Update/bugs fixed at <http://hxie.me/codes/pdrk/> or <https://github.com/hxie/pdrk/>.
- [10] H.S. Xie, BO: A unified tool for plasma waves and instabilities analysis, *Comput. Phys. Comm.* 244 (2019) 343-371; Xie, H. S., Denton, R., Zhao, J. S. and Liu, W, BO 2.0: Plasma Wave and Instability Analysis with Enhanced Polarization Calculations arXiv:2103.16014, 2021. <https://github.com/hxie/bo/>.
- [11] K. Ronnmark, WHAMP - Waves in Homogeneous Anisotropic Multicomponent Magnetized Plasma, KGI Report No. 179, Sweden, 1982.
- [12] P. Astfalk, T. Gorler and F. Jenko, DSHARK: A dispersion relation solver for obliquely propagating waves in bi-kappa-distributed plasmas, *J. Geophys. Res. Space*

- Physics, 120, 7107–7120 (2015).
- [13] R. Lopez, S. Shaaban and M. Lazar, General dispersion properties of magnetized plasmas with drifting bi-Kappa distributions. DIS-K: Dispersion Solver for Kappa Plasmas, *Journal of Plasma Physics*, 2021, 87, 905870310.
  - [14] W. Bai, H. S. Xie, C. C. Wu, Y.X. Pu, P. C. Yu, BO-KM: A comprehensive solver for dispersion relation of obliquely propagating waves in magnetized multi-species plasma with anisotropic drift kappa-Maxwellian distribution, *Computer Physics Communications* 307 (2025) 109434.
  - [15] D. Summers, S. Xue and Richard M. Thorne, Calculation of the dielectric tensor for a generalized Lorentzian (kappa) distribution function, *Phys. Plasmas*, 1, 2012 (1994).
  - [16] D. A. Gurnett and A. Bhattacharjee, *Introduction to plasma physics: with space and laboratory applications*, Cambridge, 2005.
  - [17] P. A. Robinson, Systematic methods for calculation of the dielectric properties of arbitrary plasmas. *J. Comput. Phys.* 88, 381–392 (1990).
  - [18] H. S. Xie, Generalized plasma dispersion function: One-solve-all treatment, visualizations, and application to Landau damping, *Phys. Plasmas* 20, 092125 (2013).
  - [19] J. A. C. Weideman, Computation of the Complex Error Function, *SIAM Journal on Numerical Analysis*, 1994, 31, 1497–1518.
  - [20] J. A. C. Weideman, Computing the Hilbert transform on the real line. *Math. Comput.* 64, 745–762 (1995).
  - [21] M. Brambilla and R. Bilato, An efficient interface between the solvers of Maxwell's equations and of the quasi-linear kinetic equation for simulations of ion cyclotron heating in tokamak plasmas, *Computer Physics Communications* 184 (2013) 2053–2060.
  - [22] R. Bilato, M. Brambilla and Z. Jiang, Implementing zero-banana-width quasilinear operator for fast ICRF simulations, *Journal of Physics: Conference Series* 401 (2012) 012001.
  - [23] H. S. Xie, Rapid computation of the plasma dispersion function: Rational and multi-pole approximation, and improved accuracy, *AIP Advances* 14, 075007 (2024).
  - [24] W. Bai and H. S. Xie, Toward developing a comprehensive algorithm for solving kinetic plasma dispersion relations for parallel propagation with a kappa distribution, *Phys. Plasmas* 30, 043903 (2023).
  - [25] H. S. Xie, PDRF: A general dispersion relation solver for magnetized multi-fluid plasma, *Computer Physics Communications*, 185, 670–675 (2014).
  - [26] K. Min and K. Liu, *J. Geophys. Res. Space Phys.* 120 (2015) 2739–2753.

# Supplementary: Kinetic Plasma Dispersion Relation for Arbitrary Distributions under Expansions

Hua-sheng XIE, huashengxie@gmail.com, ENN

Saturday 11<sup>th</sup> January, 2025

## Abstract

This document provides the equations to solve the electromagnetic magnetized non-relativistic kinetic dispersion relation for arbitrary gyrotrropic distributions. The distribution functions in the parallel and perpendicular directions are expanded using three types of expansions: Hermite-Hermite (HH), GPDF-Hermite (GH), and GPDF-GPDF (GG) bases. All of these expansions yield rational dispersion relations. For the HH model, by applying rational approximation to the parallel integral plasma dispersion function, we also present the final eigenvalue matrix, which allows for solving all solutions without requiring an initial guess.

## 1 The Kinetic Dispersion Relation

We consider only the electromagnetic magnetized model. In this work, we limit our discussion to linear plasma waves in an infinite, uniform, and homogeneous system. The background magnetic field is assumed to be  $\mathbf{B}_0 = (0, 0, B_0)$ , and the wave vector is given by  $\mathbf{k} = (k_x, 0, k_z) = (k \sin \theta, 0, k \cos \theta)$ , where  $k_{\parallel} = k_z$  and  $k_{\perp} = k_x$ . The plasma consists of  $S$  species, indexed by  $s = 1, 2, \dots, S$ . The electric charge, mass, and density of each species are denoted by  $q_s$ ,  $m_s$ , and  $n_{s0}$ , respectively. The dispersion relation is given by [6, 3, 12]

$$\bar{D}(\omega, \mathbf{k}) = |\mathbf{D}(\omega, \mathbf{k})| = |\mathbf{K}(\omega, \mathbf{k}) + (\mathbf{k}\mathbf{k} - k^2 \mathbf{I}) \frac{c^2}{\omega^2}| = 0,$$

i.e.,

$$\bar{D}(\omega, \mathbf{k}) = \begin{vmatrix} D_{xx} & D_{xy} & D_{xz} \\ D_{yx} & D_{yy} & D_{yz} \\ D_{zx} & D_{zy} & D_{zz} \end{vmatrix} = \begin{vmatrix} K_{xx} - \frac{k^2 c^2}{\omega^2} & K_{xy} & K_{xz} + \frac{k_z k_x c^2}{\omega^2} \\ K_{yx} & K_{yy} - \frac{k^2 c^2}{\omega^2} & K_{yz} \\ K_{zx} + \frac{k_z k_x c^2}{\omega^2} & K_{zy} & K_{zz} - \frac{k^2 c^2}{\omega^2} \end{vmatrix} = 0, \quad (1)$$

where

$$\mathbf{K} = \mathbf{I} + \mathbf{Q} = \mathbf{I} - \frac{\boldsymbol{\sigma}}{i\omega\epsilon_0}, \quad \mathbf{Q} = -\frac{\boldsymbol{\sigma}}{i\omega\epsilon_0}. \quad (2)$$

with

$$\boldsymbol{\sigma} = -i \sum_s \frac{q_s^2 n_{s0}}{m_s} \sum_{n=-\infty}^{\infty} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - n\omega_{cs} - k_{\parallel} v_{\parallel}} \times \begin{bmatrix} A_s \frac{n^2 v_{\perp}}{\mu_s^2} J_n^2 & iA_s \frac{nv_{\perp}}{\mu_s} J_n J'_n & B_s \frac{nv_{\perp}}{\mu_s} J_n^2 \\ -iA_s \frac{nv_{\perp}}{\mu_s} J_n J'_n & A_s v_{\perp} J'_n^2 & -iB_s v_{\perp} J_n J'_n \\ A_s \frac{nv_{\parallel}}{\mu_s} J_n^2 & iA_s v_{\parallel} J_n J'_n & B_s v_{\parallel} J_n^2 \end{bmatrix}, \quad (3)$$

and

$$\mu_s = \frac{k_{\perp} v_{\perp}}{\omega_{cs}}, \quad A_s = \left(1 - \frac{k_{\parallel} v_{\parallel}}{\omega}\right) \frac{\partial f_{s0}}{\partial v_{\perp}} + \frac{k_{\parallel} v_{\perp}}{\omega} \frac{\partial f_{s0}}{\partial v_{\parallel}}, \quad B_s = \frac{n\omega_{cs} v_{\parallel}}{\omega v_{\perp}} \frac{\partial f_{s0}}{\partial v_{\perp}} + \left(1 - \frac{n\omega_{cs}}{\omega}\right) \frac{\partial f_{s0}}{\partial v_{\parallel}}. \quad (4)$$

Eq.(3) is valid for non-relativistic arbitrary gyrotrropic distributions. Here,  $J_n = J_n(\mu_s)$  is the Bessel function of the first kind of order  $n$ , and its derivative  $J'_n = dJ_n(\mu_s)/d\mu_s$ ,  $J_{n+1}(\mu_s) + J_{n-1}(\mu_s) = \frac{2n}{\mu_s} J_n(\mu_s)$  and  $J_{n+1}(\mu_s) -$

$J_{n-1}(\mu_s) = -2J'_n(\mu_s)$ ,  $J_{-n} = (-1)^n J_n$ . And,  $\mathbf{n} = \frac{\mathbf{k}c}{\omega}$ ,  $\omega_{cs} = \frac{q_s B_0}{m_s}$ ,  $\omega_{ps} = \sqrt{\frac{n_{s0} q_s^2}{\epsilon_0 m_s}}$ ,  $c = \frac{1}{\sqrt{\mu_0 \epsilon_0}}$  where  $\omega_{ps}$  and  $\omega_{cs}$  are the plasma frequency and cyclotron frequency of each species (note that for electron,  $q_e < 0$  and thus  $\omega_{ce} < 0$ ),  $c$  is the speed of light,  $\epsilon_0$  is the permittivity of free space,  $\mu_0$  is the permeability of free space, and  $\mathbf{n}$  is the refractive index vector.

In this work, we write the normalized distribution function of species  $s$  to orthogonal basis functions expansion form

$$f_{s0}(v_{\parallel}, v_{\perp}) = \sum_{l=-\infty}^{\infty} \sum_{m=-\infty}^{\infty} a_{s0,lm} W_{sz}(v_{\parallel}) W_{sx}(v_{\perp}) \rho_{sz,l}(v_{\parallel}) u_{sx,m}(v_{\perp}), \quad -\infty < v_{\parallel} < \infty, \quad 0 \leq v_{\perp} < \infty, \quad (5)$$

where  $\rho_{sz,l}$  and  $u_{sx,m}$  are basis functions for parallel and perpendicular directions, with  $W_{sz}$  and  $W_{sx}$  be corresponding weight functions, which satisfy

$$\int_{-\infty}^{\infty} W_{sz}(v) \rho_n(v) \rho_{n'}^*(v) dv = A_{sz} \delta_{n,n'}, \quad \int_{-\infty}^{\infty} W_{sx}(v) u_n(v) u_{n'}^*(v) dv = A_{sx} \delta_{n,n'}. \quad (6)$$

Thus, we have

$$a_{s0,lm} = \frac{1}{A_{sx} A_{sz}} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} f_{s0}(v_{\parallel}, v_{\perp}) \rho_{sz,l}^*(v_{\parallel}) h_{sx,m}^*(v_{\perp}) dv_{\parallel} dv_{\perp}. \quad (7)$$

Note also that  $\int f_{s0} dv^3 = \int_{-\infty}^{\infty} \int_0^{\infty} 2\pi v_{\perp} f_{s0} dv_{\perp} dv_{\parallel} = 1$ .

The advantage of Eq. (5) is that the distribution function  $f_{s0}$  is decoupled into parallel and perpendicular velocity components, allowing the integral in Eq. (3) to be separated for  $v_{\parallel}$  and  $v_{\perp}$ , i.e.,  $f_{s0}(v_{\parallel}, v_{\perp}) = \sum f_l(v_{\parallel}) \cdot f_m(v_{\perp})$ . The performance is largely dependent on the choice of basis functions. Early attempts utilized orthogonal basis functions such as Hermite, Legendre, or Chebyshev polynomials [15]. In practical tests, these basis functions for parallel integration often require high orders for general cases, leading to slow convergence and high computational cost [5].

Fortunately, the Fourier-related rational basis functions introduced by Weideman [11, 16] for parallel integration are found to be both fast and highly accurate for the generalized plasma dispersion function (GPDF) [1]. For this reason, we refer to them as the GPDF basis. Another expansion method involves fitting or interpolating the parallel direction using spline functions and employing Legendre basis functions for the perpendicular direction. This approach has been used for studying wave heating in the ion cyclotron range of frequencies (ICRF) [18, 19].

Our goal is to solve the dispersion relation for arbitrary distributions with high accuracy and to obtain all important solutions without requiring an initial guess. Therefore, it is essential to express the dispersion relation in a rational form with respect to the wave frequency  $\omega$  [2, 12, 17]. Direct grid integration [7, 8, 5] or spline-based fitting [9, 10] cannot yield a rational dispersion relation for  $\omega$ .

By decoupling the distribution function, the solution for the unknown  $\omega$ —given the input parameters ( $k$ ,  $\theta$ , etc.)—requires computing the parallel integral iteratively for each  $\omega$ . In contrast, the perpendicular integral only needs to be calculated once. As such, for the perpendicular integral, high-order expansion has little impact on computational speed, whereas for the parallel integral, it is preferable to choose an expansion method that is both accurate and efficient.

To our knowledge, two types of expansions satisfy these requirements: being general for arbitrary distributions and transformable into a matrix method to solve for all solutions. The first type is the GPDF basis [1], which is related to the Fourier basis and exhibits fast, exponentially convergent behavior. It can be transformed into a matrix method similar to the case for  $\kappa$  distributions [14, 13]. The second type is the Hermite basis, which is closely related to the Maxwellian distribution and provides a form suitable for  $J$ -pole expansion. This form enables a matrix-based approach [2, 12] with a smaller matrix dimension, allowing for the computation of all solutions without requiring initial guesses.

It is noted that the default GPDF basis may not be suitable for the perpendicular direction because the integral  $\int_0^{\infty} \frac{x^p}{1+x^2} dx$  diverges for  $p \geq 2$ , requiring modifications. Furthermore, in double-precision floating-point arithmetic, the Hermite basis may not perform well for highly accurate calculations of the parallel direction. However, for most applications, it is advantageous over the GPDF basis due to its smaller required matrix dimension. Quadruple precision can be used for more accurate computations [19].

In this work, we primarily demonstrate the calculation of the dispersion relation and its transformation into a matrix eigenvalue problem to solve for all solutions using Hermite-Hermite (HH) basis functions for the parallel and

perpendicular directions, respectively. For the GPDF-Hermite (GH) and GPDF-GPDF (GG) bases, we provide the final dispersion relations but omit the details of the matrix transformation.

## 2 Hermite-Hermite Basis Function Expansion

As previously mentioned, while arbitrary bases can be used for the expansion, selecting an appropriate basis can significantly enhance performance.

### 2.1 Choose the basis function

For simplicity, we choose Hermite basis for both parallel and perpendicular direction in this section to demonstrate the performance of our approach, with

$$f_{s0}(v_{\parallel}, v_{\perp}) = \sum_{l=0}^{\infty} \sum_{m=0}^{\infty} a_{s0,lm} \rho_{sz,l}(v_{\parallel}) u_{sx,m}(v_{\perp}), \quad -\infty < v_{\parallel} < \infty, \quad 0 \leq v_{\perp} < \infty, \quad (8)$$

where  $\rho_{sz,l}$  and  $u_{sx,m}$  are basis functions for parallel and perpendicular directions, with corresponding weight functions  $W_{sz}(v_{\parallel}) = W_{sx}(v_{\perp}) = 1$  are omitted in the above form, which satisfy

$$\int_{-\infty}^{\infty} \rho_{sz,n}(v) \rho_{sz,n'}^*(v) dv = A_{sz} \delta_{n,n'}, \quad \int_{-\infty}^{\infty} u_{sx,n}(v) u_{sx,n'}^*(v) dv = A_{sx} \delta_{n,n'}. \quad (9)$$

Here, the asterisk denotes complex conjugation and  $\delta_{n,n'}$  is the Kronecker delta. Thus, we have

$$a_{s0,lm} = \frac{1}{A_{sx} A_{sz}} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} f_{s0}(v_{\parallel}, v_{\perp}) \rho_{sz,l}^*(v_{\parallel}) u_{sx,m}^*(v_{\perp}) dv_{\parallel} dv_{\perp}. \quad (10)$$

We choose Hermite basis for  $v_{\parallel}$  direction

$$\rho_{sz,n}(z) = h_n\left(\frac{\sqrt{2}(z - d_{sz})}{L_{sz}}\right), \quad -\infty < z < \infty, \quad (11)$$

with corresponding velocity widths be  $L_{sz}$  and drift velocity  $d_{sz}$ . Here,  $\sqrt{2}$  is to convenient normalized to Maxwellian case as in BO code[12]. The basis function for perpendicular  $v_{\perp}$  direction is chosen as

$$u_{sx,n}(x) = h_n\left(\frac{\sqrt{2}(x - d_{sx})}{L_{sx}}\right), \quad -\infty < x < \infty, \quad (12)$$

with corresponding velocity widths be  $L_{sx}$  and ring beam velocity  $d_{sx}$ . For most studies, we can set  $d_{sx} = 0$ . Note that we have extend  $0 \leq v_{\perp} < \infty$  to  $-\infty < v_{\perp} < \infty$ , with  $f_{s0}(v_{\parallel}, v_{\perp}) = f_{s0}(v_{\parallel}, -v_{\perp})$ . Here  $h_n$  is Hermite function

$$h_n(y) = \sqrt{\frac{1}{2^n n! \sqrt{\pi}}} H_n(y) e^{-y^2/2}, \quad \int_{-\infty}^{\infty} h_n(y) h_{n'}(y) dy = \delta_{nn'}, \quad (13)$$

$$H_0(y) = 1, \quad H_1(y) = 2y, \quad H_2(y) = 4y^2 - 2, \quad H_3(y) = 8y^3 - 12y, \quad \dots \quad (14)$$

$$H'_n(y) = 2nH_{n-1}(y), \quad H_n(-y) = (-1)^n H_n(y), \quad H_{n+1}(y) = 2yH_n(y) - 2nH_{n-1}(y). \quad (15)$$

We have  $A_{sz} = L_{sz}/\sqrt{2}$  and  $A_{sx} = L_{sx}/\sqrt{2}$ . For later more convenient of calculations, we can rewrite the above expansion to the follow form

$$f_{s0}(v_{\parallel}, v_{\perp}) = \sum_{l=0}^{\infty} \sum_{m=0}^{\infty} a_{s0,lm} \rho_{sz,l}(v_{\parallel}) u_{sx,m}(v_{\perp}) = c_{s0} \sum_{l=0}^{\infty} \sum_{m=0}^{\infty} a_{s,lm} \cdot g_{sz,l}(v_{\parallel}) \cdot g_{sx,m}(v_{\perp}), \quad (16)$$

with

$$g_{sz,l}(v_{\parallel}) = \left(\frac{v_{\parallel} - d_{sz}}{L_{sz}}\right)^l e^{-\left(\frac{v_{\parallel} - d_{sz}}{L_{sz}}\right)^2}, \quad g_{sx,m}(v_{\perp}) = \left(\frac{v_{\perp} - d_{sx}}{L_{sx}}\right)^m e^{-\left(\frac{v_{\perp} - d_{sx}}{L_{sx}}\right)^2}, \quad (17)$$

and normalized coefficient

$$c_{s0} = \frac{1}{\pi^{3/2} L_{sz} L_{sx}^2 R_s}, \quad R_s = \exp\left(-\frac{d_{sx}^2}{L_{sx}^2}\right) + \frac{\sqrt{\pi} d_{sx}}{L_{sx}} \operatorname{erfc}\left(-\frac{d_{sx}}{L_{sx}}\right), \quad (18)$$

and  $\operatorname{erfc}(-x) = 1 - \operatorname{erf}(-x) = 1 + \operatorname{erf}(x)$  is the complementary error function. After obtaining the coefficients  $a_{s0,lm}$ , it is readily to calculate the coefficients  $a_{s,lm}$ . Note that this new  $g_{sx,m}$  is not orthogonal.

The benefits of the above choice of basis functions include: (1) It naturally reduces to the drift bi-Maxwellian ring beam case [12] by retaining only the lowest-order term with  $a_{s,00} = 1 \neq 0$ . (2) The parallel integral can be expressed with only one Maxwellian  $Z$  function, and the perpendicular integral can also be reduced to a single term at the outset. The second benefit allows the  $J$ -pole matrix method in BO [12] to be directly applied here, while maintaining the same matrix dimension, even if a larger  $J$  is required for accurate computation. This means that a small modification of the Maxwellian-based BO code is sufficient to handle generalized arbitrary distributions.

## 2.2 Calculate the dispersion relation

We define

$$f_{s0,lm}(v_{\parallel}, v_{\perp}) \equiv a_{s,lm} g_{sz,l}(v_{\parallel}) g_{sx,m}(v_{\perp}) = a_{s,lm} f_{s0z,l}(v_{\parallel}) f_{s0x,m}(v_{\perp}), \quad (19)$$

$$f_{s0}(v_{\parallel}, v_{\perp}) = c_{s0} \sum_{l=0}^{\infty} \sum_{m=0}^{\infty} f_{s0,lm}(v_{\parallel}, v_{\perp}), \quad f_{s0z,l}(v_{\parallel}) \equiv g_{sz,l}(v_{\parallel}), \quad f_{s0x,m}(v_{\perp}) \equiv g_{sx,m}(v_{\perp}). \quad (20)$$

Hence, we have

$$\frac{\partial f_{s0,lm}}{\partial v_{\parallel}} = a_{s,lm} f_{s0x,m}(v_{\perp}) \frac{\partial f_{s0z,l}(v_{\parallel})}{\partial v_{\parallel}}, \quad \frac{\partial f_{s0,lm}}{\partial v_{\perp}} = a_{s,lm} f_{s0z,l}(v_{\parallel}) \frac{\partial f_{s0x,m}(v_{\perp})}{\partial v_{\perp}}, \quad (21)$$

$$\frac{\partial f_{s0z,l}(v_{\parallel})}{\partial v_{\parallel}} = -\frac{1}{L_{sz}} [2f_{s0z,l+1} - lf_{s0z,l-1}], \quad (22)$$

$$\frac{\partial f_{s0x,m}(v_{\perp})}{\partial v_{\perp}} = -\frac{1}{L_{sx}} [2f_{s0x,m+1} - mf_{s0x,m-1}]. \quad (23)$$

Here, we set  $f_{s0z,l} = f_{s0x,m} = 0$  for all  $l, m < 0$ . The above derivatives equations are valid for all  $l, m = 0, 1, 2, \dots$ . We have also numerically checked the valid of the above two derivatives.

For parallel integral [ $\operatorname{Im}(\zeta_{sn}) > 0$ ], define

$$Z_{l,p}(\zeta_{sn}) \equiv -\frac{k_{\parallel}}{L_{sz}^p \sqrt{\pi}} \int_{-\infty}^{\infty} \frac{v_{\parallel}^p}{\omega - k_{\parallel} v_{\parallel} - n\omega_{cs}} \left(\frac{v_{\parallel} - d_{sz}}{L_{sz}}\right)^l e^{-\left(\frac{v_{\parallel} - d_{sz}}{L_{sz}}\right)^2} dv_{\parallel} = \frac{1}{\sqrt{\pi}} \int_{-\infty}^{\infty} \frac{g_{l,p}(z)}{z - \zeta_{sn}} dz, \quad g_{l,p}(z) \equiv (z + d)^p z^l e^{-z^2}, \quad (24)$$

we have[1]

$$Z_{0,0}(\zeta) = Z(\zeta), \quad Z_{1,0}(\zeta) = [1 + \zeta Z(\zeta)], \quad Z_{2,0}(\zeta) = \zeta [1 + \zeta Z(\zeta)], \quad (25)$$

$$Z_{3,0}(\zeta) = \frac{1}{2} + \zeta^2 [1 + \zeta Z(\zeta)], \quad Z_{l+1,0}(\zeta) = \zeta Z_{l,0} + I_l, \quad (26)$$

$$Z_{l,1} = dZ_{l,0} + Z_{l+1,0}, \quad Z_{l,2} = d^2 Z_{l,0} + 2dZ_{l+1,0} + Z_{l+2,0}, \quad (27)$$

with  $\zeta_{sn} = \frac{\omega - k_{\parallel} d_{sz} - n\omega_{cs}}{k_{\parallel} L_{sz}}$ ,  $d = \frac{d_{sz}}{L_{sz}}$ ,  $p = 0, 1, 2$ . And we redefine  $Z_{l,0} \equiv Z_l$  for simplify the notation. Here,  $I_{2l+1} \equiv \pi^{-1/2} \int_{-\infty}^{\infty} x^{2l+1} e^{-x^2} dx = 0$  and  $I_{2l} \equiv \pi^{-1/2} \int_{-\infty}^{\infty} x^{2l} e^{-x^2} dx = \Gamma(l + \frac{1}{2})/\sqrt{\pi}$ , where  $\Gamma$  is Euler Gamma function, and  $I_0 = 1$ ,  $I_{2l} = \frac{2l-1}{2l} I_{2l-2}$ . Here,  $Z_0^{(l)}(\zeta)$  means  $l$ -th derivatatives of  $Z_0(\zeta)$ . The above functions can be readily[1] calculated to high accuracy used the standard Maxwellian plasma dispersion functions  $Z(\zeta)$ . Also, it can be rewritten to J-pole expansion form[17, 12].

For perpendicular integral

$$\Gamma_{an,m,p}(a_s, d_s) \equiv \frac{1}{L_{sx}^{p+1}} \int_0^{\infty} v_{\perp}^p J_n^2\left(\frac{k_{\perp} v_{\perp}}{\omega_{cs}}\right) \left(\frac{v_{\perp} - d_{sx}}{L_{sx}}\right)^m e^{-\left(\frac{v_{\perp} - d_{sx}}{L_{sx}}\right)^2} dv_{\perp} = \int_0^{\infty} x^p J_n^2(a_s x) (x - d_s)^m e^{-(x - d_s)^2} dx,$$

$$\Gamma_{bn,m,p}(a_s, d_s) \equiv \frac{1}{L_{sx}^{p+1}} \int_0^{\infty} v_{\perp}^p J_n\left(\frac{k_{\perp} v_{\perp}}{\omega_{cs}}\right) J'_n\left(\frac{k_{\perp} v_{\perp}}{\omega_{cs}}\right) \left(\frac{v_{\perp} - d_{sx}}{L_{sx}}\right)^m e^{-\left(\frac{v_{\perp} - d_{sx}}{L_{sx}}\right)^2} dv_{\perp} = \int_0^{\infty} x^p J_n(a_s x) J'_n(a_s x) (x - d_s)^m e^{-(x - d_s)^2} dx,$$

$$\Gamma_{cn,m,p}(a_s, d_s) \equiv \frac{1}{L_{sx}^{p+1}} \int_0^{\infty} v_{\perp}^p {J'_n}^2\left(\frac{k_{\perp} v_{\perp}}{\omega_{cs}}\right) \left(\frac{v_{\perp} - d_{sx}}{L_{sx}}\right)^m e^{-\left(\frac{v_{\perp} - d_{sx}}{L_{sx}}\right)^2} dv_{\perp} = \int_0^{\infty} x^p {J'_n}^2(a_s x) (x - d_s)^m e^{-(x - d_s)^2} dx.$$

with  $a_s = k_\perp \rho_{cs}$ ,  $d_s = d_{sx}/L_{sx}$ ,  $\rho_{cs} = L_{sx}/\omega_{cs}$ ,  $p = 0, 1, 2, 3$ . These integrals can be calculated numerically[12]. For  $d_{sx} = 0$ , they are relevant to the modified Bessel functions of the first kind as in the Maxwellian case.

Note that we have the normalized condition:  $1 = \int_{-\infty}^{\infty} \int_0^{\infty} 2\pi v_\perp f_{s0} dv_\perp dv_\parallel = 2\pi c_{s0} \sum_{l,m} a_{s,lm} \int_{-\infty}^{\infty} \int_0^{\infty} v_\perp g_{sz,l} g_{sx,m} dv_\perp dv_\parallel = 2\pi^{3/2} L_{sz} L_{sx}^2 c_{s0} \sum_{l,m} a_{s,lm} I_l \int_0^{\infty} x(x - d_s)^m e^{-(x-d_s)^2} dx$ .

Hence, we have

$$A_s = -c_{s0} \sum_l \sum_m a_{s,lm} \left\{ \frac{\omega - k_\parallel v_\parallel}{\omega} f_{s0z,l} \frac{1}{L_{sx}} [2f_{s0x,m+1} - mf_{s0x,m-1}] + \frac{k_\parallel v_\perp}{\omega} f_{s0x,m} \frac{1}{L_{sz}} [2f_{s0z,l+1} - lf_{s0z,l-1}] \right\},$$

$$B_s = -c_{s0} \sum_l \sum_m a_{s,lm} \left\{ \frac{n\omega_{cs} v_\parallel}{\omega v_\perp} f_{s0z,l} \frac{1}{L_{sx}} [2f_{s0x,m+1} - mf_{s0x,m-1}] + \frac{\omega - n\omega_{cs}}{\omega} f_{s0x,m} \frac{1}{L_{sz}} [2f_{s0z,l+1} - lf_{s0z,l-1}] \right\}.$$

Define

$$\mathbf{X}_{sn} = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi \omega v_\perp dv_\perp dv_\parallel}{\omega - k_\parallel v_\parallel - n\omega_{cs}} \times \begin{bmatrix} A_s \frac{n^2 v_\perp}{\mu_s^2} J_n^2 & i A_s \frac{n v_\perp}{\mu_s} J_n J'_n & B_s \frac{n v_\perp}{\mu_s} J_n^2 \\ -i A_s \frac{n v_\perp}{\mu_s} J_n J'_n & A_s v_\perp J_n'^2 & -i B_s v_\perp J_n J'_n \\ A_s \frac{n^2 v_\parallel}{\mu_s} J_n^2 & i A_s v_\parallel J_n J'_n & B_s v_\parallel J_n^2 \end{bmatrix}. \quad (31)$$

We have

$$X_{sn11} = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi \omega v_\perp dv_\perp dv_\parallel}{\omega - k_\parallel v_\parallel - n\omega_{cs}} \times A_s \frac{n^2 v_\perp}{\mu_s^2} J_n^2 = \frac{n^2 \omega_{cs}^2}{k_\perp^2} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi \omega dv_\perp dv_\parallel}{\omega - k_\parallel v_\parallel - n\omega_{cs}} \times A_s J_n^2$$

$$= -c_{s0} \frac{n^2 \omega_{cs}^2}{k_\perp^2} \sum_l \sum_m a_{s,lm} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi \omega dv_\perp dv_\parallel}{\omega - k_\parallel v_\parallel - n\omega_{cs}} \times \left\{ \frac{\omega - k_\parallel v_\parallel}{\omega} f_{s0z,l} \frac{1}{L_{sx}} [2f_{s0x,m+1} - mf_{s0x,m-1}] \right.$$

$$\left. + \frac{k_\parallel v_\perp}{\omega} f_{s0x,m} \frac{1}{L_{sz}} [2f_{s0z,l+1} - lf_{s0z,l-1}] \right\} J_n^2$$

$$= 2 \frac{1}{L_{sz} L_{sx}^2 R_s} \frac{n^2 \omega_{cs}^2}{k_\perp^2} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{\omega}{k_\parallel} Z_{l,0} - L_{sz} Z_{l,1} \right) [2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}] + \Gamma_{an,m,1} \frac{L_{sx}^2}{L_{sz}} [2Z_{l+1,0} - lZ_{l-1,0}] \right\}$$

$$= \frac{2}{R_s} \frac{n^2 \omega_{cs}^2}{k_\perp^2 L_{sx}^2} \sum_l \sum_m a_{s,lm} \left\{ \left( \zeta_{sn} Z_{l,0} + \frac{n\omega_{cs}}{k_\parallel L_{sz}} Z_{l,0} - Z_{l+1,0} \right) [2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}] + \Gamma_{an,m,1} \frac{L_{sx}^2}{L_{sz}^2} [2Z_{l+1,0} - lZ_{l-1,0}] \right\}$$

$$= \frac{2}{R_s} \frac{n^2 \omega_{cs}^2}{k_\perp^2 L_{sx}^2} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{n\omega_{cs}}{k_\parallel L_{sz}} Z_l - I_l \right) (2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}) + \Gamma_{an,m,1} \frac{L_{sx}^2}{L_{sz}^2} (2Z_{l+1} - lZ_{l-1}) \right\},$$

$$X_{sn12} = -X_{sn21} = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi \omega v_\perp dv_\perp dv_\parallel}{\omega - k_\parallel v_\parallel - n\omega_{cs}} \times i A_s \frac{n v_\perp}{\mu_s} J_n J'_n = i \frac{n\omega_{cs}}{k_\perp} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi \omega v_\perp dv_\perp dv_\parallel}{\omega - k_\parallel v_\parallel - n\omega_{cs}} \times A_s J_n J'_n$$

$$= \frac{2i}{L_{sz} L_{sx}^2 R_s} \frac{n\omega_{cs}}{k_\perp} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{\omega}{k_\parallel} Z_{l,0} - L_{sz} Z_{l,1} \right) [2\Gamma_{bn,m+1,1} - m\Gamma_{bn,m-1,1}] + \Gamma_{bn,m,2} \frac{L_{sx}^2}{L_{sz}} [2Z_{l+1,0} - lZ_{l-1,0}] \right\}$$

$$= \frac{2i}{R_s} \frac{n\omega_{cs}}{k_\perp L_{sx}} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{n\omega_{cs}}{k_\parallel L_{sz}} Z_l - I_l \right) [2\Gamma_{bn,m+1,1} - m\Gamma_{bn,m-1,1}] + \Gamma_{bn,m,2} \frac{L_{sx}^2}{L_{sz}^2} [2Z_{l+1} - lZ_{l-1}] \right\}$$

$$\rightarrow \frac{2i}{R_s} \frac{n\omega_{cs}}{k_\perp L_{sx}} \sum_l \sum_m a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_\parallel L_{sz}} Z_l (2\Gamma_{bn,m+1,1} - m\Gamma_{bn,m-1,1}) + \Gamma_{bn,m,2} \frac{L_{sx}^2}{L_{sz}^2} (2Z_{l+1} - lZ_{l-1}) \right\},$$

$$X_{sn22} = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi \omega v_\perp dv_\perp dv_\parallel}{\omega - k_\parallel v_\parallel - n\omega_{cs}} \times A_s v_\perp J_n'^2 = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi \omega v_\perp dv_\perp dv_\parallel}{\omega - k_\parallel v_\parallel - n\omega_{cs}} \times A_s v_\perp J_n'^2$$

$$= 2 \frac{1}{L_{sz} R_s} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{\omega}{k_\parallel} Z_{l,0} - L_{sz} Z_{l,1} \right) [2\Gamma_{cn,m+1,2} - m\Gamma_{cn,m-1,2}] + \Gamma_{cn,m,3} \frac{L_{sx}^2}{L_{sz}} [2Z_{l+1,0} - lZ_{l-1,0}] \right\}$$

$$= \frac{2}{R_s} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{n\omega_{cs}}{k_\parallel L_{sz}} Z_l - I_l \right) (2\Gamma_{cn,m+1,2} - m\Gamma_{cn,m-1,2}) + \Gamma_{cn,m,3} \frac{L_{sx}^2}{L_{sz}^2} (2Z_{l+1} - lZ_{l-1}) \right\},$$

$$\begin{aligned}
X_{sn31} &= \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s \frac{nv_{\parallel}}{\mu_s} J_n^2 = \frac{n\omega_{cs}}{k_{\perp}} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\parallel} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s J_n^2 \\
&= 2 \frac{1}{L_{sx}^2 R_s} \frac{n\omega_{cs}}{k_{\perp}} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{\omega}{k_{\parallel}} Z_{l,1} - L_{sz} Z_{l,2} \right) [2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}] + \Gamma_{an,m,1} \frac{L_{sx}^2}{L_{sz}} [2Z_{l+1,1} - lZ_{l-1,1}] \right\} \\
&= 2 \frac{1}{L_{sx}^2 R_s} \frac{n\omega_{cs}}{k_{\perp}} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{n\omega_{cs}}{k_{\parallel}} \left( \frac{d_{sz}}{L_{sz}} Z_l + Z_{l+1} \right) - d_{sz} I_l - L_{sz} I_{l+1} \right) [2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}] \right. \\
&\quad \left. + \Gamma_{an,m,1} \frac{L_{sx}^2}{L_{sz}} [2\left( \frac{d_{sz}}{L_{sz}} Z_{l+1} + Z_{l+2} \right) - l\left( \frac{d_{sz}}{L_{sz}} Z_{l-1} + Z_l \right)] \right\} \\
&\rightarrow 2 \frac{L_{sz}}{L_{sx} R_s} \frac{n\omega_{cs}}{k_{\perp} L_{sx}} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} \left( \frac{d_{sz}}{L_{sz}} Z_l + Z_{l+1} \right) \right) (2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}) \right. \\
&\quad \left. + \Gamma_{an,m,1} \frac{L_{sx}^2}{L_{sz}^2} [2\left( \frac{d_{sz}}{L_{sz}} Z_{l+1} + Z_{l+2} \right) - l\left( \frac{d_{sz}}{L_{sz}} Z_{l-1} + Z_l \right)] \right\}, \\
X_{sn32} &= \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times i A_s v_{\parallel} J_n J'_n = i \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\parallel} v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s J_n J'_n \\
&= \frac{2i}{L_{sz} L_{sx}^2 R_s} L_{sz} L_{sx} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{\omega}{k_{\parallel}} Z_{l,1} - L_{sz} Z_{l,2} \right) [2\Gamma_{bn,m+1,1} - m\Gamma_{bn,m-1,1}] + \Gamma_{bn,m,2} \frac{L_{sx}^2}{L_{sz}} [2Z_{l+1,1} - lZ_{l-1,1}] \right\} \\
&= \frac{2i L_{sz}}{L_{sx} R_s} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} \left( \frac{d_{sz}}{L_{sz}} Z_l + Z_{l+1} \right) - d_{sz} I_l - L_{sz} I_{l+1} \right) [2\Gamma_{bn,m+1,1} - m\Gamma_{bn,m-1,1}] \right. \\
&\quad \left. + \Gamma_{bn,m,2} \frac{L_{sx}^2}{L_{sz}^2} [2\left( \frac{d_{sz}}{L_{sz}} Z_{l+1} + Z_{l+2} \right) - l\left( \frac{d_{sz}}{L_{sz}} Z_{l-1} + Z_l \right)] \right\} \\
&\rightarrow \frac{2i L_{sz}}{L_{sx} R_s} \sum_l \sum_m a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} \left( \frac{d_{sz}}{L_{sz}} Z_l + Z_{l+1} \right) (2\Gamma_{bn,m+1,1} - m\Gamma_{bn,m-1,1}) \right. \\
&\quad \left. + \Gamma_{bn,m,2} \frac{L_{sx}^2}{L_{sz}^2} [2\left( \frac{d_{sz}}{L_{sz}} Z_{l+1} + Z_{l+2} \right) - l\left( \frac{d_{sz}}{L_{sz}} Z_{l-1} + Z_l \right)] \right\},
\end{aligned}$$

and

$$\begin{aligned}
X_{sn13} &= \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times B_s \frac{nv_{\perp}}{\mu_s} J_n^2 = \frac{n\omega_{cs}}{k_{\perp}} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times B_s J_n^2 \\
&= -2\pi \frac{n\omega_{cs}}{k_{\perp}} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times \sum_l \sum_m a_{s,lm} \left\{ (n\omega_{cs} v_{\parallel}) f_{s0z,l} \frac{1}{L_{sx}} [2f_{s0x,m+1} - m f_{s0x,m-1}] \right. \\
&\quad \left. + (\omega - n\omega_{cs}) v_{\perp} f_{s0x,m} \frac{1}{L_{sz}} [2f_{s0z,l+1} - l f_{s0z,l-1}] \right\} J_n^2 \\
&= \frac{2}{L_{sz} L_{sx}^2 R_s} \frac{n\omega_{cs}}{k_{\perp} k_{\parallel}} L_{sz} \sum_l \sum_m a_{s,lm} \left\{ n\omega_{cs} Z_{l,1} [2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}] + (\omega - n\omega_{cs}) \frac{L_{sx}^2}{L_{sz}^2} \Gamma_{an,m,1} [2Z_{l+1,0} - lZ_{l-1,0}] \right\} \\
&= \frac{2}{L_{sx}^2 R_s} \frac{n\omega_{cs}}{k_{\perp} k_{\parallel}} \sum_l \sum_m a_{s,lm} \left\{ n\omega_{cs} \left( \frac{d_{sz}}{L_{sz}} Z_l + Z_{l+1} \right) [2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}] \right. \\
&\quad \left. + \frac{L_{sx}^2}{L_{sz}^2} \Gamma_{an,m,1} [k_z L_{sz} (2(Z_{l+2} - I_{l+1}) - l(Z_l - I_{l-1})) + k_z d_{sz} (2Z_{l+1} - lZ_{l-1})] \right\} \\
&\rightarrow \frac{2}{R_s} \frac{n\omega_{cs}}{k_{\perp} L_{sx}} \sum_l \sum_m a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_z L_{sx}} \left( \frac{d_{sz}}{L_{sz}} Z_l + Z_{l+1} \right) (2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}) \right. \\
&\quad \left. + \frac{L_{sx}}{L_{sz}} \Gamma_{an,m,1} [(2Z_{l+2} - lZ_l) + \frac{d_{sz}}{L_{sz}} (2Z_{l+1} - lZ_{l-1})] \right\} \rightarrow X_{sn31},
\end{aligned}$$

$$\begin{aligned}
X_{sn23} &= - \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel} v_{\parallel} - n\omega_{cs}} \times (-iB_s v_{\perp} J_n J'_n) = -i \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp}^2 dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel} v_{\parallel} - n\omega_{cs}} \times B_s J_n J'_n \\
&= \frac{-2i}{L_{sz} L_{sx}^2 R_s} \frac{L_{sx}}{k_{\parallel}} L_{sz} \sum_l \sum_m a_{s,lm} \left\{ n\omega_{cs} Z_{l,1} [2\Gamma_{bn,m+1,1} - m\Gamma_{bn,m-1,1}] + (\omega - n\omega_{cs}) \frac{L_{sx}^2}{L_{sz}^2} \Gamma_{bn,m,2} [2Z_{l+1,0} - lZ_{l-1,0}] \right\} \\
&= \frac{-2i}{L_{sz} L_{sx}^2 R_s} \frac{L_{sx}}{k_{\parallel}} L_{sz} \sum_l \sum_m a_{s,lm} \left\{ n\omega_{cs} \left( \frac{d_{sz}}{L_{sz}} Z_l + Z_{l+1} \right) [2\Gamma_{bn,m+1,1} - m\Gamma_{bn,m-1,1}] \right. \\
&\quad \left. + \frac{L_{sx}^2}{L_{sz}^2} \Gamma_{bn,m,2} [k_z L_{sz} (2(Z_{l+2} - I_{l+1}) - l(Z_l - I_{l-1})) + k_z d_{sz} (2Z_{l+1} - lZ_{l-1})] \right\} \\
&\rightarrow \frac{-2i}{R_s} \sum_l \sum_m a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_z L_{sz}} \left( \frac{d_{sz}}{L_{sz}} Z_l + Z_{l+1} \right) (2\Gamma_{bn,m+1,1} - m\Gamma_{bn,m-1,1}) \right. \\
&\quad \left. + \frac{L_{sx}^2}{L_{sz}^2} \Gamma_{bn,m,2} [(2Z_{l+2} - lZ_l) + \frac{d_{sz}}{L_{sz}} (2Z_{l+1} - lZ_{l-1})] \right\} \rightarrow -X_{sn32},
\end{aligned}$$
  

$$\begin{aligned}
X_{sn33} &= \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel} v_{\parallel} - n\omega_{cs}} \times B_s v_{\parallel} J_n^2 = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\parallel} v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel} v_{\parallel} - n\omega_{cs}} \times B_s J_n^2 \\
&= \frac{2}{L_{sz} L_{sx}^2 R_s} \frac{L_{sz}^2}{k_{\parallel}} \sum_l \sum_m a_{s,lm} \left\{ n\omega_{cs} Z_{l,2} [2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}] + (\omega - n\omega_{cs}) \frac{L_{sx}^2}{L_{sz}^2} \Gamma_{an,m,1} [2Z_{l+1,1} - lZ_{l-1,1}] \right\} \\
&= \frac{2}{R_s L_{sx}^2} \sum_l \sum_m a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_z L_{sz}} \left( \frac{d_{sz}^2}{L_{sz}} Z_l + 2 \frac{d_{sz}}{L_{sz}} Z_{l+1} + Z_{l+2} \right) (2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}) \right. \\
&\quad \left. + \frac{L_{sx}^2}{L_{sz}^2} \Gamma_{an,m,1} [(2 \frac{d_{sz}}{L_{sz}} (Z_{l+2} - I_{l+1}) + 2(Z_{l+3} - I_{l+2}) - l \frac{d_{sz}}{L_{sz}} (Z_l - I_{l-1}) - l(Z_{l+1} - I_l)) \right. \\
&\quad \left. + \frac{d_{sz}}{L_{sz}} (2 \frac{d_{sz}}{L_{sz}} Z_{l+1} + 2Z_{l+2} - l \frac{d_{sz}}{L_{sz}} Z_{l-1} - lZ_l)] \right\},
\end{aligned}$$

where

$$\mathbf{Q} = \sum_s \mathbf{Q}_s, \quad \mathbf{Q}_s = \frac{\omega_{ps}^2}{\omega^2} \mathbf{P}_s, \quad \mathbf{P}_s = \sum_n \mathbf{P}_{sn}, \quad \mathbf{P}_{sn} = c_{s0} \mathbf{X}_{sn}. \quad (32)$$

Here, ' $\rightarrow$ ' means the constant terms  $I_l$  has been summation out for  $n$ . We have used  $\sum_{n=-\infty}^{\infty} J_n J'_n = 0$ ,  $\sum_{n=-\infty}^{\infty} n J_n^2 = 0$ ,  $\sum_{n=-\infty}^{\infty} n J_n J'_n = 0$ ,  $\sum_{n=-\infty}^{\infty} J_n^2 = 1$ ,  $\sum_{n=-\infty}^{\infty} (J'_n)^2 = \frac{1}{2}$  and  $\sum_{n=-\infty}^{\infty} \frac{n^2 J_n^2}{x^2} = \frac{1}{2}$ .

Keep only the  $l=0, m=0$  terms, the above dispersion relation can reduce to the drift bi-Maxwellian ring beam case[12]. By further set  $d_{sx} = 0$ , it can reduce to the drift bi-Maxwellian case[2].

After the above expansion, the dispersion relation Eq. (1) can be readily solved using conventional iterative root-finding methods. Since the perpendicular integral  $\Gamma(a_s)$  needs to be calculated only once, and the parallel integrals  $Z(\zeta_{sn})$  are related to the Maxwellian  $Z$  function and can be computed efficiently [1, 17], this approach can achieve high-accuracy solutions with reduced computational cost. In principle, this new approach can surpass previous methods [7, 8, 9, 5, 10] in both accuracy and speed. Beyond these advantages, we aim to go further—eliminating the requirement for an initial guess, as implemented in the BO code [2, 12, 14, 13].

### 2.3 Transfrom to Matrix Eigenvalue Problem

We only consider  $k_z \geq 0$  here, for Maxwellian  $Z$  function J-pole expansion, we have[12]

$$Z_l(\zeta) \simeq \sum_{j=1}^J \frac{b_j c_j^l}{\zeta - c_j}, \quad (33)$$

Here, we have used[17]  $\sum_j b_j = -1$ ,  $\sum_j b_j c_j = 0$ ,  $\sum_j b_j c_j^2 = -1/2$ ,  $\sum_j b_j c_j^3 = 0$ ,  $\dots$ . This also means that if we need high order Hermite fitting of distribution function, the corresponding coefficients should also keep to similar

order, usually we need set  $J \geq l_{max} + 4$ . To double precision, we have calculated to  $J = 24$ . Hence, the present solver can support to  $l_{max} \simeq 20$ . Though higher  $l_{max}$  can also calculate, the accuracy would reduce.

The electromagnetic case is much complicated. However, the linear transformation for  $\mathbf{Q}(\omega, \mathbf{k})$  is still similar to the original BO-K/PDRK derivation.

To seek an equivalent linear system, the Maxwell's equations

$$\partial_t \mathbf{E} = c^2 \nabla \times \mathbf{B} - \mathbf{J}/\epsilon_0, \quad (34a)$$

$$\partial_t \mathbf{B} = -\nabla \times \mathbf{E}, \quad (34b)$$

do not need to be changed. We only need to seek a new linear system for  $\mathbf{J} = \boldsymbol{\sigma} \cdot \mathbf{E}$ .

Considering the definition  $\boldsymbol{\sigma}_s = -i\epsilon_0\omega\mathbf{Q}_s = -i\epsilon_0\frac{\omega_{ps}^2}{\omega}\mathbf{P}_s$ , after  $J$ -pole expansion, we have

- $P_{s11} = \sum_n \frac{2}{R_s} \frac{n^2 \omega_{cs}^2}{k_\perp^2 L_{sz}^2} \sum_{l,m} a_{s,lm} \left\{ \left( \frac{n\omega_{cs}}{k_\parallel L_{sz}} Z_l - I_l \right) (2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}) + \Gamma_{an,m,1} \frac{L_{sz}^2}{L_{sz}^2} (2Z_{l+1} - lZ_{l-1}) \right\}$   
 $\simeq \sum_{n,j} \frac{2}{R_s} \frac{n^2 \omega_{cs}^2}{k_\perp^2 L_{sz}^2} \frac{k_z L_{sz} b_j}{\omega - c_{snj}} \sum_{l,m} a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_\parallel L_{sz}} c_j^l (2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}) + \Gamma_{an,m,1} \frac{L_{sz}^2}{L_{sz}^2} [2c_j^{l+1} - lc_j^{l-1}] \right\}$   
 $- \frac{2}{R_s} \frac{\omega_{cs}^2}{k_\perp^2 L_{sz}^2} \sum_{l,m} a_{s,lm} \left\{ I_l \sum_n n^2 (2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}) \right\} = \sum_{n,j} \frac{p_{11snj}}{\omega - c_{snj}} - 1$
- $P_{s12} \simeq \sum_{n,j} \frac{2i}{R_s} \frac{n\omega_{cs}}{k_\perp L_{sz}} \frac{k_z L_{sz} b_j}{\omega - c_{snj}} \sum_{l,m} a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_\parallel L_{sz}} c_j^l (2\Gamma_{bn,m+1,1} - m\Gamma_{bn,m-1,1}) + \Gamma_{bn,m,2} \frac{L_{sz}^2}{L_{sz}^2} (2c_j^{l+1} - lc_j^{l-1}) \right\} = \sum_{n,j} \frac{p_{12snj}}{\omega - c_{snj}}.$
- $P_{s21} \simeq \sum_{n,j} \frac{p_{21snj}}{\omega - c_{snj}} = \sum_{n,j} \frac{-p_{12snj}}{\omega - c_{snj}}.$
- $P_{s22} \simeq -\sum_n \frac{2}{R_s} \sum_{l,m} a_{s,lm} \left\{ I_l (2\Gamma_{cn,m+1,2} - m\Gamma_{cn,m-1,2}) \right\} + \sum_{n,j} \frac{2}{R_s} \frac{k_z L_{sz} b_j}{\omega - c_{snj}} \sum_{l,m} a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_\parallel L_{sz}} c_j^l (2\Gamma_{cn,m+1,2} - m\Gamma_{cn,m-1,2}) + \Gamma_{cn,m,3} \frac{L_{sz}^2}{L_{sz}^2} (2c_j^{l+1} - lc_j^{l-1}) \right\} = -1 + \sum_{n,j} \frac{p_{22snj}}{\omega - c_{snj}}.$
- $P_{s13} \simeq \sum_{n,j} \frac{2}{R_s} \frac{n\omega_{cs}}{k_\perp L_{sz}} \frac{k_z L_{sz} b_j}{\omega - c_{snj}} \sum_{l,m} a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_z L_{sz}} (\frac{d_{sz}}{L_{sz}} c_j^l + c_j^{l+1}) (2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}) + \frac{L_{sz}}{L_{sz}} \Gamma_{an,m,1} [(2c_j^{l+2} - lc_j^l) + \frac{d_{sz}}{L_{sz}} (2c_j^{l+1} - lc_j^{l-1})] \right\} = \sum_{n,j} \frac{p_{13snj}}{\omega - c_{snj}}.$
- $P_{s31} \simeq \sum_{n,j} \frac{2}{R_s} \frac{n\omega_{cs}}{k_\perp L_{sz}} \frac{k_z L_{sz} b_j}{\omega - c_{snj}} \sum_{l,m} a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_\parallel L_{sz}} (\frac{d_{sz}}{L_{sz}} c_j^l + c_j^{l+1}) (2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}) + \Gamma_{an,m,1} \frac{L_{sz}}{L_{sz}} [2(\frac{d_{sz}}{L_{sz}} c_j^{l+1} + c_j^{l+2}) - l(\frac{d_{sz}}{L_{sz}} c_j^{l-1} + c_j^l)] \right\} = \sum_{n,j} \frac{p_{31snj}}{\omega - c_{snj}}.$
- $P_{s23} \simeq -\sum_{n,j} \frac{2i}{R_s} \frac{k_z L_{sz} b_j}{\omega - c_{snj}} \sum_{l,m} a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_z L_{sz}} (\frac{d_{sz}}{L_{sz}} c_j^l + c_j^{l+1}) (2\Gamma_{bn,m+1,1} - m\Gamma_{bn,m-1,1}) + \frac{L_{sz}}{L_{sz}} \Gamma_{bn,m,2} [(2c_j^{l+2} - lc_j^l) + \frac{d_{sz}}{L_{sz}} (2c_j^{l+1} - lc_j^{l-1})] \right\} = \sum_{n,j} \frac{p_{23snj}}{\omega - c_{snj}}.$
- $P_{s32} \simeq \sum_{n,j} \frac{2i}{R_s} \frac{k_z L_{sz} b_j}{\omega - c_{snj}} \sum_{l,m} a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_\parallel L_{sz}} (\frac{d_{sz}}{L_{sz}} c_j^l + c_j^{l+1}) (2\Gamma_{bn,m+1,1} - m\Gamma_{bn,m-1,1}) + \Gamma_{bn,m,2} \frac{L_{sz}}{L_{sz}} [2(\frac{d_{sz}}{L_{sz}} c_j^{l+1} + c_j^{l+2}) - l(\frac{d_{sz}}{L_{sz}} c_j^{l-1} + c_j^l)] \right\} = \sum_{n,j} \frac{p_{32snj}}{\omega - c_{snj}}.$
- $P_{s33} \simeq \sum_{n,j} \frac{2}{R_s} \frac{L_{sz}}{L_{sz}} \frac{k_z L_{sz} b_j}{\omega - c_{snj}} \sum_{l,m} a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_z L_{sz}} (\frac{d_{sz}}{L_{sz}} c_j^l + 2\frac{d_{sz}}{L_{sz}} c_j^{l+1} + c_j^{l+2}) (2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}) + \frac{L_{sz}}{L_{sz}} \Gamma_{an,m,1} [(2\frac{d_{sz}}{L_{sz}} c_j^{l+2} + 2c_j^{l+3} - l\frac{d_{sz}}{L_{sz}} c_j^l - lc_j^{l+1}) + \frac{d_{sz}}{L_{sz}} (2\frac{d_{sz}}{L_{sz}} c_j^{l+1} + 2c_j^{l+2} - l\frac{d_{sz}}{L_{sz}} c_j^{l-1} - lc_j^l)] \right\} - \sum_n \frac{2}{R_s} \sum_{l,m} a_{s,lm} \left\{ \Gamma_{an,m,1} (2\frac{d_{sz}}{L_{sz}} I_{l+1} + 2I_{l+2} - l\frac{d_{sz}}{L_{sz}} I_{l-1} - lI_l) \right\} = -1 + \sum_{n,j} \frac{p_{33snj}}{\omega - c_{snj}}.$

Here,  $\sum_{n,j} = \sum_{n=-\infty}^{\infty} \sum_{j=1}^J$  and  $\sum_{l,m} = \sum_l \sum_m$ . In the above, say,  $p_{11snj} = \frac{2}{R_s} \frac{n^2 \omega_{cs}^2}{k_\perp^2 L_{sz}^2} k_z L_{sz} b_j \sum_{l,m} a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_\parallel L_{sz}} c_j^l (2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}) + \Gamma_{an,m,1} \frac{L_{sz}^2}{L_{sz}^2} [2c_j^{l+1} - lc_j^{l-1}] \right\}$ , and other terms are similar.

It is thus easy to find that after  $J$ -pole expansion, the relations between  $\mathbf{J}$  and  $\mathbf{E}$  has the following form

$$\begin{pmatrix} J_x \\ J_y \\ J_z \end{pmatrix} = -i\epsilon_0 \begin{pmatrix} \frac{b_{11}}{\omega} + \sum_{snj} \frac{b_{snj11}}{\omega - c_{snj}} & \frac{b_{12}}{\omega} + \sum_{snj} \frac{b_{snj12}}{\omega - c_{snj}} & \frac{b_{13}}{\omega} + \sum_{snj} \frac{b_{snj13}}{\omega - c_{snj}} \\ \frac{b_{21}}{\omega} + \sum_{snj} \frac{b_{snj21}}{\omega - c_{snj}} & \frac{b_{22}}{\omega} + \sum_{snj} \frac{b_{snj22}}{\omega - c_{snj}} & \frac{b_{23}}{\omega} + \sum_{snj} \frac{b_{snj23}}{\omega - c_{snj}} \\ \frac{b_{31}}{\omega} + \sum_{snj} \frac{b_{snj31}}{\omega - c_{snj}} & \frac{b_{32}}{\omega} + \sum_{snj} \frac{b_{snj32}}{\omega - c_{snj}} & \frac{b_{33}}{\omega} + \sum_{snj} \frac{b_{snj33}}{\omega - c_{snj}} \end{pmatrix} \begin{pmatrix} E_x \\ E_y \\ E_z \end{pmatrix}. \quad (35)$$

with the coefficients

$$\left\{ \begin{array}{l} b_{snj11} = \omega_{ps}^2 p_{11snj} / c_{snj}, \quad b_{11} = -\sum_s \omega_{ps}^2 [\sum_n \frac{2}{R_s} \frac{\omega_{cs}^2}{k_\perp^2 L_{sx}^2} \sum_{l,m} a_{s,lm} \left\{ I_l \sum_n n^2 (2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}) \right\} + \sum_{nj} p_{11snj} / c_{snj}], \\ b_{snj12} = \omega_{ps}^2 p_{12snj} / c_{snj}, \quad b_{12} = -\sum_s \omega_{ps}^2 [\sum_{nj} p_{12snj} / c_{snj}], \\ b_{snj21} = \omega_{ps}^2 p_{21snj} / c_{snj}, \quad b_{21} = -\sum_s \omega_{ps}^2 [\sum_{nj} p_{21snj} / c_{snj}], \\ b_{snj22} = \omega_{ps}^2 p_{22snj} / c_{snj}, \quad b_{22} = -\sum_s \omega_{ps}^2 [\sum_n \frac{2}{R_s} \sum_{l,m} a_{s,lm} \left\{ I_l (2\Gamma_{cn,m+1,2} - m\Gamma_{cn,m-1,2}) \right\} + \sum_{nj} p_{22snj} / c_{snj}], \\ b_{snj13} = \omega_{ps}^2 p_{13snj} / c_{snj}, \quad b_{13} = -\sum_s \omega_{ps}^2 [\sum_{nj} p_{13snj} / c_{snj}], \\ b_{snj31} = \omega_{ps}^2 p_{31snj} / c_{snj}, \quad b_{31} = -\sum_s \omega_{ps}^2 [\sum_{nj} p_{31snj} / c_{snj}], \\ b_{snj23} = \omega_{ps}^2 p_{23snj} / c_{snj}, \quad b_{23} = -\sum_s \omega_{ps}^2 [\sum_{nj} p_{23snj} / c_{snj}], \\ b_{snj32} = \omega_{ps}^2 p_{32snj} / c_{snj}, \quad b_{32} = -\sum_s \omega_{ps}^2 [\sum_{nj} p_{32snj} / c_{snj}], \\ b_{snj33} = \omega_{ps}^2 p_{33snj} / c_{snj}, \quad b_{33} = -\sum_s \omega_{ps}^2 [\sum_n \frac{2}{R_s} \sum_{l,m} a_{s,lm} \left\{ \Gamma_{an,m,1} (2\frac{d_{sz}}{L_{sz}} I_{l+1} + 2I_{l+2} - l\frac{d_{sz}}{L_{sz}} I_{l-1} - lI_l) \right\} + \sum_{nj} p_{33snj} / c_{snj}], \\ c_{snj} = k_z v_{dsz} + n\omega_{cs} + k_z v_{zts} c_j. \end{array} \right. \quad (36)$$

In numerical test, considering the cutoff of summation  $n$ , i.e.,  $\sum_n = \sum_{n=-N}^N$  with  $N \neq \infty$ , we find the above original form of  $b_{11}$ ,  $b_{22}$  and  $b_{33}$ , converges faster (i.e., can use smaller  $N$  to obtain convergent results) than the below form

$$\left\{ \begin{array}{l} b_{11} = -\sum_s \omega_{ps}^2 [1 + \sum_{nj} p_{11snj} / c_{snj}], \\ b_{22} = -\sum_s \omega_{ps}^2 [1 + \sum_{nj} p_{22snj} / c_{snj}], \\ b_{33} = -\sum_s \omega_{ps}^2 [1 + \sum_{nj} p_{33snj} / c_{snj}]. \end{array} \right. \quad (37)$$

It is readily to see that all the singularities from  $\frac{1}{k_z}$  in  $\mathbf{P}_s$  are removable. The  $\frac{n\omega_{cs}}{k_z}$  singularities at  $k_x = 0$  in  $P_{s11}$ ,  $P_{s12}$ ,  $P_{s21}$ ,  $P_{s13}$ ,  $P_{s31}$  are also removable. Thus, the overall equations have no singularity and will not meet numerical difficulty. In the solver, to short the code, if  $k_x \rho_s < k_\delta$  we set  $k_x \rho_s = k_\delta$  for magnetized species in EM version. For example, we can set  $k_\delta = 10^{-30}$ .

Combining Eqs. (34) and (35), the equivalent linear system for electromagnetic dispersion relation can be obtained as

$$\left\{ \begin{array}{lcl} \omega v_{snjx} & = & c_{snj} v_{snjx} + b_{snj11} E_x + b_{snj12} E_y + b_{snj13} E_z, \\ \omega j_x & = & b_{11} E_x + b_{12} E_y + b_{13} E_z, \\ iJ_x \epsilon_0 & = & j_x + \sum_{snj} v_{snjx}, \\ \omega v_{snjy} & = & c_{snj} v_{snjy} + b_{snj21} E_x + b_{snj22} E_y + b_{snj23} E_z, \\ \omega j_y & = & b_{21} E_x + b_{22} E_y + b_{23} E_z, \\ iJ_y / \epsilon_0 & = & j_y + \sum_{snj} v_{snjy}, \\ \omega v_{snjz} & = & c_{snj} v_{snjz} + b_{snj31} E_x + b_{snj32} E_y + b_{snj33} E_z, \\ \omega j_z & = & b_{31} E_x + b_{32} E_y + b_{33} E_z, \\ iJ_z / \epsilon_0 & = & j_z + \sum_{snj} v_{snjz}, \\ \omega E_x & = & c^2 k_z B_y - iJ_x / \epsilon_0, \\ \omega E_y & = & -c^2 k_z B_x + c^2 k_x B_z - iJ_y / \epsilon_0, \\ \omega E_z & = & -c^2 k_x B_y - iJ_z / \epsilon_0, \\ \omega B_x & = & -k_z E_y, \\ \omega B_y & = & k_z E_x - k_x E_z, \\ \omega B_z & = & k_x E_y, \end{array} \right. \quad (38)$$

which yields a sparse matrix eigenvalue problem. The symbols such as  $v_{snjx}$ ,  $j_{x,y,z}$  and  $J_{x,y,z}$  used here do not have direct physical meanings but are analogy to the perturbed velocity and current density in the fluid derivations of plasma waves. The elements of the eigenvector ( $E_x, E_y, E_z, B_x, B_y, B_z$ ) still represent the original perturbed electric and magnetic fields. Thus, the polarization of the solutions can also be obtained in a straightforward manner. The dimension of the matrix is  $N_N = 3 \times (N_{SNJ} + 1) + 6 = 3 \times \{[S \times (2 \times N + 1)] \times J + 1\} + 6$ ,  $N$  is the harmonic numbers kept for magnetized species,  $J$  is the number of the order of  $J$ -pole expansion for  $Z$  function.

We can also separate the contribution from each species of  $\delta \mathbf{J} = \sum_s \delta \mathbf{J}_s = \sum_s \boldsymbol{\sigma}_s \cdot \delta \mathbf{E}$ . To do this, we use a

relation of  $\frac{b_{11}}{\omega} = \sum_s \frac{b_{11s}}{\omega}$ , and then we rewrite Eqs. (35) and (37) as

$$\begin{aligned} \begin{pmatrix} \delta J_x \\ \delta J_y \\ \delta J_z \end{pmatrix} &= -i\epsilon_0 \begin{pmatrix} \sum_s \frac{b_{s11}}{\omega} + \sum_{snj} \frac{b_{snj11}}{\omega - c_{snj}} & \sum_s \frac{b_{s12}}{\omega} + \sum_{snj} \frac{b_{snj12}}{\omega - c_{snj}} & \sum_s \frac{b_{s13}}{\omega} + \sum_{snj} \frac{b_{snj13}}{\omega - c_{snj}} \\ \sum_s \frac{b_{s21}}{\omega} + \sum_{snj} \frac{b_{snj21}}{\omega - c_{snj}} & \sum_s \frac{b_{s22}}{\omega} + \sum_{snj} \frac{b_{snj22}}{\omega - c_{snj}} & \sum_s \frac{b_{s23}}{\omega} + \sum_{snj} \frac{b_{snj23}}{\omega - c_{snj}} \\ \sum_s \frac{b_{s31}}{\omega} + \sum_{snj} \frac{b_{snj31}}{\omega - c_{snj}} & \sum_s \frac{b_{s32}}{\omega} + \sum_{snj} \frac{b_{snj32}}{\omega - c_{snj}} & \sum_s \frac{b_{s33}}{\omega} + \sum_{snj} \frac{b_{snj33}}{\omega - c_{snj}} \end{pmatrix} \begin{pmatrix} \delta E_x \\ \delta E_y \\ \delta E_z \end{pmatrix} \\ &= \sum_s \boldsymbol{\sigma}_s \cdot \begin{pmatrix} \delta E_x \\ \delta E_y \\ \delta E_z \end{pmatrix} \end{aligned} \quad (39)$$

with the coefficients

$$\left\{ \begin{array}{l} b_{snj11} = \omega_{ps}^2 p_{11snj}/c_{snj}, \quad b_{s11} = -\omega_{ps}^2 [\sum_n \frac{2}{R_s} \frac{\omega_{cs}^2}{k_\perp^2 L_{sz}^2} \sum_{l,m} a_{s,lm} \left\{ I_l \sum_n n^2 (2\Gamma_{an,m+1,0} - m\Gamma_{an,m-1,0}) \right\} + \sum_{nj} p_{11snj}/c_{snj}], \\ b_{snj12} = \omega_{ps}^2 p_{12snj}/c_{snj}, \quad b_{s12} = -\omega_{ps}^2 [\sum_{nj} p_{12snj}/c_{snj}], \\ b_{snj21} = \omega_{ps}^2 p_{21snj}/c_{snj}, \quad b_{s21} = -\omega_{ps}^2 [\sum_{nj} p_{21snj}/c_{snj}], \\ b_{snj22} = \omega_{ps}^2 p_{22snj}/c_{snj}, \quad b_{s22} = -\omega_{ps}^2 [\sum_n \frac{2}{R_s} \sum_{l,m} a_{s,lm} \left\{ I_l (2\Gamma_{cn,m+1,2} - m\Gamma_{cn,m-1,2}) \right\} + \sum_{nj} p_{22snj}/c_{snj}], \\ b_{snj13} = \omega_{ps}^2 p_{13snj}/c_{snj}, \quad b_{s13} = -\omega_{ps}^2 [\sum_{nj} p_{13snj}/c_{snj}], \\ b_{snj31} = \omega_{ps}^2 p_{31snj}/c_{snj}, \quad b_{s31} = -\omega_{ps}^2 [\sum_{nj} p_{31snj}/c_{snj}], \\ b_{snj23} = \omega_{ps}^2 p_{23snj}/c_{snj}, \quad b_{s23} = -\omega_{ps}^2 [\sum_{nj} p_{23snj}/c_{snj}], \\ b_{snj32} = \omega_{ps}^2 p_{32snj}/c_{snj}, \quad b_{s32} = -\omega_{ps}^2 [\sum_{nj} p_{32snj}/c_{snj}], \\ b_{snj33} = \omega_{ps}^2 p_{33snj}/c_{snj}, \quad b_{s33} = -\omega_{ps}^2 [\sum_n \frac{2}{R_s} \sum_{l,m} a_{s,lm} \left\{ \Gamma_{an,m,1} (2\frac{d_{sz}}{L_{sz}} I_{l+1} + 2I_{l+2} - l\frac{d_{sz}}{L_{sz}} I_{l-1} - lI_l) \right\} + \sum_{nj} p_{33snj}/c_{snj}], \\ c_{snj} = k_z v_{dsz} + n\omega_{cs} + k_z v_{zts} c_j. \end{array} \right. \quad (40)$$

Consequently, we have

$$\delta \mathbf{J}_s = \boldsymbol{\sigma}_s \cdot \delta \mathbf{E}, \quad \boldsymbol{\sigma}_s = -i\epsilon_0 \begin{pmatrix} \frac{b_{s11}}{\omega} + \sum_{nj} \frac{b_{snj11}}{\omega - c_{snj}} & \frac{b_{s12}}{\omega} + \sum_{nj} \frac{b_{snj12}}{\omega - c_{snj}} & \frac{b_{s13}}{\omega} + \sum_{nj} \frac{b_{snj13}}{\omega - c_{snj}} \\ \frac{b_{s21}}{\omega} + \sum_{nj} \frac{b_{snj21}}{\omega - c_{snj}} & \frac{b_{s22}}{\omega} + \sum_{nj} \frac{b_{snj22}}{\omega - c_{snj}} & \frac{b_{s23}}{\omega} + \sum_{nj} \frac{b_{snj23}}{\omega - c_{snj}} \\ \frac{b_{s31}}{\omega} + \sum_{nj} \frac{b_{snj31}}{\omega - c_{snj}} & \frac{b_{s32}}{\omega} + \sum_{nj} \frac{b_{snj32}}{\omega - c_{snj}} & \frac{b_{s33}}{\omega} + \sum_{nj} \frac{b_{snj33}}{\omega - c_{snj}} \end{pmatrix}. \quad (41)$$

We can use Eq. (41) to obtain  $\delta \mathbf{J}_s$ . Since  $\delta \mathbf{E}$  is known, the first approach requires solving the above 3-by-3 tensor for each species.

The second approach would be more convenient for obtaining  $\delta \mathbf{J}_s$  based on the fact that a matrix eigenvalue method is used in BO/PDRK. For example, as given in Eq. (132) of Ref. [12], the perturbed current in  $x$  direction is

$$i\delta J_x \epsilon_0 = j_x + \sum_{snj} v_{snjx}, \quad (42)$$

where  $j_x$  and  $v_{snjx}$  have been solved along with  $\delta \mathbf{E}$  and  $\delta \mathbf{B}$ .  $\delta J_{sx}$  can be directly obtained once  $j_x$  and  $v_{snjx}$  for each species  $s$  are known. Similarly, we can obtain  $\delta J_{sy}$  and  $\delta J_{sz}$ .

The quantities  $v_{snjx}$  are species quantities, but  $j_x$  was not in the original version of BO/PDRK. With the addition of only  $S - 1$  matrix elements, we can replace the matrix element  $j_x$  by a sum over  $S$  matrix elements  $j_{sx}$ , where  $S$  is the number of species. To do this, we modified the BO/PDRK matrix equations in Eq. (39), i.e.,

$$\begin{cases} \omega j_x = b_{11}\delta E_x + b_{12}\delta E_y + b_{13}\delta E_z, \\ \omega j_y = b_{21}\delta E_x + b_{22}\delta E_y + b_{23}\delta E_z, \\ \omega j_z = b_{31}\delta E_x + b_{32}\delta E_y + b_{33}\delta E_z, \end{cases} \quad (43)$$

as

$$\begin{cases} \omega j_{sx} = b_{s11}\delta E_x + b_{s12}\delta E_y + b_{s13}\delta E_z, \\ \omega j_{sy} = b_{s21}\delta E_x + b_{s22}\delta E_y + b_{s23}\delta E_z, \\ \omega j_{sz} = b_{s31}\delta E_x + b_{s32}\delta E_y + b_{s33}\delta E_z. \end{cases} \quad (44)$$

This separation can directly give  $j_{sx,y,z}$  from the BO/PDRK matrix, which then yields  $\delta J_{sx,y,z}$  through the following equations

$$\begin{cases} \delta J_{sx} = (j_{sx} + \sum_{nj} v_{snjx})/(i\epsilon_0), \\ \delta J_{sy} = (j_{sy} + \sum_{nj} v_{snjy})/(i\epsilon_0), \\ \delta J_{sz} = (j_{sz} + \sum_{nj} v_{snjz})/(i\epsilon_0). \end{cases} \quad (45)$$

The updated matrix equations of BO, i.e., Eq.(132) of Ref.[12], become

$$\left\{ \begin{array}{lcl} \omega v_{snjx} & = & c_{snj}v_{snjx} + b_{snj11}\delta E_x + b_{snj12}\delta E_y + b_{snj13}\delta E_z, \\ \omega j_{sx} & = & b_{s11}\delta E_x + b_{s12}\delta E_y + b_{s13}\delta E_z, \\ i\delta J_x/\epsilon_0 & = & j_x + \sum_{snj} v_{snjx}, \\ \omega v_{snjy} & = & c_{snj}v_{snjy} + b_{snj21}\delta E_x + b_{snj22}\delta E_y + b_{snj23}\delta E_z, \\ \omega j_{sy} & = & b_{s21}\delta E_x + b_{s22}\delta E_y + b_{s23}\delta E_z, \\ i\delta J_y/\epsilon_0 & = & j_y + \sum_{snj} v_{snjy}, \\ \omega v_{snjz} & = & c_{snj}v_{snjz} + b_{snj31}\delta E_x + b_{snj32}\delta E_y + b_{snj33}\delta E_z, \\ \omega j_{sz} & = & b_{s31}\delta E_x + b_{s32}\delta E_y + b_{s33}\delta E_z, \\ i\delta J_z/\epsilon_0 & = & j_z + \sum_{snj} v_{snjz}, \\ \omega \delta E_x & = & c^2 k_z \delta B_y - i\delta J_x/\epsilon_0, \\ \omega \delta E_y & = & -c^2 k_z \delta B_x + c^2 k_x \delta B_z - i\delta J_y/\epsilon_0, \\ \omega \delta E_z & = & -c^2 k_x \delta B_y - i\delta J_z/\epsilon_0, \\ \omega \delta B_x & = & -k_z \delta E_y, \\ \omega \delta B_y & = & k_z \delta E_x - k_x \delta E_z, \\ \omega \delta B_z & = & k_x \delta E_y, \end{array} \right. \quad (46)$$

which yields a sparse matrix eigenvalue problem  $\omega \mathbf{X} = \mathbf{M}(\mathbf{k}) \cdot \mathbf{X}$ . The symbols such as  $v_{snjx}$ ,  $j_{sx,y,z}$  and  $\delta J_{x,y,z}$  used here are analogous to the perturbed velocity and current density in fluid derivations of plasma waves. The elements of the eigenvector ( $\delta E_x, \delta E_y, \delta E_z, \delta B_x, \delta B_y, \delta B_z$ ) represent the perturbed electric and magnetic fields. Thus, all variables of one plasma wave mode can be obtained in a straightforward manner. In addition, the dimension of the matrix is  $N_N = 3 \times (N_{SNJ} + S) + 6 = 3 \times \{[S \times (2 \times N + 1)] \times J + S\} + 6$ ,  $N$  is the number of harmonics retained for magnetized species, and  $J$  is the order of the  $J$ -pole expansion used for calculation of the plasma dispersion  $Z$  function.

### 3 GPDF-Hermite Basis Function Expansion

As previously mentioned, while arbitrary bases can be used for the expansion, selecting an appropriate basis can significantly enhance performance.

#### 3.1 Choose the basis function

We choose GPDF basis for parallel direction and Hermite basis for perpendicular direction in this section, with

$$f_{s0}(v_{\parallel}, v_{\perp}) = W_{sz}(v_{\parallel}) \sum_{l=-\infty}^{\infty} \sum_{m=0}^{\infty} a_{s0,lm} \rho_{sz,l}(v_{\parallel}) u_{sx,m}(v_{\perp}), \quad -\infty < v_{\parallel} < \infty, \quad 0 \leq v_{\perp} < \infty, \quad (47)$$

where  $\rho_{sz,l}$  and  $u_{sx,m}$  are basis functions for parallel and perpendicular directions, with  $W_{sz}$  be corresponding weight functions, which satisfy

$$\int_{-\infty}^{\infty} W_{sz}(v) \rho_{sz,n}(v) \rho_{sz,n'}^*(v) dv = A_{sz} \delta_{n,n'}, \quad \int_{-\infty}^{\infty} u_{sx,n}(v) u_{sx,n'}^*(v) dv = A_{sx} \delta_{n,n'}. \quad (48)$$

Here, the asterisk denotes complex conjugation and  $\delta_{n,n'}$  is the Kronechker delta. The weight  $W_{sx} = 1$  are omitted in the above form. Thus, we have

$$a_{s0,lm} = \frac{1}{A_{sx} A_{sz}} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} f_{s0}(v_{\parallel}, v_{\perp}) \rho_{sz,l}^*(v_{\parallel}) u_{sx,m}^*(v_{\perp}) dv_{\parallel} dv_{\perp}. \quad (49)$$

We choose GPDF basis [11, 1] for  $v_{\parallel}$  direction

$$\rho_{sz,n}(z) = \frac{(L_{sz} + iz)^n}{(L_{sz} - iz)^n}, \quad W_{sz}(z) = \frac{L_{sz}^2}{L_{sz}^2 + z^2}, \quad -\infty < z < \infty, \quad (50)$$

with corresponding velocity widths be  $L_{sz}$ . Use

$$e^{i\phi} = \frac{(L_{sz} + iz)}{(L_{sz} - iz)}, \quad z = L_{sz} \cdot \tan\left(\frac{\phi}{2}\right), \quad \frac{dz}{d\phi} = \frac{L_{sz}^2 + z^2}{2L_{sz}}, \quad (51)$$

and

$$\int_{-\pi}^{\pi} e^{in\phi} e^{-im\phi} d\phi = 2\pi\delta_{m,n}, \quad (52)$$

it is readily to show that  $A_{sz} = \pi L_{sz}$ . Since the above basis function is relevant to Fourier basis, which would be convergent exponentially and  $a_{s,lm}$  can be calculated fastly by fast Fourier transformation (FFT). Another benefit is that the parallel velocity integral Z function can be calculated analytically, thus be also fast and accurate. In practical test, we find the truncation  $l = -M, -(M-1), \dots, -1, 0, 1, \dots, (M-1), M$  are usually sufficiently accurate for  $M \leq 16$ . Due to the even symmetry of  $f_{s0}(v_{\perp})$ , we have  $a_{s0,lm} = 0$  for odd  $m = 1, 3, 5, \dots$ .

The basis function for perpendicular  $v_{\perp}$  direction is choosen as

$$u_{sx,n}(x) = h_n\left(\frac{\sqrt{2}(x - d_{sx})}{L_{sx}}\right), \quad -\infty < x < \infty, \quad (53)$$

with corresponding velocity widths be  $L_{sx}$ . Note that we have extend  $0 \leq v_{\perp} < \infty$  to  $-\infty < v_{\perp} < \infty$ , with  $f_{s0}(v_{\parallel}, v_{\perp}) = f_{s0}(v_{\parallel}, -v_{\perp})$ . Here  $h_n$  is Hermite function

$$h_n(y) = \sqrt{\frac{1}{2^n n! \sqrt{\pi}}} H_n(y) e^{-y^2/2}, \quad \int_{-\infty}^{\infty} h_n(y) h_{n'}(y) dy = \delta_{nn'}, \quad (54)$$

$$H_0(y) = 1, \quad H_1(y) = 2y, \quad H_2(y) = 4y^2 - 2, \quad H_3(y) = 8y^3 - 12y, \quad \dots \quad (55)$$

$$H'_n(y) = 2nH_{n-1}(y), \quad H_n(-y) = (-1)^n H_n(y), \quad H_{n+1}(y) = 2yH_n((y)) - 2nH_{n-1}(y). \quad (56)$$

We have  $A_{sx} = L_{sx}/\sqrt{2}$ .

For later more convenient of calculations, we can rewrite the above expansion to the follow form

$$f_{s0}(v_{\parallel}, v_{\perp}) = W_{sz}(v_{\parallel}) \sum_{l=-\infty}^{\infty} \sum_{m=0}^{\infty} a_{s0,lm} \rho_{sz,l}(v_{\parallel}) u_{sx,m}(v_{\perp}) = c_{s0} W_{sz}(v_{\parallel}) \sum_{l=-\infty}^{\infty} \sum_{m=0}^{\infty} a_{s,lm} \cdot \rho_{sz,l}(v_{\parallel}) \cdot g_{sx,m}(v_{\perp}), \quad (57)$$

with

$$g_{sx,m}(v_{\perp}) = \left(\frac{v_{\perp} - d_{sx}}{L_{sx}}\right)^m e^{-\left(\frac{v_{\perp} - d_{sx}}{L_{sx}}\right)^2}, \quad (58)$$

and normalized coefficient

$$c_{s0} = \frac{1}{\pi^2 L_{sz} L_{sx}^2 R_s}, \quad R_s = \exp\left(-\frac{d_{sx}^2}{L_{sx}^2}\right) + \frac{\sqrt{\pi} d_{sx}}{L_{sx}} \operatorname{erfc}\left(-\frac{d_{sx}}{L_{sx}}\right), \quad (59)$$

and  $\operatorname{erfc}(-x) = 1 - \operatorname{erf}(-x) = 1 + \operatorname{erf}(x)$  is the complementary error function. After obtaining the coefficients  $a_{s0,lm}$ , it is readily to calculate the coefficients  $a_{s,lm}$ . Note that this new  $g_{sx,m}$  is not orthogonal.

### 3.2 Calculate the dispersion relation

We define

$$f_{s0,lm}(v_{\parallel}, v_{\perp}) \equiv a_{s,lm} W_{sz}(v_{\parallel}) \rho_{sz,l}(v_{\parallel}) u_{sx,m}(v_{\perp}) = a_{s,lm} f_{s0z,l}(v_{\parallel}) f_{s0x,m}(v_{\perp}), \quad (60)$$

$$f_{s0}(v_{\parallel}, v_{\perp}) = c_{s0} \sum_{l=-\infty}^{\infty} \sum_{m=0}^{\infty} f_{s0,lm}(v_{\parallel}, v_{\perp}), \quad f_{s0z,l}(v_{\parallel}) \equiv W_{sz}(v_{\parallel}) \rho_{sz,l}(v_{\parallel}), \quad f_{s0x,m}(v_{\perp}) \equiv u_{sx,m}(v_{\perp}). \quad (61)$$

Hence, we have

$$\frac{\partial f_{s0,lm}}{\partial v_{\parallel}} = a_{s,lm} f_{s0x,m}(v_{\perp}) \frac{\partial f_{s0z,l}(v_{\parallel})}{\partial v_{\parallel}}, \quad \frac{\partial f_{s0,lm}}{\partial v_{\perp}} = a_{s,lm} f_{s0z,l}(v_{\parallel}) \frac{\partial f_{s0x,m}(v_{\perp})}{\partial v_{\perp}}, \quad (62)$$

$$\frac{\partial f_{s0z,l}(v_{\parallel})}{\partial v_{\parallel}} = \frac{\partial}{\partial v_{\parallel}} \left[ \frac{(L_{sz} + iv_{\parallel})^l}{(L_{sz} - iv_{\parallel})^l} \frac{L_{sz}^2}{L_{sz}^2 + v_{\parallel}^2} \right] = \frac{i}{2L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}], \quad (63)$$

$$\frac{\partial f_{s0x,m}(v_{\perp})}{\partial v_{\perp}} = \frac{1}{L_{sx}} [mf_{s0x,m-1} - 2f_{s0x,m+1}]. \quad (64)$$

Here, we set  $f_{s0x,m} = 0$  for all  $m < 0$ . The above derivatives equations are valid for all  $l = 0, \pm 1, \pm 2, \dots$  and  $m = 0, 1, 2, \dots$ . We have also numerically checked the valid of the above two derivatives.

For parallel integral  $[\text{Im}(\zeta_{sn}) > 0]$ , define

$$Z_{l,p}(\zeta_{sn}) \equiv \frac{k_{\parallel}}{L_{sz}^p \pi} \int_{-\infty}^{\infty} \frac{v_{\parallel}^p f_{s0z,l}}{\omega - k_{\parallel} v_{\parallel} - n\omega_{cs}} dv_{\parallel} = \frac{1}{\pi} \int_{-\infty}^{\infty} \frac{g_{l,p}(z)}{\zeta_{sn} - z} dz, \quad (65)$$

$$g_{l,p}(z) \equiv \frac{(1+iz)^l}{(1-iz)^l} \frac{z^p}{1+z^2}, \quad (66)$$

we have[1]

$$Z_{l,0} = \begin{cases} -\frac{i}{(1-i\zeta_{sn})}, & l=0, \\ -\frac{2i}{1+\zeta_{sn}^2} \frac{(1+i\zeta_{sn})^l}{(1-i\zeta_{sn})^l}, & l>0, \\ 0, & l<0, \end{cases} \quad (67)$$

$$Z_{l,1} = \zeta_{sn} Z_{l,0} - \frac{1}{\pi} \int_{-\infty}^{\infty} \frac{(1+iz)^l}{(1-iz)^l} \frac{1}{1+z^2} dz = \zeta_{sn} Z_{l,0} - \delta_{l,0}, \quad (68)$$

$$Z_{l,2} = \zeta_{sn} Z_{l,1} - \frac{1}{\pi} \int_{-\infty}^{\infty} z \frac{(1+iz)^l}{(1-iz)^l} \frac{1}{1+z^2} dz = \zeta_{sn} Z_{l,1} + \text{sgn}(l) \cdot (-1)^l \cdot i, \quad (69)$$

with  $\zeta_{sn} = \frac{\omega - n\omega_{cs}}{k_{\parallel} L_{sz}}$ ,  $p = 0, 1, 2$ . And we redefine  $Z_{l,0} \equiv Z_l$  for simplify the notation. We have also numerically checked the valid of the above  $Z_{l,p}$  equations for different  $l$ . Note also that the final right hand side form is also valid for weak damped  $\text{Im}(\zeta_{sn}) \simeq 0$  mode, since which is naturally analytic continuous for both  $\text{Im}(\zeta_{sn}) > 0$  and  $\text{Im}(\zeta_{sn}) \leq 0$ . They may be not valid for strong damped mode, which is due to that the analytic form of the  $f_{0s}$  is not exactly as the one give by the expansion form. In this work, we hope to solve all the solutions of the dispersion relations, hence we mainly use the above rational form of  $Z_{l,p}$ . It is shown[17] that the rational form is sufficient for weak damped mode, say  $\text{Im}(\zeta) > -2$ . Note also that  $I_{l,0} = \frac{1}{\pi} \int_{-\infty}^{\infty} \frac{(1+iz)^l}{(1-iz)^l} \frac{1}{1+z^2} dz = \delta_{l,0}$  due to the orthogonal, and  $I_{l,1} = \frac{1}{\pi} \int_{-\infty}^{\infty} \frac{(1+iz)^l}{(1-iz)^l} \frac{z}{1+z^2} dz$ .

For perpendicular integral

$$\begin{aligned} \Gamma_{an,m,p}(a_s, d_s) &\equiv \frac{1}{L_{sx}^{p+1}} \int_0^{\infty} v_{\perp}^p J_n^2 \left( \frac{k_{\perp} v_{\perp}}{\omega_{cs}} \right) \left( \frac{v_{\perp} - d_{sx}}{L_{sx}} \right)^m e^{-\left( \frac{v_{\perp} - d_{sx}}{L_{sx}} \right)^2} dv_{\perp} = \int_0^{\infty} x^p J_n^2(a_s x) (x - d_s)^m e^{-(x - d_s)^2} dx, \\ \Gamma_{bn,m,p}(a_s, d_s) &\equiv \frac{1}{L_{sx}^{p+1}} \int_0^{\infty} v_{\perp}^p J_n \left( \frac{k_{\perp} v_{\perp}}{\omega_{cs}} \right) J'_n \left( \frac{k_{\perp} v_{\perp}}{\omega_{cs}} \right) \left( \frac{v_{\perp} - d_{sx}}{L_{sx}} \right)^m e^{-\left( \frac{v_{\perp} - d_{sx}}{L_{sx}} \right)^2} dv_{\perp} = \int_0^{\infty} x^p J_n(a_s x) J'_n(a_s x) (x - d_s)^m e^{-(x - d_s)^2} dx, \\ \Gamma_{cn,m,p}(a_s, d_s) &\equiv \frac{1}{L_{sx}^{p+1}} \int_0^{\infty} v_{\perp}^p J'^2_n \left( \frac{k_{\perp} v_{\perp}}{\omega_{cs}} \right) \left( \frac{v_{\perp} - d_{sx}}{L_{sx}} \right)^m e^{-\left( \frac{v_{\perp} - d_{sx}}{L_{sx}} \right)^2} dv_{\perp} = \int_0^{\infty} x^p J'^2_n(a_s x) (x - d_s)^m e^{-(x - d_s)^2} dx, \end{aligned}$$

with  $a_s = k_{\perp} \rho_{cs}$ ,  $d_s = d_{sx}/L_{sx}$ ,  $\rho_{cs} = L_{sx}/\omega_{cs}$ ,  $p = 0, 1, 2, 3$ . These integrals can be calculated numerically[12]. For  $d_{sx} = 0$ , they are relavant to the modified Bessel functions of the first kind as in the Maxwellian case.

Note that we have the normalized condition:  $1 = \int_{-\infty}^{\infty} \int_0^{\infty} 2\pi v_{\perp} f_{s0} dv_{\perp} dv_{\parallel}$ .

Hence, we have

$$\begin{aligned} A_s &= c_{s0} \sum_l \sum_m a_{s,lm} \left\{ \frac{\omega - k_{\parallel} v_{\parallel}}{\omega} f_{s0z,l} \frac{1}{L_{sx}} [mf_{s0x,m-1} - 2f_{s0x,m+1}] + \right. \\ &\quad \left. \frac{k_{\parallel} v_{\perp}}{\omega} f_{s0x,m} \frac{i}{2L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \right\}, \end{aligned} \quad (73)$$

$$\begin{aligned} B_s &= c_{s0} \sum_l \sum_m a_{s,lm} \left\{ \frac{n\omega_{cs} v_{\parallel}}{\omega v_{\perp}} f_{s0z,l} \frac{1}{L_{sx}} [mf_{s0x,m-1} - 2f_{s0x,m+1}] + \right. \\ &\quad \left. \frac{\omega - n\omega_{cs}}{\omega} f_{s0x,m} \frac{i}{2L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \right\}. \end{aligned} \quad (74)$$

Define

$$\mathbf{X}_{sn} = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times \begin{bmatrix} A_s \frac{n^2 v_{\perp}}{\mu_s^2} J_n^2 & iA_s \frac{nv_{\perp}}{\mu_s} J_n J'_n & B_s \frac{nv_{\perp}}{\mu_s} J_n^2 \\ -iA_s \frac{nv_{\perp}}{\mu_s} J_n J'_n & A_s v_{\perp} J'_n {}^2 & -iB_s v_{\perp} J_n J'_n \\ A_s \frac{nv_{\parallel}}{\mu_s} J_n^2 & iA_s v_{\parallel} J_n J'_n & B_s v_{\parallel} J_n^2 \end{bmatrix}. \quad (75)$$

We have

$$\begin{aligned} X_{sn11} &= \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s \frac{n^2 v_{\perp}}{\mu_s^2} J_n^2 = \frac{n^2 \omega_{cs}^2}{k_{\perp}^2} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s J_n^2 \\ &= c_{s0} \frac{n^2 \omega_{cs}^2}{k_{\perp}^2} \sum_l \sum_m a_{s,lm} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{\pi\omega dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times \left\{ \frac{\omega - k_{\parallel}v_{\parallel}}{\omega} f_{s0z,l} \frac{2}{L_{sx}} [mf_{s0x,m-1} - 2f_{s0x,m+1}] \right. \\ &\quad \left. + \frac{k_{\parallel}v_{\perp}}{\omega} f_{s0x,m} \frac{i}{L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \right\} J_n^2 \\ &= \frac{1}{\pi L_{sz} L_{sx}^2 R_s} \frac{n^2 \omega_{cs}^2}{k_{\perp}^2} \sum_l \sum_m a_{s,lm} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times \left\{ (\omega - k_{\parallel}v_{\parallel}) f_{s0z,l} \frac{2}{L_{sx}} [mf_{s0x,m-1} - 2f_{s0x,m+1}] \right. \\ &\quad \left. + k_{\parallel}v_{\perp} f_{s0x,m} \frac{i}{L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \right\} J_n^2 \\ &= \frac{1}{R_s} \frac{n^2 \omega_{cs}^2}{k_{\perp}^2 L_{sx}^2} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,0} + I_{l,0} \right) (2m\Gamma_{an,m-1,0} - 4\Gamma_{an,m+1,0}) \right. \\ &\quad \left. + \Gamma_{an,m,1} \frac{iL_{sx}^2}{L_{sz}^2} [(l-1)Z_{l-1,0} + 2lZ_{l,0} + (l+1)Z_{l+1,0}] \right\}, \end{aligned}$$

$$\begin{aligned} X_{sn12} &= -X_{sn21} = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times iA_s \frac{nv_{\perp}}{\mu_s} J_n J'_n = i \frac{n\omega_{cs}}{k_{\perp}} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s J_n J'_n \\ &= i \frac{1}{R_s} \frac{n\omega_{cs}}{k_{\perp} L_{sx}} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,0} + I_{l,0} \right) (2m\Gamma_{bn,m-1,1} - 4\Gamma_{2n,m+1,1}) \right. \\ &\quad \left. + \Gamma_{bn,m,2} \frac{iL_{sx}^2}{L_{sz}^2} [(l-1)Z_{l-1,0} + 2lZ_{l,0} + (l+1)Z_{l+1,0}] \right\} \\ &\rightarrow i \frac{1}{R_s} \frac{n\omega_{cs}}{k_{\perp} L_{sx}} \sum_l \sum_m a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,0} (2m\Gamma_{bn,m-1,1} - 4\Gamma_{2n,m+1,1}) \right. \\ &\quad \left. + \Gamma_{bn,m,2} \frac{iL_{sx}^2}{L_{sz}^2} [(l-1)Z_{l-1,0} + 2lZ_{l,0} + (l+1)Z_{l+1,0}] \right\}, \end{aligned}$$

$$\begin{aligned} X_{sn22} &= \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s v_{\perp} J_n' {}^2 = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s v_{\perp} J_n' {}^2 \\ &= \frac{1}{R_s} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,0} + I_{l,0} \right) (2m\Gamma_{cn,m-1,2} - 4\Gamma_{cn,m+1,2}) \right. \\ &\quad \left. + \Gamma_{cn,m,3} \frac{iL_{sx}^2}{L_{sz}^2} [(l-1)Z_{l-1,0} + 2lZ_{l,0} + (l+1)Z_{l+1,0}] \right\}, \end{aligned}$$

$$\begin{aligned}
X_{sn31} &= X_{sn13} = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s \frac{nv_{\parallel}}{\mu_s} J_n^2 = \frac{n\omega_{cs}}{k_{\perp}} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\parallel} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s J_n^2 \\
&= c_{s0} \frac{n\omega_{cs}}{k_{\perp}} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\parallel} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \sum_l \sum_m a_{s,lm} \left\{ \frac{\omega - k_{\parallel}v_{\parallel}}{\omega} f_{s0z,l} \frac{1}{L_{sx}} [mf_{s0x,m-1} - 2f_{s0x,m+1}] + \right. \\
&\quad \left. \frac{k_{\parallel}v_{\perp}}{\omega} f_{s0x,m} \frac{i}{2L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \right\} J_n^2 \\
&= \frac{1}{\pi L_{sz} L_{sx}^2 R_s} \frac{n\omega_{cs}}{k_{\perp}} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{v_{\parallel} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \sum_l \sum_m a_{s,lm} \left\{ (\omega - k_{\parallel}v_{\parallel}) f_{s0z,l} \frac{1}{L_{sx}} [2mf_{s0x,m-1} - 4f_{s0x,m+1}] + \right. \\
&\quad \left. k_{\parallel}v_{\perp} f_{s0x,m} \frac{i}{L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \right\} J_n^2 \\
&= \frac{L_{sz}}{L_{sx} R_s} \frac{n\omega_{cs}}{k_{\perp} L_{sx}} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,1} + I_{l,1} \right) (2m\Gamma_{an,m-1,0} - 4\Gamma_{an,m+1,0}) \right. \\
&\quad \left. + \Gamma_{an,m,1} \frac{iL_{sx}^2}{L_{sz}^2} [(l-1)Z_{l-1,1} + 2lZ_{l,1} + (l+1)Z_{l+1,1}] \right\} \\
&\rightarrow \frac{1}{R_s} \frac{n\omega_{cs}}{k_{\perp} L_{sx}} \sum_l \sum_m a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_{\parallel} L_{sx}} Z_{l,1} (2m\Gamma_{an,m-1,0} - 4\Gamma_{an,m+1,0}) \right. \\
&\quad \left. + \Gamma_{an,m,1} \frac{iL_{sx}}{L_{sz}} [(l-1)Z_{l-1,1} + 2lZ_{l,1} + (l+1)Z_{l+1,1}] \right\}, \\
\\
X_{sn32} &= -X_{sn23} = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times iA_s v_{\parallel} J_n J'_n = i \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\parallel} v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s J_n J'_n \\
&= i \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\parallel} v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} c_{s0} \sum_l \sum_m a_{s,lm} \left\{ \frac{\omega - k_{\parallel}v_{\parallel}}{\omega} f_{s0z,l} \frac{1}{L_{sx}} [mf_{s0x,m-1} - 2f_{s0x,m+1}] \right. \\
&\quad \left. + \frac{k_{\parallel}v_{\perp}}{\omega} f_{s0x,m} \frac{i}{2L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \right\} J_n J'_n \\
&= \frac{i}{\pi L_{sz} L_{sx}^2 R_s} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{v_{\parallel} v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \sum_l \sum_m a_{s,lm} \left\{ (\omega - k_{\parallel}v_{\parallel}) f_{s0z,l} \frac{1}{L_{sx}} [2mf_{s0x,m-1} - 4f_{s0x,m+1}] \right. \\
&\quad \left. + k_{\parallel}v_{\perp} f_{s0x,m} \frac{i}{L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \right\} J_n J'_n \\
&= i \frac{L_{sz}}{L_{sx} R_s} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,1} + I_{l,1} \right) (2m\Gamma_{bn,m-1,1} - 4\Gamma_{bn,m+1,1}) \right. \\
&\quad \left. + \Gamma_{bn,m,2} \frac{iL_{sx}^2}{L_{sz}^2} [(l-1)Z_{l-1,1} + 2lZ_{l,1} + (l+1)Z_{l+1,1}] \right\} \\
&\rightarrow i \frac{1}{R_s} \sum_l \sum_m a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_{\parallel} L_{sx}} Z_{l,1} (2m\Gamma_{bn,m-1,1} - 4\Gamma_{bn,m+1,1}) \right. \\
&\quad \left. + \Gamma_{bn,m,2} \frac{iL_{sx}}{L_{sz}} [(l-1)Z_{l-1,1} + 2lZ_{l,1} + (l+1)Z_{l+1,1}] \right\},
\end{aligned}$$

and

$$\begin{aligned}
X_{sn33} &= \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times B_s v_{\parallel} J_n^2 = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\parallel} v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times B_s J_n^2 \\
&= \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\parallel} v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} c_{s0} \sum_l \sum_m a_{s,lm} \left\{ \frac{n\omega_{cs} v_{\parallel}}{\omega v_{\perp}} f_{s0z,l} \frac{1}{L_{sz}} [m f_{s0x,m-1} - 2f_{s0x,m+1}] \right. \\
&\quad \left. + \frac{\omega - n\omega_{cs}}{\omega} f_{s0x,m} \frac{i}{2L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \right\} J_n^2 \\
&= \frac{1}{\pi L_{sz} L_{sx}^2 R_s} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \sum_l \sum_m a_{s,lm} \left\{ n\omega_{cs} v_{\parallel}^2 f_{s0z,l} \frac{1}{L_{sx}} [2mf_{s0x,m-1} - 4f_{s0x,m+1}] \right. \\
&\quad \left. + v_{\parallel} v_{\perp} (\omega - n\omega_{cs}) f_{s0x,m} \frac{i}{L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \right\} J_n^2 \\
&= \frac{L_{sz}^2}{L_{sx}^2 R_s} \sum_l \sum_m a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,2} (2m\Gamma_{an,m-1,0} - 4\Gamma_{1n,m+1,0}) \right. \\
&\quad \left. + \Gamma_{an,m,1} i \frac{L_{sz}^2}{L_{sx}^2} [(l-1)Z_{l-1,2} + 2lZ_{l,2} + (l+1)Z_{l+1,2} + (l-1)I_{l-1,1} + 2lI_{l,1} + (l+1)I_{l+1,1}] \right\} \\
&= \frac{L_{sz}^2}{L_{sx}^2 R_s} \sum_l \sum_m a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,2} (2m\Gamma_{an,m-1,0} - 4\Gamma_{1n,m+1,0}) \right. \\
&\quad \left. + \Gamma_{an,m,1} i \frac{L_{sz}^2}{L_{sx}^2} [(l-1)Z_{l-1,2} + 2lZ_{l,2} + (l+1)Z_{l+1,2} + 2i\delta_{l,0}] \right\},
\end{aligned}$$

where

$$Q = \sum_s Q_s, \quad Q_s = \frac{\omega_{ps}^2}{\omega^2} P_s, \quad P_s = \sum_n P_{sn}, \quad P_{sn} = c_{s0} \mathbf{X}_{sn}. \quad (76)$$

We have used  $(l-1)I_{l-1,1} + 2lI_{l,1} + (l+1)I_{l+1,1} = 2i\delta_{l,0}$ .

Here, ' $\rightarrow$ ' means the constant terms  $I_l$  has been summation out for  $n$ . We have used  $\sum_{n=-\infty}^{\infty} J_n J'_n = 0$ ,  $\sum_{n=-\infty}^{\infty} n J_n^2 = 0$ ,  $\sum_{n=-\infty}^{\infty} n J_n J'_n = 0$ ,  $\sum_{n=-\infty}^{\infty} J_n^2 = 1$ ,  $\sum_{n=-\infty}^{\infty} (J'_n)^2 = \frac{1}{2}$  and  $\sum_{n=-\infty}^{\infty} \frac{n^2 J_n^2}{x^2} = \frac{1}{2}$ .

After the above expansion, the dispersion relation Eq.(1) can be readily solved use conventional iterative root finding method. Since the perpendicular integral  $\Gamma(a_s)$  need only calculate once, and the parallel integrals  $Z(\zeta_{sn})$  are finite rational form, this approach can obtain high accurate solution with less computation cost. The above dispersion relation can also be transformed to matrix method similar to the  $\kappa$  distribution case[14, 13]. We omit the transformation here since it is slightly complicated.

## 4 GPDF-GPDF Basis Function Expansion

As previously mentioned, while arbitrary bases can be used for the expansion, selecting an appropriate basis can significantly enhance performance.

### 4.1 Choose the basis function

We choose GPDF basis for parallel direction and modified GPDF basis for perpendicular direction in this section, with

$$f_{s0}(v_{\parallel}, v_{\perp}) = W_{sz}(v_{\parallel}) W_{sx}^2(v_{\perp}) \sum_{l=-\infty}^{\infty} \sum_{m=-\infty}^{\infty} a_{s0,lm} \rho_{sz,l}(v_{\parallel}) u_{sx,m}(v_{\perp}), \quad -\infty < v_{\parallel} < \infty, \quad 0 \leq v_{\perp} < \infty, \quad (77)$$

where  $\rho_{sz,l}$  and  $u_{sx,m}$  are basis functions for parallel and perpendicular directions, with  $W_{sz}$  and  $W_{sx}$  be corresponding weight functions, which satisfy

$$\int_{-\infty}^{\infty} W_{sz}(v) \rho_{sz,n}(v) \rho_{sz,n'}^*(v) dv = A_{sz} \delta_{n,n'}, \quad \int_{-\infty}^{\infty} W_{sx}(v) u_{sx,n}(v) u_{sx,n'}^*(v) dv = A_{sx} \delta_{n,n'}. \quad (78)$$

Here, the asterisk denotes complex conjugation and  $\delta_{n,n'}$  is the Kronecker delta. Note for perpendicular direction, we use  $W_{sx}^2(v_\perp)$  instead of  $W_{sx}(v_\perp)$  is to avoid the divergence of later perpendicular integral. Thus, we have

$$a_{s0,lm} = \frac{1}{A_{sz} A_{sx}} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} \frac{f_{s0}(v_\parallel, v_\perp)}{W_{sx}(v_\perp)} \rho_{sz,l}^*(v_\parallel) u_{sx,m}^*(v_\perp) dv_\parallel dv_\perp. \quad (79)$$

We choose both GPDF basis [11, 1] for  $v_\parallel$  and  $v_\perp$  direction

$$\rho_{sz,n}(z) = \frac{(L_{sz} + iz)^n}{(L_{sz} - iz)^n}, \quad W_{sz}(z) = \frac{L_{sz}^2}{L_{sz}^2 + z^2}, \quad -\infty < z < \infty, \quad (80)$$

$$u_{sx,n}(x) = \frac{(L_{sx} + ix)^n}{(L_{sx} - ix)^n}, \quad W_{sx}(x) = \frac{L_{sx}^2}{L_{sx}^2 + x^2}, \quad 0 < x < \infty, \quad (81)$$

with corresponding velocity widths be  $L_{sz}$  and  $L_{sx}$ . Use

$$e^{i\phi} = \frac{(L + iz)}{(L - iz)}, \quad z = L \cdot \tan\left(\frac{\phi}{2}\right), \quad \frac{dz}{d\phi} = \frac{L^2 + z^2}{2L}, \quad (82)$$

and

$$\int_{-\pi}^{\pi} e^{in\phi} e^{-im\phi} d\phi = 2\pi\delta_{m,n}, \quad (83)$$

it is readily to show that  $A_{sz} = \pi L_{sz}$  and  $A_{sx} = \pi L_{sx}$ . Since the above basis function is relevant to Fourier basis, which would be convergent exponentially and  $a_{s,lm}$  can be calculated fastly by fast Fourier transformation (FFT). Another benefit is that the parallel velocity integral  $Z$  function can be calculated analytically, thus be also fast and accurate. In practical test, we find the truncation  $l = -M, -(M-1), \dots, -1, 0, 1, \dots, (M-1), M$  are usually sufficiently accurate for  $M \leq 16$ . Note that we have extend  $0 \leq v_\perp < \infty$  to  $-\infty < v_\perp < \infty$ , with  $f_{s0}(v_\parallel, v_\perp) = f_{s0}(v_\parallel, -v_\perp)$ . Due to the even symmetry of  $f_{s0}(v_\perp)$ , we have  $a_{s,l,m} = a_{s,l,-m}$ . The benifit of GPDF-GPDF expansion is that the coefficients can be calculate fastly use FFT.

For later more convenient of calculations, we can rewrite the above expansion to the follow form

$$\begin{aligned} f_{s0}(v_\parallel, v_\perp) &= W_{sz}(v_\parallel) W_{sx}^2(v_\perp) \sum_{l=-\infty}^{\infty} \sum_{m=-\infty}^{\infty} a_{s0,lm} \rho_{sz,l}(v_\parallel) u_{sx,m}(v_\perp) \\ &= c_{s0} W_{sz}(v_\parallel) W_{sx}^2(v_\perp) \sum_{l=-\infty}^{\infty} \sum_{m=-\infty}^{\infty} a_{s,lm} \cdot \rho_{sz,l}(v_\parallel) \cdot u_{sx,m}(v_\perp), \end{aligned} \quad (84)$$

with the normalized coefficient

$$c_{s0} = \frac{1}{\pi^2 L_{sz} L_{sx}^2}. \quad (85)$$

After obtaining the coefficients  $a_{s0,lm}$ , it is readily to calculate the coefficients  $a_{s,lm}$ .

## 4.2 Calculate the dispersion relation

We define

$$f_{s0,lm}(v_\parallel, v_\perp) \equiv a_{s,lm} W_{sz}(v_\parallel) W_{sx}^2(v_\perp) \rho_{sz,l}(v_\parallel) u_{sx,m}(v_\perp) = a_{s,lm} f_{s0z,l}(v_\parallel) f_{s0x,m}(v_\perp), \quad (86)$$

$$f_{s0}(v_\parallel, v_\perp) = c_{s0} \sum_{l=-\infty}^{\infty} \sum_{m=-\infty}^{\infty} f_{s0,lm}(v_\parallel, v_\perp), \quad f_{s0z,l}(v_\parallel) \equiv W_{sz}(v_\parallel) \rho_{sz,l}(v_\parallel), \quad f_{s0x,m}(v_\perp) \equiv W_{sx}^2(v_\perp) u_{sx,m}(v_\perp). \quad (87)$$

Hence, we have

$$\frac{\partial f_{s0,lm}}{\partial v_\parallel} = a_{s,lm} f_{s0x,m}(v_\perp) \frac{\partial f_{s0z,l}(v_\parallel)}{\partial v_\parallel}, \quad \frac{\partial f_{s0,lm}}{\partial v_\perp} = a_{s,lm} f_{s0z,l}(v_\parallel) \frac{\partial f_{s0x,m}(v_\perp)}{\partial v_\perp}, \quad (88)$$

$$\frac{\partial f_{s0z,l}(v_\parallel)}{\partial v_\parallel} = \frac{\partial}{\partial v_\parallel} \left[ \frac{(L_{sz} + iv_\parallel)^l}{(L_{sz} - iv_\parallel)^l} \frac{L_{sz}^2}{L_{sz}^2 + v_\parallel^2} \right] = \frac{i}{2L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}], \quad (89)$$

$$\frac{\partial f_{s0x,m}(v_\perp)}{\partial v_\perp} = \frac{\partial}{\partial v_\perp} \left[ \frac{(L_{sx} + iv_\perp)^m}{(L_{sx} - iv_\perp)^m} \left( \frac{L_{sx}^2}{L_{sx}^2 + v_\perp^2} \right)^2 \right] = \frac{i}{2L_{sx}} [(m-2)f_{s0x,m-1} + 2mf_{s0x,m} + (m+2)f_{s0x,m+1}]. \quad (90)$$

The above derivatives equations are valid for all  $l, m = 0, \pm 1, \pm 2, \dots$ . We have also numerically checked the valid of the above two derivatives.

For parallel integral  $[\text{Im}(\zeta_{sn}) > 0]$ , define

$$Z_{l,p}(\zeta_{sn}) \equiv \frac{k_{\parallel}}{L_{sz}^p \pi} \int_{-\infty}^{\infty} \frac{v_{\parallel}^p f_{s0z,l}}{\omega - k_{\parallel} v_{\parallel} - n\omega_{cs}} dv_{\parallel} = \frac{1}{\pi} \int_{-\infty}^{\infty} \frac{g_{l,p}(z)}{\zeta_{sn} - z} dz, \quad (91)$$

$$g_{l,p}(z) \equiv \frac{(1+iz)^l}{(1-iz)^l} \frac{z^p}{1+z^2}, \quad (92)$$

we have[1]

$$Z_{l,0} = \begin{cases} -\frac{i}{(1-i\zeta_{sn})}, & l=0, \\ -\frac{2i}{1+\zeta_{sn}^2} \frac{(1+i\zeta_{sn})^l}{(1-i\zeta_{sn})^l}, & l>0, \\ 0, & l<0, \end{cases} \quad (93)$$

$$Z_{l,1} = \zeta_{sn} Z_{l,0} - \frac{1}{\pi} \int_{-\infty}^{\infty} \frac{(1+iz)^l}{(1-iz)^l} \frac{1}{1+z^2} dz = \zeta_{sn} Z_{l,0} - \delta_{l,0}, \quad (94)$$

$$Z_{l,2} = \zeta_{sn} Z_{l,1} - \frac{1}{\pi} \int_{-\infty}^{\infty} z \frac{(1+iz)^l}{(1-iz)^l} \frac{1}{1+z^2} dz = \zeta_{sn} Z_{l,1} + \text{sgn}(l) \cdot (-1)^l \cdot i, \quad (95)$$

with  $\zeta_{sn} = \frac{\omega - n\omega_{cs}}{k_{\parallel} L_{sz}}$ ,  $p = 0, 1, 2$ . And we redefine  $Z_{l,0} \equiv Z_l$  for simplify the notation. We have also numerically checked the valid of the above  $Z_{l,p}$  equations for different  $l$ . Note also that the final right hand side form is also valid for weak damped  $\text{Im}(\zeta_{sn}) \simeq 0$  mode, since which is naturally analytic continuous for both  $\text{Im}(\zeta_{sn}) > 0$  and  $\text{Im}(\zeta_{sn}) \leq 0$ . They may be not valid for strong damped mode, which is due to that the analytic form of the  $f_{0s}$  is not exactly as the one give by the expansion form. In this work, we hope to solve all the solutions of the dispersion relations, hence we mainly use the above rational form of  $Z_{l,p}$ . It is shown[17] that the rational form is sufficient for weak damped mode, say  $\text{Im}(\zeta) > -2$ . Note also that  $I_{l,0} = \frac{1}{\pi} \int_{-\infty}^{\infty} \frac{(1+iz)^l}{(1-iz)^l} \frac{1}{1+z^2} dz = \delta_{l,0}$  due to the orthogonal, and  $I_{l,1} = \frac{1}{\pi} \int_{-\infty}^{\infty} \frac{(1+iz)^l}{(1-iz)^l} \frac{z}{1+z^2} dz$ .

For perpendicular integral

$$\Gamma_{an,m,p}(a_s) \equiv \frac{1}{L_{sx}^{p+1}} \int_0^{\infty} v_{\perp}^p J_n^2\left(\frac{k_{\perp} v_{\perp}}{\omega_{cs}}\right) f_{s0x,m} dv_{\perp} = \int_0^{\infty} x^p J_n^2(a_s x) \frac{(1+ix)^m}{(1-ix)^m} \frac{1}{(1+x^2)^2} dx, \quad (96)$$

$$\Gamma_{bn,m,p}(a_s) \equiv \frac{1}{L_{sx}^{p+1}} \int_0^{\infty} v_{\perp}^p J_n\left(\frac{k_{\perp} v_{\perp}}{\omega_{cs}}\right) J'_n\left(\frac{k_{\perp} v_{\perp}}{\omega_{cs}}\right) f_{s0x,m} dv_{\perp} = \int_0^{\infty} x^p J_n(a_s x) J'_n(a_s x) \frac{(1+ix)^m}{(1-ix)^m} \frac{1}{(1+x^2)^2} dx, \quad (97)$$

$$\Gamma_{cn,m,p}(a_s) \equiv \frac{1}{L_{sx}^{p+1}} \int_0^{\infty} v_{\perp}^p J'^2_n\left(\frac{k_{\perp} v_{\perp}}{\omega_{cs}}\right) f_{s0x,m} dv_{\perp} = \int_0^{\infty} x^p J'^2_n(a_s x) \frac{(1+ix)^m}{(1-ix)^m} \frac{1}{(1+x^2)^2} dx. \quad (98)$$

with  $a_s = k_{\perp} \rho_{cs}$ ,  $\rho_{cs} = L_{sx}/\omega_{cs}$ ,  $p = 0, 1, 2, 3$ . These integral can be calculated numerically. Due to the  $\frac{1}{(1+x^2)^2}$  term, the integral is convergent for even  $p = 3$ . Note also  $J_{\alpha}(x) = \sum_{m=0}^{\infty} \frac{(-1)^m}{m! \Gamma(m+\alpha+1)} \left(\frac{x}{2}\right)^{2m+\alpha}$  for small  $x$ .

Hence, we have

$$A_s = c_{s0} \sum_l \sum_m a_{s,lm} \left\{ \frac{\omega - k_{\parallel} v_{\parallel}}{\omega} f_{s0z,l} \frac{i}{2L_{sz}} [(m-2)f_{s0x,m-1} + 2mf_{s0x,m} + (m+2)f_{s0x,m+1}] + \frac{k_{\parallel} v_{\perp}}{\omega} f_{s0x,m} \frac{i}{2L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \right\}, \quad (99)$$

$$B_s = c_{s0} \sum_l \sum_m a_{s,lm} \left\{ \frac{n\omega_{cs} v_{\parallel}}{\omega v_{\perp}} f_{s0z,l} \frac{i}{2L_{sx}} [(m-2)f_{s0x,m-1} + 2mf_{s0x,m} + (m+2)f_{s0x,m+1}] + \frac{\omega - n\omega_{cs}}{\omega} f_{s0x,m} \frac{i}{2L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \right\}. \quad (100)$$

Note that we have the normalized condition:  $1 = \int_{-\infty}^{\infty} \int_0^{\infty} 2\pi v_{\perp} f_{s0} dv_{\perp} dv_{\parallel}$ .

Define

$$\mathbf{X}_{sn} = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times \begin{bmatrix} A_s \frac{n^2 v_{\perp}}{\mu_s^2} J_n^2 & iA_s \frac{nv_{\perp}}{\mu_s} J_n J'_n & B_s \frac{nv_{\perp}}{\mu_s} J_n^2 \\ -iA_s \frac{nv_{\perp}}{\mu_s} J_n J'_n & A_s v_{\perp} J_n'^2 & -iB_s v_{\perp} J_n J'_n \\ A_s \frac{nv_{\parallel}}{\mu_s} J_n^2 & iA_s v_{\parallel} J_n J'_n & B_s v_{\parallel} J_n^2 \end{bmatrix}. \quad (101)$$

We have

$$\begin{aligned} X_{sn11} &= \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s \frac{n^2 v_{\perp}}{\mu_s^2} J_n^2 = \frac{n^2 \omega_{cs}^2}{k_{\perp}^2} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s J_n^2 \\ &= c_{s0} \frac{n^2 \omega_{cs}^2}{k_{\perp}^2} \sum_l \sum_m a_{s,lm} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{\pi\omega dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times \left\{ \right. \\ &\quad \left. \frac{\omega - k_{\parallel}v_{\parallel}}{\omega} f_{s0z,l} \frac{i}{L_{sx}} [(m-2)f_{s0x,m-1} + 2mf_{s0x,m} + (m+2)f_{s0x,m+1}] \right. \\ &\quad \left. + \frac{k_{\parallel}v_{\perp}}{\omega} f_{s0x,m} \frac{i}{L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \right\} J_n^2 \\ &= \frac{i}{\pi L_{sz} L_{sx}^2} \frac{n^2 \omega_{cs}^2}{k_{\perp}^2} \sum_l \sum_m a_{s,lm} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times \left\{ \right. \\ &\quad (\omega - k_{\parallel}v_{\parallel}) f_{s0z,l} \frac{2}{L_{sx}} [(m-2)f_{s0x,m-1} + 2mf_{s0x,m} + (m+2)f_{s0x,m+1}] \\ &\quad + k_{\parallel}v_{\perp} f_{s0x,m} \frac{1}{L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \left. \right\} J_n^2 \\ &= i \frac{n^2 \omega_{cs}^2}{k_{\perp}^2 L_{sx}^2} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,0} + I_{l,0} \right) [(m-2)\Gamma_{an,m-1,0} + 2m\Gamma_{an,m,0} + (m+2)\Gamma_{an,m+1,0}] \right. \\ &\quad \left. + \Gamma_{an,m,1} \frac{L_{sx}^2}{L_{sz}^2} [(l-1)Z_{l-1,0} + 2lZ_{l,0} + (l+1)Z_{l+1,0}] \right\}, \end{aligned}$$

$$\begin{aligned} X_{sn12} &= -X_{sn21} = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times iA_s \frac{nv_{\perp}}{\mu_s} J_n J'_n = i \frac{n\omega_{cs}}{k_{\perp}} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s J_n J'_n \\ &= -\frac{n\omega_{cs}}{k_{\perp} L_{sx}} \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,0} + I_{l,0} \right) [(m-2)\Gamma_{bn,m-1,1} + 2m\Gamma_{2n,m,1} + (m+2)\Gamma_{2n,m+1,1}] \right. \\ &\quad \left. + \Gamma_{bn,m,2} \frac{iL_{sx}^2}{L_{sz}^2} [(l-1)Z_{l-1,0} + 2lZ_{l,0} + (l+1)Z_{l+1,0}] \right\} \\ &\rightarrow -\frac{n\omega_{cs}}{k_{\perp} L_{sx}} \sum_l \sum_m a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,0} [(m-2)\Gamma_{bn,m-1,1} + 2m\Gamma_{2n,m,1} + (m+2)\Gamma_{2n,m+1,1}] \right. \\ &\quad \left. + \Gamma_{bn,m,2} \frac{L_{sx}^2}{L_{sz}^2} [(l-1)Z_{l-1,0} + 2lZ_{l,0} + (l+1)Z_{l+1,0}] \right\}, \end{aligned}$$

$$\begin{aligned} X_{sn22} &= \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s v_{\perp} J_n'^2 = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s v_{\perp} J_n'^2 \\ &= i \sum_l \sum_m a_{s,lm} \left\{ \left( \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,0} + I_{l,0} \right) [(m-2)\Gamma_{cn,m-1,2} + 2m\Gamma_{cn,m,2} + (m+2)\Gamma_{cn,m+1,2}] \right. \\ &\quad \left. + \Gamma_{cn,m,3} \frac{L_{sx}^2}{L_{sz}^2} [(l-1)Z_{l-1,0} + 2lZ_{l,0} + (l+1)Z_{l+1,0}] \right\}, \end{aligned}$$

$$\begin{aligned}
X_{sn31} &= X_{sn13} = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s \frac{nv_{\parallel}}{\mu_s} J_n^2 = \frac{n\omega_{cs}}{k_{\perp}} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\parallel} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s J_n^2 \\
&= c_{s0} \frac{n\omega_{cs}}{k_{\perp}} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\parallel} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \sum_l \sum_m a_{s,lm} \left\{ \right. \\
&\quad \frac{\omega - k_{\parallel}v_{\parallel}}{\omega} f_{s0z,l} \frac{i}{2L_{sx}} [(m-2)f_{s0x,m-1} + 2mf_{s0x,m} + (m+2)f_{s0x,m+1}] + \\
&\quad \frac{k_{\parallel}v_{\perp}}{\omega} f_{s0x,m} \frac{i}{2L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \left. \right\} J_n^2 \\
&= \frac{i}{\pi L_{sz} L_{sx}^2} \frac{n\omega_{cs}}{k_{\perp}} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{v_{\parallel} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \sum_l \sum_m a_{s,lm} \left\{ \right. \\
&\quad (\omega - k_{\parallel}v_{\parallel}) f_{s0z,l} \frac{1}{L_{sx}} [(m-2)f_{s0x,m-1} + 2mf_{s0x,m} + (m+2)f_{s0x,m+1}] + \\
&\quad k_{\parallel}v_{\perp} f_{s0x,m} \frac{1}{L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \left. \right\} J_n^2 \\
&= i \frac{L_{sz}}{L_{sx}} \frac{n\omega_{cs}}{k_{\perp} L_{sx}} \sum_l \sum_m a_{s,lm} \left\{ \right. \\
&\quad \left( \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,1} + I_{l,1} \right) [(m-2)\Gamma_{an,m-1,0} + 2m\Gamma_{an,m,0} + (m+2)\Gamma_{an,m+1,0}] \\
&\quad + \Gamma_{an,m,1} \frac{L_{sx}^2}{L_{sz}^2} [(l-1)Z_{l-1,1} + 2lZ_{l,1} + (l+1)Z_{l+1,1}] \left. \right\} \\
&\rightarrow i \frac{n\omega_{cs}}{k_{\perp} L_{sx}} \sum_l \sum_m a_{s,lm} \left\{ \right. \\
&\quad \left( \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,1} \right) [(m-2)\Gamma_{an,m-1,0} + 2m\Gamma_{an,m,0} + (m+2)\Gamma_{an,m+1,0}] \\
&\quad + \Gamma_{an,m,1} \frac{L_{sx}}{L_{sz}} [(l-1)Z_{l-1,1} + 2lZ_{l,1} + (l+1)Z_{l+1,1}] \left. \right\}, \\
\\
X_{sn32} &= -X_{sn23} = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times iA_s v_{\parallel} J_n J'_n = i \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\parallel} v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times A_s J_n J'_n \\
&= i \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\parallel} v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} c_{s0} \sum_l \sum_m a_{s,lm} \left\{ \right. \\
&\quad \frac{\omega - k_{\parallel}v_{\parallel}}{\omega} f_{s0z,l} \frac{i}{2L_{sx}} [(m-2)f_{s0x,m-1} + 2mf_{s0x,m} + (m+2)f_{s0x,m+1}] \\
&\quad + \frac{k_{\parallel}v_{\perp}}{\omega} f_{s0x,m} \frac{i}{2L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \left. \right\} J_n J'_n \\
&= -\frac{1}{\pi L_{sz} L_{sx}^2} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{v_{\parallel} v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \sum_l \sum_m a_{s,lm} \left\{ \right. \\
&\quad (\omega - k_{\parallel}v_{\parallel}) f_{s0z,l} \frac{1}{L_{sx}} [(m-2)f_{s0x,m-1} + 2mf_{s0x,m} + (m+2)f_{s0x,m+1}] \\
&\quad + k_{\parallel}v_{\perp} f_{s0x,m} \frac{1}{L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \left. \right\} J_n J'_n \\
&= -\frac{L_{sz}}{L_{sx}} \sum_l \sum_m a_{s,lm} \left\{ \right. \\
&\quad \left( \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,1} + I_{l,1} \right) [(m-2)\Gamma_{bn,m-1,1} + 2m\Gamma_{bn,m,1} + (m+2)\Gamma_{bn,m+1,1}] \\
&\quad + \Gamma_{bn,m,2} \frac{L_{sx}^2}{L_{sz}^2} [(l-1)Z_{l-1,1} + 2lZ_{l,1} + (l+1)Z_{l+1,1}] \left. \right\} \\
&\rightarrow -\sum_l \sum_m a_{s,lm} \left\{ \right. \\
&\quad \left( \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,1} \right) [(m-2)\Gamma_{bn,m-1,1} + 2m\Gamma_{bn,m,1} + (m+2)\Gamma_{bn,m+1,1}] \\
&\quad + \Gamma_{bn,m,2} \frac{L_{sx}}{L_{sz}} [(l-1)Z_{l-1,1} + 2lZ_{l,1} + (l+1)Z_{l+1,1}] \left. \right\},
\end{aligned}$$

and

$$\begin{aligned}
X_{sn33} &= \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times B_s v_{\parallel} J_n^2 = \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\parallel} v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \times B_s J_n^2 \\
&= \int_{-\infty}^{\infty} \int_0^{\infty} \frac{2\pi\omega v_{\parallel} v_{\perp} dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} c_{s0} \sum_l \sum_m a_{s,lm} \left\{ \right. \\
&\quad \frac{n\omega_{cs} v_{\parallel}}{\omega v_{\perp}} f_{s0z,l} \frac{i}{2L_{sx}} [(m-2)f_{s0x,m-1} + 2mf_{s0x,m} + (m+2)f_{s0x,m+1}] \\
&\quad + \frac{\omega - n\omega_{cs}}{\omega} f_{s0x,m} \frac{i}{2L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \left. \right\} J_n^2 \\
&= \frac{i}{\pi L_{sz} L_{sx}^2} \int_{-\infty}^{\infty} \int_0^{\infty} \frac{dv_{\perp} dv_{\parallel}}{\omega - k_{\parallel}v_{\parallel} - n\omega_{cs}} \sum_l \sum_m a_{s,lm} \left\{ \right. \\
&\quad n\omega_{cs} v_{\parallel}^2 f_{s0z,l} \frac{1}{L_{sx}} [(m-2)f_{s0x,m-1} + 2mf_{s0x,m} + (m+2)f_{s0x,m+1}] \\
&\quad + v_{\parallel} v_{\perp} (\omega - n\omega_{cs}) f_{s0x,m} \frac{1}{L_{sz}} [(l-1)f_{s0z,l-1} + 2lf_{s0z,l} + (l+1)f_{s0z,l+1}] \left. \right\} J_n^2 \\
&= i \frac{L_{sz}^2}{L_{sx}^2} \sum_l \sum_m a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,2} [(m-2)\Gamma_{an,m-1,0} + 2m\Gamma_{1n,m,0} + (m+2)\Gamma_{1n,m+1,0}] \right. \\
&\quad + \Gamma_{an,m,1} \frac{L_{sz}^2}{L_{sx}^2} [(l-1)Z_{l-1,2} + 2lZ_{l,2} + (l+1)Z_{l+1,2} + (l-1)I_{l-1,1} + 2lI_{l,1} + (l+1)I_{l+1,1}] \left. \right\} \\
&= i \frac{L_{sz}^2}{L_{sx}^2} \sum_l \sum_m a_{s,lm} \left\{ \frac{n\omega_{cs}}{k_{\parallel} L_{sz}} Z_{l,2} [(m-2)\Gamma_{an,m-1,0} + 2m\Gamma_{1n,m,0} + (m+2)\Gamma_{1n,m+1,0}] \right. \\
&\quad + \Gamma_{an,m,1} \frac{L_{sz}^2}{L_{sx}^2} [(l-1)Z_{l-1,2} + 2lZ_{l,2} + (l+1)Z_{l+1,2} + 2i\delta_{l,0}] \left. \right\},
\end{aligned}$$

where

$$\mathbf{Q} = \sum_s \mathbf{Q}_s, \quad \mathbf{Q}_s = \frac{\omega_{ps}^2}{\omega^2} \mathbf{P}_s, \quad \mathbf{P}_s = \sum_n \mathbf{P}_{sn}, \quad \mathbf{P}_{sn} = c_{s0} \mathbf{X}_{sn}. \quad (102)$$

We have used  $(l-1)I_{l-1,1} + 2lI_{l,1} + (l+1)I_{l+1,1} = 2i\delta_{l,0}$ .

Here, ' $\rightarrow$ ' means the constant terms  $I_l$  has been summation out for  $n$ . We have used  $\sum_{n=-\infty}^{\infty} J_n J'_n = 0$ ,  $\sum_{n=-\infty}^{\infty} n J_n^2 = 0$ ,  $\sum_{n=-\infty}^{\infty} n J_n J'_n = 0$ ,  $\sum_{n=-\infty}^{\infty} J_n^2 = 1$ ,  $\sum_{n=-\infty}^{\infty} (J'_n)^2 = \frac{1}{2}$  and  $\sum_{n=-\infty}^{\infty} \frac{n^2 J_n^2}{x^2} = \frac{1}{2}$ .

After the above expansion, the dispersion relation Eq.(1) can be readily solved use conventional iterative root finding method. Since the perpendicular integral  $\Gamma(a_s)$  need only calculate once, and the parallel integrals  $Z(\zeta_{sn})$  are finite rational form, this approach can obtain high accurate solution with less computation cost. The above dispersion relation can also be transformed to matrix method similar to the  $\kappa$  distribution case[14, 13]. We omit the transformation here since it is slightly complicated.

Last update: Saturday 11<sup>th</sup> January, 2025 15:39.

## References

- [1] H. S. Xie, Generalized plasma dispersion function: One-solve-all treatment, visualizations, and application to Landau damping, Phys. Plasmas 20, 092125 (2013).
- [2] H. S. Xie and Y. Xiao, PDRK: A General Kinetic Dispersion Relation Solver for Magnetized Plasma, Plasma Science and Technology, 18, 2, 97 (2016). DOI: 10.1088/1009-0630/18/2/01. Update/bugs fixed at <http://hsxie.me/codes/pdrk/> or <https://github.com/hsxie/pdrk/>.

- [3] D. A. Gurnett and A. Bhattacharjee, Introduction to plasma physics: with space and laboratory applications, Cambridge, 2005.
- [4] H. S. Xie, PDRF: A general dispersion relation solver for magnetized multi-fluid plasma, Computer Physics Communications, 185, 670–675 (2014).
- [5] Daniel Verscharen, Kristopher G. Klein, Benjamin D. G. Chandran, Michael L. Stevens, Chadi S. Salem and Stuart D. Bale, ALPS: The Arbitrary Linear Plasma Solver, J. Plasma Phys., 84 (2018) 905840403.
- [6] D. Summers, S.Xue and Richard M. Thorne, Calculation of the dielectric tensor for a generalized Lorentzian (kappa) distribution function, Phys. Plasmas, 1, 2012 (1994).
- [7] Y. Matsuda and G. R. Smith, A microinstability code for a uniform magnetized plasma with an arbitrary distribution function, Journal of Computational Physics, 1992, 100, 229-235.
- [8] P. Hellinger and P. M. Travnicek, Proton core-beam system in the expanding solar wind: Hybrid simulations, Journal of Geophysical Research: Space Physics, 2011, 116, A11101 .
- [9] P. Astfalk and F. Jenko, LEOPARD: A grid-based dispersion relation solver for arbitrary gyrotropic distributions, J. Geophys. Res. Space Physics, 122, 89-101 (2017).
- [10] S. W. A. Irvine, Collective instability and physics of the anomalous Doppler resonance in fusion plasmas, University of Warwick, PhD thesis, 2018.
- [11] J. A. C. Weideman, Computation of the Complex Error Function, SIAM Journal on Numerical Analysis, 1994, 31, 1497-1518.
- [12] H.S. Xie, BO: A unified tool for plasma waves and instabilities analysis, Comput. Phys. Comm. 244 (2019) 343-371; Xie, H. S., Denton, R., Zhao, J. S. and Liu, W, BO 2.0: Plasma Wave and Instability Analysis with Enhanced Polarization Calculations arXiv:2103.16014, 2021. <https://github.com/hxie/bo/>.
- [13] W. Bai, H. S. Xie, C. C. Wu, Y.X. Pu, P. C. Yu, BO-KM: A comprehensive solver for dispersion relation of obliquely propagating waves in magnetized multi-species plasma with anisotropic drift kappa-Maxwellian distribution, Computer Physics Communications 307 (2025) 109434.
- [14] W. Bai and H. S. Xie, Toward developing a comprehensive algorithm for solving kinetic plasma dispersion relations for parallel propagation with a kappa distribution, Phys. Plasmas 30, 043903 (2023).
- [15] P. A. Robinson, Systematic methods for calculation of the dielectric properties of arbitrary plasmas. J. Comput. Phys. 88, 381–392 (1990).
- [16] J. A. C. Weideman, Computing the Hilbert transform on the real line. Math. Comput. 64, 745–762 (1995).
- [17] H. S. Xie, Rapid computation of the plasma dispersion function: Rational and multi-pole approximation, and improved accuracy, AIP Advances 14, 075007 (2024).
- [18] M. Brambilla and R. Bilato, An efficient interface between the solvers of Maxwell's equations and of the quasilinear kinetic equation for simulations of ion cyclotron heating in tokamak plasmas, Computer Physics Communications 184 (2013) 2053–2060.
- [19] R. Bilato, M. Brambilla and Z. Jiang, Implementing zero-banana-width quasilinear operator for fast ICRF simulations, Journal of Physics: Conference Series 401 (2012) 012001.