

# Stochastic Stepwise Ensembles for Variable Selection

Lu Xin and Mu Zhu  
University of Waterloo  
Waterloo, ON, Canada N2L 3G1

March 4, 2011

## Abstract

In this article, we advocate the ensemble approach for variable selection. We point out that the stochastic mechanism used to generate the variable-selection ensemble (VSE) must be picked with care. We construct a VSE using a stochastic stepwise algorithm, and compare its performance with numerous state-of-the-art algorithms.

# 1 Introduction

The ensemble approach for statistical modelling was first made popular by such algorithms as boosting (Freund and Schapire 1996; Friedman *et al.* 2000), bagging (Breiman 1996), random forest (Breiman 2001), and the gradient boosting machine (Friedman 2001). They are powerful algorithms for solving prediction problems. This article is concerned with using the ensemble approach for a different problem, variable selection. We shall use the terms “prediction ensemble” and “variable-selection ensemble” to differentiate ensembles used for these different purposes.

## 1.1 Variable-selection ensembles (VSEs)

First, we give a general description of variable-selection ensembles (VSEs). Suppose there are  $p$  candidate variables. A VSE (of size  $B$ ) can be represented by a  $B \times p$  matrix, say  $\mathbf{E}$ , whose  $j$ -th column contains  $B$  independent measures of how important variable  $j$  is. Let  $\mathbf{E}(b, j)$  denote the  $(b, j)$ -th entry of  $\mathbf{E}$ . Using the ensemble  $\mathbf{E}$  as a whole, one typically ranks the importance of variable  $j$  using a majority-vote type of summary, such as

$$R(j) = \frac{1}{B} \sum_{b=1}^B \mathbf{E}(b, j), \quad (1)$$

and the variables that are ranked “considerably higher” than the rest are then selected.

The key for generating a VSE lies in producing multiple measures of importance for each candidate variable. By contrast, traditional variable selection procedures, including stepwise selection and Lasso, typically produce just one such measure, that is,  $B = 1$ . It shouldn’t be hard for any statistician to appreciate that averaging over a number of independent measures is often beneficial. This is the main reason why VSEs are attractive and more powerful than many traditional approaches.

To make selection decisions, one must be more precise about what it means to say that some variables are ranked “considerably higher” than the rest. One option is to select variable  $j$  if it is ranked “above average,” i.e., if

$$R(j) > \frac{1}{p} \sum_{k=1}^p R(k). \quad (2)$$

This is what we use in all the experiments reported below, but we emphasize that other thresholding rules can be used as well. For example, one can make a so-called “scree plot” of  $R(1), R(2), \dots, R(p)$ , and look for an “elbow” — a very common practice in principal component analysis (e.g. Jolliffe 2002), but the precise location of the “elbow” is highly subjective, which is why we choose not to use this strategy here.

The distinction between ranking and thresholding is particularly important for VSEs; we will say more about this in Section 4.1.

## 1.2 PGA

Zhu and Chipman (2006) constructed a VSE using a so-called parallel genetic algorithm (PGA). To produce multiple measures of variable importance, PGA repeatedly performs stochastic rather than deterministic optimization of the Akaike Information Criterion (AIC; Akaike 1973), while deliberately stopping each optimization path prematurely. In practice, one must be more exact about what “premature” means, but we won’t go into the specifics here and refer the readers to Zhu and Chipman (2006, Section 3.2) for details.

The main idea is as follows. Early termination forces each optimization path to produce sub-optimal rather than optimal solutions, while the use of stochastic rather than deterministic optimization allows each of these sub-optimal solutions to be different from each other (Zhu 2008). For example, suppose we have five candidate variables,  $x_1, x_2, \dots, x_5$ . The first time we stochastically optimize the AIC for just a few steps, we may arrive at the solution  $\{x_1, x_2, x_3\}$ ; the second time, we may arrive at  $\{x_1, x_2, x_4\}$ ; and the third time, perhaps  $\{x_1, x_2, x_5\}$ . This produces the following ensemble:

$$\mathbf{E} = \begin{bmatrix} 1 & 1 & 1 & 0 & 0 \\ 1 & 1 & 0 & 1 & 0 \\ 1 & 1 & 0 & 0 & 1 \end{bmatrix}.$$

Since

$$R(1) = R(2) = 1 > \frac{1}{3} = R(3) = R(4) = R(5),$$

the ensemble selects  $\{x_1, x_2\}$ .

Zhu and Chipman (2006) used the genetic algorithm (GA; Goldberg 1989) as their stochastic optimizer in each path, but our general description of VSEs above (Section 1.1) makes it clear that any other stochastic optimizer can be used for PGA to work, despite the name “PGA.” This is a crucial point, and we will come back to it later (Sections 1.3 and 4.2).

Though driven by the AIC, it has been observed that PGA has a much higher probability of selecting the correct subset of variables than optimizing the AIC by exhaustive search — of course, such observations have only been made on mid-sized simulation problems where an exhaustive search is feasible and the correct subset is known. Nonetheless, they show quite conclusively that PGA is not merely a better search algorithm, because one cannot possibly perform a better search than an exhaustive one. Therefore, PGA can be seen as an effective AIC “booster,” and this is precisely why the ensemble approach to variable selection is valuable and powerful.

## 1.3 Motivating example: A weak signal

One of the key objectives of this article is to present a better variable-selection ensemble than what PGA produces, one which we call the stochastic stepwise ensemble (ST2E). Like Zhu and Chipman (2006), we also focus on multiple linear regression models, although VSEs are easily applicable to other statistical models such as logistic regression and Cox regression.

We first describe a simple experiment to motivate our work. There are 20 potential predictors,  $\mathbf{x}_1, \mathbf{x}_2, \dots, \mathbf{x}_{20}$ , but only three of them are actually used in the true model to generate the response,  $\mathbf{y}$ :

$$\mathbf{y} = \alpha \mathbf{x}_1 + 2\mathbf{x}_2 + 3\mathbf{x}_3 + \sigma \boldsymbol{\epsilon}, \quad \mathbf{x}_1, \dots, \mathbf{x}_{20}, \boldsymbol{\epsilon} \sim \mathcal{N}(\mathbf{0}, \mathbf{I}). \quad (3)$$

The sample size  $n$  is taken to be 100, and  $\sigma = 3$ . In addition, the three variables that generate  $\mathbf{y}$  are correlated, with  $\text{Corr}(\mathbf{x}_i, \mathbf{x}_j) = 0.7$  for  $i, j \in \{1, 2, 3\}$  and  $i \neq j$ . The  $\mathbf{x}$ 's and  $\boldsymbol{\epsilon}$  are otherwise independent of each other.

We shall consider  $\alpha = 0.1, 0.2, \dots, 0.9, 1.0, 1.2$  and  $1.5$ . By construction, there are three types of variables:  $\mathbf{x}_1$  is a relatively weak variable — it is part of the true model but its signal-to-noise ratio is relatively low;  $\mathbf{x}_2$  and  $\mathbf{x}_3$  are relatively strong variables; and  $\mathbf{x}_4, \dots, \mathbf{x}_{20}$  are noise variables — they are not part of the true model.

For each  $\alpha$ , the experiment is repeated 100 times. Figure 1 shows the average frequency the three different types of variables are selected by two different VSEs, PGA and ST2E, as our experimental parameter  $\alpha$  varies. The two VSEs are both of size  $B = 300$ .

The messages from this experiment are as follows. In terms of catching the strong signals ( $\mathbf{x}_2$  and  $\mathbf{x}_3$ ), ST2E and PGA are about the same. In terms of guarding against the noise variables ( $\mathbf{x}_j$  for  $j > 3$ ), ST2E is slightly better than PGA. But, most importantly, we see that ST2E is significantly better than PGA at catching the weak signal,  $\mathbf{x}_1$ . It is in this sense that ST2E is a better VSE than PGA.

The improved performance of ST2E is due to the use of a more structured stochastic optimizer in each path. In particular, a so-called stochastic stepwise (STST or simply ST2) algorithm is used, which is why we call it the “stochastic stepwise ensemble” (or ST2E). Explanations for why a more structured stochastic optimizer is desirable are given in Section 2.3.1.

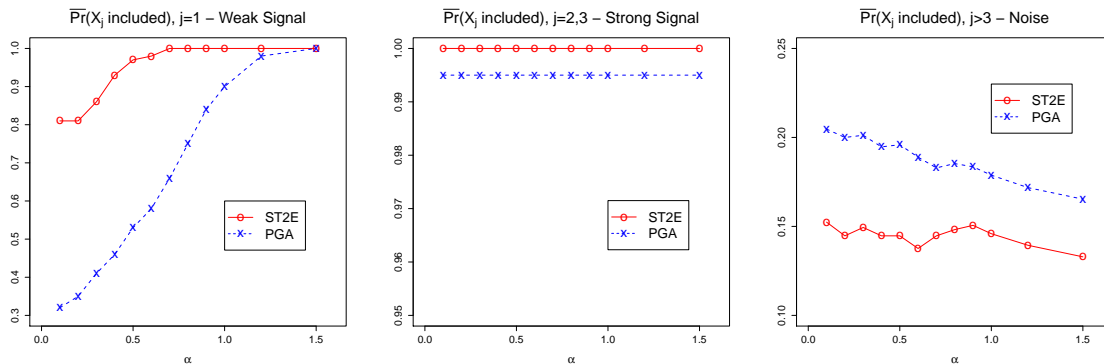


Figure 1: Motivating example (Section 1.3). Average frequency the three different types of variables are selected by ST2E and PGA. Notice that the vertical scales are not identical.

## 1.4 Random Lasso and stability selection

The idea of using the ensemble approach for variable selection has started to catch up in recent years, for example, the “random Lasso” method (Wang *et al.* 2009) and the “stability selection” method (Meinshausen and Bühlmann 2010). The latter consists of a general class of methods for structural estimation, including graphical modeling, but we shall limit our discussions here to the regression problem.

For regression problems, these algorithms essentially give rise to different VSEs as we have defined them in Section 1.1, although they are *not* explicitly presented or labeled as ensemble algorithms by the authors. The “random Lasso” method, for instance, was presented to “alleviate [various] limitations of [the] Lasso” when dealing with highly correlated variables and “large  $p$ , small  $n$ ” problems. The “stability selection” method, on the other hand, was presented to reduce the influence of regularization parameters and to provide “finite sample familywise error control” for the expected number of false discoveries. We shall see later that, while this method does provide very good error control for false discoveries, it appears to do so at the expense of missing true signals.

Even though one can apply stability selection to different regression procedures, we will consider only its application to the Lasso (Tibshirani 1996). At a very high level, both the random Lasso and the stability selection algorithms consist of running a randomized Lasso repeatedly on many bootstrap samples and aggregating the results. That is, they can both be regarded as VSEs. They differ on how the Lasso is randomized. For Wang *et al.* (2009), each Lasso is run with a randomly selected subset of variables; both the size of this subset and the  $l_1$ -regularization parameter  $\lambda$  are selected by cross validation (CV) and fixed at the CV choices. For Meinshausen and Bühlmann (2010), all regularization parameters  $\lambda \geq \lambda_{min}$  are considered; each Lasso is run by randomly scaling the regularization parameter for every regression coefficient; and the parameter  $\lambda_{min}$  is chosen to control the expected number of false discoveries.

## 1.5 Outline

We proceed as follows. In Section 2, we describe a more structured approach to generate VSEs, the ST2 algorithm. We explain why the ST2 algorithm produces better ensembles than the genetic algorithm. We also describe how to set the tuning parameter in ST2. In Section 3, we present a number of simulated and real-data examples, and compare ST2E with a number of other variable-selection algorithms, such as Lasso (Tibshirani 1996) and its variations (e.g., Zou 2006; Meinshausen 2007), LARS (Efron *et al.* 2004), SCAD (Fan and Li 2001), elastic net (Zou and Hastie 2005), VISA (Radchenko and James 2008), and the two ensemble approaches mentioned above — random Lasso (Wang *et al.* 2009) and stability selection (Meinshausen and Bühlmann 2010). In Section 4, we make a few more general comments about the ensemble approach for variable selection, and present a simple extension of ST2E to tackle “large  $p$ , small  $n$ ” problems.

## 2 Stochastic stepwise selection

In this section, we describe a more structured stochastic search algorithm suitable for variable selection. In section 2.3.1, some explanations will be given as to why a more structured stochastic search is desirable.

### 2.1 The ST2 algorithm

Traditional stepwise regression combines forward and backward selection, alternating between forward and backward steps. In the forward step, each variable other than those already included is added to the current model, one at a time, and the one that can best improve the objective function, e.g., the AIC, is retained. In the backward step, each variable already included is deleted from the current model, one at a time, and the one that can best improve the objective function is discarded. The algorithm continues until no improvement can be made by either the forward or the backward step.

Instead of adding or deleting variables one at a time, ST2 adds or deletes a *group* of variables at a time, where the group size is *randomly* decided. In traditional stepwise, the group size is one and each candidate variable is assessed. When the group size is larger than one, as is often the case for ST2, the total number of variable groups can be quite large. Instead of evaluating all possible groups, only a *randomly* selected few are assessed and the best one chosen. Table 1 contains a detailed description of the ST2 algorithm.

### 2.2 Tuning functions

We now explain how the numbers  $g_f, g_b, k_f, k_b$  (see Table 1) are determined. Suppose we are doing a forward (backward) step and the potential predictors to be added (deleted) are  $\{x_1, x_2, \dots, x_m\}$ . First, we need to determine  $g$ , the number of variables to add (delete). Intuitively, it seems reasonable that  $g$  should depend on  $m$ , say

$$g = \phi_g(m).$$

Second, given  $g$ , we have a total of  $\binom{m}{g}$  possible groups of variables and need to determine  $k$ , the number of groups to assess. Intuitively, it also seems reasonable that  $k$  should depend on  $\binom{m}{g}$ , say

$$k = \phi_k(m, g).$$

We define the function  $\phi_g$  as

$$\phi_g(m) \sim \text{Unif}(\Psi_m),$$

where

$$\Psi_m = \{1, 2, 3, \dots, \lfloor \lambda m + 0.5 \rfloor\},$$

Table 1: The stochastic stepwise (STST or simply ST2) algorithm for variable selection.

<p><b>Repeat</b></p> <ol style="list-style-type: none"> <li>1. (Forward Step) Suppose <math>d</math> variables, <math>\{x_{l_1}, x_{l_2}, \dots, x_{l_d}\}</math> are not in the current model. Initially, <math>d = p</math>. <ol style="list-style-type: none"> <li>(a) Determine the number of variables we want to add into the model, or the group size, say <math>g_f \leq d</math>.<sup>†</sup></li> <li>(b) Determine the number of candidate groups that will be assessed, <math>k_f</math>.<sup>†</sup></li> <li>(c) Generate <math>k_f</math> candidate groups of size <math>g_f</math>, each by randomly choosing <math>g_f</math> variables without replacement from the set, <math>\{x_{l_1}, x_{l_2}, \dots, x_{l_d}\}</math>.</li> <li>(d) Assess each candidate group by adding it into the current model, one group at a time. The one that can best improve the objective function (e.g., the AIC) is added into the model.</li> </ol> </li> <li>2. (Backward Step) Suppose <math>h</math> variables, <math>\{x_{l_1}, x_{l_2}, \dots, x_{l_h}\}</math> are in the current model. <ol style="list-style-type: none"> <li>(a) Determine the number of variables we want to delete from the model, or the group size, say <math>g_b \leq h</math>.<sup>†</sup></li> <li>(b) Determine the number of candidate groups that will be assessed, <math>k_b</math>.<sup>†</sup></li> <li>(c) Generate <math>k_b</math> candidate groups of size <math>g_b</math>, each by randomly choosing <math>g_b</math> variables without replacement from the set, <math>\{x_{l_1}, x_{l_2}, \dots, x_{l_h}\}</math>.</li> <li>(d) Assess each candidate group by deleting it from the current model, one group at a time. The one that can best improve the objective function (e.g., the AIC) is deleted from the model.</li> </ol> </li> </ol> <p><b>Until</b></p> <p>no improvement can be made by either the forward or the backward step.</p>
--

<sup>†</sup> Details for how the numbers  $g_f, k_f, g_b, k_b$  are determined are given in Sections 2.2 and 2.3.

for some  $0 < \lambda < 1$ , and  $\lfloor x \rfloor$  is the largest integer not greater than  $x$ . The function  $\phi_k$  is defined as:

$$\phi_k(m, g) = \left\lfloor \binom{m}{g}^{1/\kappa} + 0.5 \right\rfloor \quad (4)$$

for some  $\kappa > 1$ . We fix  $\lambda = 1/2$  and discuss how to choose the parameter  $\kappa$  later (Section 2.3). Here, we first explain why the functions  $\phi_g$  and  $\phi_k$  are chosen to have these particular forms, and why we fix  $\lambda = 1/2$ .

First, it is important that  $g = \phi_g(m)$  is a stochastic and not a deterministic function. Consider the first forward step and the first backward step. Suppose there are  $m = p = 20$  potential predictors. If  $\phi_g(m)$  is a deterministic function, say  $\phi_g(20) = 7$  and  $\phi_g(7) = 3$ , then, for all individual paths, only models with 7 predictors are assessed by the forward step and those with  $7 - 3 = 4$  predictors are assessed by the backward step. Many models, such as those with 2 or 3 predictors, are never assessed. Clearly, more flexibility is needed. According to our definition and with  $\lambda = 1/2$ ,  $\phi_g(20) \sim \text{Unif}\{1, 2, \dots, 10\}$ . In the first forward step, some paths may add 3 variables, while others may add 1, 2, 4, 5, ..., or 10 variables.

Next, it makes sense that we should not add or delete too many variables in a *single* step. This is why we fix  $\lambda = 1/2$ , so that at the most half of the available variables can be added or deleted. Notice that this restriction only applies to single search steps; it does not preclude the algorithm (which consists of many such steps) from selecting all the variables if necessary.

Finally, we want the function  $k = \phi_k(m, g)$  to be monotonically increasing in  $\binom{m}{g}$  — as more subsets become available, more candidate groups should be assessed in order to have a reasonable chance of finding an improvement. However, we cannot afford to let this grow linearly in  $\binom{m}{g}$  since it can be a very large number and that’s why we use  $\binom{m}{g}^{1/\kappa}$  for some  $\kappa > 1$ .

## 2.3 Tuning parameters

We now explain how to choose the tuning parameter,  $\kappa$ . For prediction ensembles, cross validation can be used to adjust various tuning parameters in order to maximize *prediction accuracy*, but this requires our validation data to contain the right answer. For variable-selection ensembles, however, this is not viable. We cannot empirically adjust its tuning parameter(s) to maximize *selection accuracy* because, no matter how we set data aside for validation, we won’t know which variables are in the “true model” and which ones are not. For this reason, many researchers still use cross-validated prediction error to guide the choice of tuning parameters for their variable-selection procedure, but Yang (2005) has clearly established that prediction accuracy and selection accuracy are fundamentally at odds with each other. In a more recent article, Shmueli (2010) discusses various related issues from a less technical and more philosophical point of view. It must be stated without ambiguity that we are aiming for selection accuracy, not prediction accuracy. As such, cross validation is out of the question. Instead, we use ideas from Breiman (2001) to help us specify our



tuning parameter.

### 2.3.1 Strength-diversity tradeoff

Breiman (2001) studied prediction ensembles that he called random forests (RF):

$$\text{RF} = \{f(\mathbf{x}; \theta_b) : \theta_b \stackrel{iid}{\sim} \mathcal{P}_\theta, b = 1, 2, \dots, B\}.$$

For classification,  $f(\mathbf{x}; \theta_b)$  is a classifier completely parameterized by  $\theta_b$ , and the statement “ $\theta_b \stackrel{iid}{\sim} \mathcal{P}_\theta$ ” means that each  $f(\cdot; \theta_b)$  is generated using an iid stochastic mechanism,  $\mathcal{P}_\theta$ , e.g., bootstrap sampling (e.g., Breiman 1996) and/or random subspaces (e.g., Ho 1998).

Breiman (2001) proved that, for a random forest to be effective, individual members of the ensemble must be as good classifiers as possible, but they must also be as uncorrelated to each other as possible. In other words, a good classification ensemble is a *diverse* collection of *strong* classifiers.

Typically, the diversity of an ensemble can be increased by increasing  $\text{Var}(\mathcal{P}_\theta)$ . But, unfortunately, this almost always reduces its strength. Therefore, it is important to use a stochastic mechanism  $\mathcal{P}_\theta$  with a “reasonable”  $\text{Var}(\mathcal{P}_\theta)$ . This basic principle has been noted elsewhere, too. For example, Friedman and Popescu (2003) described ensembles from an importance-sampling point of view. There, the corresponding notion of  $\text{Var}(\mathcal{P}_\theta)$  is simply the variance of the importance-sampling distribution, also referred to as the trial distribution. It is well-known in the importance-sampling literature that the variance of the trial distribution must be specified carefully (e.g., Liu 2001, Section 2.5).

Although Breiman’s theory of strength-diversity tradeoff is developed for prediction ensembles, some of these ideas can be borrowed for VSEs. In fact, this tradeoff explains why ST2E produces better variable-selection ensembles than PGA. Recall that PGA uses the genetic algorithm as the main stochastic mechanism to produce the ensemble, whereas ST2E uses a more structured ST2 algorithm (Section 2.1). Using Breiman’s language, we can say that the more structured ST2 algorithm has a “more reasonable” variance than the genetic algorithm. It also allows us to exercise more control over the algorithm via the tuning parameter  $\kappa$  in order to better balance the intricate tradeoff between strength and diversity.

### 2.3.2 Computable measures of strength and diversity

We now describe how to use the diversity-strength tradeoff to specify the tuning parameter,  $\kappa$ . Given  $p$  potential covariates, let  $\mathbf{E}$  be a VSE of size  $B$ . The idea is to define *computable* measures of its diversity and strength, say  $\mathcal{D}(\mathbf{E})$  and  $\mathcal{S}(\mathbf{E})$ , and choose  $\kappa$  to balance the tradeoff between them.

Given a VSE,  $\mathbf{E}$ , its diversity  $\mathcal{D}(\mathbf{E})$  can be measured by the average within-ensemble variation. For every variable  $j$ , there are  $B$  independent measures of how important the variable is. The

quantity

$$v(j) = \frac{1}{B-1} \sum_{b=1}^B \left[ \mathbf{E}(b, j) - \frac{1}{B} \sum_{b=1}^B \mathbf{E}(b, j) \right]^2 \quad (5)$$

is the within-ensemble variance of these measures, and the quantity

$$\mathcal{D}(\mathbf{E}) = \frac{1}{p} \sum_{j=1}^p v(j), \quad (6)$$

is a measure of the average within-ensemble variation.

Let  $F(\cdot)$  denote the objective function that each path of the VSE aims to optimize. We measure the mean strength of  $\mathbf{E}$  by the average percent improvement of the objective function over the null model, i.e.,

$$\mathcal{S}(\mathbf{E}) = \frac{1}{B} \sum_{b=1}^B \frac{|F(\mathbf{E}(b, \cdot)) - F_0|}{F_0} \quad (7)$$

where  $F_0$  is the objective function evaluated at the null model, i.e., a model that does not contain any predictors.

### 2.3.3 Example

Figure 2 shows an example of how our tuning strategy works. This is based on 50 simulations using equation (3), while fixing  $\alpha = 1$ . The quantities  $\mathcal{S}(\mathbf{E})$  and  $\mathcal{D}(\mathbf{E})$  are plotted against  $\kappa$  (left and middle). For  $\kappa$ , the logarithmic scale is used. Variable-selection performance, measured here by

$$\text{Perf}(\mathbf{E}) = \text{ASF}(\text{Signal}) - \text{ASF}(\text{Noise}),$$

where ‘‘ASF’’ stands for the average selection frequency, is also plotted (right).

The behavior depicted here is fairly typical. We see from the left panel that  $\mathcal{S}(\mathbf{E})$  tends to decrease as we increase  $\kappa$ . This is because, when  $\kappa$  is relatively small, the search conducted by steps 1(d) and 2(d) in the ST2 algorithm (Table 1) is relatively greedy; many candidate subsets (of a certain given size) are evaluated and the best one, chosen. This results in high strength. As  $\kappa$  increases, the search becomes less greedy, which reduces strength.

On the other hand, the greedier the search, the higher the chance of finding the same subset. This explains why a small  $\kappa$  tends to produce low diversity. As  $\kappa$  increases and the search becomes less greedy, diversity starts to increase. But the parameter  $\kappa$  controls not only the greediness but also the scope of the search. For example, it is easy to see from (4) that  $\phi_k(m, g) \rightarrow 1$  as  $\kappa \rightarrow \infty$ . This means that, when  $\kappa$  is very large, the scope of the search performed by steps 1(d) and 2(d) becomes quite limited, which also reduces diversity. This is why we see that, in the middle panel, the diversity measure  $\mathcal{D}(\mathbf{E})$  first increases but eventually decreases with  $\kappa$ .

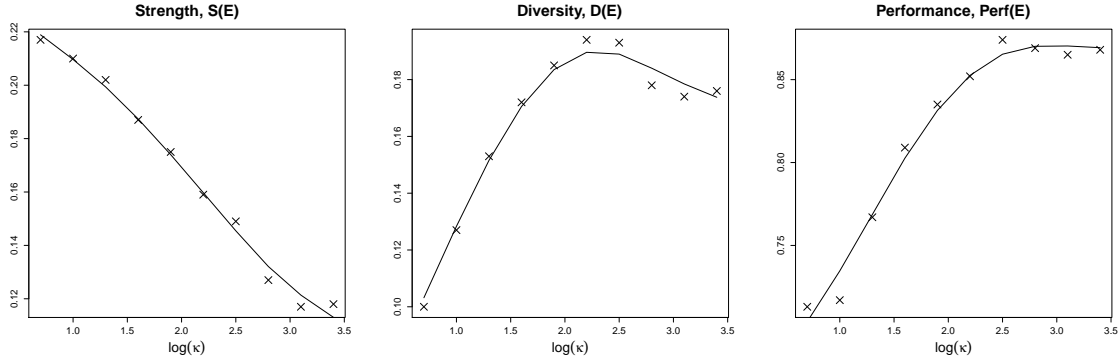


Figure 2: Illustration of how to select the tuning parameter,  $\kappa$ , in ST2E. Based on 50 simulations of model (3) with  $\alpha = 1$ .

Finally, we see from the right panel that, as  $\mathcal{D}(\mathbf{E})$  reaches its peak level, the variable-selection performance also starts to level off or drop. This means choosing  $\kappa$  by looking for the peak in the  $\mathcal{D}(\mathbf{E})$  plot can be an effective strategy. This is what we use in all the experiments we report below.

Of course, we must emphasize that the measure  $\text{Perf}(\mathbf{E})$  and hence the right panel of Figure 2 are typically not available; they are only available for simulated examples where the true model is known. We include them here merely as a validation that it makes sense to choose  $\kappa$  in such a way. In reality, one must rely on the plot of  $\mathcal{D}(\mathbf{E})$  alone to make the choice.

## 2.4 Effect of sample size

Before we move on to examples and performance comparisons, we conduct a simple experiment to examine the performance of ST2E as the sample size  $n$  increases. As in Section 2.3.3, we simulate from our motivating example, equation (3), except we fix  $\alpha = 0.15$  this time. Using a small  $\alpha$  creates a more difficult problem, which will allow us to see the effect of  $n$  more clearly. For each  $n = 50, 100, 150, 250$  and  $500$ , we perform 100 simulations and record the average number of times the three types of variables (strong, weak, noise) are selected. Table 2 shows that ST2E behaves “reasonably” in this respect. As  $n$  increases, signal variables (both strong and weak) are selected with increasing probability, and the opposite is true for noise variables.

## 3 Examples

We now present a few examples and compare the performance of ST2E with a number of other methods. For VSEs (ST2E, PGA, and stability selection), we use a size of  $B = 300$ . To run stability selection, two tuning parameters are required,  $\pi_{thr}$  and  $\lambda_{min}$  — see Meinshausen and Bühlmann (2010) for details. The authors suggested fixing either one at a “sensible” value and choosing the

Table 2: Average number of times (out of 100) the three types of variables — weak signal ( $j = 1$ ), strong signal ( $j = 2, 3$ ), and noise ( $j > 3$ ) — are selected by ST2E as the sample size  $n$  varies. Same setting as the motivating example in Section 1.3, with  $\alpha = 0.15$ .

Sample Size ( $n$ )	$\mathbf{x}_j \in$ Weak Signal ( $j = 1$ )	$\mathbf{x}_j \in$ Strong Signal ( $j = 2, 3$ )	$\mathbf{x}_j \in$ Noise ( $j > 3$ )
50	62	99	17.12
100	86	100	15.41
150	89	100	13.18
250	97	100	11.82
500	99	100	11.53

other to control the expected number of false discoveries. We fix  $\pi_{thr} = 0.6$ , and report results for a range of  $\lambda_{min}$  values.

### 3.1 A widely used benchmark

First, we look at a widely used benchmark simulation. There are  $p = 8$  variables,  $\mathbf{x}_1, \dots, \mathbf{x}_8$ , each generated from the standard normal. Furthermore, the variables are generated to be correlated, with  $\rho(\mathbf{x}_i, \mathbf{x}_j) = 0.5^{|i-j|}$  for all  $i \neq j$ . The response  $\mathbf{y}$  is generated by

$$\mathbf{y} = 3\mathbf{x}_1 + 1.5\mathbf{x}_2 + 2\mathbf{x}_5 + \sigma\epsilon \quad (8)$$

where  $\epsilon \sim N(\mathbf{0}, \mathbf{I})$ . That is, only three variables are true signals; the remaining five are noise. This benchmark was first used by Tibshirani (1996), but it has been used by *almost* every major variable-selection paper published ever since.

For example, Fan and Li (2001, Example 4.1) used this simulation to compare Lasso, the non-negative garrote (Breiman 1995), hard thresholding (see, e.g., Donoho 1995), best subset regression (e.g., Miller 2002), and SCAD (Fan and Li 2001). Wang *et al.* (2009, Example 1) used this simulation to compare Lasso, adaptive Lasso (Zou 2006), elastic net (Zou and Hastie 2005), relaxed Lasso (Meinshausen 2007), VISA (Radchenko and James 2008), and random Lasso (Wang *et al.* 2009).

Results from Fan and Li (2001) are replicated in Table 3, together with results from three VSEs — ST2E, PGA, and stability selection. The ensemble algorithms are clearly among the most competitive. PGA and stability selection using a relatively large  $\lambda_{min}$  are slightly better than ST2E at excluding noise variables, but, as will become clearer in Table 4, they are also more likely than ST2E to miss true signals.

Results from Wang *et al.* (2009) are replicated in Table 4, together with results from ST2E, PGA, and stability selection. Here, the difficulty of PGA becomes clearer. It is better than ST2E in terms of excluding noise variables, but it also misses true signals more often. The same can be said about stability selection using a relatively large  $\lambda_{min}$  value. It controls the number of false discoveries quite effectively, but we see that this will cause the method to behave poorly in terms of catching

Table 3: Widely-used benchmark (Section 3.1). Average number of zero coefficients for the noise group (oracle result = 5) and the signal group (oracle result = 0), based on 100 simulations. Results other than those for ST2E, PGA and stability selection are taken from Fan and Li (2001, Table 1). SCAD1 uses cross-validation to select the tuning parameter, while SCAD2 uses a fixed tuning parameter — details are in Fan and Li (2001).

Method	Avg. No. of 0 Coef.	
	$\mathbf{x}_j \in \text{Noise}$ ( $j = 3, 4, 6, 7, 8$ )	$\mathbf{x}_j \in \text{Signal}$ ( $j = 1, 2, 5$ )
$n = 40, \sigma = 3$		
SCAD1	4.20	0.21
SCAD2	4.31	0.27
LASSO	3.53	0.07
Hard	4.09	0.19
Best subset	4.50	0.35
Garrote	2.80	0.09
Oracle	5.00	0.00
ST2E	4.56	0.18
PGA	4.75	0.16
Stability selection		
$\lambda_{min} = 1.5$	4.96	1.03
$\lambda_{min} = 1.0$	4.86	0.58
$\lambda_{min} = 0.5$	4.54	0.18
$n = 60, \sigma = 1$		
SCAD1	4.37	0.00
SCAD2	4.42	0.00
LASSO	3.56	0.00
Hard	4.02	0.00
Best subset	4.73	0.00
Garrote	3.38	0.00
Oracle	5.00	0.00
ST2E	4.81	0.00
PGA	4.96	0.00
Stability selection		
$\lambda_{min} = 1.5$	5.00	0.21
$\lambda_{min} = 1.0$	5.00	0.01
$\lambda_{min} = 0.5$	4.95	0.00

true signals. In order to improve its false negative rates, we must reduce  $\lambda_{min}$ , but this necessarily allows for more false discoveries. Random Lasso has the best ability to catch true signals, but to do so, it makes a large number of false discoveries at the same time.

### 3.2 Highly-correlated predictors

Next, we look at a simulation (Wang *et al.* 2009, Example 4) that is specifically created to study variable selection algorithms when the predictors are highly correlated *and* their coefficients have opposite signs. There are  $p = 40$  variables,  $\mathbf{x}_1, \dots, \mathbf{x}_{40}$ , each generated from the standard normal. The response  $\mathbf{y}$  is generated by

$$\mathbf{y} = 3\mathbf{x}_1 + 3\mathbf{x}_2 - 2\mathbf{x}_3 + 3\mathbf{x}_4 + 3\mathbf{x}_5 - 2\mathbf{x}_6 + \sigma\epsilon \quad (9)$$

where  $\epsilon \sim N(\mathbf{0}, \mathbf{I})$  and  $\sigma = 6$ . In addition, the 40 variables are generated to have the following (block diagonal) correlation structure:

$$\begin{bmatrix} \mathbf{C}_{3 \times 3} & - & - \\ - & \mathbf{C}_{3 \times 3} & - \\ - & - & - \end{bmatrix}, \quad \text{where } \mathbf{C} = \begin{bmatrix} 1 & 0.9 & 0.9 \\ 0.9 & 1 & 0.9 \\ 0.9 & 0.9 & 1 \end{bmatrix}.$$

That is, there are three groups of variables:  $V_1 = \{1, 2, 3\}$ ,  $V_2 = \{4, 5, 6\}$ , and  $V_3 = \{7, 8, \dots, 40\}$ . The first two groups,  $V_1$  and  $V_2$ , are true signals, but, within each of  $V_1$  and  $V_2$ , the variables are highly correlated. There is no between-group correlation.

Results from Wang *et al.* (2009) are replicated in Table 5, together with results from the ST2E, PGA, and stability selection. Clearly, ST2E and random Lasso are the top two performers for this problem. PGA has a much higher tendency than ST2E to miss true signals. Stability selection appears to have some difficulties here as well. If we choose  $\lambda_{min}$  to control the false discoveries too aggressively, we start to lose signals quite badly. When its false discovery rate is as low as that of relaxed Lasso and VISA, for example, stability selection misses true signals much more often. On the other hand, even if  $\lambda_{min}$  is relaxed to allow for many false discoveries in this case, stability selection still cannot seem to catch the signals as well as ST2E or random Lasso. This example clearly demonstrates that, when the predictors are highly correlated, the performances of PGA and stability selection can start to deteriorate quite significantly, whereas ST2E produces a much more robust VSE.

### 3.3 Diabetes data

Finally, we analyze the “diabetes” data set, which was used as the main example in the “least angle regression” (LAR) paper (Efron *et al.* 2004). This is a real data set; a standardized version of the data set is available as part of the R package, `lars`. There are  $n = 442$  diabetes patients and  $p = 10$

Table 4: Widely-used benchmark (Section 3.1). Minimal, median, and maximal number of times (out of 100 simulations) different types of variables (signal versus noise) are selected. Results other than those for ST2E, PGA and stability selection are taken from Wang *et al.* (2009, Table 2).

Method	$\mathbf{x}_j \in \text{Signal}$ ( $j = 1, 2, 5$ )			$\mathbf{x}_j \in \text{Noise}$ ( $j = 3, 4, 6, 7, 8$ )		
	Min	Median	Max	Min	Median	Max
$n = 50, \sigma = 1$						
Lasso	100	100	100	46	58	64
Adaptive Lasso	100	100	100	23	27	38
Elastic Net	100	100	100	46	59	64
Relaxed Lasso	100	100	100	10	15	19
VISA	100	100	100	11	17	20
Random Lasso	100	100	100	28	33	44
ST2E	100	100	100	1	1	8
PGA	100	100	100	0	2	6
Stability selection						
$\lambda_{min} = 1.5$	75	86	100	0	0	2
$\lambda_{min} = 1.0$	100	100	100	0	0	2
$\lambda_{min} = 0.5$	100	100	100	0	0	7
$n = 50, \sigma = 3$						
Lasso	99	100	100	48	55	61
Adaptive Lasso	95	99	100	33	40	48
Elastic Net	100	100	100	44	55	69
Relaxed Lasso	93	100	100	11	18	21
VISA	97	100	100	15	21	24
Random Lasso	99	100	100	45	57	68
ST2E	89	96	100	4	12	20
PGA	82	98	100	4	7	11
Stability selection						
$\lambda_{min} = 1.5$	59	64	100	0	0	3
$\lambda_{min} = 1.0$	81	83	100	0	2	9
$\lambda_{min} = 0.5$	90	98	100	4	8	22
$n = 50, \sigma = 6$						
Lasso	76	85	99	47	49	53
Adaptive Lasso	62	76	96	32	36	38
Elastic Net	85	92	100	43	51	70
Relaxed Lasso	60	70	98	15	19	21
VISA	61	72	98	15	19	24
Random Lasso	92	94	100	40	48	58
ST2E	68	69	96	9	13	21
PGA	54	76	94	9	14	16
Stability selection						
$\lambda_{min} = 1.5$	40	41	83	0	4	8
$\lambda_{min} = 1.0$	59	61	92	4	8	18
$\lambda_{min} = 0.5$	76	84	100	30	42	50

Table 5: Highly-correlated predictors (Section 3.2). Minimal, median, and maximal number of times (out of 100 simulations) different types of variables (signal versus noise) are selected. Results other than those for ST2E, PGA, and stability selection are taken from Wang *et al.* (2009, Table 2).

Method	$\mathbf{x}_j \in \text{Signal}$ ( $j \leq 6$ )			$\mathbf{x}_j \in \text{Noise}$ ( $j > 6$ )		
	Min	Median	Max	Min	Median	Max
$n = 50$						
Lasso	11	70	77	12	17	25
Adaptive Lasso	16	49	59	4	8	14
Elastic Net	63	92	96	9	17	23
Relaxed Lasso	4	63	70	0	4	9
VISA	4	62	73	1	3	8
Random Lasso	84	96	97	11	21	30
ST2E	85	96	100	18	25	34
PGA	55	87	90	14	23	32
Stability selection						
$\lambda_{min} = 0.1$	1	35	42	1	5	13
$\lambda_{min} = 0.01$	1	37	45	7	13	22
$\lambda_{min} = 0.002$	1	40	52	31	42	54
$n = 100$						
Lasso	8	84	88	12	22	31
Adaptive Lasso	17	62	72	4	10	14
Elastic Net	70	98	99	7	14	21
Relaxed Lasso	3	75	84	1	3	8
VISA	3	76	85	1	4	9
Random Lasso	89	99	99	8	14	21
ST2E	93	100	100	14	21	27
PGA	40	85	92	13	22	33
Stability selection						
$\lambda_{min} = 0.5$	1	67	73	3	8	13
$\lambda_{min} = 0.3$	2	69	75	13	26	32
$\lambda_{min} = 0.2$	3	71	78	60	72	78



variables, such as age, sex, body mass index, and so on. The response is a measure of disease progression.

Figure 3 shows results from both LAR and ST2E. For LAR, the entire solution paths are displayed for all the variables. As the penalty size decreases, the variables enter the model sequentially. The order in which they enter the model is listed in Table 6. For ST2E, the variable importance measure (1) are plotted for each variable. The order in which these variables are ranked by ST2E is also listed in Table 6.

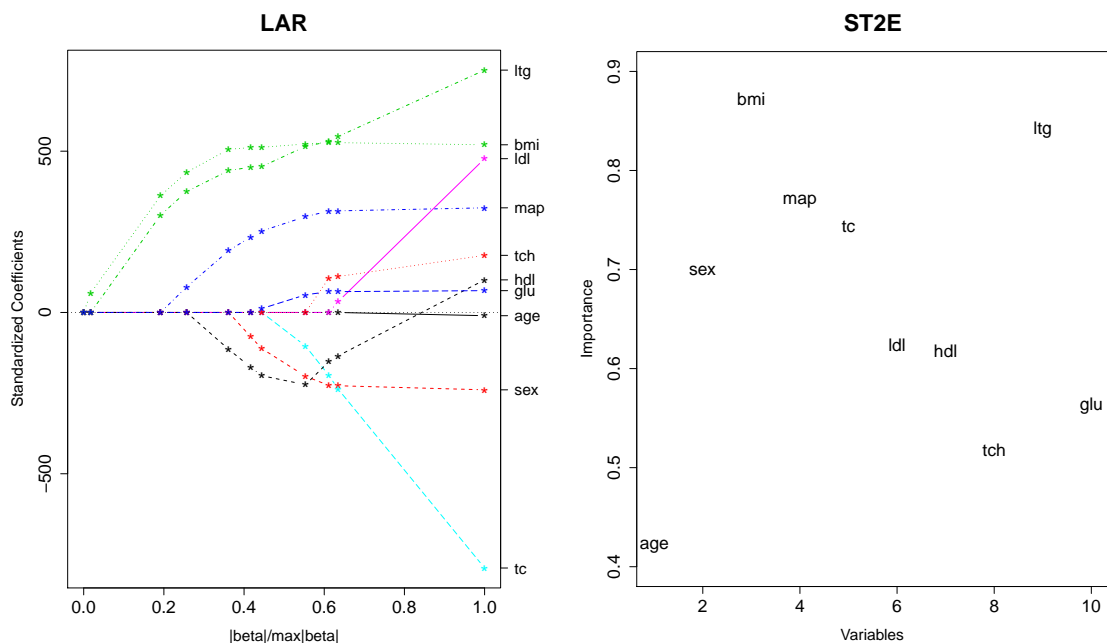


Figure 3: Diabetes data. Left: Results from least angle regression. Right: Results from ST2E.

According to Table 6, LAR and ST2E agree that “bmi”, “lgl”, and “map” are the top three variables, whereas “age” is the least important variable. For the intermediate variables, LAR and ST2E seem to disagree on their relative importance. For example, the variable “ldl” is the last one to be entered into the model by LAR before the variable “age”, an indication that it is perhaps not an important variable, whereas ST2E ranks it in the middle.

Upon closer examination, however, we can see from Figure 3 that, once “ldl” is in the model, it actually gets a relatively large coefficient, larger than some of the other variables that were entered earlier — this can almost certainly be attributed to “ldl” being highly correlated with these other variables. Therefore, there is good reason why ST2E does not rank “ldl” close to the bottom. Similar statements can be made for “tc”, “hdi”, and “sex”.

Table 6: Diabetes data.

Method	Ordering and Ranking of Variables (top $\rightarrow$ bottom)										
	LAR	bmi	ltg	map	hdl	sex	glu	tc	tch	ldl	age
ST2E	bmi	ltg	map	tc	sex	ldl	hdl	glu	tch	age	

## 4 Discussions

Before we end, we would like discuss a few important issues.

### 4.1 Ranking versus thresholding

The variable importance measure (1) is a particularly nice feature for the ensemble approach. Using an ensemble approach, variable selection is performed in two steps: ranking and thresholding. We first rank the variables, e.g., by equation (1), and then use a thresholding rule to make the selection, e.g., equation (2).

As proponents of the ensemble approach, we are of the opinion that the task of ranking is the more fundamental of the two. From a decision-theoretic point of view, once the variables are ranked, the choice of the decision threshold has more to do with one’s prior belief of how sparse the model is likely to be.

We also think that variable *selection* per se is not quite the right objective, whereas variable *ranking* is. Imagine the problem of searching for a few biomarkers that are associated with a certain disease. What type of answer is more useful to the medical doctor? Telling her that you think it is biomarkers A, B, and C that are associated? Or giving her a ranked list of the biomarkers? Such a list is precisely what the ensemble approach aims to provide.

Therefore, we would have preferred not to introduce any thresholding rule at all. But, in order to compare with other methods in the literature, it is not enough to just rank the variables; we must make an active selection decision. In fact, because experiments are typically repeated multiple times, we must use a thresholding rule that is automatic, such as equation (2). However, it is not our intention to take this thresholding rule too seriously; it is only introduced so that we could produce the same type of results as everybody else on various benchmark experiments. As far as we are concerned, the output of variable-selection ensembles is the variable importance measure (1), which can be used to *rank* potential variables.

### 4.2 Stochastic generating mechanisms

It is clear from our definition (Section 1.1) that there can be many ways to construct VSEs. To do so, we must employ a stochastic mechanism so that we can repeatedly perform traditional variable selection and obtain slightly different answers each time. One way to achieve this is to use a stochastic

Table 7: Stochastic generating mechanisms for different VSEs.

VSE	Generating Mechanism
PGA	genetic algorithm
ST2E	stochastic stepwise search algorithm
Random Lasso	bootstrap + random subsets
Stability Selection	bootstrap + random scaling of regularization parameter

rather than a deterministic search algorithm to perform the selection, e.g., PGA (Zhu and Chipman 2006) and ST2E (this paper). Another way is to perform the selection on bootstrap samples, e.g., random Lasso (Wang *et al.* 2009) and stability selection (Meinshausen and Bühlmann 2010). According to our own empirical experiences (not reported in this paper), bootstrapping alone usually does not generate enough diversity within the ensemble to give satisfactory performance. This explains why extra randomization is employed by both the random Lasso and the stability selection methods; see Section 1.4. Table 7 summarizes the stochastic mechanisms used to generate different VSEs.

This leads us to a very natural question: what makes a good stochastic mechanism for generating VSEs? This question will likely take some time to answer; we certainly don’t have an answer at the moment. What we have shown in this paper is the following: the ST2 algorithm appears to be quite an effective VSE-generating mechanism, and various ideas we have used to develop ST2E can help us think about this kind of questions in a more systematic manner.

### 4.3 “Large $p$ , small $n$ ” problems

We now describe a simple extension that allows ST2E to tackle “large  $p$ , small  $n$ ” problems. To do so, we simply insert a pre-screening step before running each ST2 path by performing “sure independence screening” or SIS (Fan and Lv 2008) on a bootstrap sample to pre-select  $q < n$  variables, e.g.,  $q = n - 1$ . The ST2 algorithm is then applied to this subset of  $q$  variables. Notice that, while this imposes an upper limit on how many variables *each* ST2 path can include, it by no means restricts the number of variables the ST2E ensemble can include as a whole.

To test this strategy, we use another simulation from Wang *et al.* (2009, Example 5) with  $p = 120$  and  $n = 50$ , designed specifically as a test case for  $p > n$  problems. The 120 covariates are generated from a multivariate normal distribution with mean zero and covariance matrix,

$$\begin{bmatrix} \Sigma_{30 \times 30} & - & - & - \\ - & \Sigma_{30 \times 30} & \mathbf{J}_{30 \times 30} & - \\ - & \mathbf{J}_{30 \times 30} & \Sigma_{30 \times 30} & - \\ - & - & - & \Sigma_{30 \times 30} \end{bmatrix},$$

where

$$\Sigma_{i,j} = \begin{cases} 1, & i = j \\ 0.7, & i \neq j \end{cases} \quad \text{and} \quad \mathbf{J}_{i,j} = 0.2 \quad \forall \quad i, j.$$

The first 60 coefficients are generated from  $N(3, 0.5)$  and then fixed for all simulations; the remaining 60 coefficients are equal to zero. We are able to obtain and use exactly the same set of 60 non-zero coefficients and the noise level for  $\epsilon$  ( $\sigma = 50$ ) as those used by Wang *et al.* (2009).

Table 8: A “large  $p$ , small  $n$ ” problem (Section 4.3). Minimal, median, and maximal number of times (out of 100 simulations) different types of variables (signal versus noise) are selected. Results other than those for ST2E and stability selection are taken from Wang *et al.* (2009, Table 2).

Method	$\mathbf{x}_j \in \text{Signal}$ ( $j = 1, 2, \dots, 60$ )			$\mathbf{x}_j \in \text{Noise}$ ( $j = 61, 62, \dots, 120$ )		
	Min	Median	Max	Min	Median	Max
Lasso	19	30	40	3	8	14
Adaptive Lasso	15	25	35	0	7	11
Elastic Net	40	50	61	1	5	8
Relaxed Lasso	14	23	34	0	3	8
VISA	16	27	35	0	2	8
Random Lasso	76	86	95	18	29	38
ST2E (with SIS)	81	88	95	0	1	5
Stability selection						
$\lambda_{min} = 10^{-2}$	4	22	52	0	3	10
$\lambda_{min} = 10^{-4}$	13	40	80	1	6	25
$\lambda_{min} = 10^{-5}$	73	95	100	16	38	80

Table 8 shows the results. Again, random Lasso is competitive in terms of catching the signals, but it makes a large number of false discoveries. Stability selection has the same difficulty as before — it misses signals when large values of  $\lambda_{min}$  are used to regulate false discoveries, and its ability to catch the signals can match that of ST2E and random Lasso only if  $\lambda_{min}$  is set to be so low as to tolerate a very large number of false discoveries.

Readers will find that the performance of ST2E (with SIS) on this  $p > n$  example is quite remarkable. This is because the extra pre-selection step really makes it an entirely different VSE altogether, since the stochastic generating mechanism (see Section 4.2 and Table 7) has fundamentally changed. Intuitively, it is easy to see that SIS can improve ensemble strength by screening out noise variables, while doing so on bootstrap samples can further enhance ensemble diversity. This reinforces the points we have made earlier in Section 4.2 — the question of how to design and/or characterize a good stochastic mechanism for generating VSEs is a very intriguing one indeed, and thinking about the strength and diversity of the ensemble often gives us some useful insights.

## 4.4 False positives versus false negatives

Another striking phenomenon that we can observe from all our experiments is the extremely delicate balance between false positive and false negative rates in variable selection problems. It is very hard to reduce one without significantly affecting the other. For VSEs, the underlying stochastic generating mechanism is, again, critical. Among the four VSEs listed in Table 7, PGA seems to “care” more about false positives, whereas random Lasso appears to “care” more about false negatives. Stability selection allows users to control the number of false positives through a tuning parameter, but, as our experiments have shown, aggressive control of false positive rates necessarily leads to very poor false negative rates, and vice versa.

Overall, ST2E appears to balance the two objectives nicely, and this is precisely why we think it is a valuable practical algorithm. But, of course, there is no reason to believe why one cannot find another generating mechanism to produce a VSE that will balance the two objectives even better. However, as we’ve alluded to earlier, the more interesting question is not whether we can find another mechanism, but how we can know that we have found a good one. This we leave to future research.

## 5 Summary

We are now ready to summarize the main contributions of this paper. First, we gave a formal and general description of the ensemble approach for variable selection. Next, we pointed out that Breiman’s theory for prediction ensembles — in particular, the tradeoff between diversity and strength — is useful in guiding the development of variable-selection ensembles as well. Finally, we used a more structured stochastic mechanism, the ST2 algorithm, to construct a better variable-selection ensemble, ST2E, which we demonstrated to be more robust than other VSEs, and competitive against many state-of-the-art algorithms.

## References

- Akaike, H. (1973). Information theory and an extension of the maximum likelihood principle. In *Second International Symposium on Information Theory*, pages 267–281.
- Breiman, L. (1995). Better subset regression using the nonnegative garrote. *Technometrics*, **37**, 373–384.
- Breiman, L. (1996). Bagging predictors. *Machine Learning*, **24**(2), 123–140.
- Breiman, L. (2001). Random forests. *Machine Learning*, **45**(1), 5–32.
- Donoho, D. L. (1995). De-noising by soft-thresholding. *IEEE Transactions on Information Theory*, **41**(3), 613–627.

- Efron, B., Hastie, T., Johnstone, I., and Tibshirani, R. (2004). Least Angle Regression (with discussion). *The Annals of Statistics*, **32**(2), 407–499.
- Fan, J. and Li, R. (2001). Variable selection via nonconcave penalized likelihood and its oracle properties. *Journal of the American Statistical Association*, **96**(456), 1348–1360.
- Fan, J. and Lv, J. (2008). Sure independence screening for ultrahigh dimensional feature space (with discussion). *Journal of the Royal Statistical Society Series B*, **70**, 849–911.
- Freund, Y. and Schapire, R. (1996). Experiments with a new boosting algorithm. In *Machine Learning: Proceedings of the Thirteenth International Conference*, pages 148–156, San Francisco. Morgan Kaufman.
- Friedman, J. H. (2001). Greedy function approximation: A gradient boosting machine. *The Annals of Statistics*, **29**(5), 1189–1232.
- Friedman, J. H. and Popescu, B. (2003). Importance-sampled learning ensembles. Technical report, Stanford University.
- Friedman, J. H., Hastie, T. J., and Tibshirani, R. J. (2000). Additive logistic regression: A statistical view of boosting (with discussion). *The Annals of Statistics*, **28**(2), 337–407.
- Goldberg, D. E. (1989). *Genetic Algorithms in Search, Optimization and Machine Learning*. Addison-Wesley, Reading, MA, USA.
- Ho, T. K. (1998). The random subspace method for constructing decision forests. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, **20**(8), 832–844.
- Jolliffe, I. T. (2002). *Principal Component Analysis*. Springer-Verlag, 2nd edition.
- Liu, J. S. (2001). *Monte Carlo Strategies in Scientific Computing*. Springer-Verlag.
- Meinshausen, N. (2007). Relaxed Lasso. *Computational Statistics & Data Analysis*, **52**, 374–393.
- Meinshausen, N. and Bühlmann, P. (2010). Stability selection (with discussion). *Journal of the Royal Statistical Society Series B*, **72**, 417–473.
- Miller, A. J. (2002). *Subset Selection in Regression*. Chapman and Hall, 2nd edition.
- Radchenko, P. and James, G. (2008). Variable inclusion and shrinkage algorithms. *Journal of the American Statistical Association*, **103**, 1304–1315.
- Shmueli, G. (2010). To explain or to predict? *Statistical Science*, **25**(3), 289–310.
- Tibshirani, R. (1996). Regression shrinkage and selection via the Lasso. *Journal of the Royal Statistical Society Series B*, **58**, 267–288.

- Wang, S., Nan, B., Rosset, S., and Zhu, J. (2009). Random Lasso. Manuscript under review.
- Yang, Y. (2005). Can the strengths of AIC and BIC be shared? A conflict between model identification and regression estimation. *Biometrika*, **92**, 937–950.
- Zhu, M. (2008). Kernels and ensembles: Perspectives on statistical learning. *The American Statistician*, **62**, 97–109.
- Zhu, M. and Chipman, H. A. (2006). Darwinian evolution in parallel universes: A parallel genetic algorithm for variable selection. *Technometrics*, **48**, 491–502.
- Zou, H. (2006). The adaptive Lasso and its oracle properties. *Journal of the American Statistical Association*, **101**, 1418–1429.
- Zou, H. and Hastie, T. J. (2005). Regularization and variable selection via the elastic net. *Journal of the Royal Statistical Society Series B*, **67**, 301–320.