

# Information Theory of DNA Sequencing

Abolfazl Motahari, Guy Bresler and David Tse  
Department of Electrical Engineering and Computer Sciences  
University of California, Berkeley  
{motahari,gbresler,dtse}@eecs.berkeley.edu

## Abstract

DNA sequencing is the basic workhorse of modern day biology and medicine. Shotgun sequencing is the dominant technique used: many randomly located short fragments called reads are extracted from the DNA sequence, and these reads are assembled to reconstruct the original sequence. A basic question is: given a sequencing technology and the statistics of the DNA sequence, what is the minimum number of reads required for reliable reconstruction? This number provides a fundamental limit to the performance of *any* assembly algorithm. By drawing an analogy between the DNA sequencing problem and the classic communication problem, we formulate this question in terms of an information theoretic notion of *sequencing capacity*. This is the asymptotic ratio of the length of the DNA sequence to the minimum number of reads required to reconstruct it reliably. We compute the sequencing capacity explicitly for a simple statistical model of the DNA sequence and the read process. Using this framework, we also study the impact of noise in the read process on the sequencing capacity.

## 1 Introduction

DNA sequencing is the basic workhorse of modern day biology and medicine. Since the sequencing of the Human Reference Genome ten years ago, there has been an explosive advance in sequencing technology, resulting in several orders of magnitude increase in throughput and decrease in cost. This advance allows the generation of a massive amount of data, enabling the exploration of a diverse set of questions in biology and medicine that were beyond reach even several years ago. These questions include discovering genetic variations across different humans (such as single-nucleotide polymorphisms SNPs), identifying genes affected by mutation in cancer tissue genomes, sequencing an individual's genome for diagnosis (personal genomics), and understanding DNA regulation in different body tissues.

Shotgun sequencing is the dominant method currently used to sequence long strands of DNA, including entire genomes. The basic shotgun DNA sequencing set-up is shown in Figure 1. Starting with a DNA molecule, the goal is to obtain the sequence of nucleotides ( $A, G, C$  or  $T$ ) comprising it. (For humans, the DNA sequence has about  $3 \times 10^9$  nucleotides, or base pairs.) The sequencing machine extracts a large number of reads from the DNA; each read is a randomly located fragment of the DNA sequence, of lengths of the order of

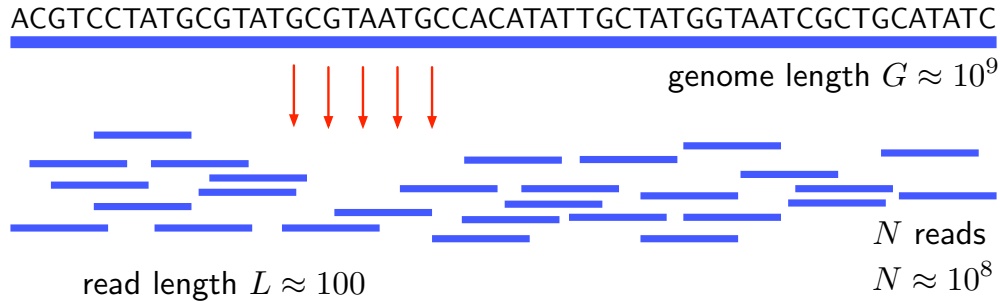


Figure 1: Schematic for shotgun sequencing.

100-1000 base pairs, depending on the sequencing technology. The number of reads can be of the order of 10's to 100's of millions. The *DNA assembly problem* is to reconstruct the DNA sequence from the many reads.

When the human genome was sequenced in 2001, there was only one sequencing technology, the Sanger platform [20]. Since 2005, there has been a proliferation of “next generation” platforms, including Roche/454, Life Technologies SOLiD, Illumina Hi-Seq 2000 and Pacific Biosciences RS. Compared to the Sanger platform, these technologies can provide massively parallel sequencing, producing far more reads per instrument run and at a lower cost, although the reads are shorter in lengths. Each of these technologies generates reads of different lengths and with different noise profiles. For example, the 454 machines have read lengths of about 400 base pairs, while the SOLiD machines have read lengths of about 100 base pairs. At the same time, there has been a proliferation of a large number of assembly algorithms, many tailored to specific sequencing technologies. (Recent survey articles [17, 14, 15] discuss no less than 20 such algorithms, and the Wikipedia entry on this topic listed 35 [29].)

The design of these algorithms is based primarily on *computational* considerations. The goal is to design efficient algorithms that can scale well with the large amount of sequencing data. Current algorithms are often tailored to particular machines and are designed based on heuristics and domain knowledge regarding the specific DNA being sequenced; this makes it difficult to compare different algorithms, not to mention to define what it means by an “optimal” assembly algorithm for a given sequencing problem.

An alternative to the computational view is the *statistical* view. In this view, the genome sequence is regarded as a random string to be estimated based on the read data. The basic question is: what is the minimum number of reads needed to reconstruct the DNA sequence with a given reliability? This minimum number can be used as a benchmark to compare different algorithms, and an optimal algorithm is one that achieves this minimum number. It can also provide an algorithm-independent basis for comparing different sequencing technologies and for designing new technologies.

This statistical view falls in the realm of *DNA sequencing theory* [28]. A well-known lower bound on the number of reads needed can be obtained by a *coverage analysis*, an approach pioneered by Lander and Waterman [12]. This lower bound is the number of reads such that with a desired probability the randomly located reads cover the entire genome sequence. While this is clearly a lower bound on the minimum number of reads needed, it is in general not tight: only requiring the reads to cover the entire genome sequence does not guarantee

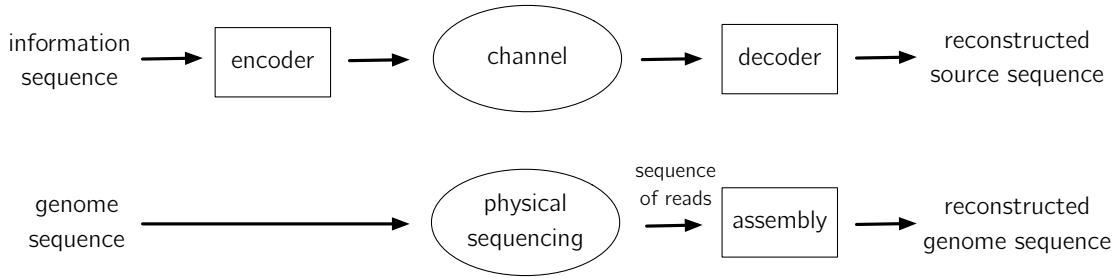


Figure 2: (a) The general communication problem. (b) The DNA sequencing problem viewed as a restricted communication problem.

that consecutive reads can actually be stitched back together to recover the entire sequence. The ability to do that depends on other factors such as the statistical characteristics of the DNA sequence and also the noise profile in the read process. Thus, characterizing the minimum number of reads required for reconstruction is in general an open question.

In this paper, we obtain new results to this question through defining a notion we call *sequencing capacity*. This notion is inspired by an analogy between the DNA sequencing problem and the classical communication problem. The basic communication problem is that of encoding an information source at one point for transmission through a noisy channel to be decoded at another point (Figure 2(a)). The problem is to design a "good" encoder and a "good" decoder. The DNA sequencing problem can be cast as a restricted case of the communication problem (Figure 2(b)). The DNA sequence of base pairs  $s_1, s_2, \dots, s_G$  is the sequence of information source symbols. The physical sequencing process is the channel which generates from the DNA sequence a set of reads  $\mathbf{r}_1, \mathbf{r}_2, \dots, \mathbf{r}_N$ . Each read is viewed as a channel output. The assembly algorithm is the *decoder* which tries to reconstruct the original genome sequence from the sequence of reads. The problem is to design a "good" assembly algorithm. Note that the only difference with the general communication problem is that there is no explicit encoder to optimize and the DNA sequence is sent directly onto the channel.

Communication is an age-old field and in its early days, communication system designs were ad hoc and tailored for specific sources and specific channels. In 1948, Claude Shannon changed all this by introducing *information theory* as a unified framework to study communication problems [21]. He made several key contributions. First, he explicitly modeled the source and the channel as random processes. Second, he showed that for a wide class of sources and channels, there is a maximum rate of flow of information, measured by the number of information source symbols per channel output, which can be conveyed reliably through the channel. Third, he showed how this maximum reliable rate can be explicitly computed in terms of the statistics of the source and the statistics of the channel.

The main goal of the present paper is to initiate a similar program for the DNA sequencing problem. Shannon's main result assumes that one can optimize the encoder and the decoder. For the DNA sequencing problem, the encoder is fixed and only the decoder (the assembly algorithm) can be optimized. Nevertheless, we show in this paper that one can also define a maximum reliable rate of flow of information for the DNA sequencing problem. We call

this quantity the *sequencing capacity*  $C$ . It gives the maximum number of DNA base pairs that can be resolved per read, by *any* assembly algorithm, without regard to computational limitations. Equivalently, the minimum number of reads required to reconstruct a DNA sequence of length  $G$  base pairs is  $G/C$ .

The sequencing capacity  $C$  depends on both the statistics of the DNA sequence as well as the specific physical sequencing process. To make our ideas concrete, we first consider a very simple model for which we compute  $C$  explicitly:

1. the DNA sequence is modeled as an i.i.d. random process of length  $G$  with each symbol taking values according to a probability distribution  $\mathbf{p}$  on the alphabet  $\{A, G, C, T\}$ .
2. each read is of length  $L$  symbols and begins at a uniformly distributed location on the DNA sequence and the locations are independent from one read to another.
3. the read process is noiseless.

For this model, it turns out that the sequencing capacity  $C$  depends on the read length  $L$  through a normalized parameter

$$\bar{L} := \frac{L}{\ln G},$$

as follows:

1. If  $\bar{L} < 2/H_2(\mathbf{p})$ , then  $C(\bar{L}) = 0$ .
2. If  $\bar{L} > 2/H_2(\mathbf{p})$ , then  $C(\bar{L}) = \bar{L}$  base pairs per read.

The result is summarized in Figure 3. Here  $H_2(\mathbf{p})$  is the Renyi entropy of order-2, defined to be

$$H_2(\mathbf{p}) := -\ln \sum_i p_i^2. \tag{1}$$

Denoting by  $N^* = G/C$  the minimum number of reads required to reconstruct the DNA sequence, the capacity result may be rewritten in terms of system parameters  $G$ ,  $L$ , and  $N^*$ :

1. If  $L < 2 \ln G / H_2(\mathbf{p})$ , then  $N^* = \infty$ .
2. If  $L > 2 \ln G / H_2(\mathbf{p})$ , then  $N^* = G \ln G / L$ .

Since each read reveals  $L$  DNA base pairs, a naive thought would be that the sequencing capacity  $C$  is simply  $L$  base pairs/read. However, this is not correct since the location of each read is unknown to the decoder. The larger the length  $G$  of the DNA sequence, the more uncertainty there is about the location of each read, and the less information each read provides. The result says that  $L/\ln G$  is the effective amount of information provided by a read, provided that this number is larger than a threshold. If  $L/\ln G$  is below the threshold, reconstruction is impossible no matter how many reads are provided to the assembly algorithm. The threshold value  $2/H_2(\mathbf{p})$  depends on the statistics of the source.

The condition  $\bar{L} > 2/H_2(\mathbf{p})$  can be interpreted as the condition for *no duplication* of length  $L$  subsequences in the length  $G$  DNA sequence. (An estimate of the corresponding threshold for real DNA data can be found in [27].) Arratia et al [2] showed that this is a

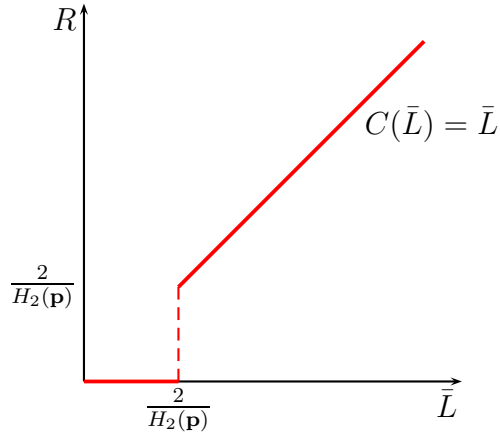


Figure 3: The sequencing capacity  $C$  as a function of the normalized read length  $\bar{L}$ .

necessary and sufficient condition for reconstruction of the i.i.d. DNA sequence if *all* length  $L$  subsequences of the DNA sequence are given as reads. This arises in a technology called *sequencing by hybridization*. What our result says is that, for shotgun sequencing where the reads are randomly sampled, if in addition to this no-duplication condition, it also holds that the sequencing rate  $G/N$  is less than  $\bar{L}$ , then reconstruction is possible. We will see that this second condition is precisely the coverage condition of Lander-Waterman. Hence, what our result says is that no-duplication and coverage are sufficient for reconstruction.

Li [13] has also posed the question of minimum number of reads for the i.i.d. equiprobable DNA sequence model. He showed that if  $L > 4 \log_2 G$ , then the number of reads needed is  $O(G/L \log_2 G)$ . Specializing our result to the equiprobable case, our capacity result shows that reconstruction is possible *if and only if*  $L > \log_2 G$  and the number of reads is  $G/L \ln G$ . Not only our result is necessary and sufficient, we have a much weaker condition on the read length  $L$  and we get the right pre-constant on the number of reads needed, not only how the number of reads scales with  $G$  and  $L$ . As will be seen later, many different algorithms have the same scaling behavior in their achievable rates, but it is the pre-constant which distinguishes them.

The basic model of i.i.d. DNA sequence and noiseless reads is very simplistic. However, the result obtained for this model builds the foundation on which we will consider more realistic extensions. First, we study the impact of read noise on the sequencing capacity. We show that the effect of noise is primarily on increasing the threshold on the read length below which sequencing is impossible. Second, we consider more complex stochastic models for the DNA sequence, including the Markov model. A subsequent paper will deal with repeats in the DNA sequence. Repeats are subsequences that appear much more often than would be predicted by an i.i.d. statistical model; higher mammalian DNA in particular has many long repeats.

A brief remark on notation is in order. Sets (and probabilistic events) are denoted by calligraphic type, e.g.  $\mathcal{A}, \mathcal{B}, \mathcal{E}$ , vectors by boldface, e.g.  $\mathbf{s}, \mathbf{x}, \mathbf{y}$ , and random variables by capital letters such as  $S, X, Y$ . Random vectors are denoted by capital boldface, such as  $\mathbf{S}, \mathbf{X}, \mathbf{Y}$ . The exception to these rules, for the sake of consistency with the literature, are the (non-random) parameters  $G, N$ , and  $L$ , and the constants  $R$  and  $C$ .

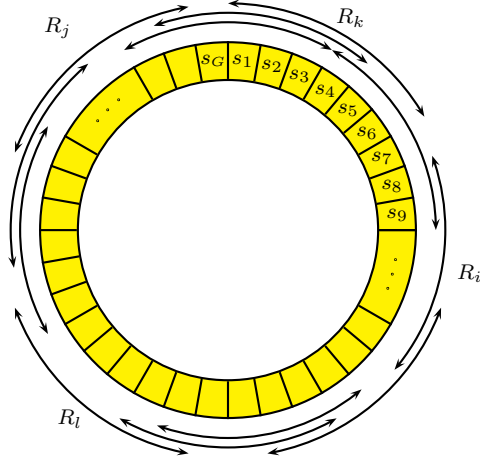


Figure 4: A circular DNA sequence which is sampled randomly by a read machine.

The rest of the paper is organized as follows. Section 2.1 gives the precise information theoretic formulation of the problem and the statement of our main result on the sequencing capacity of the simple model. Section 2.3 explains why our result provides an upper bound to what is achievable by any assembly algorithm. An optimal algorithm is presented in Section 2.4, where a heuristic argument is given to explain why it achieves capacity. Sections 3 and 4 describe extensions of our basic result to incorporate read noise and more complex models for the DNA sequence, respectively. Finally, Section 5 contains the formal proofs of all the results in the paper.

## 2 Problem Formulation and Main Result

### 2.1 Formulation

A DNA sequence  $\mathbf{s} = s_1 s_2 \dots s_G$  is a long sequence of nucleotides, or bases, with each base  $s_i \in \{A, C, T, G\}$ . For notational convenience we instead denote the bases by numerals, i.e.  $s_i \in \{1, 2, 3, 4\}$ . We assume that the DNA sequence is circular, i.e.,  $s_i = s_j$  if  $i = j \bmod G$ ; this simplifies the exposition, and all results apply with appropriate minor modification to the non-circular case as well.

The objective of DNA sequencing is to reconstruct the whole sequence based on  $N$  reads drawn randomly from the sequence, see Figure 4. A read is a substring of length  $L$  from the DNA sequence. The set of reads is denoted by  $\mathcal{R} = \{\mathbf{r}_1, \mathbf{r}_2, \dots, \mathbf{r}_N\}$ . The starting location of read  $i$  is  $t_i$ , so  $r_i = \mathbf{s}[t_i, t_i + L - 1]$ . The set of starting locations of the reads is denoted  $\mathcal{T} = \{t_1, t_2, \dots, t_N\}$ , where we assume  $1 \leq t_1 \leq t_2 \leq \dots \leq t_N \leq G$ .

An *assembly algorithm* is a map taking a set of  $N$  reads  $\mathcal{R} = \{\mathbf{r}_1, \dots, \mathbf{r}_N\}$  and returning an estimated sequence  $\hat{\mathbf{s}} = \hat{\mathbf{s}}(\mathcal{R})$ . We require *perfect reconstruction*, which presumes that the algorithm  $\phi$  makes an error if  $\hat{\mathbf{s}} \neq \mathbf{s}$ . We let  $\mathbb{P}$  denote the probability model for the (random) DNA sequence  $\mathbf{S}$  and the sample locations  $\mathcal{T}$ , and  $\mathcal{E} := \{\hat{\mathbf{S}} \neq \mathbf{S}\}$  the error event. A question of central interest is: what is the minimum number of reads  $N$  such that the reconstruction error probability is less than a given target  $\epsilon$ , and what is the optimal assembly algorithm

that can achieve such performance? Unfortunately, this is in general a difficult question to answer.

Taking a cue from information theory, we instead ask an easier *asymptotic* question: what is the largest information rate  $R := G/N$  achievable such that  $\mathbb{P}(\mathcal{E}) \rightarrow 0$  as  $N, G \rightarrow \infty$ , and which algorithm achieves the optimal rate asymptotically? More precisely, a rate  $R$  base pair/read is said to be *achievable* if there exists an assembly algorithm such that  $\mathbb{P}(\mathcal{E}) \rightarrow 0$  as  $N, G \rightarrow \infty$  with  $G/N$  fixed to be  $R$ . The *capacity*  $C$  is defined as the supremum of all achievable rates. Given a probability model for  $\mathbf{S}$  and the sample locations  $\mathcal{T}$ , we would like to compute  $C$ .

## 2.2 Main result for a Specific Model

Let us now focus on a specific simple probabilistic model:

- Each base  $S_i$  is selected independently and identically according to the probability distribution  $\mathbb{P}(S_i = j) = p_j$ , with  $\mathbf{p} = (p_1, p_2, p_3, p_4)$ .
- The set of starting locations  $\mathcal{T}$  of the reads is obtained by ordering  $N$  uniformly and independently chosen starting points from the DNA sequence.

Our general definition of capacity above is in the limit of large  $G$ , the length of the DNA sequence. However, we were not explicit about how the read length  $L$  scales. For this particular model it turns out, for reasons that will become clear, that the natural scaling is to also let  $L \rightarrow \infty$  but fixing the ratio:

$$\bar{L} := \frac{L}{\ln G}.$$

The main result for this model is:

**Theorem 1.** *The capacity  $C(\bar{L})$  is given by*

$$C(\bar{L}) = \begin{cases} 0 & \text{if } \bar{L} < 2/H_2(\mathbf{p}), \\ \bar{L} & \text{if } \bar{L} > 2/H_2(\mathbf{p}). \end{cases} \quad (2)$$

The proof of this Theorem is sketched in the next two subsections, with the details relegated to Section 5. Section 2.3 explains why the expression (2) is a natural upper bound to the capacity, while section 2.4 gives a simple assembly algorithm which can achieve the upper bound.

## 2.3 Upper Bound

In this section we derive an upper bound on the capacity for the i.i.d. sequence model; such a bound holds for any algorithm, even one possessing unbounded computational power. The bound is made up of two necessary conditions. First, reconstruction of the DNA sequence is clearly impossible if it is not covered by the reads. Second, reconstruction is not possible if there are excessively long duplicated portions of the genome. Loosely, such duplications

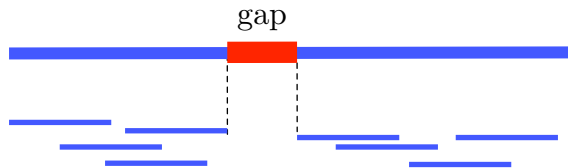


Figure 5: The reads must cover the sequence.

(which arise due to the random nature of the DNA source) create confusion if they are longer than the read length.

The rest of this section examines these necessary conditions in more detail, determining which choices of parameters cause them not to be satisfied.

**Coverage.** In order to reconstruct the DNA sequence it is necessary to observe each of the nucleotides, i.e. the reads must cover the sequence (see Figure 5). Worse than the missing nucleotides, a gap in coverage also creates ambiguity in the order of the contiguous pieces. The paper of Lander and Waterman [12] studied the coverage problem in the context of DNA sequencing.

**Lemma 2** (Coverage-limited). *Suppose the information rate is  $R = \frac{G}{N} \geq \bar{L}$ . Then the sequence is not covered by the reads with probability  $1 - o(1)$ . On the other hand, if  $R < \bar{L}$ , the sequence is covered by the reads with probability  $1 - o(1)$ .*

The first statement of the lemma implies that  $C(\bar{L}) \leq \bar{L}$ . A standard coupon collector-style argument proves this lemma. A back-of-the-envelope justification, which will be useful in the sequel, is as follows. To a very good approximation, the starting locations of the reads are given according to a Poisson process with rate  $\lambda = N/G$ , and thus each spacing has an exponential( $\lambda$ ) distribution. Hence, the probability that there is a gap between two successive reads is approximately  $e^{-\lambda L}$ . Hence, the expected number of gaps is approximately:

$$Ne^{-L\lambda}.$$

This quantity is bounded away from zero if  $R \geq \bar{L}$ , and approaches zero otherwise.

Note that coverage depends on the read locations but is independent of the DNA sequence itself. The situation is reversed for the next condition, which depends only on the sequence.

**Duplication.** The random nature of the DNA sequence gives rise to a variety of patterns. The key observation in [24] is that there exist two patterns in the DNA sequence precluding reconstruction from an arbitrary set of reads of length  $L$ . In other words, reconstruction is not possible even if the  $L$ -spectrum, i.e. the set of all substrings of length  $L$  appearing in the DNA sequence, is given. The first pattern is the three way duplication of a substring of length  $L - 1$ . The second pattern is two interleaved pairs of duplications of length  $L - 1$ , see Figure 6. Arratia et al. [2] carried out a thorough analysis of randomly occurring duplications for the same i.i.d. sequence model as ours, and showed that the second pattern of two interleaved duplications is the typical event for reconstruction to fail. A consequence of Theorem 7 in [2] is the following lemma, see also [5].






Figure 6: Two pairs of interleaved duplications create ambiguity: from the reads it is impossible to know whether the sequences  $\mathbf{x}$  and  $\mathbf{y}$  are as shown, or swapped.

**Lemma 3** (Duplication-limited). *If  $\bar{L} < \frac{2}{H_2(\mathbf{p})}$ , then a random DNA sequence contains two pairs of interleaved duplications with probability  $1 - o(1)$  and hence  $C(\bar{L}) = 0$ .*

Following Arratia et al. [2], the first-order back-of-the-envelope calculation to understand this result is how many duplications of length  $L$  are expected to arise. If there are two pairs of interleaved duplications, then there must be some duplications in the first place; and conversely, if there are several pairs of duplications, it is plausible that with a reasonably high probability they will be interleaved. Denoting by  $\mathbf{S}_i^L$  the length- $L$  subsequence starting at position  $i$ , we have

$$\mathbb{E}[\# \text{ of length } L \text{ duplications}] = \sum_{1 \leq i < j \leq G} \mathbb{P}(\mathbf{S}_i^L = \mathbf{S}_j^L). \quad (3)$$

Now, the probability that two specific *physically disjoint* length- $\ell$  subsequences are identical is:

$$\left( \sum_i p_i^2 \right)^\ell = e^{-\ell H_2(\mathbf{p})},$$

where  $H_2(\mathbf{p}) = -\log \left( \sum_i p_i^2 \right)$  is the Rényi entropy of order-2. Ignoring the  $GL$  terms in (3) where  $\mathbf{S}_i^L$  and  $\mathbf{S}_j^L$  overlap, we get the lower bound:

$$\mathbb{E}[\# \text{ of duplications}] > \left( \frac{G^2}{2} - GL \right) e^{-LH_2(\mathbf{p})} \approx \frac{G^2}{2} e^{-LH_2(\mathbf{p})}. \quad (4)$$

This number approaches infinity if  $\bar{L} = L/\ln G$  is less than  $2/H_2(\mathbf{p})$ , suggesting that under this condition, the probability of having two pairs of interleaved duplications is very high. Moreover, as a consequence of Lemma 11 in Section 5, the contribution of the terms in (3) due to physically overlapping subsequences is not large, and so the lower bound in (4) is essentially tight. This suggests that  $\bar{L} = 2/H_2(\mathbf{p})$  is in fact *the* threshold for existence of interleaved duplications.

Note that for any *fixed* read length  $L$ , the probability of such a duplication event will approach 1 as the DNA length  $G \rightarrow \infty$ . This means that if we had defined capacity for a fixed read length  $L$ , then for *any* value of  $L$ , the capacity would have been zero. Thus, to get a meaningful capacity result, one must scale  $L$  with  $G$ , and Lemma 3 suggests that letting  $L$  and  $G$  grow while fixing  $\bar{L}$  is the correct scaling. This is further validated by the achievability result in the next section.

## 2.4 Optimal Algorithm

A simple greedy algorithm (perhaps surprisingly) turns out to be optimal, achieving the capacity described in Theorem 1. Essentially, the greedy algorithm merges the reads repeatedly into *contigs*<sup>1</sup> and greedily based on an overlap score between any two strings. For a given score, the algorithm is given as follows.

**Greedy Algorithm:** Input:  $\mathcal{R}$ , the set of reads of length  $L$ .

1. Initialize the set of contigs as the given reads.
2. Find two contigs with largest overlap score, breaking ties arbitrarily, and merge them into one contig.
3. Repeat Step 2 until only one contig remains.

For the specific model of Theorem 1, we use the overlap score  $W(\mathbf{s}_1, \mathbf{s}_2)$ , defined as the length of the longest suffix of  $\mathbf{s}_1$  identical to a prefix of  $\mathbf{s}_2$ .

**Theorem 4** (Achievable rate). *The greedy algorithm with overlap score  $W$  can achieve any rate  $R < \bar{L}$  if  $\bar{L} > 2/H_2(\mathbf{p})$ , thus achieving capacity.*

Basically, this result says that if the reads cover the DNA sequence and there are no duplications of length  $L$ , then the greedy algorithm can reconstruct the DNA sequence. Let us give a back-of-the-envelope calculation to understand this result. The detailed proof will be given in Section 5.

Since the greedy algorithm merges reads according to overlap score, we may think of the algorithm as working in stages, starting with an overlap score of  $L$  down to an overlap score of 0. At stage  $\ell$ , the merging is between contigs with overlap score  $\ell$ . The key is to find the typical stage at which errors in merging *first* occurs. Assuming no errors have occurred in stages  $L, L-1, \dots, \ell+1$ . Consider the situation in stage  $\ell$ , as shown in Figure 7. The algorithm has already merged the reads into a number of contigs. The boundary between two neighboring contigs is where the overlap between the neighboring reads is less than or equal to  $\ell$ ; if it were larger than  $\ell$ , the two contigs would have been merged already. Hence, the expected number of contigs at stage  $\ell$  is the expected number of pairs of successive reads with spacing greater than  $L-\ell$ . Again invoking the Poisson approximation, this is roughly equal to

$$Ne^{-\lambda(L-\ell)},$$

where  $\lambda = N/G = 1/R$ .

Two contigs will be merged in error in stage  $\ell$  if the length  $\ell$  suffix of one contig equals the length  $\ell$  prefix of another contig. Assuming these substrings are physically disjoint, the probability of this event is:

$$e^{-\ell H_2(\mathbf{p})}.$$

Hence, the expected number of pairs of contigs for which this confusion event happens is approximately:

$$\left[ Ne^{-\lambda(L-\ell)} \right]^2 \cdot e^{-\ell H_2(\mathbf{p})}. \tag{5}$$

---

<sup>1</sup>Here, a contig means a contiguous, overlapping sequenced reads.

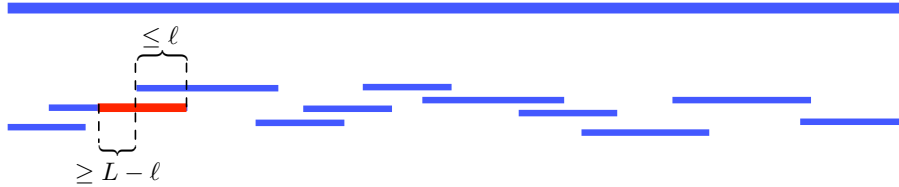


Figure 7: The greedy algorithm merges reads into contigs according to the amount of overlap. At stage  $\ell$  the algorithm has already merged all reads with overlap greater than  $\ell$ . The red segment denotes a read at the boundary of two contigs; the neighboring read must be offset by at least  $L - \ell$ .

This number is largest either when  $\ell = L$  or  $\ell = 0$ . This suggests that, typically, errors occur in stage  $L$  or stage 0 of the algorithm. Errors occur at stage  $L$  if there are duplications of length  $L$  substrings in the DNA sequence. Errors occur at stage 0 if there are still leftover unmerged contigs. The no-duplication condition ensures that the probability of the former event is small. The coverage condition ensures that the probability of the latter event is small. Hence, the two necessary conditions are also sufficient for reconstruction.

The greedy algorithm was apparently first introduced in [7] as an approximation algorithm for the shortest common superstring (SCS) problem and has been intensely studied in this context. (The shortest common superstring problem is the problem of finding the shortest string containing a set of given strings.) A worst-case approximation factor of 3.5, the best known, is shown in [11] (for more on approximations for SCS see the references therein).

The greedy algorithm has also been shown to be optimal for the SCS problem under certain probabilistic settings [6]. However, in their model the given strings are all independently drawn and not from a single “mother” sequence, as in our model. In contrast, in our model, even though the original DNA sequence is assumed to be i.i.d., the reads will be highly *correlated*, since many of the reads will be physically overlapping. In fact, it follows from [6] that, given  $N$  reads and the read length  $L$  scales like  $\ln N$ , the length of the shortest common superstring scales like  $N \ln N$ . On the other hand, in our model, the length of the reconstructed sequence would be proportional to  $N$ . Hence, the length of the shortest common superstring is much longer, a consequence of the fact that the reads are all independent and therefore much harder to merge. So the two problems are totally different, although coincidentally the greedy algorithm is optimal for both problems.

## 2.5 Achievable Rates of Existing Algorithms

The greedy algorithm was used by several of the most widely used genome assemblers for Sanger data, such as phrap, TIGR Assembler [22] and CAP3 [8]. More recent software aimed at assembling short-read sequencing data uses different algorithms. We will evaluate the achievable rates of some of these algorithms on our basic statistical model and compare them to the information theoretic limit. The goal is not to compare between different algorithms; that would have been unfair since they are mainly designed for more complex scenarios including noisy reads and repeats in the DNA sequence. Rather, the aim is to illustrate our

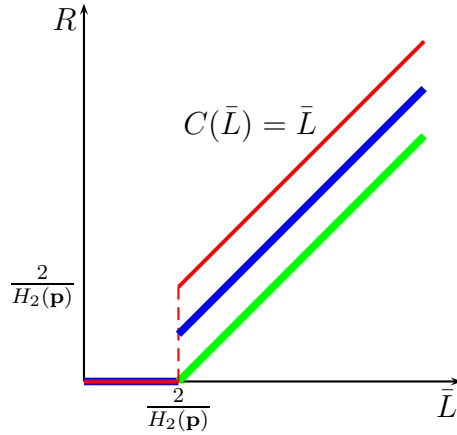


Figure 8: The rate obtained by the sequential algorithm is in the middle, given by  $R_{\text{seq}} = \bar{L} - 1/H_2(\mathbf{p})$ , the rate obtained by the  $K$ -mers based algorithm is at bottom, given by  $R_{K\text{-mer}} = \bar{L} - 2/H_2(\mathbf{p})$ , and the capacity  $C(\bar{L}) = \bar{L}$  is highest.

information theoretic framework and make some contact with existing assembly algorithm literature.

### 2.5.1 Sequential Algorithm

By merging reads with the largest overlap first, the greedy algorithm discussed above effectively grows the contigs *in parallel*. An alternative greedy strategy, used by software like SSAKE [26], VCAKE [10] and SHARCGS [4], grows one contig *sequentially*. An unassembled read is chosen to start a contig, which is then repeatedly extended (say towards the right) by identifying reads that have the largest overlap with the contig until no more extension is possible. The algorithm succeeds if the final contig is the original DNA sequence.

The following proposition gives the achievable rate of this algorithm.

**Proposition 5.** *The sequential algorithm can achieve rate  $R$  up to  $\bar{L} - 1/H_2(\mathbf{p})$  if  $\bar{L} > 2/H_2(\mathbf{p})$ .*

The result is plotted in Fig. 8. The performance is strictly worse than the capacity, by an additive shift of  $-1/H_2(\mathbf{p})$ .

We now give a back-of-the-envelope calculation to justify Proposition 5. Motivated by the discussion following Theorem 4, we seek the typical overlap  $\ell$  at which the first error occurs in merging a read; unlike the greedy algorithm, where this overlap corresponds to a specific stage of the algorithm, for the sequential algorithm this error can occur anytime between the first and last merging.

Let us compute the expected number of pairs of reads which can be merged in error at overlap  $\ell$ . To begin, a read has the potential to be merged to an incorrect successor at overlap  $\ell$  if it has overlap less than  $\ell$  to its true successor, since otherwise the sequential algorithm discovers the read's true successor. By the Poisson approximation, there are roughly  $Ne^{-\lambda(L-\ell)}$  reads with physical overlap less than  $\ell$  to their successors. In particular,

if  $\ell < L - \lambda^{-1} \ln N$  there will be no such reads, and so we may assume that  $\ell$  lies between  $L - \lambda^{-1} \ln N$  and  $L$ .

Note furthermore that in order for an error to occur, the second read must not yet have been merged when the algorithm encounters the first read, and thus the second read must be positioned later in the sequence. This adds a factor one-half. Combining this reasoning with the preceding paragraph, we see that there are approximately

$$\frac{1}{2} N^2 e^{-\lambda(L-\ell)}$$

pairs of reads which may potentially be merged incorrectly at overlap  $\ell$ .

For such a pair, an erroneous merging actually occurs if the length- $\ell$  suffix of the first read equals the length- $\ell$  prefix of the second. Assuming (as in the greedy algorithm calculation) that these substrings are physically disjoint, the probability of this event is  $e^{-\ell H_2(\mathbf{p})}$ .

The expected number of pairs of reads which are merged in error at overlap  $\ell$ , for  $L - \lambda^{-1} \ln N \leq \ell \leq L$ , is thus approximately

$$N^2 e^{-\lambda(L-\ell)} e^{-\ell H_2(\mathbf{p})}. \quad (6)$$

This number is largest when  $\ell = L$  or  $\ell = L - \lambda^{-1} \ln N$ , so the expression in (6) approaches zero if and only if  $R = \lambda^{-1} < \bar{L} - 1/H_2(\mathbf{p})$  and  $\bar{L} > 2/H_2(\mathbf{p})$ , as in Proposition 5.

### 2.5.2 $K$ -Mers based Algorithms

Due to complexity considerations, many recent assembly algorithms operate on  $K$ -mers instead of directly on the reads themselves.  $K$ -mers are length  $K$  subsequences of the reads; from each read, one can generate  $L - K + 1$   $K$ -mers. One of the early works which pioneer this approach is the sort-and-extend technique in ARACHNE [19]. By lexicographically sorting the set of all the  $K$ -mers generated from the collection of reads, identical  $K$ -mers from physically overlapping reads will be adjacent to each other. This enables the overlap relation between the reads (so called overlap graph) to be computed in  $O(N \log N)$  time (time to sort the set of  $K$ -mers) as opposed to the  $O(N^2)$  time needed if pairwise comparisons between the reads were done. Another related approach is the De Bruijn graph approach [9, 16]. In this approach, the  $K$ -mers are represented as vertices of a De Bruijn graph and there is an edge between two vertices if they overlap in  $K - 1$  base pairs. The DNA sequence reconstruction problem is then formulated as computing an Eulerian path which traverses all the edges of the De Bruijn graph.

The rate achievable by these algorithms on the basic statistical model can be analyzed by observing that two conditions must be satisfied for them to work. First,  $K$  should be chosen such that with high probability,  $K$ -mers from physically disjoint parts of the DNA sequence should be distinct, i.e. there are no duplications of length  $K$  subsequences in the DNA sequence. In the sort-and-extend technique, this will ensure that two identical adjacent  $K$ -mers in the sorted list belong to two physically overlapping reads rather than two physically disjoint reads. In the De Bruijn graph approach, this will ensure that the Eulerian path will be connecting  $K$ -mers that are physically overlapping. This minimum  $K$  can be calculated as we did to justify Lemma 3:

$$\frac{K}{\ln G} > \frac{2}{H_2(\mathbf{p})}. \quad (7)$$

Second, all successive reads should have physical overlap of at least  $K$  base pairs. This is needed so that the reads can be assembled via the  $K$ -mers. According to the Poisson approximation, the expected number of successive reads with spacing greater than  $L - K$  base pairs is roughly  $Ne^{-(L-K)/R}$ , where  $R = N/G$ . Hence, to ensure that with high probability all successive reads have overlap at least  $K$  base pairs, this expected number should be small, i.e.

$$R < \frac{L - K}{\ln N} \approx \frac{L - K}{\ln G}. \quad (8)$$

Substituting eq. (7) into this and using the definition  $\bar{L} = L/\ln G$ , we obtain

$$R < \bar{L} - \frac{2}{H_2(\mathbf{p})}.$$

This achievable rate is plotted in Figure 8. Note that the achievable rate of these  $K$ -mer based algorithms is strictly less than the performance achieved by the greedy algorithm (the capacity). The reason is that for  $\bar{L} > 2/H_2(\mathbf{p})$ , while the greedy algorithm only requires the reads to cover the DNA sequence, the  $K$ -mer based algorithms need more, that successive reads have (normalized) overlap at least  $2/H_2(\mathbf{p})$ .

## 2.6 Complexity of Greedy Algorithm

A naive implementation of the greedy algorithm would require an all-to-all pairwise comparison between all the reads. This would require a complexity of  $O(N^2)$  comparisons. For  $N$  in the order of tens of millions, this is not acceptable. However, drawing inspiration from the sort-and-extend technique discussed in the previous section, a more clever implementation would yield a complexity of  $O(LN \log N)$ . Since  $L \ll N$ , this is a much more efficient implementation. Recall that in stage  $\ell$  of the greedy algorithm, successive reads with overlap  $\ell$  are considered. Instead of doing many pairwise comparisons to obtain such reads, one can simply extract all the  $\ell$ -mers from the reads and perform a sort-and-extend to find all the reads with overlap  $\ell$ . Since we have to apply sort-and-extend in each stage of the algorithm, the total complexity is  $O(LN \log N)$ .

An idea similar to this and resulting in the same complexity was described by Turner [23] (in the context of the shortest common superstring problem), with the sorting effectively replaced with a suffix tree data structure. Ukkonen [25] used a more sophisticated data structure, which essentially computes overlaps between strings in parallel, to reduce the complexity to  $O(NL)$ .

## 3 Markov Source Model

The i.i.d. model for the DNA sequence considered in the basic result is over-simplistic. Here, we will consider a DNA sequence modeled by a Markov process.

In this section, we model correlation in the DNA sequence by using a Markov model with transition matrix  $Q = [q_{ij}]_{i,j \in \{1,2,3,4\}}$  where  $q_{ij} = \mathbb{P}(S_k = i | S_{k-1} = j)$ .

In the basic model, we observed that the sequencing capacity depends on the DNA statistics through the Rényi entropy of order-2. We prove that a similar dependency holds

for Markov DNA sources. In [18], it is shown that the Rényi entropy *rate* of order-2 for a stationary ergodic Markov source with transition matrix  $Q$  is given by

$$H_2(Q) := \log \left( \frac{1}{\rho_{\max}(\bar{Q})} \right),$$

where  $\rho_{\max}(\bar{Q}) \triangleq \max\{|\rho| : \rho \text{ eigenvalue of } \bar{Q}\}$ , and  $\bar{Q} = [q_{ij}^2]_{i,j \in \{1,2,3,4\}}$ . In terms of this quantity, we state the following theorem.

**Theorem 6.** *The sequencing capacity of a stationary ergodic Markov DNA sequence is given by*

$$C(\bar{L}) = \begin{cases} 0 & \text{if } \bar{L} < 2/H_2(Q), \\ \bar{L} & \text{if } \bar{L} > 2/H_2(Q). \end{cases} \quad (9)$$

The upper bounds on the capacity of the DNA sequencing in the case of i.i.d. model are derived in Section 2.3. The coverage limit, i.e.  $C(\bar{L}) \leq \bar{L}$ , remains unchanged in the Markov model. Hence, we only need to obtain a new bound for the duplication-limited region.

**Lemma 7.** *If  $\bar{L} < 2/H_2(Q)$ , then a Markov DNA sequence contains two pairs of interleaved duplications with probability  $1 - o(1)$  and hence  $C(\bar{L}) = 0$ .*

A similar heuristic argument as that of the i.i.d. model shows that the duplication-limited upper bound depends on  $\rho_{\max}(\bar{Q})$  in the Markov model. In fact, for any two physically disjoint sequences  $\mathbf{S}_i^L$  and  $\mathbf{S}_j^L$ :

$$\mathbb{P}(\mathbf{S}_i^L = \mathbf{S}_j^L) \approx e^{-L \log(\rho_{\max}(\bar{Q}))}.$$

The lemma follows from the fact that there are roughly  $G^2$  of such pairs in the DNA sequence. A formal proof of this lemma is provided in Section 5.2.2.

To obtain the achievability result, we make use of the greedy algorithm with the overlap score exactly the same as that of the i.i.d. model. The result reads:

**Lemma 8** (Achievable rate). *The greedy algorithm with overlap score  $W$  can achieve any rate  $R < \bar{L}$  if  $\bar{L} > 2/H_2(Q)$ , thus achieving capacity.*

This lemma is proved in Section 5.2.1. The key technical contribution of this result is to show that the effect of physically overlapping reads does not affect the asymptotic performance of the algorithm, just as in the i.i.d. case.

## 4 Noisy Reads

In our basic model, we assume that the read process is noiseless. In this section, we would like to assess the effect of noise on the greedy algorithm. We consider a simple probabilistic model for the noise. A nucleotide  $s$  is read to be  $r$  with probability  $Q(r|s)$ . The read noise for each nucleotide is assumed to be independent of each other, i.e. if  $\mathbf{r}$  is a read from the physical underlying subsequence  $\mathbf{s}$  of the DNA sequence, then

$$\mathbb{P}(\mathbf{r}|\mathbf{s}) = \prod_{i=1}^L Q(r_i|s_i).$$

Moreover, it is assumed that the noise affecting different reads is independent.

In the jargon of information theory, we are modeling the noise in the read process as a *discrete memoryless channel* with transition probability  $Q(\cdot|\cdot)$ . Noise processes in actual sequencing technologies can be more complex than this model. For example, the amount of noise can increase as the read process proceeds, or there may be insertions and deletions in addition to substitutions. Nevertheless, understanding the effect of noise on the assembly problem in this model provides considerable insight to the problem.

Here, we will show that the capacity result in the noiseless case is robust to noise in the sense that the greedy algorithm for the noisy case can achieve an information rate that gracefully decreases from the noiseless capacity as the noise level increases.

## 4.1 Uniform Source and Symmetric Noise

For concreteness, let us focus first on the example of the uniform source model  $\mathbf{p} = (1/4, 1/4, 1/4, 1/4)$  and a symmetric noise model with transition probabilities:

$$Q(i|j) = \begin{cases} 1 - \epsilon & \text{if } i = j \\ \epsilon/3 & \text{if } i \neq j. \end{cases} \quad (10)$$

Here,  $\epsilon$  is often called the error rate of the read process. It ranges from 1% to 10% depending on the sequencing technology.

To tailor the greedy algorithm for the noisy reads, the only requirement is to define the overlap score between two distinct reads. In the noiseless case, two reads overlap at length at least  $\ell$  if the length  $\ell$  prefix of one read is identical to the length  $\ell$  suffix of the other read. The overlap score is the largest such  $\ell$ . When there is noise, this criterion is not appropriate. Instead, a natural modification of this definition is that two reads overlap at length at least  $\ell$  if the Hamming distance between the prefix and the suffix strings are less than a fraction  $\alpha$  of the length  $\ell$ . The overlap score between the two reads is the largest such  $\ell$ . The parameter  $\alpha$  controls how stringent the overlap criterion is. By optimizing over the value of  $\alpha$ , we can obtain the following result.

**Theorem 9** (Achievable rate). *The greedy algorithm with the modified definition of overlap score between reads can achieve any rate  $R < \bar{L}$  if  $\bar{L} > 2/I^*(\epsilon)$ , where*

$$I^*(\epsilon) = D(\alpha^* || \frac{3}{4})$$

and  $\alpha^*$  satisfies

$$D(\alpha^* || \frac{3}{4}) = 2D(\alpha^* || 2\epsilon - \frac{4}{3}\epsilon^2).$$

Here,  $D(\alpha||\beta)$  is the divergence between a  $\text{Bern}(\alpha)$  and a  $\text{Bern}(\beta)$  random variable.

The rate achieved by this algorithm is shown in Figure 9. The only difference between the achievable rate and the noiseless capacity is a larger threshold,  $2/I^*(\epsilon)$  at which the rate first becomes non-zero. Once the rate is non-zero, the noise has no effect on the capacity. A plot of this threshold as a function of  $\epsilon$  is shown in Figure 10. It can be seen that when  $\epsilon = 0$ ,  $I^*(\epsilon) = \ln 4 = H_2(\mathbf{p})$ , and decreases continuously as  $\epsilon$  increases.



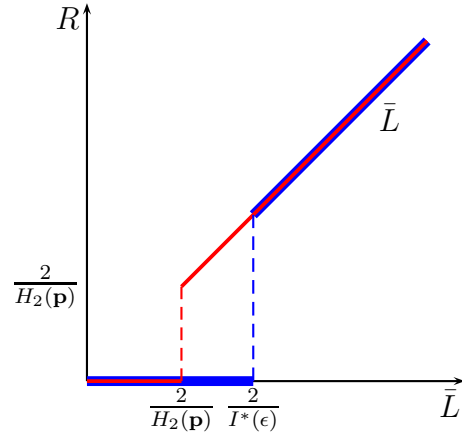


Figure 9: Plot of the achievable rate of the modified greedy algorithm under noise.

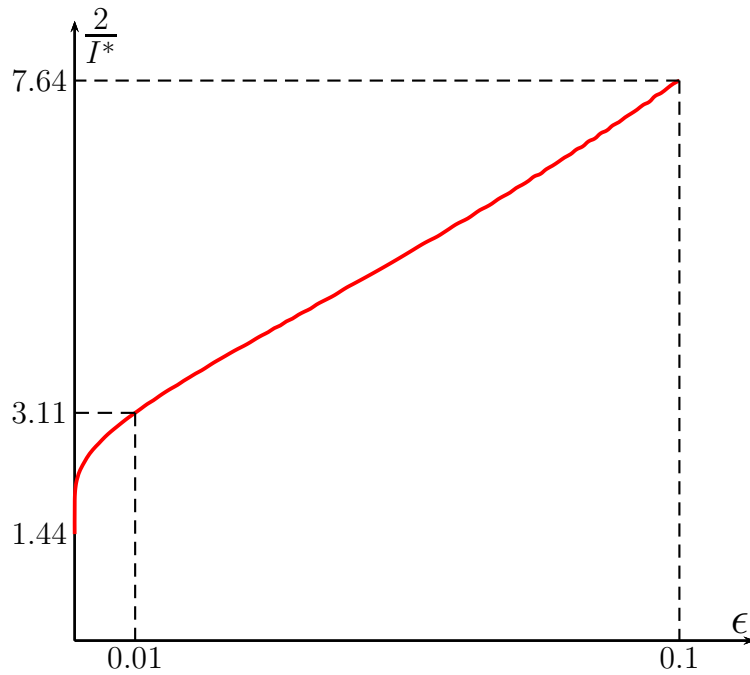


Figure 10: Plot of  $\frac{2}{I^*(\epsilon)}$  as a function of  $\epsilon$  for the uniform source and symmetric noise model.

The rigorous proof of this result can be found in Section 5.3, but a heuristic proof along the lines of that for the noiseless case is as follows. As in that argument, we picture the greedy algorithm as working in stages, starting with an overlap score of  $L$  down to an overlap score of 0. Since spacing between reads is independent of the DNA sequence and noise process, the number of reads at stage  $\ell$  given no errors have occurred in previous stages is again roughly

$$Ne^{-\lambda(L-\ell)}.$$

To pass this stage without making any error, the greedy algorithm should merge only those contigs having spacing of length  $\ell$  correctly to their partners. Similar to the noiseless case, the greedy algorithm makes an error if the overlap score between two non-consecutive reads is  $\ell$  at stage  $\ell$ , in other words

1. The Hamming distance between the length  $\ell$  suffix of the present read and the length  $\ell$  prefix of some read which is not the successor is less than  $\alpha\ell$  by random chance.

A standard large deviations calculation shows that the probability of this event is approximately:

$$\exp\left\{-\ell D\left(\alpha\left\|\frac{3}{4}\right.\right)\right\},$$

which is the probability that two independent strings of length  $\ell$  having Hamming distance less than  $\alpha\ell$ . Hence, the expected number of pairs of contigs for which this confusion event happens is approximately:

$$\left[Ne^{-\lambda(L-\ell)}\right]^2 \exp\left\{-\ell D\left(\alpha\left\|\frac{3}{4}\right.\right)\right\}. \quad (11)$$

Unlike the noiseless case, however, there is another important event affecting the performance of the algorithm. The *mis-detection* event defined as

2. The Hamming distance between the length  $\ell$  suffix of the present read and the length  $\ell$  prefix of the successor read is larger than  $\alpha\ell$  due to excessive amount of noise.

Again, a standard large deviations calculation shows that the probability of this event for given read is approximately:

$$\exp\{-\ell D(\alpha\|\eta)\},$$

where  $\eta = 2\epsilon - \frac{4}{3}\epsilon^2$  is the probability that the  $i$ th symbol in the length  $\ell$  suffix of the present read does not match the  $i$ th symbol in the length  $\ell$  prefix of the successor read. Here, we are assuming that  $\alpha > \eta$ . Hence, the expected number of contigs missing their successor contig at stage  $\ell$  is approximately:

$$Ne^{-\lambda(L-\ell)} \exp\{-\ell D(\alpha\|\eta)\}. \quad (12)$$

Both Equations (11) and (12) are largest either when  $\ell = L$  or  $\ell = 0$ . Similar to the noiseless case, errors do not occur at stage 0 if the DNA sequence is covered by the reads. The condition  $R = \frac{G}{N} < \bar{L}$  guarantees no gap exists in the assembled sequence. The two

equations provide different conditions for error events at stage  $L$ . It can be deduced that errors do not occur at stage  $L$  if

$$\bar{L} = \frac{L}{\ln G} > \frac{2}{\min(2D(\alpha||\eta), D(\alpha||\frac{3}{4}))}.$$

Selecting  $\alpha$  to minimize the right hand side results in the two expressions within the minimum being equal, which gives the result.

## 4.2 General Source and Noise Model

The Hamming distance criterion for determining overlap score in the example above can be viewed as a test between two hypotheses: whether a given read is the successor read of the present read, or it is physically disjoint from the present read. The choice of the threshold  $\alpha$  can be interpreted as optimizing a specific tradeoff between the *false alarm* probability, i.e. probability that a disjoint read is mistaken as the successor read, and the *mis-detection* probability, i.e. the probability of missing the correct successor read. Using this viewpoint, we can generalize the Hamming distance rule to arbitrary source and noise models. The class of hypothesis testing rules that is optimal in trading off the two types of error is the *maximum a posteriori* (MAP) rule.

In more details, the basic hypothesis testing problem is this. Let  $\mathbf{X}$  and  $\mathbf{Y}$  be two random sequences of length  $\ell$ . Consider two hypotheses:

- $H_0$ :  $\mathbf{X}$  and  $\mathbf{Y}$  are noisy reads from the same physical source subsequence;
- $H_1$ :  $\mathbf{X}$  and  $\mathbf{Y}$  are noisy reads from two disjoint source subsequences.

In log likelihood form, the MAP rule for this hypothesis testing problem is:

$$\text{Decide } H_0 \text{ if } \log \frac{P(\mathbf{x}, \mathbf{y})}{P(\mathbf{x})P(\mathbf{y})} = \sum_{j=1}^{\ell} \log \frac{P_{X,Y}(x_j, y_j)}{P_X(x_j)P_Y(y_j)} \geq \ell\theta, \quad (13)$$

where  $P_{X,Y}(x, y)$ ,  $P_X(x)$  and  $P_Y(y)$  are the marginals of the joint distribution  $P_S(s)Q(x|s)Q(y|s)$ , and  $\theta$  is a parameter reflecting the prior distribution of  $H_0$  and  $H_1$ . Note that when specializing to the uniform source and symmetric noise model, this MAP rule reduces to the Hamming distance rule.

Using this MAP rule, the criterion for declaring an overlap of at least  $\ell$  between two reads  $\mathbf{R}_i$  and  $\mathbf{R}_j$  is simply if the MAP rule on the length  $\ell$  suffix of  $\mathbf{R}_i$  and the length  $\ell$  prefix of read  $\mathbf{R}_j$  yields  $H_0$ .

By optimizing the threshold parameter  $\theta$ , one can prove the following result. Here,  $D(P||Q)$  is the divergence of the distribution  $P$  relative to  $Q$ .

**Theorem 10** (Achievable rate for general source and noise). *The modified greedy algorithm can achieve any rate  $R < \bar{L}$  if  $\bar{L} > 2/I^*$ , with*

$$I^* = D(P_{\mu^*} || P_X \cdot P_Y),$$

where

$$P_{\mu}(x, y) := \frac{[P_{X,Y}(x, y)]^{\mu} [P_X(x)P_Y(y)]^{1-\mu}}{\sum_{a,b} [P_{X,Y}(a, b)]^{\mu} [P_X(a)P_Y(b)]^{1-\mu}}$$

and  $\mu^*$  satisfies

$$D(P_{\mu^*} || P_X \cdot P_Y) = 2D(P_{\mu^*} || P_{X,Y}).$$

This rate is achieved by using the threshold value:

$$\theta^* = D(P_{\mu^*} || P_X \cdot P_Y) - D(P_{\mu^*} || P_{X,Y}).$$

The details of the proof of this theorem are in Section 5.3. It follows the same lines as the proof for the uniform source and symmetric noise example, basically reducing the calculations of the error probability to a problem of optimizing a tradeoff between the false alarm and mis-detection probability. This latter problem is a standard large deviations calculation. (See for example Chapter 11.7 and 11.9 of [3].)

## 5 Proofs

### 5.1 Proof of Theorem 4

We first state and prove the following lemma. This result can be found in [2], but for ease of generalization to other cases later, we will include the proof.

**Lemma 11.** *For any distinct substrings  $\mathbf{X}$  and  $\mathbf{Y}$  of length  $\ell$  of the i.i.d. DNA sequence:*

1. *If the strings have no physical overlap, the probability that they are identical is  $e^{-\ell H_2(\mathbf{p})}$ .*
2. *If the strings have physical overlap, the probability that they are identical is bounded above by  $e^{-\ell H_2(\mathbf{p})/2}$ .*

*Proof.* We first note that for any  $k$  distinct bases in the DNA sequence the probability that they are identical is given by

$$\pi_k \triangleq \sum_{i=1}^4 p_i^k.$$

1- Consider  $\mathbf{X} = S_{i+1} \dots S_{i+\ell}$  and  $\mathbf{Y} = S_{j+1} \dots S_{j+\ell}$  have no physical overlap. In this case, the events  $\{S_{i+m} = S_{j+m}\}$  for  $m \in \{1, \dots, \ell\}$  are independent and equiprobable. Therefore, the probability that  $\mathbf{X} = \mathbf{Y}$  is given by

$$\pi_2^\ell = e^{-\ell H_2(\mathbf{p})}.$$

2- For the case of overlapping strings  $\mathbf{X}$  and  $\mathbf{Y}$ , we assume that a substring of length  $k < \ell$  from the DNA sequence is shared between the two strings. Without loss of generality, we also assume that  $\mathbf{X}$  and  $\mathbf{Y}$  are, respectively, the prefix and suffix of  $\mathbf{S}_1^{2\ell-k}$ . Let  $q$  and  $r$  be the quotient and remainder of  $\ell$  divided by  $\ell - k$ , i.e.,  $\ell = q(\ell - k) + r$  where  $0 \leq r < \ell - k$ . It can be shown that  $\mathbf{X} = \mathbf{Y}$  if and only if  $\mathbf{S}_1^{2\ell-k}$  is a string of the form  $\mathbf{UVUV} \dots \mathbf{UVU}$  where  $\mathbf{U}$  and  $\mathbf{V}$  have length  $r$  and  $\ell - k - r$ . Since the number of  $\mathbf{U}$  and  $\mathbf{V}$  are, respectively,  $q + 2$  and  $q + 1$ , the probability of observing a structure of the form  $\mathbf{UVUV} \dots \mathbf{UVU}$  is given by

$$(\pi_{q+2})^r \times (\pi_{q+1})^{\ell-k-r} \stackrel{(a)}{\leq} (\pi_2)^{\frac{r(q+2)}{2}} \times (\pi_2)^{\frac{(\ell-k-r)(q+1)}{2}} = (\pi_2)^{\ell-\frac{k}{2}},$$

where (a) comes from the fact that  $(\pi_q)^{\frac{1}{q}} \leq (\pi_2)^{\frac{1}{2}}$  for all  $q \geq 2$ . Since  $k < \ell$ , we have  $(\pi_2)^{\ell - \frac{k}{2}} \leq (\pi_2)^{\frac{\ell}{2}}$ . Therefore, the probability that  $\mathbf{X} = \mathbf{Y}$  for two overlapping strings is bounded above by

$$(\pi_2)^{\frac{\ell}{2}} = e^{-\ell H_2(\mathbf{p})/2}.$$

This completes the proof.  $\square$

### Proof of Theorem 4

The greedy algorithm finds a contig corresponding to a substring of the DNA sequence if each read  $\mathbf{R}_i$  is correctly merged to its successor read  $\mathbf{R}_i^s$  with the correct amount of *physical overlap* between them which is  $V_i = L - (T_i^s - T_i) \bmod G$ .<sup>2</sup> If, in addition, the whole sequence is covered by the reads then the output of the algorithm is exactly the DNA sequence  $\mathbf{S}$ .

Let  $\mathcal{E}_1$  be the event that some read is merged incorrectly; this includes merging to the read's valid successor but at the wrong relative position as well as merging to an impostor<sup>3</sup>. Let  $\mathcal{E}_2$  be the event that the DNA sequence is not covered by the reads. The union of these events,  $\mathcal{E}_1 \cup \mathcal{E}_2$ , contains the error event  $\mathcal{E}$ , and hence to prove Theorem 4 it is sufficient to prove that both events have probabilities approaching zero in the limit. Since  $R < \bar{L}$ , the coverage condition is satisfied, and hence  $\mathbb{P}(\mathcal{E}_2)$  approaches zero. We only need to focus on event  $\mathcal{E}_1$ .

Since the greedy algorithm merges reads according to overlap score, we may think of the algorithm as working in stages starting with an overlap score of  $L$  down to an overlap score of 0. Thus  $\mathcal{E}_1$  naturally decomposes as  $\mathcal{E}_1 = \cup_{\ell} \mathcal{A}_{\ell}$ , where  $\mathcal{A}_{\ell}$  is the event that the first error in merging occurs at stage  $\ell$ .

Now, we claim that

$$\mathcal{A}_{\ell} \subseteq \mathcal{B}_{\ell} \cup \mathcal{C}_{\ell}, \quad (14)$$

where:

$$\mathcal{B}_{\ell} \triangleq \{\mathbf{R}_j \neq \mathbf{R}_i^s, U_j \leq \ell, V_i \leq \ell, W_{ij} = \ell \text{ for some } i \neq j.\} \quad (15)$$

$$\mathcal{C}_{\ell} \triangleq \{\mathbf{R}_j = \mathbf{R}_i^s, U_j = V_i < \ell, W_{ij} = \ell \text{ for some } i \neq j.\} \quad (16)$$

If the event  $\mathcal{A}_{\ell}$  occurs, then either there are two reads  $\mathbf{R}_i$  and  $\mathbf{R}_j$ 's such that  $\mathbf{R}_i$  is merged to its successor  $\mathbf{R}_j$  but at an overlap larger than their physical overlap, or there are two reads  $\mathbf{R}_i$  and  $\mathbf{R}_j$  such that  $\mathbf{R}_i$  is merged to  $\mathbf{R}_j$ , an impostor. The first case implies the event  $\mathcal{B}_{\ell}$ . In the second case, in addition to  $W_{ij} = \ell$ , it must be true that the physical overlaps  $V_i, U_j \leq \ell$ , since otherwise at least one of these two reads would have been merged at an earlier stage. (By definition of  $\mathcal{A}_{\ell}$ , there were no errors before stage  $\ell$ ). Hence, in this second case, the event  $\mathcal{B}_{\ell}$  occurs.

Now we will bound  $\mathbb{P}(\mathcal{B}_{\ell})$  and  $\mathbb{P}(\mathcal{C}_{\ell})$ .

First, let us consider the event  $\mathcal{B}_{\ell}$ . This is the event that two reads which are not neighbors with each other got merged by mistake. Intuitively, event  $\mathcal{B}_{\ell}$  says that the pairs of reads that can potentially cause such confusion at stage  $\ell$  are limited to those with short physical overlap with their own neighboring reads, since the ones with large physical overlaps have already been successfully merged to their correct neighbor by the algorithm in the early

<sup>2</sup>Note that the physical overlap can take negative values.

<sup>3</sup>A read  $R_j$  is an impostor to  $R_i$  if  $W(\mathbf{R}_i, \mathbf{R}_j) \geq V_i$ .

stages. In Figure 7, these are the reads at the ends of the contigs that are formed by stage  $\ell$ .

For any two distinct reads  $\mathbf{R}_i$  and  $\mathbf{R}_j$ , we define the following event

$$\mathcal{B}_\ell^{ij} \triangleq \{\mathbf{R}_j \neq \mathbf{R}_i^s, U_j \leq \ell, V_i \leq \ell, W_{ij} = \ell\}$$

From the definition of  $\mathcal{B}_\ell$  in (15), we have  $\mathcal{B}_\ell \subseteq \cup_{ij} \mathcal{B}_\ell^{ij}$ . Applying the union bound and considering the fact that  $\mathcal{B}_\ell^{ij}$ 's are equiprobable yields

$$\mathbb{P}(\mathcal{B}_\ell) \leq N^2 \mathbb{P}(\mathcal{B}_\ell^{12}).$$

Let  $\mathcal{D}$  be the event that the two reads  $\mathbf{R}_1$  and  $\mathbf{R}_2$  have no physical overlap. Using the law of total probability we obtain

$$\mathbb{P}(\mathcal{B}_\ell^{12}) = \mathbb{P}(\mathcal{B}_\ell^{12}|\mathcal{D})\mathbb{P}(\mathcal{D}) + \mathbb{P}(\mathcal{B}_\ell^{12}|\mathcal{D}^c)\mathbb{P}(\mathcal{D}^c).$$

Since  $\mathcal{D}^c$  happens only if  $T_2 \in [T_1 - L + 1, T_1 + L - 1]$ ,  $\mathbb{P}(\mathcal{D}^c) \leq \frac{2L}{G}$ . Hence,

$$\mathbb{P}(\mathcal{B}_\ell^{12}) \leq \mathbb{P}(\mathcal{B}_\ell^{12}|\mathcal{D}) + \mathbb{P}(\mathcal{B}_\ell^{12}|\mathcal{D}^c) \frac{2L}{G}. \quad (17)$$

We proceed with bounding  $\mathbb{P}(\mathcal{B}_\ell^{12}|\mathcal{D})$  as follows,

$$\begin{aligned} \mathbb{P}(\mathcal{B}_\ell^{12}|\mathcal{D}) &= \mathbb{P}(U_2 \leq \ell, V_1 \leq \ell, W_{12} = \ell|\mathcal{D}) \\ &\stackrel{(a)}{=} \mathbb{P}(U_2 \leq \ell, V_1 \leq \ell|\mathcal{D})\mathbb{P}(W_{12} = \ell|\mathcal{D}) \\ &\stackrel{(b)}{=} \mathbb{P}(U_2 \leq \ell, V_1 \leq \ell|\mathcal{D})e^{-\ell H_2(\mathbf{p})}, \end{aligned}$$

where (a) comes from the fact that given  $\mathcal{D}$ , the events  $\{U_2 \leq \ell, V_1 \leq \ell\}$  and  $\{W_{12} = \ell\}$  are independent, and (b) follows from Lemma 11 part 1.

Note that the event  $\{\mathbf{R}_2 \neq \mathbf{R}_1^s, U_2 \leq \ell, V_1 \leq \ell\}$  implies that no reads start in the intervals  $[T_1, T_1 + L - \ell - 1]$  and  $[T_2 - L + \ell + 1, T_2]$ . Given  $\mathcal{D}$ , if the two intervals overlap then there exists a read with starting position  $T_i$  with  $T_i \in [T_1, T_1 + L - \ell - 1]$  or  $T_i \in [T_2 - L + \ell + 1, T_2]$ . To see this, suppose  $T_i$  is not in one of the intervals then  $\mathbf{R}_2$  has to be the successor of  $\mathbf{R}_1$  contradicting  $\mathbf{R}_2 \neq \mathbf{R}_1^s$ . If the two intervals are disjoint, then the probability that there is no read starting in them is given by

$$\left(1 - \frac{2(L - \ell)}{G}\right)^{N-2}.$$

Using the inequality  $1 - a \leq e^{-a}$ , we obtain

$$\mathbb{P}(\mathcal{B}_\ell^{12}|\mathcal{D}) \leq e^{-2\lambda(L-\ell)(1-2/N)} e^{-\ell H_2(\mathbf{p})} \quad (18)$$

To bound  $\mathbb{P}(\mathcal{B}_\ell^{12}|\mathcal{D}^c)$ , we note that it has a non-zero value only if the length of physical overlap between  $\mathbf{R}_1$  and  $\mathbf{R}_2$  is less than  $\ell$ . Hence, we only consider physical overlaps of

length less than  $\ell$  and denote this event by  $\mathcal{D}_1$ . We proceed as follows,

$$\begin{aligned}\mathbb{P}(\mathcal{B}_\ell^{12}|\mathcal{D}^c) &\leq \mathbb{P}(U_2 \leq \ell, V_1 \leq \ell, W_{12} = \ell|\mathcal{D}_1) \\ &\leq \mathbb{P}(V_1 \leq \ell, W_{12} = \ell|\mathcal{D}_1) \\ &\stackrel{(a)}{\leq} \mathbb{P}(V_1 \leq \ell|\mathcal{D}_1)\mathbb{P}(W_{12} = \ell|\mathcal{D}_1) \\ &\stackrel{(b)}{\leq} \mathbb{P}(V_1 \leq \ell|\mathcal{D}_1)e^{-\ell H_2(\mathbf{p})/2}\end{aligned}$$

where (a) comes from the fact that given  $\mathcal{D}_1$ , the events  $\{V_1 \leq \ell\}$  and  $\{W_{12} = \ell\}$  are independent, and (b) follows from Lemma 11 part 2. Since  $\{V_1 \leq \ell\}$  corresponds to the event that there is no read starting in the interval  $[T_1, T_1 + L - \ell - 1]$ , we obtain

$$\mathbb{P}(V_1 \leq \ell|\bar{\mathcal{D}}_2) = \left(1 - \frac{L - \ell}{G}\right)^{N-2}.$$

Using the inequality  $1 - a \leq e^{-a}$ , we obtain

$$\mathbb{P}(\mathcal{B}_\ell^{12}|\mathcal{D}_2) \leq e^{-\lambda(L-\ell)(1-2/N)} e^{-\ell H_2(\mathbf{p})/2}.$$

Putting all terms together, we have

$$\mathbb{P}(\mathcal{B}_\ell) \leq q_\ell^2 + 2\lambda L q_\ell. \quad (19)$$

where

$$q_\ell = \lambda G e^{-\lambda(L-\ell)(1-2/N)} e^{-\ell H_2(\mathbf{p})/2}. \quad (20)$$

The first term reflects the contribution from the reads with no physical overlap and the second term from the reads with physical overlap. Even though there are lots more of the former than the latter, the probability of confusion when the reads are physically overlapping can be much larger. Hence both terms have to be considered.

Let us define

$$\mathcal{C}_\ell^i \triangleq \{V_i < \ell, W(\mathbf{R}_i, \mathbf{R}_i^s) = \ell\}.$$

From the definition of  $\mathcal{C}_\ell$  in (16), we have  $\mathcal{C}_\ell \subseteq \cup_i \mathcal{C}_\ell^i$ . Applying the union bound and considering the fact that  $\mathcal{C}_\ell^i$ 's are equiprobable yields

$$\mathcal{C}_\ell \leq N\mathbb{P}(\mathcal{C}_\ell^1).$$

Hence,

$$\mathbb{P}(\mathcal{C}_\ell) \leq N\mathbb{P}(W(\mathbf{R}_i, \mathbf{R}_i^s) = \ell|V_i < \ell)\mathbb{P}(V_i < \ell)$$

Applying Lemma 11 part 2, we obtain

$$\mathbb{P}(\mathcal{C}_\ell) \leq N e^{-\ell H_2(\mathbf{p})/2} \left(1 - \frac{L - \ell}{G}\right)^{N-1}.$$

Using the inequality  $1 - a \leq e^{-a}$ , we obtain

$$\begin{aligned} \mathbb{P}(\mathcal{C}_\ell) &\leq \lambda G e^{-\lambda(L-\ell)(1-1/N)} e^{-\ell H_2(\mathbf{p})/2} \\ &\leq q_\ell \end{aligned} \tag{21}$$

Using the bounds, (19) and (21), we get

$$\mathbb{P}(\mathcal{E}_1) = \mathbb{P}(\cup_\ell \mathcal{A}_\ell) \leq \sum_{\ell=0}^L \mathbb{P}(\mathcal{A}_\ell) = \sum_{\ell=0}^L \mathbb{P}(\mathcal{B}_\ell) + \mathbb{P}(\mathcal{C}_\ell) \leq \sum_{\ell=0}^L q_\ell^2 + (2\lambda L + 1)q_\ell,$$

where  $q_\ell$  is defined in (20).

To show that  $\mathbb{P}(\mathcal{E}_1) \rightarrow 0$ , it is sufficient to argue that  $q_0$  and  $q_L$  go to zero exponentially in  $L$ . Considering first  $q_0$ , it vanishes exponentially in  $L$  if  $R = \frac{G}{N} = \lambda^{-1} < \bar{L}$ , matching the coverage-limited constraint of Theorem 2. Also,  $q_L$  vanishes exponentially in  $L$  if  $\bar{L} > \frac{2}{H_2(\mathbf{p})}$ , which is the duplication-limited constraint of Theorem 3. Thus, the conditions of Theorem 4 are evidently sufficient for  $\mathbb{P}(\mathcal{E}_1) = o(1)$ .

Since  $\mathbb{P}(\mathcal{E}_1) = o(1)$  and  $\mathbb{P}(\mathcal{E}_2) = o(1)$ , we conclude that the necessary conditions of Section 2.3 are sufficient for correct assembly, completing the proof.

## 5.2 Proof of Theorem 6

The stationary distribution of the source is denoted by  $\mathbf{p} = (p_1, p_2, p_3, p_4)^t$ . Since  $\bar{Q}$  has positive entries, the Perron-Frobenius theorem implies that its largest eigenvalue  $\rho_{\max}(\bar{Q})$  is real and positive and the corresponding eigenvector  $\boldsymbol{\pi}$  has positive components. The following inequality is useful:

$$\begin{aligned} \sum_{i_1 i_2 \dots i_\ell} q_{i_2 i_1}^2 q_{i_3 i_2}^2 \dots q_{i_\ell i_{\ell-1}}^2 &\leq \max_{i_1 \in \{1,2,3,4\}} \left\{ \frac{1}{\pi_{i_1}} \right\} \sum_{i_1 i_2 \dots i_\ell} \pi_{i_1} q_{i_2 i_1}^2 q_{i_3 i_2}^2 \dots q_{i_\ell i_{\ell-1}}^2 \\ &= \max_{i \in \{1,2,3,4\}} \left\{ \frac{1}{\pi_i} \right\} \|\bar{Q}^{\ell-1} \boldsymbol{\pi}\|_1 \\ &= \max_{i \in \{1,2,3,4\}} \left\{ \frac{1}{\pi_i} \right\} (\rho_{\max}(\bar{Q}))^{\ell-1} \|\boldsymbol{\pi}\|_1 \\ &= \gamma (\rho_{\max}(\bar{Q}))^\ell \end{aligned} \tag{22}$$

where  $\gamma = \max_{i \in \{1,2,3,4\}} \left\{ \frac{\|\boldsymbol{\pi}\|_1}{\pi_i \rho_{\max}(\bar{Q})} \right\}$ .

We first prove the achievability result given in Lemma 8.

### 5.2.1 Proof of Achievability

The achievability of the Markov model follows closely from that of the i.i.d. model. In fact, we only need to replace Lemma 11 with the following lemma.

**Lemma 12.** *For any distinct substrings  $\mathbf{X}$  and  $\mathbf{Y}$  of length  $\ell$  of the Markov DNA sequence:*

1. *If the strings have no physical overlap, the probability that they are identical is bounded above by  $\gamma e^{\ell \log(\rho_{\max}(\bar{Q}))}$ .*



2. If the strings have physical overlap, the probability that they are identical is bounded above by  $\sqrt{\gamma}e^{\ell \log(\rho_{\max}(\bar{Q}))}/2$ .

*Proof.* 1- From Markov property, we can show that

$$\begin{aligned} \mathbb{P}(\mathbf{X} = \mathbf{Y}) &= \sum_{i_1 i_2 \dots i_\ell} \mathbb{P}(X_1 = Y_1 = i_1) q_{i_2 i_1}^2 q_{i_3 i_2}^2 \dots q_{i_\ell i_{\ell-1}}^2 \\ &\leq \sum_{i_1 i_2 \dots i_\ell} q_{i_2 i_1}^2 q_{i_3 i_2}^2 \dots q_{i_\ell i_{\ell-1}}^2 \\ &= \gamma \left( \rho_{\max}(\bar{Q}) \right)^\ell, \end{aligned}$$

where the last line follows from (22).

2- Without loss of generality, we assume that  $\mathbf{X} = \mathbf{S}[1, \ell]$  and  $\mathbf{Y} = \mathbf{S}[\ell - k + 1, 2\ell - k]$  for some  $k \in \{1, \dots, \ell - 1\}$ . Let  $q$  and  $r$  be the quotient and remainder of dividing  $2\ell - k$  by  $\ell - k$ . From decomposition of  $\mathbf{S}[1, 2\ell - k]$  as  $\mathbf{U}_1 \mathbf{U}_2 \dots \mathbf{U}_q \mathbf{V}$  where  $|\mathbf{U}_i| = \ell - k$  for all  $i \in \{1, \dots, q\}$  and  $|\mathbf{V}| = r$ , one can deduce that  $\mathbf{X} = \mathbf{Y}$  if and only if  $\mathbf{U}_i = S_1 S_2 \dots S_{\ell-k}$  for all  $i \in \{1, \dots, q\}$  and  $\mathbf{V} = S_1 S_2 \dots S_r$ . Hence, we have

$$\begin{aligned} \mathbb{P}(\mathbf{X} = \mathbf{Y}) &= \mathbb{P}(\mathbf{S}[1, 2\ell - k] = \mathbf{U}\mathbf{U} \dots \mathbf{U}\mathbf{V}) \\ &= \sum_{i_1 i_2 \dots i_{\ell-k}} p_{i_1} \left( q_{i_2 i_1} q_{i_3 i_2} \dots q_{i_1 i_{\ell-k}} \right)^q \left( q_{i_2 i_1} q_{i_3 i_2} \dots q_{i_r i_{r-1}} \right) \\ &\stackrel{(a)}{\leq} \sqrt{\sum_{i_1} p_{i_1}^2} \sqrt{\sum_{i_1 i_2 \dots i_{\ell-k}} \left( q_{i_2 i_1}^2 q_{i_3 i_2}^2 \dots q_{i_1 i_{\ell-k}}^2 \right)^q \left( q_{i_2 i_1}^2 q_{i_3 i_2}^2 \dots q_{i_r i_{r-1}}^2 \right)} \\ &\stackrel{(b)}{\leq} \sqrt{\sum_{i_1 i_2 \dots i_{\ell-k}} \left( q_{i_2 i_1}^2 q_{i_3 i_2}^2 \dots q_{i_1 i_{\ell-k}}^2 \right)^q \left( q_{i_2 i_1}^2 q_{i_3 i_2}^2 \dots q_{i_r i_{r-1}}^2 \right)} \\ &\stackrel{(c)}{\leq} \sqrt{\sum_{i_1 i_2 \dots i_{2\ell-k}} q_{i_2 i_1}^2 q_{i_3 i_2}^2 \dots q_{i_{2\ell-k} i_{2\ell-k-1}}^2} \\ &\stackrel{(d)}{\leq} \sqrt{\gamma \left( \rho_{\max}(\bar{Q}) \right)^{2\ell-k}} \\ &= \sqrt{\gamma} \left( \rho_{\max}(\bar{Q}) \right)^{\ell - \frac{k}{2}} \\ &\stackrel{(e)}{\leq} \sqrt{\gamma} \left( \rho_{\max}(\bar{Q}) \right)^{\frac{\ell}{2}}, \end{aligned}$$

where (a) follows from the Cauchy-Schwarz inequality and (b) follows from the fact that  $\sum_i P_i^2 \leq 1$ . In (c), some extra terms are added to the inequality. (d) comes from (22) and finally (e) comes from the fact that  $k < \ell$  and  $\rho_{\max}(\bar{Q}) \leq 1$ .  $\square$

### 5.2.2 Proof of Converse

In [2], Arratia *et al.* showed that interleaved pairs of repeats are the dominant term causing non-recoverability. They also used poisson approximation to derive bounds on the event that  $\mathbf{S}$  is recoverable from its  $L$ -spectrum. We take a similar approach to obtain an upper bound under the Markov model. First, we state the following theorem regarding Poisson approximation of the sum of indicator random variables, c.f. Arratia *et al.* [1].

**Theorem 13** (Chen-Stein Poisson approximation). *Let  $W = \sum_{\alpha \in I} \chi_\alpha$  where  $\chi_\alpha$ 's are indicator random variables for some index set  $I$ . For each  $\alpha$ ,  $B_\alpha \subseteq I$  denotes the set of indices where  $\chi_\alpha$  is independent from the  $\sigma$ -algebra generated by all  $\chi_\beta$  with  $\beta \in I - B_\alpha$ . Let*

$$b_1 = \sum_{\alpha \in I} \sum_{\beta \in B_\alpha} \mathbb{E}[\chi_\alpha] \mathbb{E}[\chi_\beta], \quad (23)$$

$$b_2 = \sum_{\alpha \in I} \sum_{\beta \in B_\alpha, \beta \neq \alpha} \mathbb{E}[\chi_\alpha \chi_\beta]. \quad (24)$$

Then

$$d_{TV}(W, W') \leq \frac{1 - e^{-\theta}}{\theta} (b_1 + b_2), \quad (25)$$

where  $\theta = \mathbb{E}[W]$  and  $d_{TV}(W, W')$  is the total variation distance<sup>4</sup> between  $W$  and Poisson random variable  $W'$  with the same mean.

**Proof of Lemma 7** Let  $\mathcal{U}$  denote the event that there is no two pairs of interleaved duplications in the DNA sequence. Given the presence of  $k$  duplications in  $\mathbf{S}$ , the probability of  $\mathcal{U}$  can be found by using the Catalan numbers [2]. This probability is  $2^k / (k + 1)!$ . If  $Z$  denotes the random variable indicating the number of duplications in the DNA sequence, we obtain,

$$\mathbb{P}(\mathcal{U}) = \sum_k \frac{2^k}{(k + 1)!} \mathbb{P}(Z = k).$$

To approximate  $\mathbb{P}(\mathcal{U})$ , we partition the sequence as

$$\mathbf{S} = S_1 \mathbf{X}_1 S_{L+2} \mathbf{X}_2 S_{2(L+1)+1} \mathbf{X}_3 \dots S_{(K-1)(L+1)+1} \mathbf{X}_K$$

where  $\mathbf{X}_i = \mathbf{S}[(i - 1)(L + 1) + 2, i(L + 1)]$  and  $K = \frac{G}{L+1}$ . Each  $\mathbf{X}_i$  has length  $L$  and will be denoted by  $\mathbf{X}_i = X_{i1} \dots X_{iL}$ . We write  $\mathbf{X}_i \sim \mathbf{X}_j$  with  $i \neq j$  to mean  $X_{i1} \neq X_{j1}$  and  $X_{ik} = X_{jk}$  for  $2 \leq k \leq L$ . In other words,  $\mathbf{X}_i \sim \mathbf{X}_j$  means that there is a repeat of length at least  $L - 1$  starting from locations  $(i - 1)(L + 1) + 3$  and  $(j - 1)(L + 1) + 3$  in the DNA sequence and the repeat cannot be extended from left. The requirement  $X_{i1} \neq X_{j1}$  is due to the fact that allowing left extension ruins accuracy of Poisson approximation as repeats appear in clumps.

Let  $I = \{(i, j) | 1 \leq i < j \leq K\}$ . Let  $\chi_\alpha$  with  $\alpha \in I$  denote the indicator random variable for a repeat at  $\alpha = (i, j)$ , i.e.,  $\chi_\alpha = \mathbf{1}(\mathbf{X}_i \sim \mathbf{X}_j)$ . Let  $W = \sum_{\alpha \in I} \chi_\alpha$ . Clearly,

$$\mathbb{P}(\mathcal{U}) \leq \sum_k \frac{2^k}{(k + 1)!} \mathbb{P}(W = k).$$

Letting  $\mathbf{Y} = S_1 S_{L+2} \dots S_{(K-1)(L+1)+1}$ , we obtain

$$\mathbb{P}(\mathcal{U}) \leq \sum_{\mathbf{Y}} \sum_k \frac{2^k}{(k + 1)!} \mathbb{P}(W = k | \mathbf{Y}) \mathbb{P}(\mathbf{Y}).$$

---

<sup>4</sup>The total variation distance between two distributions  $W$  and  $W'$  is defined by  $d_{TV}(W, W') = \sup_{A \in \mathcal{F}} |\mathbb{P}_W(A) - \mathbb{P}_{W'}(A)|$ , where  $\mathcal{F}$  is the  $\sigma$ -algebra defined for  $W$  and  $W'$

For any  $\mathbf{Y}$ , let  $\epsilon$  be the total variation distance between  $W$  and its corresponding Poisson distribution  $W'$  with mean  $\theta_{\mathbf{Y}} = \mathbb{E}[W|\mathbf{Y}]$ . Then, we obtain

$$\begin{aligned}
\mathbb{P}(\mathcal{U}) &\leq \sum_{\mathbf{Y}} \left( \epsilon + e^{-\theta_{\mathbf{Y}}} \sum_{k=0}^{\infty} \frac{(2\theta_{\mathbf{Y}})^k}{k!(k+1)!} \right) \mathbb{P}(\mathbf{Y}) \\
&= \epsilon + \sum_{\mathbf{Y}} e^{-\theta_{\mathbf{Y}}} \sum_{k=0}^{\infty} \frac{(2\theta_{\mathbf{Y}})^k}{k!(k+1)!} \mathbb{P}(\mathbf{Y}) \\
&\leq \epsilon + \sum_{\mathbf{Y}} e^{-\theta_{\mathbf{Y}}} \sum_{k=0}^{\infty} \left( \frac{(\sqrt{2\theta_{\mathbf{Y}}})^k}{k!} \right)^2 \mathbb{P}(\mathbf{Y}) \\
&\leq \epsilon + \sum_{\mathbf{Y}} e^{-\theta_{\mathbf{Y}}} \left( \sum_{k=0}^{\infty} \frac{(\sqrt{2\theta_{\mathbf{Y}}})^k}{k!} \right)^2 \mathbb{P}(\mathbf{Y}) \\
&\leq \epsilon + \sum_{\mathbf{Y}} e^{-\theta_{\mathbf{Y}} + 2\sqrt{2\theta_{\mathbf{Y}}}} \mathbb{P}(\mathbf{Y})
\end{aligned}$$

We assume  $\theta_{\mathbf{Y}} \geq 8$  for all  $\mathbf{Y}$  and let  $\theta = \min_{\mathbf{Y}} \theta_{\mathbf{Y}}$ . For this region, the exponential factor within the summation is monotonically decreasing and

$$\mathbb{P}(\mathcal{U}) \leq \epsilon + e^{-\theta + 2\sqrt{2\theta}}. \quad (26)$$

To calculate the bound, we need to obtain an upper bound for  $\epsilon$  and a lower bound for  $\theta$ . We start with the lower bound on  $\theta$ . From Markov property and for a given  $\alpha = (i, j)$ ,

$$\begin{aligned}
\mathbb{E}[\chi_{\alpha}|\mathbf{Y}] &= \sum_{i_1 i_2 \dots i_L} \mathbb{P}(X_{i_1} \neq X_{j_1}|\mathbf{Y}) q_{i_2 i_1}^2 q_{i_3 i_2}^2 \dots q_{i_L i_{L-1}}^2 \\
&\geq \min \left\{ \frac{\mathbb{P}(X_{i_1} \neq X_{j_1}|\mathbf{Y})}{\pi_{i_1}} \right\} \sum_{i_1 i_2 \dots i_L} \pi_{i_1} q_{i_2 i_1}^2 q_{i_3 i_2}^2 \dots q_{i_L i_{L-1}}^2 \\
&= \zeta \left( \rho_{\max}(\bar{Q}) \right)^L
\end{aligned}$$

where  $\zeta = \min \left\{ \frac{\mathbb{P}(X_{i_1} \neq X_{j_1}|\mathbf{Y})}{\pi_{i_1} \rho_{\max}(\bar{Q})} \right\}$ . Therefore,

$$\theta_{\mathbf{Y}} = \sum_{\alpha \in I} \mathbb{E}[\chi_{\alpha}|Y] \geq \binom{K}{2} \zeta \left( \rho_{\max}(\bar{Q}) \right)^L = \theta. \quad (27)$$

To bound  $\epsilon$ , we make use of the Chen-Stein method. Let  $B_{\alpha} = \{(i', j') \in I | i' = i \text{ or } j' = j\}$ . Note that  $B_{\alpha}$  has cardinality  $2K - 3$ . Since given  $\mathbf{Y}$ ,  $\chi_{\alpha}$  is independent of the sigma-algebra generated by all  $\chi_{\beta}$ ,  $\beta \in I - B_{\alpha}$ , we can use Theorem 13 to obtain

$$d_{\text{TV}}(W, W'|\mathbf{Y}) \leq \frac{b_1 + b_2}{\theta_{\mathbf{Y}}}, \quad (28)$$

where  $b_1$  and  $b_2$  are defined in (23) and (24), respectively. Since  $\mathbb{E}[X_{\alpha} X_{\beta}] = \mathbb{E}[X_{\alpha}] \mathbb{E}[X_{\beta}]$  for all  $\alpha \neq \beta \in B_{\alpha}$ , we can conclude that  $b_2 \leq b_1$ . Therefore,

$$d_{\text{TV}}(W, W'|\mathbf{Y}) \leq \frac{2b_1}{\theta_{\mathbf{Y}}}.$$

Since  $\theta \leq \theta_{\mathbf{Y}}$ ,

$$d_{\text{TV}}(W, W' | \mathbf{Y}) \leq \frac{2b_1}{\theta}.$$

In order to compute  $b_1$ , we need an upper bound on  $\mathbb{E}[\chi_\alpha | \mathbf{Y}]$ . By using (22), we obtain

$$\begin{aligned} \mathbb{E}[\chi_\alpha | \mathbf{Y}] &= \sum_{i_1 i_2 \dots i_L} \mathbb{P}(X_{i_1} \neq X_{j_1} | \mathbf{Y}) q_{i_2 i_1}^2 q_{i_3 i_2}^2 \dots q_{i_L i_{L-1}}^2 \\ &\leq \sum_{i_1 i_2 \dots i_L} q_{i_2 i_1}^2 q_{i_3 i_2}^2 \dots q_{i_L i_{L-1}}^2 \\ &\leq \gamma \left( \rho_{\max}(\bar{Q}) \right)^L. \end{aligned}$$

Hence,

$$\begin{aligned} b_1 &= \sum_{\alpha \in I} \sum_{\beta \in B_\alpha} \mathbb{E}[\chi_\alpha | \mathbf{Y}] \mathbb{E}[\chi_\beta | \mathbf{Y}], \\ &\leq (2K - 3) \binom{K}{2} \gamma^2 \left( \rho_{\max}(\bar{Q}) \right)^{2L} \\ &= \frac{\gamma^2 \theta^2 (2K - 3)}{\zeta^2 \binom{K}{2}} \\ &\leq \frac{4\gamma^2 \theta^2}{\zeta^2 K}. \end{aligned}$$

Using the bound for  $b_1$ , we have the following bound for the total variation distance.

$$d_{\text{TV}}(W, W' | \mathbf{Y}) \leq \frac{8\gamma^2 \theta}{\zeta^2 K}.$$

Form the above inequality, we can choose  $\epsilon = \frac{8\gamma^2 \theta}{\zeta^2 K}$ . Substituting in (26) yields

$$\mathbb{P}(\mathcal{U}) \leq \frac{8\gamma^2 \theta}{\zeta^2 K} + e^{-\theta + 2\sqrt{2\theta}}. \quad (29)$$

From the definition of  $\theta$  in (27), we have

$$\theta = \frac{\zeta(K-1)(L+1)^2}{2K} G^{2-\bar{L} \log\left(\frac{1}{\rho_{\max}(\bar{Q})}\right)}.$$

Therefore, if  $2 > \bar{L} \log\left(\frac{1}{\rho_{\max}(\bar{Q})}\right)$  then  $\theta$  and  $\frac{\theta}{K}$  go, respectively, to infinity and zero exponentially fast. Since the right hand side of (29) approaches zero, we can conclude that with probability  $1 - o(1)$  there exists a two pairs of interleaved duplications in the sequence. This completes the proof.

### 5.3 Proof of Theorems 4 and 10

In this section, we prove the achievability result of Theorem 10. Theorem 4 follows immediately from Theorem 10. As explained in Section 4.2, the criterion for overlap scoring is

based the MAP rule for deciding between two hypotheses:  $H_0$  and  $H_1$ . The null hypothesis  $H_0$  indicates that two reads are from same physical source subsequence. Formally, we say two reads  $\mathbf{R}_i$  and  $\mathbf{R}_j$  have the overlap score  $W_{ij} = w$  if  $w$  is the longest suffix of  $\mathbf{R}_i$  and prefix of  $\mathbf{R}_j$  passing the criterion (13).

Let  $f(\ell) = (1 + \ell)^{|\mathcal{X}|}$ , where  $|\mathcal{X}|$  is the cardinality of the channel's output symbols. The following theorem is a standard result in the hypothesis testing problem, c.f. Chapter 11.7 of [3].

**Theorem 14.** *Let  $\mathbf{X}$  and  $\mathbf{Y}$  be two random sequences of length  $\ell$ . For the given hypotheses  $H_0$  and  $H_1$  and their corresponding MAP rule (13),*

$$\mathbb{P}(H_0|H_1) \leq f(\ell) \exp \{-\ell D(P_\mu || P_X \cdot P_Y)\}$$

and

$$\mathbb{P}(H_1|H_0) \leq f(\ell) \exp \{-\ell D(P_\mu || P_{X,Y})\},$$

where

$$P_\mu(x, y) := \frac{[P_{X,Y}(x, y)]^\mu [P_X(x)P_Y(y)]^{1-\mu}}{\sum_{a,b} [P_{X,Y}(a, b)]^\mu [P_X(a)P_Y(b)]^{1-\mu}}$$

and  $\mu$  is the solution of

$$D(P_\mu || P_X \cdot P_Y) - D(P_\mu || P_{X,Y}) = \theta.$$

Parallel to the proof of the noiseless case, we first prove the following lemma concerning erroneous merging due to impostor reads.

**Lemma 15** (False alarm). *For any distinct  $\ell$ -mers  $\mathbf{X}$  and  $\mathbf{Y}$  from the set of reads:*

1. *If the two  $\ell$ -mers have no physical overlap, the probability that  $H_0$  is accepted is*

$$f(\ell) e^{-\ell D(P_\mu || P_X \cdot P_Y)}. \quad (30)$$

2. *If the two  $\ell$ -mers have physical overlap, the probability that  $H_0$  is accepted is*

$$\gamma f(\ell) e^{-\ell D(P_\mu || P_X \cdot P_Y)/2}, \quad (31)$$

where  $\gamma$  is a constant.

*Proof.* The proof of the first statement is an immediate consequence of Theorem 14.

We now turn to the second statement. We only consider  $\ell = 2k$  and the other case can be deduced easily by following similar steps. Let  $\chi_j = \log \frac{P(x_j, y_j)}{P(x_j)P(y_j)}$ . Since  $\chi_j$ 's are not independent, we cannot directly use Theorem 14 to compute  $\mathbb{P}\left(\sum_{j=1}^{\ell} \chi_j \geq \ell\theta\right)$ . However, we claim that  $\chi_j$ 's can be partitioned into two disjoint sets  $J_1$  and  $J_2$  of the same size, where the  $\chi_j$ 's within each set are independent. Assuming the claim,

$$\begin{aligned} \mathbb{P}\left(\sum_{j=1}^{\ell} \chi_j \geq \ell\theta\right) &= \mathbb{P}\left(\sum_{j \in J_1} \chi_j + \sum_{j \in J_2} \chi_j \geq \ell\theta\right) \\ &\stackrel{(a)}{\leq} \mathbb{P}\left(\sum_{j \in J_1} \chi_j \geq \frac{\ell}{2}\theta\right) + \mathbb{P}\left(\sum_{j \in J_2} \chi_j \geq \frac{\ell}{2}\theta\right) \\ &\leq 2\mathbb{P}\left(\sum_{j \in J_1} \chi_j \geq \frac{\ell}{2}\theta\right), \end{aligned}$$

where (a) follows from the union bound. Since  $|J_1| = \frac{\ell}{2}$ , one can use Theorem 14 to show (31).

It remains to prove the claim. To this end, let  $k$  be the amount of physical overlap between  $\mathbf{X}$  and  $\mathbf{Y}$ . Without loss of generality, we assume that  $S_1 S_2 \dots S_{2\ell+k}$  is the shared DNA sequence. Let  $q$  and  $r$  be the quotient and remainder of  $\ell$  divided by  $2(\ell - k)$ , i.e.  $\ell = 2q(\ell - k) + r$  where  $0 \leq r < 2(\ell - k)$ . Since  $\ell$  is even,  $r$  is even. Let  $J_1$  be the set of indices  $j$  where either  $(j \bmod 2(\ell - k)) \in \{0, 1, \dots, \ell - k - 1\}$  for  $j \in \{1, \dots, 2q(\ell - k)\}$  or  $j \in \{2q(\ell - k) + 1, \dots, 2q(\ell - k) + \frac{\ell}{2}\}$ . We claim that the random variables  $\chi_j$ 's with  $j \in J_1$  are independent. We observe that  $\chi_j$  depends only on  $s_j$  and  $s_{j+(\ell-k)}$ . Consider two indices  $j_1 < j_2 \in J_1$ . The pairs  $(s_{j_1}, s_{j_1+(\ell-k)})$  and  $(s_{j_2}, s_{j_2+(\ell-k)})$  are disjoint iff  $j_1 + (\ell - k) \neq j_2$ . By the construction of  $J_1$ , one can show that  $j_1 + (\ell - k) \neq j_2$  for any  $j_1 < j_2 \in J_1$ . Hence,  $\chi_j$ 's with  $j \in J_1$  are independent. A similar argument shows  $\chi_j$ 's with  $j \in J_2 = \{1, \dots, 2\ell - k\} - J_1$  are independent. This completes the proof.  $\square$

As discussed in Section 4.2, the mis-detection event needs to be considered in the noisy case. To deal with this event, we state the following lemma.

**Lemma 16** (Mis-detection). *Let  $\mathbf{X}$  and  $\mathbf{Y}$  be two distinct  $\ell$ -mers from the same physical location. The probability that  $H_1$  is accepted is bounded by*

$$f(\ell) \exp\{-\ell D(P_\mu || P_{X,Y})\}.$$

*Proof.* This is an immediate consequence of Theorem 14.  $\square$

Similar to the proof of achievability result in the noiseless case, we decompose the error event  $\mathcal{E}$  into  $\mathcal{E}_1 \cup \mathcal{E}_2$  where  $\mathcal{E}_1$  is the event that some read is merged incorrectly and  $\mathcal{E}_2$  is the event that the DNA sequence is not covered by the reads. The probability of the second event, similar to the noiseless case, goes to zero exponentially fast if  $R > \bar{L}$ . We only need to compute  $\mathbb{P}(\mathcal{E}_1)$ . Again,  $\mathcal{E}_1$  can be decomposed as  $\mathcal{E}_1 = \cup_\ell \mathcal{A}_\ell$ , where  $\mathcal{A}_\ell$  is the event that the first error in merging occurs at stage  $\ell$ . Moreover,

$$\mathcal{A}_\ell \subseteq \mathcal{B}_\ell \cup \mathcal{C}_\ell, \quad (32)$$

where:

$$\mathcal{B}_\ell \triangleq \{\mathbf{R}_j \neq \mathbf{R}_i^s, U_j \leq \ell, V_i \leq \ell, W_{ij} = \ell \text{ for some } i \neq j.\} \quad (33)$$

$$\mathcal{C}_\ell \triangleq \{\mathbf{R}_j = \mathbf{R}_i^s, U_j = V_i \neq \ell, W_{ij} = \ell \text{ for some } i \neq j.\} \quad (34)$$

Note that here the definition of  $\mathcal{C}_\ell$  is different from that of (16) as for the noiseless reads the overlap score is never less than the physical overlap. However, in the noisy reads there is a chance for observing this event due to mis-detection.

The analysis of  $\mathcal{B}_\ell$  follows closely from that of the noiseless case. In fact, using Lemma 15 which is a counterpart of Lemma 11 and following similar steps in calculation of  $\mathbb{P}(\mathcal{B}_\ell)$  in the noiseless case, one can obtain

$$\mathbb{P}(\mathcal{B}_\ell) \leq f(\ell)(q_\ell^2 + 2\gamma\lambda Lq_\ell), \quad (35)$$

where

$$q_\ell = \lambda G e^{-\lambda(L-\ell)(1-2/N)} e^{-\ell D(P_\mu \| P_X \cdot P_Y)/2}. \quad (36)$$

To compute  $\mathbb{P}(\mathcal{C}_\ell)$ , we note that  $\mathcal{C}_\ell \subseteq \cup_i \mathcal{C}_\ell^i$ , where

$$\mathcal{C}_\ell^i \triangleq \{V_i = \ell, W(\mathbf{R}_i, \mathbf{R}_i^s) \neq \ell\}.$$

Applying the union bound and considering the fact that  $\mathcal{C}_\ell^i$ 's are equiprobable yields

$$\mathcal{C}_\ell \leq N \mathbb{P}(\mathcal{C}_\ell^1).$$

Hence,

$$\mathbb{P}(\mathcal{C}_\ell) \leq N(\mathbb{P}(W(\mathbf{R}_i, \mathbf{R}_i^s) > \ell | V_i = \ell) + \mathbb{P}(W(\mathbf{R}_i, \mathbf{R}_i^s) < \ell | V_i = \ell)) \mathbb{P}(V_i < \ell).$$

Using Lemma 15 part 2 and Lemma 16 yields

$$\begin{aligned} \mathbb{P}(\mathcal{C}_\ell) &\leq \lambda G f(\ell) \left( \gamma e^{-\ell D(P_\mu \| P_X \cdot P_Y)/2} + e^{-\ell D(P_\mu \| P_{X,Y})} \right) e^{-\lambda(L-\ell)(1-1/N)} \\ &\leq f(\ell) (\gamma q_\ell + q'_\ell), \end{aligned}$$

where

$$q'_\ell = \lambda G e^{-\ell D(P_\mu \| P_{X,Y})} e^{-\lambda(L-\ell)(1-1/N)}.$$

Combining all the terms, we obtain

$$\mathbb{P}(\mathcal{E}_1) \leq \sum_{\ell=0}^L \mathbb{P}(\mathcal{B}_\ell) + \mathbb{P}(\mathcal{C}_\ell) \leq \sum_{\ell=0}^L f(\ell) (q_\ell^2 + \gamma(2\lambda L + 1)q_\ell + q'_\ell).$$

To show that  $\mathbb{P}(\mathcal{E}_1) \rightarrow 0$ , it is sufficient to argue that  $q_0$ ,  $q'_0$ ,  $q_L$ , and  $q'_L$  go to zero exponentially in  $L$ . Considering first  $q_0$  and  $q'_0$ , they vanish exponentially in  $L$  if  $R = \frac{G}{N} = \lambda^{-1} < \bar{L}$ . The terms  $q_L$  and  $q'_L$  vanish exponentially in  $L$  if

$$\bar{L} > \frac{2}{\min(2D(P_\mu \| P_{X,Y}), D(P_\mu \| P_X \cdot P_Y))}.$$

It can be easily seen that the value of  $\mu^*$  optimizing the right hand side is when the two terms in the minimum matches. Hence,

$$\bar{L} > \frac{2}{D(P_{\mu^*} \| P_X \cdot P_Y)}.$$

The optimum threshold,  $\theta^*$ , in Theorem 10 can be deduced from Theorem 14.

Since  $\mathbb{P}(\mathcal{E}_1) = o(1)$  and  $\mathbb{P}(\mathcal{E}_2) = o(1)$ , we conclude that the rate given in Theorem 10 is indeed achievable. This completes the proof.

## Acknowledgements

This work is supported by the Natural Sciences and Engineering Research Council (NSERC) of Canada and by the Center for Science of Information (CSoI), an NSF Science and Technology Center, under grant agreement CCF-0939370. The authors would like to thank Professor Yun Song for discussions in the early stage of this project, and Ramtin Pedersani for discussions about the complexity of the greedy algorithm.

## References

- [1] Richard Arratia, Larry Goldstein, and Louis Gordon, *Poisson approximation and the Chen-Stein method*, *Statistical Science* **5** (1990), no. 4, 403–434.
- [2] Richard Arratia, Daniela Martin, Gesine Reinert, and Michael S. Waterman, *Poisson process approximation for sequence repeats, and sequencing by hybridization*, *J. of Comp. Bio.* **3** (1996), 425–463.
- [3] T. M. Covar and J. A. Thomas, *Elements of information theory*, Oxford University Press, 2006.
- [4] C. Dohm, C. Lottaz, T. Borodina, and H. Himmelbauer, *SHARCGS, a fast and highly accurate short-read assembly algorithm for de novo genomic sequencing*, *Genome Res.* **17** (2007), 1697–1706.
- [5] Martin Dyer, Alan Frieze, and Stephen Suen, *The probability of unique solutions of sequencing by hybridization*, *Journal of Computational Biology* **1** (1994), no. 2, 105–110.
- [6] A. Frieze and W. Szpankowski, *Greedy algorithms for the shortest common superstring that are asymptotically optimal*, *Algorithmica* **21** (1998), no. 1, 21–36.
- [7] J. K. Gallant, *String compression algorithms*, Ph.D. thesis, Princeton University, 1998.
- [8] X Huang and A Madan, *CAP3: A DNA sequence assembly program*, *Genome Research* **9** (1999), no. 9, 868–877.
- [9] Waterman MS Idury RM, *A new algorithm for DNA sequence assembly*, *J. Comp. Bio* **2** (1995), 291–306.
- [10] W.R. Jeck, J.A. Reinhardt, D.A. Baltrus, M.T. Hickenbotham, V. Magrini, E.R. Mardis, J.L. Dangl, and C.D. Jones, *Extending assembly of short DNA sequences to handle error*, *Bioinformatics* **23** (2007), 2942–2944.
- [11] Haim Kaplan and Nira Shafir, *The greedy algorithm for shortest superstrings*, *Inf. Process. Lett.* **93** (2005), no. 1, 13–17.
- [12] Eric S. Lander and Michael S. Waterman, *Genomic mapping by fingerprinting random clones: A mathematical analysis*, *Genomics* **2** (1988), no. 3, 231–239.
- [13] M. Li, *Towards a DNA sequencing theory (learning a string)*, *Foundations of Computer Science*, vol. 1, Oct 1990, pp. 125–134.
- [14] J. Miller, S. Koren, and G. Sutton, *Assembly algorithms for next-generation sequencing data*, *Genomics* **95** (2010), 315–327.
- [15] Konrad Paszkiewicz and David J. Studholme, *De novo assembly of short sequence reads*, *Briefings in Bioinformatics* **11** (2010), no. 5, 457–472.



- [16] P. A. Pevzner, H. Tang, and M. S. Waterman, *An Eulerian path approach to DNA fragment assembly*, Proc Natl Acad Sci USA **98** (2001), 9748–53.
- [17] Mihai Pop, *Genome assembly reborn: recent computational challenges*, Briefings of Bioinformatics **10** (2009), no. 4, 354–366.
- [18] Z. Rached, F. Alajaji, and L. Lorne Campbell, *Renyi’s divergence and entropy rates for finite alphabet markov sources*, Information Theory, IEEE Transactions on **47** (2001), no. 4, 1553–1561.
- [19] Batzoglou S, Jaffe DB, and Stanley K et al, *ARACHNE: a whole-genome shotgun assembler*, Genome Research **12** (2002), 177–89.
- [20] F. Sanger, S. Nicklen, and A. R. Coulson, *DNA sequencing with chain-terminating inhibitors*, Proceedings of the National Academy of Science of the USA **74** (1977), no. 12, 5463–5467.
- [21] Claude Shannon, *A mathematical theory of communication*, Bell System Technical Journal **27** (1948), 379–423.
- [22] G. G. Sutton, O. White, M. D. Adams, and Ar Kerlavage, *TIGR Assembler: A new tool for assembling large shotgun sequencing projects*, Genome Science & Technology **1** (1995), 9–19.
- [23] Jonathan S. Turner, *Approximation algorithms for the shortest common superstring problem*, Information and Computation **83** (1989), no. 1, 1–20.
- [24] E Ukkonen, *Approximate string matching with q-grams and maximal matches*, Theoretical Computer Science **92** (1992), no. 1, 191–211.
- [25] Esko Ukkonen, *A linear-time algorithm for finding approximate shortest common superstrings*, Algorithmica **5** (1990), 313–323, 10.1007/BF01840391.
- [26] R.L. Warren, G.G. Sutton, S.J. Jones, and R.A. Holt, *Assembling millions of short DNA sequences using SSAKE*, Bioinformatics **23** (2007), 500–501.
- [27] Nava Whiteford, Niall Haslam, Gerald Weber, Adam Pruögel-Bennett<sup>1</sup>, Jonathan W. Essex, Peter L. Roach, Mark Bradley, and Cameron Neylon, *An analysis of the feasibility of short read sequencing*, Nucleic Acids Research **33** (2005), no. 19.
- [28] Wikipedia, *Dna sequencing theory* — *Wikipedia, the free encyclopedia*, 2012, [Online; accessed February-21-2012].
- [29] \_\_\_\_\_, *Sequence assembly* — *Wikipedia, the free encyclopedia*, 2012, [Online; accessed February-21-2012].