

Indirect Reciprocity with Trinary Reputations

Shoma Tanabe¹, Hideyuki Suzuki², and Naoki Masuda^{1,*}

¹ Department of Mathematical Informatics,
The University of Tokyo,
7-3-1 Hongo, Bunkyo, Tokyo 113-8656, Japan

² Institute of Industrial Science,
The University of Tokyo,
4-6-1 Komaba, Meguro, Tokyo 153-8505, Japan

* Corresponding author (masuda@mist.i.u-tokyo.ac.jp)

February 22, 2019

Abstract

Indirect reciprocity is a reputation-based mechanism for cooperation in social dilemma situations when individuals do not repeatedly meet. The conditions under which cooperation based on indirect reciprocity occurs have been examined in great details. Most previous theoretical analysis assumed for mathematical tractability that an individual possesses a binary reputation value, i.e., good or bad, which depends on their past actions and other factors. However, in real situations, reputations of individuals may be multiple valued. Another puzzling discrepancy between the theory and experiments is the status of the so-called image scoring, in which cooperation and defection are judged to be good and bad, respectively, independent of other factors. Such an assessment rule is found in behavioral experiments, whereas it is known to be unstable in theory. In the present study, we fill both gaps by analyzing a trinary reputation model. By an exhaustive search, we identify all the cooperative and stable equilibria composed of a homogeneous population or a heterogeneous population containing two types of players. Some results derived for the trinary reputation model are direct extensions of those for the binary model. However, we find that the trinary model allows cooperation under image scoring without special conditions.

1 Introduction

Humans and other animals often cooperate even when cooperation is more costly than defection. In such social dilemma situations, direct reciprocity is among main accounts for cooperation between pairs of individuals that repeatedly meet each other [1, 2]. However, individuals, in particular humans, cooperate with others even when they seldom meet the same partners more than once, as is the case for large populations. Reputation-based indirect reciprocity (also called downstream reciprocity; we simply call it indirect reciprocity in this paper) seems to be a dominant mechanism that enables cooperation in this situation. In indirect reciprocity, individuals cooperate with others with good reputations and they in turn gain good reputations if they appositely behave (e.g., cooperate) toward somebody else. The conditions under which indirect reciprocity realizes cooperation have been theoretically and numerically clarified in great details [3–19].

Under the so-called image scoring, cooperation and defection are regarded to be good and bad behavior, respectively [3,4]. Laboratory experiments suggest that humans use image scoring to evaluate others' behavior [20–22]. However, main theories attain that image scoring does not stabilize cooperation [5, 6, 9, 10, 12]. Although some studies have shown the viability of cooperation under image scoring [3, 8, 14–17], the situations in which cooperation occurs are, in our view, quite restricted (but see [19]; we discuss this reference in Discussion). Under image scoring, cooperation occurs only when individuals always cooperate in the first round [3], unconditional defectors sometimes cooperate [8], the number of interaction obeys the binomial distribution [14] or Poisson distribution [16], the probability that individuals recognize others' reputations increases in time [15], or the reputations of individuals are almost invisible to others [17]. Therefore, the reason for the discrepancy between the experiments and theory remains obscure.

For mathematical tractability and possible influences of the first seminal theoretical papers on this subject [3,4], most theoretical results of indirect reciprocity are derived from the analysis of binary reputation models. In other words, individuals are endowed with the binary reputation, i.e., good (G) or bad (B), depending on the last action toward others and other

factors. However, the binary reputation may not be realistic in that only the last behavior of an individual in the social dilemma situation determines the reputation of the individual. In fact, experimental [20–28] and numerical [29] studies of indirect reciprocity in the context of online marketplaces often assume that the reputations are many valued, which complies with the reality of online marketplaces [30,31]. Many valued reputations have also been employed in numerical studies of indirect reciprocity in theoretical biology literature [4,5,7]. Nevertheless, these studies are not concerned with relationships between the possibility of cooperation and the variety of reputation values.

In this paper we analyze a trinary reputation model to identify stable populations that realize cooperation. The difference between the present results and those derived from the binary reputation models is remarkable. In particular, we find that image scoring can stabilize cooperation in the trinary reputation model.

2 Model

2.1 Donation Game with Reputations

We consider an infinitely large population. In each generation, the so-called donation game is repeated for sufficiently many rounds. Figure 1(A) illustrates the interaction in each round. Two players are randomly selected from the population, one as donor and the other as recipient, with the equal probability. The donor intends to cooperate (C) or defect (D) toward the recipient according to the action rule σ , which we define below. We assume that the donor misimplements intended C such that the donor actually defects with probability $\epsilon_1 > 0$ and that the intended D is always correctly implemented. We seek the possibility of cooperation in the population under this kind of implementation error, which is adverse to cooperation [6,8–17,19]. If the donor implements C, the donor pays cost c , and the recipient obtains benefit b . If the donor implements D, the payoffs to the donor and recipient do not change. We assume that $0 < c < b$ such that the donation game is essentially the prisoner’s dilemma.

We assume that each player possesses a reputation that takes one of the three values, i.e., +, 0, or –. The action rule σ is a function from the recipient’s reputation to the donor’s intended

action (i.e., C or D). Therefore, there are $2^3 = 8$ action rules, as shown in Fig. 1(B). For example, the AllC and AllD intend C and D regardless of the recipient’s reputation, respectively. The so-called generous discriminator (gDisc) intends C when the recipient’s reputation is either + or 0 and D otherwise. The so-called rigorous discriminator (rDisc) intends C when the recipient’s reputation is + and D otherwise.

At the end of each round, the observer assesses the donor to be G or B depending on the donor’s implemented action (i.e., C or D) and the recipient’s reputation (i.e., +, 0, or –). Such an assessment rule is a function from the donor’s implemented action and the recipient’s reputation to the observer’s assessment and is called the second-order social norm, which extends the concept in the case of the binary reputation [5, 13]. There are $2^{2 \times 3} = 64$ social norms. For example, under the social norm called image scoring (Fig. 1(C)), the observer assigns G and B to the donor’s action C and D, respectively, regardless of the recipient’s reputation. Another social norm named scoring–standing is also shown in Fig. 1(C). Finally, we assume that the assessment (i.e., G or B) that the donor receives is opposite to the one assigned by the observer with probability $\epsilon_a > 0$ [10, 12, 18].

We repeat many rounds of the game and define the payoff to each player as the sum of the payoff obtained in the games that involve the player. Because the population is infinite, each pair of players plays the game at most once such that direct reciprocity is excluded.

For a later use, we mention four representative second-order social norms in the binary reputation model (Fig. 1(D)). Image scoring (“scoring” in Fig. 1(D)) does not stabilize cooperation [6, 9, 10, 12] unless somewhat strong conditions are met [3, 8, 14–17] (but see [19]). Simple standing (“standing” in Fig. 1(D)) and stern judging (“judging” in Fig. 1(D); also called Kandori [32]) are known to stabilize cooperation [10]. Shunning stabilizes cooperation under certain conditions [12, 18].

2.2 Reputation Dynamics

After each round, the donor’s reputation is updated on the basis of the observer’s assessment. Basically, the donor’s reputation shifts upward and downward if the donor receives G and B, respectively. When the reputation is binary (i.e., + and –), + and – are equivalent to G and B

that the donor receives in the last game, respectively [3, 13]. However, the relationship between the reputation and assessment is not straightforward in the trinary reputation model. We assume that reputation dynamics obey a Markov chain. We consider the reputation dynamics illustrated in Fig. 2.

In the reputation dynamics shown in Fig. 2(A), which we call the gradual dynamics, the reputation is assumed to move by at most one level in each round. The reputation is unchanged with probability α ($0 \leq \alpha < 1$).

In the reputation dynamics shown in Fig. 2(B), which we call the saltatory dynamics, the donor's reputation can transit from + to - or vice versa in one step. When a + donor receives B, the donor's new reputation becomes - and 0 with probabilities β_d and $1 - \beta_d$, respectively ($0 \leq \beta_d \leq 1$). When a - donor receives G, the donor's new reputation becomes + and 0 with probabilities β_u and $1 - \beta_u$, respectively ($0 \leq \beta_u \leq 1$). When $(\beta_d, \beta_u) = (1, 0)$, the reputation dynamics are similar to the so-called T -period punishment with $T = 2$ [32] in which players have either state 0 (innocent), 1 (guilty and no repent), ..., or T (guilty and $T - 1$ times of repentant behavior). Guilty players in state 1 regain the innocent state by cooperating with innocent players successive T times. Therefore, the states 0, 1, and 2 are similar to reputations +, -, and 0, respectively, in our model. When $(\beta_d, \beta_u) = (0, 1)$, the reputation dynamics are similar to the so-called tolerant scoring [19] because the donor's reputation becomes - if and only if the donor receives B in the last two rounds, and the donor obtains a + reputation if the donor cooperates just once.

3 Analysis Methods

3.1 Homogeneous Populations

We first examine the stability of a homogeneous population of resident players with action rule σ against mutants with different action rules under a given social norm. Let p_+ , p_0 , and p_- be the probabilities that the reputation of a resident player is +, 0, and -, respectively. After a transient of the reputation dynamics, the three probabilities converge to the equilibrium values denoted by p_+^* , p_0^* , and p_-^* . For expository purposes, we focus on the gradual reputation

dynamics (Fig. 2(A)) in this section. The following calculations are similar for the saltatory reputation dynamics (Fig. 2(B)); the corresponding results are shown in Appendix A. For the gradual reputation dynamics, we obtain

$$\begin{cases} p_+^* &= p_+^*[\alpha + (1 - \alpha)\Phi^*] + p_0^*(1 - \alpha)\Phi^*, \\ p_0^* &= p_+^*(1 - \alpha)(1 - \Phi^*) + p_0^*\alpha + p_-^*(1 - \alpha)\Phi^*, \\ p_-^* &= p_0^*(1 - \alpha)(1 - \Phi^*) + p_-^*[\alpha + (1 - \alpha)(1 - \Phi^*)], \end{cases} \quad (1)$$

where Φ^* is the probability that the donor receives G in the equilibrium. It should be noted that Eq. (1) and the following results are independent of the value of α . Equation (1) and the normalization $p_+^* + p_0^* + p_-^* = 1$ lead to

$$(p_+^*, p_0^*, p_-^*) = \left(\frac{\Phi^{*2}}{1 - \Phi^* + \Phi^{*2}}, \frac{\Phi^*(1 - \Phi^*)}{1 - \Phi^* + \Phi^{*2}}, \frac{(1 - \Phi^*)^2}{1 - \Phi^* + \Phi^{*2}} \right). \quad (2)$$

Equation (2) implies that the distribution of the reputation is monotonous in the sense that $p_+^* > p_0^* > p_-^*$ if $\Phi^* > 0.5$ and $p_+^* < p_0^* < p_-^*$ if $\Phi^* < 0.5$.

Φ^* is given by

$$\Phi^* = \sum_{r \in \{+, 0, -\}} p_r^* [\zeta_r \Phi_{C,r} + (1 - \zeta_r) \Phi_{D,r}], \quad (3)$$

where ζ_r represents the probability that the donor's implemented action is C when the recipient has reputation $r \in \{+, 0, -\}$. ζ_r has a one-to-one correspondence with action rule σ . For example, AllC, gDisc, rDisc, and AllD are equivalent to $(\zeta_+, \zeta_0, \zeta_-) = (1 - \epsilon_i, 1 - \epsilon_i, 1 - \epsilon_i)$, $(1 - \epsilon_i, 1 - \epsilon_i, 0)$, $(1 - \epsilon_i, 0, 0)$, and $(0, 0, 0)$, respectively. $\Phi_{C,r}$ and $\Phi_{D,r}$ in Eq. (3) are the probabilities that the donor receives G when the donor's action is C and D, respectively, and the recipient has reputation $r \in \{+, 0, -\}$. For example, under image scoring (Fig. 1(C)), $\Phi_{C,r} = 1 - \epsilon_a$ and $\Phi_{D,r} = \epsilon_a$ for any r . Under the so-called scoring-standing (see Sec. 4.1 for the notation of the social norms) shown in Fig. 1(C), $\Phi_{C,r} = 1 - \epsilon_a$ for any r , $\Phi_{D,+} = \Phi_{D,0} = \epsilon_a$, and $\Phi_{D,-} = 1 - \epsilon_a$. Each term on the right-hand side of Eq. (3) is a multiplication of three probabilities, i.e., (i) probability p_r^* that a recipient with reputation r is selected, (ii) probability ζ_r or $1 - \zeta_r$ that a donor implements C or D, respectively, and (iii) probability $\Phi_{C,r}$ or $\Phi_{D,r}$ that the observer assigns G to the donor.

We substitute p_+^* , p_0^* , and p_-^* obtained from Eq. (2) in the right-hand side of Eq. (3), which we denote by $f(\Phi^*)$. We obtain Φ^* by solving $x = f(x)$, $0 \leq x \leq 1$. Because $f(x)$ is quadratic

in x , equation $x = f(x)$ has at most three solutions. Under any pair of action rule and social norm, to which we refer as action–norm pair in the following, $0 < \epsilon_a \leq f(x) \leq (1 - \epsilon_i)(1 - \epsilon_a) < 1$ holds true for any $0 \leq x \leq 1$. Therefore, the iteration scheme, in which we start with an initial x value ($0 \leq x \leq 1$) and repeatedly apply f , always converges. If the iteration starting from $x = 0$ and that starting from $x = 1$ converge to the same value, the solution specified by Φ^* and $\{p_+^*, p_0^*, p_-^*\}$ is unique. We confirmed that $x = f(x)$ has a unique solution for each of the $8 \times 64 = 512$ action–norm pairs.

Let $\Psi(\sigma, \{p_+, p_0, p_-\})$ be the probability that a donor with action rule σ cooperates with a recipient with reputation distribution $\{p_+, p_0, p_-\}$. We obtain

$$\Psi(\sigma, \{p_+, p_0, p_-\}) = p_+\zeta_+ + p_0\zeta_0 + p_-\zeta_-. \quad (4)$$

The average payoff per round to a resident player in the homogeneous population is given by

$$\pi = -c\Psi(\sigma, \{p_+^*, p_0^*, p_-^*\}) + b\Psi(\sigma, \{p_+^*, p_0^*, p_-^*\}). \quad (5)$$

To examine the stability of the homogeneous population, we consider an infinitesimally small fraction of mutants with action rule $\sigma' (\neq \sigma)$ that invades the homogeneous resident population. The equilibrium probability distribution of the mutant's reputation, denoted by $\{p_+^*, p_0^*, p_-^*\}$, the equilibrium probability that a mutant receives G, denoted by Φ^* , and payoff to a mutant player, denoted by π' , are given by

$$(p_+^*, p_0^*, p_-^*) = \left(\frac{\Phi'^{*2}}{1 - \Phi'^* + \Phi'^{*2}}, \frac{\Phi'^*(1 - \Phi'^*)}{1 - \Phi'^* + \Phi'^{*2}}, \frac{(1 - \Phi'^*)^2}{1 - \Phi'^* + \Phi'^{*2}} \right), \quad (6)$$

$$\Phi'^* = \sum_{r \in \{+, 0, -\}} p_r^* [\zeta'_r \Phi_{C,r} + (1 - \zeta'_r) \Phi_{D,r}], \quad (7)$$

and

$$\pi' = -c\Psi(\sigma', \{p_+^*, p_0^*, p_-^*\}) + b\Psi(\sigma, \{p_+^*, p_0^*, p_-^*\}), \quad (8)$$

respectively. In Eq. (7), ζ'_r represents the probability that a mutant cooperates with a recipient with reputation r . It should be noted that p_r^* in Eq. (7) is the solution of Eqs. (2) and (3) and that $\Phi_{C,r}$ and $\Phi_{D,r}$ also refer to the values for the resident population.

Action rule σ adopted by the resident players is strict Nash equilibrium if the payoff to a resident player (i.e., π) is larger than the payoff to any mutant player (i.e., π'). Using Eqs. (5) and (8), we obtain this condition as follows:

$$\begin{aligned} & \frac{b}{c} [\Psi(\sigma, \{p'_+, p'_0, p'_-\}) - \Psi(\sigma, \{p^*_+, p^*_0, p^*_-\})] \\ & < \Psi(\sigma', \{p^*_+, p^*_0, p^*_-\}) - \Psi(\sigma, \{p^*_+, p^*_0, p^*_-\}) \quad \text{for any } \sigma' \neq \sigma. \end{aligned} \quad (9)$$

3.2 Heterogeneous Populations Composed of Two Action Rules

We also examine the stability of heterogeneous populations in which two action rules, denoted by σ_1 and σ_2 , coexist with fractions q_1 and q_2 , respectively ($q_1 + q_2 = 1$). For each of $(q_1, q_2) = (0.01, 0.99), (0.02, 0.98), \dots, (0.99, 0.01)$, we first calculate the equilibrium probabilities of G for σ_1 and σ_2 by an iteration scheme similar to that described in Sec. 3.1. Under the gradual reputation dynamics, the distribution of the reputation values is given by

$$(p^*_{+,i}, p^*_{0,i}, p^*_{-,i}) = \left(\frac{\Phi_i^{*2}}{1 - \Phi_i^* + \Phi_i^{*2}}, \frac{\Phi_i^*(1 - \Phi_i^*)}{1 - \Phi_i^* + \Phi_i^{*2}}, \frac{(1 - \Phi_i^*)^2}{1 - \Phi_i^* + \Phi_i^{*2}} \right), \quad (10)$$

where $p^*_{r,i}$ is the equilibrium probability that a player with action rule i ($i = 1, 2$) possesses reputation $r \in \{+, 0, -\}$, and Φ_i^* represents the equilibrium probability that a σ_i player receives G. The equivalent of Eq. (10) and the following results can be obtained similarly for the saltatory reputation dynamics. Φ_i^* is given by

$$\Phi_i^* = \sum_{j=1}^2 \sum_{r \in \{+, 0, -\}} q_j p_{r,j}^* [\zeta_{r,i} \Phi_{C,r} + (1 - \zeta_{r,i}) \Phi_{D,r}], \quad (11)$$

where $\zeta_{r,i}$ is the probability that a σ_i donor implements C when the recipient has reputation r . Substitution of Eq. (10) in Eq. (11) leads to $\vec{\Phi}^* = g(\vec{\Phi}^*)$, where $\vec{\Phi}^* = (\Phi_1^*, \Phi_2^*)$.

It should be noted that $\vec{\Phi}^* = g(\vec{\Phi}^*)$ may have multiple fixed points. An example is given by the population composed of the equal fraction of $\sigma_1 = \text{gDisc}$ and $\sigma_2 = \text{rDisc}$, i.e., $q_1 = q_2 = 0.5$, under image scoring. In this case, both a cooperative population (i.e., $\Phi_1^*, \Phi_2^* \approx (1 - \epsilon_i)(1 - \epsilon_a)$) and a defective population (i.e., $\Phi_1^*, \Phi_2^* \approx \epsilon_a$) satisfy $\vec{\Phi}^* = g(\vec{\Phi}^*)$. Because of the multistability, we adopt $11^2 = 121$ initial conditions, i.e., $\vec{\Phi} = (0.1i, 0.1j)$, $0 \leq i, j \leq 10$, for the iteration scheme to identify all the fixed points. In fact, we find that the multistability does not cause a

severe problem. We will show in Results that five mixed populations composed of two action rules are stable and realize a sufficiently large probability of cooperation. Among them, only one population, which consists of gDisc and rDisc and is stable under the so-called scoring-shunning social norm, yields the bistable equilibria. One equilibrium yields a large cooperation probability (> 0.93) and the other equilibrium yields a low cooperation probability (< 0.03). These results are qualitatively the same for the gradual and saltatory reputation dynamics. For this social norm, we only keep the more cooperative equilibrium.

Then, we obtain the ternary distribution of reputation for each of the two action rules by substituting Φ_i^* in Eq. (11). The average payoff per round to a σ_i resident player ($i = 1, 2$) is given by

$$\pi_i = -c \sum_{j=1}^2 q_j \Psi(\sigma_i, \{p_{+,j}^*, p_{0,j}^*, p_{-,j}^*\}) + b \sum_{j=1}^2 q_j \Psi(\sigma_j, \{p_{+,i}^*, p_{0,i}^*, p_{-,i}^*\}), \quad (12)$$

where $\Psi(\sigma_i, \{p_{+,j}^*, p_{0,j}^*, p_{-,j}^*\})$ is the probability that a σ_i donor cooperates with a σ_j recipient. In the equilibrium, the payoffs to the players with the different action rules are the same. Therefore, we calculate the value of b/c for which $\pi_1 = \pi_2$. If $d(\pi_1 - \pi_2)/dq_1 > 0$, the mixed population is unstable against an infinitesimally small drift of the fraction of the two action rules. We are concerned with the pairs of σ_1 and σ_2 that satisfy $d(\pi_1 - \pi_2)/dq_1 < 0$ at the obtained b/c value.

The mixed population is strict Nash when the payoff to any of the six mutants with a third action rule is smaller than that to a resident player. By substituting Eq. (6) in

$$\Phi'^* = \sum_{j=1}^2 \sum_{r \in \{+, 0, -\}} q_j p_{r,j}^* [\zeta'_r \Phi_{C,r} + (1 - \zeta'_r) \Phi_{D,r}], \quad (13)$$

we obtain the equilibrium probability that a mutant receives G (i.e., Φ'^*) and the equilibrium distribution of the mutant's reputation (i.e., $\{p_{+,j}^*, p_{0,j}^*, p_{-,j}^*\}$). The payoff to a mutant player is given by

$$\pi' = -c \sum_{j=1}^2 q_j \Psi(\sigma', \{p_{+,j}^*, p_{0,j}^*, p_{-,j}^*\}) + b \sum_{j=1}^2 q_j \Psi(\sigma_j, \{p_{+,j}^*, p_{0,j}^*, p_{-,j}^*\}). \quad (14)$$

We do not examine the mixed population composed of more than two action rules.

4 Results

We refer to each action rule by concatenating three letters, either C or D. The first, second, and the third letters represent the intended action toward a recipient with reputation +, 0, and -, respectively. For example, gDisc = CCD and rDisc = CDD.

4.1 Gradual Reputation Dynamics

4.1.1 Enumeration of Stable Populations

We set $\epsilon_i = \epsilon_a = 0.02$ and consider the gradual reputation dynamics (Fig. 2(A)). We found that the homogeneous population is stable against invasion by mutants for some benefit-to-cost values b/c for 108 out of $8 \times 64 = 512$ action–norm pairs. We exclude 64 pairs with $\sigma = \text{AllD}$ from the 108 pairs because of the lack of cooperation. The entire game is symmetric with respect to the simultaneous flipping of $G \leftrightarrow B$ and $+ \leftrightarrow -$ [10]. Therefore, there are $(108 - 64)/2 = 22$ essentially distinct pairs. The 22 pairs are listed in Table 1. In addition, there are nine essentially distinct mixtures of two action rules that are stable under a certain social norm. Among these stable populations, there are 12 homogeneous populations composed of a single action rule and five heterogeneous populations composed of two action rules that realize a probability of cooperation larger than 0.5 for a b/c value smaller than 20. Our additional numerical simulations suggest that the probability of cooperation tends to unity if and only if this criterion is satisfied (Appendix B).

The cooperative equilibria, i.e., stable populations satisfying this criterion under a given social norm, are summarized in Fig. 3(A). In Fig. 3(A), a social norm is represented by a combination of s_+ , s_0 , and s_- , each of which takes either GG, BG, BB, or GB. For example, $s_+ = \text{BG}$ indicates that donor’s implemented action C and D toward a + recipient is assessed to be B and G, respectively. In fact, all the cooperative equilibria require $s_+ = \text{GB}$ such that only s_0 and s_- are indicated in Fig. 3(A).

4.1.2 $s_0 = \text{GG}$ or BG

Six action–norm pairs having $\sigma = \text{rDisc}$, $s_+ = \text{GB}$, $s_0 = \text{GG}$ or BG , and $s_- = \text{GG}$, BG , or BB realize a large probability of cooperation (≈ 0.94), a large probability of G (≈ 0.98), and a mild restriction on b/c (i.e., $b/c > 1.004$). In these equilibria, most resident players have the + reputation because the probability of G is large. A small fraction of players possesses the 0 reputation owing to error (see Sec. 2.1 for the definition of two types of error), and an even smaller fraction of players possesses the – reputation.

We call the six social norms standing–standing, standing–judging, standing–shunning, judging–standing, judging–judging, and judging–shunning. The first (second) half of the name represents the social norm represented by s_+ and s_0 (s_+ and s_-) in the case of the binary reputation model. For example, the combination of $s_+ = \text{GB}$ and $s_0 = \text{GG}$ represents the standing social norm in the binary model if 0 is identified with – in the binary model (Fig. 1(D)). Similarly, the combination of $s_+ = \text{GB}$ and $s_- = \text{BG}$ represents the judging social norm in the binary model. Therefore, we call the social norm given by $s_+ = \text{GB}$, $s_0 = \text{GG}$, and $s_- = \text{BG}$ standing–judging.

The six norms realize nearly perfect cooperation because the first half of the social norm (i.e., combination of s_+ and s_0) is either standing or judging and the rDisc donor cooperates with + recipients, but not 0 recipients. It should be noted that standing and judging are the only second-order social norms that stabilize cooperation without special conditions in the binary reputation model [10]. Even if the donor’s reputation transits from 0 to – owing to error, the donor regains the 0 reputation by cooperating with a + recipient, which occupies the majority of the population. Although donors meeting recipients with the – reputation receive B under $s_- = \text{BB}$, cooperation at the population level is maintained because few players have the – reputation.

4.1.3 $s_0 = \text{BB}$

Two cooperative action–norm pairs, i.e., $\sigma = \text{rDisc}$, $s_+ = \text{GB}$, $s_0 = \text{BB}$, and $s_- = \text{GG}$ or BG , are also stable under a mild condition on b/c , i.e., $b/c > 1.018$. However, the probability of G (≈ 0.74) and that of cooperation (≈ 0.66) are not as large as those for the previous six action–norm pairs. This is intuitively because, under the current social norms, i.e., shunning–standing

and shunning–judging, a donor whose recipient has a 0 reputation always receives B except in the case of the assessment error. This behavior of the model is similar to that under shunning in the binary reputation model. Nevertheless, different from the case of the binary model, the cooperation probability tends to unity in the error-free limit (Appendix B) for the two norms in the trinary reputation model. We discuss this point further in Discussion.

4.1.4 $s_0 = \text{GB}$

The other cooperative equilibria are four homogeneous populations and five heterogeneous populations, which are stable under social norms satisfying $s_+ = s_0 = \text{GB}$ (Fig. 3(A)). For $s_- = \text{GG}$ (scoring–standing) and BG (scoring–judging), a homogeneous population composed of gDisc is stable for large b/c (> 8.480), and a mixed population composed of gDisc and rDisc is stable for small b/c (< 8.480). For $s_- = \text{BB}$ (scoring–shunning), a homogeneous population composed of gDisc is stable for large b/c (> 8.108), and a mixed population composed of gDisc and rDisc is stable for small b/c (< 8.108). The fraction of gDisc increases with b/c under scoring–standing and is unity when $b/c > 8.480$, as shown in Fig. 3(B). The results shown in Fig. 3(B) are indistinguishable from those for scoring–judging and similar to those for scoring–shunning. For the three social norms, the fraction of gDisc converges to $1 - c/b$ in the limit $\epsilon_i, \epsilon_a \rightarrow 0$ (Appendix C), which implies that only the mixed population of gDisc and rDisc is stable in the error-free limit. Consistent with this, the threshold value of b/c above which the homogeneous gDisc population is stable diverges as the error probabilities become small (Appendix B).

If we hypothetically merge + and 0, our result that cooperation is stable under scoring–standing and scoring–judging corresponds to the fact that the cooperation is stable under standing and judging, respectively, in the binary model [10]. Under scoring–shunning, cooperation is not undermined by $s_- = \text{BB}$ for the same reason as that for standing–shunning and judging–shunning (see Sec. 4.1.2 and Discussion).

Under scoring–scoring (i.e., $s_+ = s_0 = s_- = \text{GB}$), which we also call the image scoring (Fig. 1(C)), there are three types of stable populations depending on the b/c value. When $1.941 < b/c < 8.230$, the mixed population composed of gDisc and CDC is stable (Fig. 3(C)).

We regard CDC as a variant of rDisc because there are few players having the $-$ reputation in the stable population; a CDC player obtains a slightly larger payoff than an rDisc player. In fact, the mixed population of gDisc and rDisc is stable against invasion by all but CDC mutants. When $8.230 < b/c < 12.53$, the homogeneous population of gDisc is stable (Fig. 3(C)). When $b/c > 12.53$, the mixed population composed of gDisc and AllC is stable (Fig. 3(C)). In all the three cases, cooperation occurs with a large probability (> 0.94). This result is in a stark contrast with that in the binary reputation model, whereby image scoring does not usually support cooperation [6, 9, 10, 12]. We discuss this discrepancy in Discussion.

Under image scoring, the values of b/c and the error probabilities under the assumption $\epsilon_i = \epsilon_a$, for which one of the three populations is stable are shown in Fig. 4. For small error, the homogeneous population of gDisc and the mixed population composed of gDisc and AllC are invaded by rDisc mutants. Only the heterogeneous population composed of gDisc and CDC survives the error-free limit. In this limit, the fraction of gDisc is given by $1 - c/b$ for the same reason as that for the heterogeneous population composed of gDisc and rDisc under scoring-standing (Sec. 4.1.4; also see Appendix C).

4.2 Saltatory Reputation Dynamics

Under the saltatory reputation dynamics (Fig. 2(B)), we set $\beta_d = 0.5$, $\beta_u = 0$, $\epsilon_i = \epsilon_a = 0.02$ and identify stable populations under each social norm. To select cooperative equilibria, we imposed the same condition as that in the case of the gradual reputation dynamics, i.e., a cooperation probability larger than 0.5 for some $b/c < 20$. We find that the set of cooperative equilibria is the same as that for the gradual reputation dynamics (Fig. 3(A)). The cooperation probability is equal to 0.9237 for rDisc under standing-standing, 0.8614 for rDisc under standing-shunning, 0.6804 for rDisc under shunning-standing, 0.9340 for gDisc under scoring-standing, and 0.9340 for gDisc under scoring-shunning or image scoring. The cooperation probability is preserved if we replace standing by judging. Because a $+$ reputation can turn into a $-$ reputation in one step, the probability of cooperation is somewhat smaller than in the case of the gradual reputation dynamics. The difference in the cooperation probability between the two reputation dynamics is relatively large when s_- is BB or GB. This is because players with the $-$ reputation,

albeit occupying a small fraction, can make other players with the + reputation to transit to the – reputation in one step under these social norms.

We also identified the stable populations under the saltatory reputation dynamics with $\beta_d = 0$, $\beta_u = 0.5$, and $\epsilon_i = \epsilon_a = 0.02$. The set of cooperative equilibria is the same as that for the gradual reputation dynamics. The cooperation probabilities in stable and cooperative populations are equal to 0.9416 for rDisc under standing–standing, 0.9401 for rDisc under standing–shunning, 0.7605 for rDisc under shunning–standing, 0.9785 for gDisc under scoring–standing, and 0.9783 for gDisc under scoring–shunning or image scoring. The cooperation probability is preserved if we replace standing by judging. Because a – reputation can turn into a + reputation in one step, the probability of cooperation is a little larger than in the case of the gradual reputation dynamics. The difference is relatively large when $s_0 = \text{BB}$.

5 Discussion

We analyzed a trinary reputation model of indirect reciprocity and identified cooperative Nash equilibria composed of a single action rule or mixture of two action rules. Independent of details of the reputation dynamics (i.e., gradual or saltatory), we found at a small error level (i.e., $\epsilon_i = \epsilon_a = 0.02$) that 12 homogeneous populations and five mixed populations are cooperative and stable under different social norms (Fig. 3(A)). When the error probabilities are even smaller, eight homogeneous populations and four mixed populations remain stable (Appendix B). In particular, under image scoring, the heterogeneous population composed of gDisc and CDC (a variant of rDisc) is stable in the error-free limit (Fig. 4; see Fig. 1(B) for the definition of gDisc, CDC, and rDisc).

The results derived from the trinary reputation model and those derived from the binary reputation model [3] are similar in some aspects. For example, the standing–standing social norm (i.e., $s_+ = \text{GB}$, $s_0 = s_- = \text{GG}$) in the trinary model coincides with the standing social norm in the binary model (Fig. 1(D)) if we merge the 0 and – reputations in the trinary model. Therefore, the result that standing–standing enables cooperation is not surprising. Similarly, scoring–judging (i.e., $s_+ = s_0 = \text{GB}$, $s_- = \text{BG}$), for example, is almost equivalent to judging in

the binary model if we merge + and 0 reputations in the trinary model. However, the results for the trinary and binary models are fundamentally different in the following two aspects.

First, shunning (see Fig. 1(D) in the case of the binary reputation model) is more supportive of cooperation in the trinary than binary model. In the binary model, shunning results in a cooperation probability of $\approx 1/2$ in the error-free limit unless a cooperation prone initial condition and a finite number of rounds are combined [12] or reputations of players are only partially visible to others [18]. In the trinary model, shunning–standing and shunning–judging stabilize full cooperation in the error-free limit (Appendix B). Under these social norms, a donor meeting a recipient with a 0 reputation receives B irrespective of the action, which is common to the behavior of the binary model. In the trinary model, however, even if a donor obtains a – reputation, the donor easily receives G either by cooperating with a + recipient or justifiably defecting against a – recipient. Owing to the contribution of the justified defection, a donor gains G more often than B on average. If players with the + reputation increase in number owing to this mechanism, players more likely receive G than B. This positive feedback sustains cooperation under shunning–related social norms in the trinary model.

Second, and the more important, image scoring is capable of supporting cooperation in our model. This conclusion is consistent with the results derived from behavioral experiments [20–22] and those derived from numerical simulations [4, 29] but opposite to those derived from the binary reputation model [6, 9, 10, 12]. We reached this conclusion by simply introducing a third reputation to the standard binary model of indirect reciprocity. The cooperation under image scoring in our model does not require forced cooperation in the first round [3], partial cooperation of defective players [8], binomially or Poisson distributed number of rounds [14, 16], growth of social networks used for reputation passing [15], or almost invisible reputations [17]. In our model, cooperation under image scoring occurs for the following intuitive reason. Although the composition of the stable population depends on the benefit-to-cost ratio and the error probabilities, the main action rule present in the stable population is gDisc, which cooperates with + and 0 recipients and defects against – recipients. In the equilibrium, most gDisc resident players possess the + reputation. If some AllD mutants are present, a – player in the population is likely to be AllD and not gDisc. With the trinary reputation, gDisc players

justifyingly defect (i.e., D against a $-$ recipient) but do not selfishly defect (i.e., D against a $+$ or 0 recipient). A donor that has justifyingly defected would receive a 0 reputation but not a $-$ reputation because few recipients have the $-$ reputation in the population. Therefore, gDisc players would not obtain the $-$ reputation. gDisc players that happen to obtain the 0 reputation, when selected as donor, likely meet a recipient with a $+$ reputation such that they regain the $+$ reputation. In contrast, AllD players would obtain the $-$ reputation such that they are not helped by others. This contrasts with the case of the binary reputation model, in which a discriminating donor that defects against whatever recipient immediately receives the worst reputation (i.e., $-$) and then is defected by others.

The mechanism of cooperation under image scoring in our model is similar to that under the so-called tolerant scoring proposed by Berger [19]. The population of tolerant discriminator, which defects against a recipient if the recipient has defected in the last two rounds and cooperates otherwise, is stable. Berger assumed three action rules, i.e., tolerant discriminator, which is similar to gDisc, AllC, and AllD and investigated the behavior of the model under tolerant scoring. We carried out an exhaustive search of the space of the action rule and social norms to find the viability of image scoring. In contrast to Berger's model [19], cooperation is stable even if the reputation moves only one step in a round, and cooperation is realized by mixture of two types of discriminative players (i.e., gDisc and CDC) rather than by one type.

Appendix A: Distribution of the Reputation for the Saltatory Reputation Dynamics

Under the saltatory reputation dynamics (Fig. 2(B)), we obtain

$$\begin{cases} p_+^* &= p_+^* \Phi^* + p_0^* \Phi^* + p_-^* \beta_u \Phi^*, \\ p_0^* &= p_+^* (1 - \beta_d) (1 - \Phi^*) + p_-^* (1 - \beta_u) \Phi^*, \\ p_-^* &= p_+^* \beta_d (1 - \Phi^*) + p_0^* (1 - \Phi^*) + p_-^* (1 - \Phi^*). \end{cases} \quad (15)$$

Equation (15) and the normalization $p_+^* + p_0^* + p_-^* = 1$ lead to

$$\begin{bmatrix} p_+^* \\ p_0^* \\ p_-^* \end{bmatrix} = \frac{1}{Z} \begin{bmatrix} (1 - \beta_u)\Phi^{*2} + \beta_u\Phi^* \\ (1 - \beta_d\beta_u)\Phi^*(1 - \Phi^*) \\ (1 - \beta_d)(1 - \Phi^*)^2 + \beta_d(1 - \Phi^*) \end{bmatrix}, \quad (16)$$

where $Z = 1 - (1 - \beta_d)(1 - \beta_u)\Phi^*(1 - \Phi^*)$.

Appendix B: Justification of the Criterion of Equilibrium Selection

We defined cooperative equilibrium as stable population in which the probability of cooperation is larger than 0.5 for some b/c such that $b/c < 20$. To justify this criterion, we carry out additional numerical simulations with various error probabilities satisfying $\epsilon_i = \epsilon_a$. The probability of cooperation in each stable homogeneous population is shown for various error probability values in Fig. 5. Figure 5 shows that, under 13 out of the 22 stable action–norm pairs, the probability of cooperation seems to converge to unity in the error-free limit. It should be noted that we identified 12, not 13, cooperative homogeneous populations in the main text. One of the 13 action–norm pairs is excluded because it is stable only for large b/c values (i.e., $b/c > 52.63$) at $\epsilon_i = \epsilon_a = 0.02$ (Table 1). The probability of cooperation is larger than 0.5 for some b/c for five out of the nine stable heterogeneous populations composed of two action rules. For all the five heterogeneous populations, the probability of cooperation is larger than 0.5 for a b/c value smaller than 20 at $\epsilon_i = \epsilon_a = 0.02$.

In the homogeneous populations, under eight out of the 13 social norms for which the probability of cooperation seems to converge to unity in the error-free limit, i.e., standing–standing, standing–judging, standing–shunning, judging–standing, judging–judging, judging–shunning, shunning–standing, and shunning–judging, the range of b/c in which the corresponding action rule is stable tends to $b/c > 1$ as the error probabilities become small. For example, under standing–standing, standing–judging, judging–standing, and judging–judging, the homogeneous population of rDisc is stable in the range $b/c > 1.00006$ when $\epsilon_i = \epsilon_a = 0.0025$; the corresponding range is $b/c > 1.004$ when $\epsilon_i = \epsilon_a = 0.02$ (Table 1). Under the other five

social norms, i.e., standing–scoring, scoring–standing, scoring–judging, scoring–shunning, and scoring–scoring, stable cooperation requires a large value of b/c when the error probabilities are small. For example, under standing–scoring, the homogeneous population of CDC is stable in the range $b/c > 402.1$ when $\epsilon_i = \epsilon_a = 0.0025$; the corresponding range is $b/c > 52.63$ when $\epsilon_i = \epsilon_a = 0.02$ (Table 1). Under image scoring, the homogeneous population of gDisc is stable in the range $b/c > 66.51$ when $\epsilon_i = \epsilon_a = 0.0025$; the corresponding range is $8.230 < b/c < 12.53$ when $\epsilon_i = \epsilon_a = 0.02$ (Table 1, Fig. 4).

In the heterogeneous populations, four out of five equilibria, i.e., mixture of gDisc and rDisc under scoring–standing, mixture of gDisc and rDisc under scoring–judging, mixture of gDisc and rDisc under scoring–shunning, and mixture of gDisc and CDC under image scoring, realize a large probability of cooperation in a wide range of b/c when $\epsilon_i = \epsilon_a = 0.02$ (Figs. 3(B) and 3(C)) and also do so when the error probabilities are smaller. For example, the heterogeneous population composed of gDisc and CDC is stable under image scoring in the range $1.994 < b/c < 66.51$ when $\epsilon_i = \epsilon_a = 0.0025$; the corresponding range is $1.941 < b/c < 8.230$ when $\epsilon_i = \epsilon_a = 0.02$ (Fig. 4).

Appendix C: Fraction of Two Action Rules in the Error-free Limit

We consider a social norm given by $s_+ = s_0 = \text{GB}$ and $s_- = \text{GG}$, BG , or BB . In the limit $\epsilon_i, \epsilon_a \rightarrow 0$, the fraction of gDisc, denoted by q_{gDisc} , and that of rDisc converge to $1 - c/b$ and c/b , respectively, for the following reason. In the equilibrium, few players possess the 0 or – reputation. The behavior of rDisc players and that of gDisc players differ only toward recipients with reputation 0. An rDisc donor with a + reputation defects against a recipient with a 0 reputation, receives B, and transits to the 0 reputation. If this rDisc player is selected as recipient, an rDisc donor defects and a gDisc donor cooperates. If selected as donor, this rDisc player would cooperate because most recipients have the + reputation, receive G, and transit to +. Because the rDisc player with a 0 reputation is selected as recipient once on average before selected as donor, the expected payoff to the rDisc donor during this period is equal to

$q_{\text{gDisc}}b$ on average. During the same period, a gDisc donor with a + reputation cooperates with a recipient with a 0 reputation, pays c , receives G , keeps a + reputation, and gains benefit b when selected as recipient. By equating the payoffs to rDisc and gDisc players, we obtain $q_{\text{gDisc}}b = -c + b$, which leads to $q_{\text{gDisc}} = 1 - c/b$.

Acknowledgements

We thank Mitsuhiro Nakamura for critical reading of the manuscript and the guidance on the literature on image scoring. N.M. acknowledges the support provided through Grants-in-Aid for Scientific Research (No. 23681033, and Innovative Areas “Systems Molecular Ethology” (No. 20115009)) from MEXT, Japan.

References

- [1] R. L. Trivers. The evolution of reciprocal altruism. *Q. Rev. Biol.*, 46:35–57, 1971.
- [2] R. Axelrod. *The Evolution of Cooperation*. Basic Books, NY, 1984.
- [3] M. A. Nowak and K. Sigmund. The dynamics of indirect reciprocity. *J. Theor. Biol.*, 194:561–574, 1998a.
- [4] M. A. Nowak and K. Sigmund. Evolution of indirect reciprocity by image scoring. *Nature*, 393:573–577, 1998b.
- [5] O. Leimar and P. Hammerstein. Evolution of cooperation through indirect reciprocity. *Proc. R. Soc. B*, 268:745–753, 2001.
- [6] K. Panchanathan and R. Boyd. A tale of two defectors: the importance of standing for evolution of indirect reciprocity. *J. Theor. Biol.*, 224:115–126, 2003.
- [7] M. Mohtashemi and L. Mui. Evolution of indirect reciprocity by social information: the role of trust and reputation in evolution of altruism. *J. Theor. Biol.*, 223:523–531, 2003.

- [8] M. A. Fishman. Indirect reciprocity among imperfect individuals. *J. Theor. Biol.*, 225:285–292, 2003.
- [9] H. Ohtsuki. Reactive strategies in indirect reciprocity. *J. Theor. Biol.*, 227:299–314, 2004.
- [10] H. Ohtsuki and Y. Iwasa. How should we define goodness?—reputation dynamics in indirect reciprocity. *J. Theor. Biol.*, 231:107–120, 2004.
- [11] H. Ohtsuki and Y. Iwasa. The leading eight: Social norms that can maintain cooperation by indirect reciprocity. *J. Theor. Biol.*, 239:435–444, 2006.
- [12] H. Ohtsuki and Y. Iwasa. Global analyses of evolutionary dynamics and exhaustive search for social norms that maintain cooperation by reputation. *J. Theor. Biol.*, 244:518–531, 2007.
- [13] M. A. Nowak and K. Sigmund. Evolution of indirect reciprocity. *Nature*, 437:1291–1298, 2005.
- [14] H. Brandt and K. Sigmund. The logic of reprobation: assessment and action rules for indirect reciprocation. *J. Theor. Biol.*, 231:475–486, 2004.
- [15] H. Brandt and K. Sigmund. Indirect reciprocity, image scoring, and moral hazard. *Proc. Natl. Acad. Sci. USA*, 102:2666–2670, 2005.
- [16] H. Brandt and K. Sigmund. The good, the bad and the discriminator—Errors in direct and indirect reciprocity. *J. Theor. Biol.*, 239:183–194, 2006.
- [17] S. Uchida. Effect of private information on indirect reciprocity. *Phys. Rev. E*, 82:036111, 2010.
- [18] M. Nakamura and N. Masuda. Indirect reciprocity under incomplete observation. *PLoS Comput. Biol.*, 7:e1002113, 2011.
- [19] U. Berger. Learning to cooperate via indirect reciprocity. *Games Econ. Behav.*, 72:30–37, 2011.

- [20] C. Wedekind and M. Milinski. Cooperation through image scoring in humans. *Science*, 288:850–852, 2000.
- [21] M. Milinski, D. Semmann, T. C. M. Bakker, and H.-J. Krambeck. Cooperation through indirect reciprocity: image scoring or standing strategy? *Proc. R. Soc. B*, 268:2495–2501, 2001.
- [22] I. Seinen and A. Schram. Social status and group norms: Indirect reciprocity in a repeated helping experiment. *Eur. Econ. Rev.*, 50:581–602, 2006.
- [23] M. Milinski, D. Semmann, and H.-J. Krambeck. Reputation helps solve the ‘tragedy of the commons’. *Nature*, 415:424–426, 2002.
- [24] C. Wedekind and V. A. Braithwaite. The long-term benefits of human generosity in indirect reciprocity. *Curr. Biol.*, 12:1012–1015, 2002.
- [25] C. Keser. Experimental games for the design of reputation management systems. *IBM Syst. J.*, 42:498–506, 2003.
- [26] G. E. Bolton and E. Katok. How effective are electronic reputation mechanisms? An experimental investigation. *Manage. Sci.*, 50:1587–1602, 2004.
- [27] G. E. Bolton, E. Katok, and A. Ockenfels. Cooperation among strangers with limited information about reputation. *J. Public Econ.*, 89:1457–1468, 2005.
- [28] D. Engelmann and U. Fischbacher. Indirect reciprocity and strategic reputation building in an experimental helping game. *Games Econ. Behav.*, 67:399–407, 2009.
- [29] A. Diekmann and W. Przepiorka. The evolution of trust and reputation: Results from simulation experiments. In *Third ESSA Conference*, pages 1–7, 2005.
- [30] P. Resnick and R. Zeckhauser. Trust among strangers in internet transactions: Empirical analysis of eBay’s reputation system. *Adv. Appl. Microeconomics*, 11:127–157, 2002.

- [31] P. Resnick, R. Zeckhauser, J. Swanson, and K. Lockwood. The value of reputation on eBay: A controlled experiment. *Exp. Econ.*, 9:79–101, 2006.
- [32] M. Kandori. Social norms and community enforcement. *Rev. Econ. Stud.*, 59:63–80, 1992.

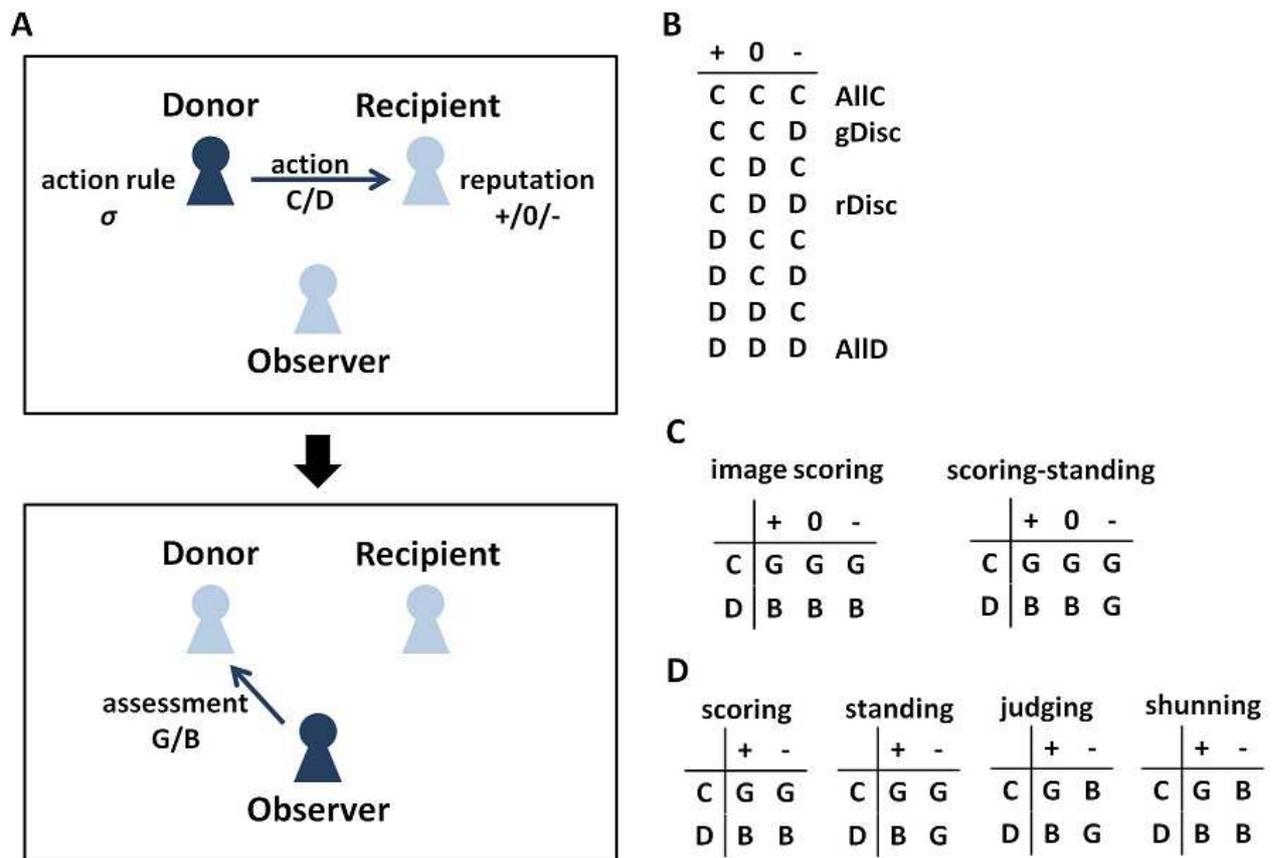


Figure 1: Rule of the donation game with trinary reputations. (A) Illustration of the interaction in a single game. (B) Eight action rules. (C) Representative social norms. The rows represent the donor's actions (i.e., C and D), the columns represent the recipient's reputations (+, 0, and -), and G and B represent the assessments that observer assigns to the donor. (D) Representative social norms in the binary reputation model.

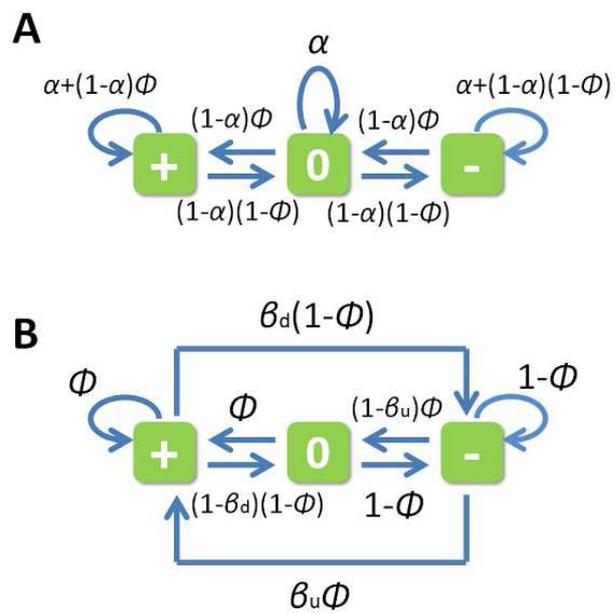


Figure 2: Two types of reputation dynamics. (A) Gradual reputation dynamics. (B) Saltatory reputation dynamics. Φ represents the probability that the donor receives G.

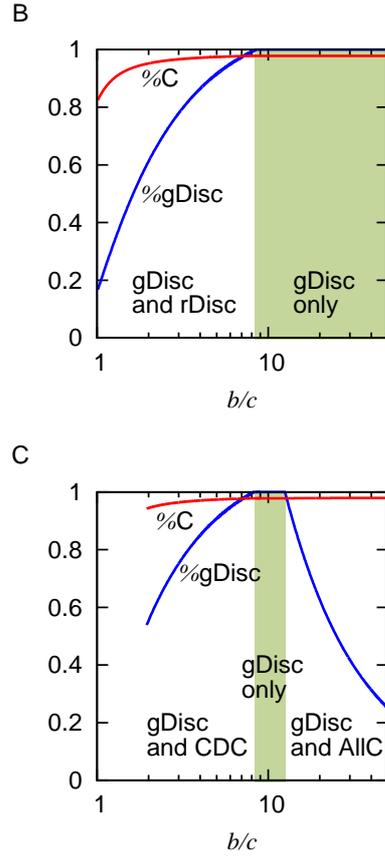
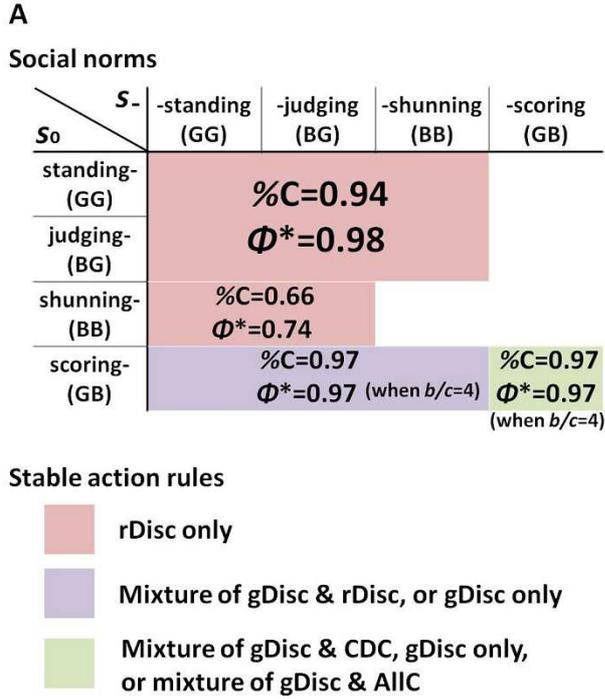


Figure 3: Results for the gradual reputation dynamics. We set $\epsilon_i = \epsilon_a = 0.02$. (A) Cooperative and stable action rules under different social norms. All the shown social norms own $s_+ = GB$. (B) Average cooperation probability and the fraction of gDisc players under scoring-standing (i.e., $s_+ = s_0 = GB$ and $s_- = GG$). It should be noted that the fraction of gDisc and that of rDisc sum to unity. (C) Average cooperation probability and the fraction of gDisc players under scoring-scoring (also called image scoring; $s_+ = s_0 = s_- = GB$). The fraction of gDisc and that of CDC or AllC sum to unity.

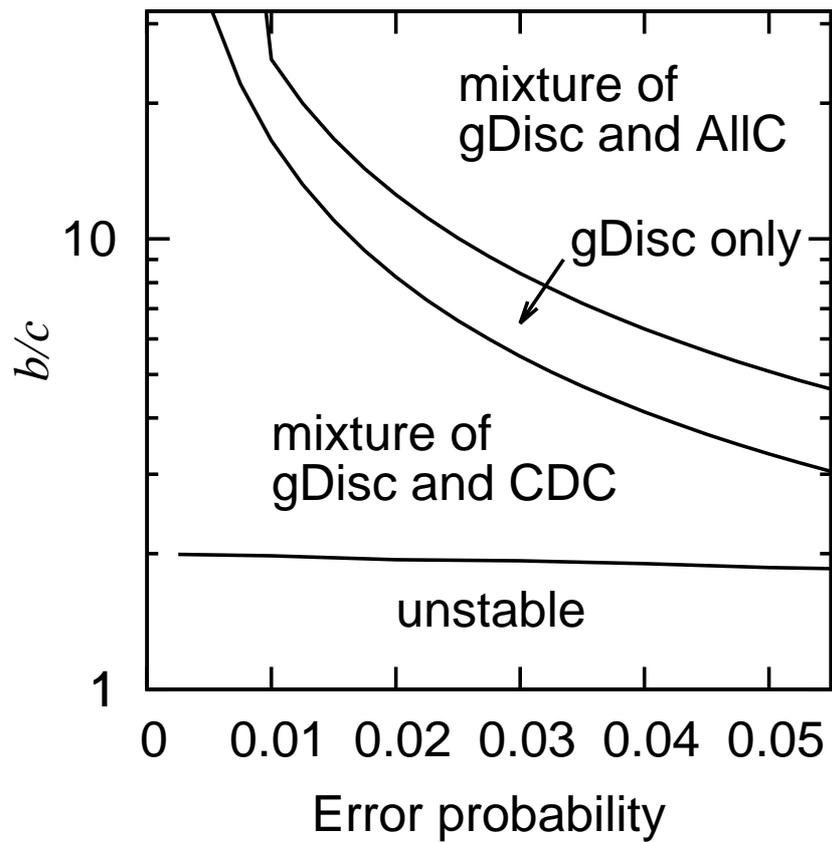


Figure 4: Parameter regions in which one of the three populations is stable under image scoring. We set the error probability $\epsilon_1 = \epsilon_a$.

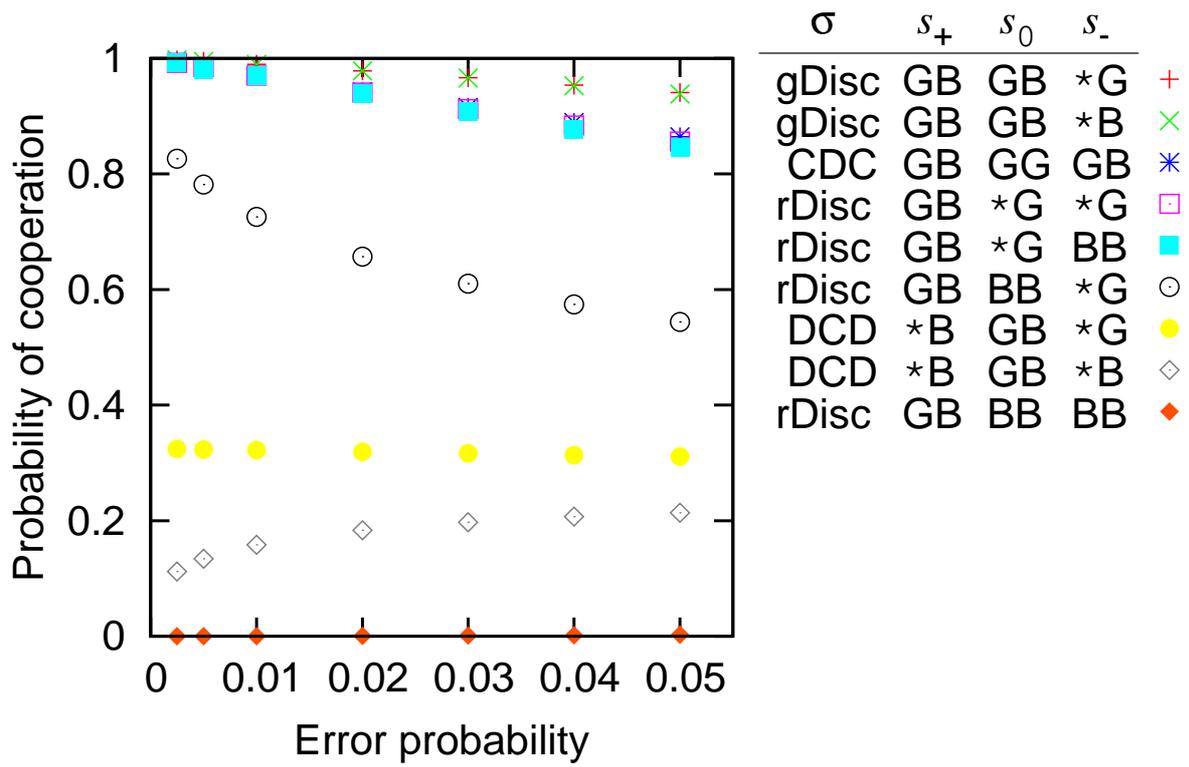


Figure 5: Relationships between the probability of cooperation and the error probability for the 22 stable homogeneous populations. We assume the gradual reputation dynamics and set $\epsilon_i = \epsilon_a$. An asterisk represents either G or B.

Table 1: Stable action–norm pairs. We also show the range of b/c in which action rule σ is stable, probability of C, and mean G assessment (i.e., Φ^*) under the gradual reputation dynamics. An asterisk represents either G or B. We set $\epsilon_1 = \epsilon_a = 0.02$.

σ	s_+	s_0	s_-	range of b/c	%C	Φ^*
CCD	GB	GB	*G	$8.480 < b/c$	0.9784	0.9800
			BB	$8.108 < b/c$	0.9783	0.9783
			GB	$8.230 < b/c < 12.53$		
CDC	GB	GG	GB	$52.63 < b/c$	0.9424	0.9808
CDD	GB	*G	*G	$1.004 < b/c$	0.9409	0.9808
		*G	BB	$1.004 < b/c$	0.9392	0.9792
		BB	*G	$1.018 < b/c$	0.6571	0.7445
DCD	*B	GB	*G	$3.716 < b/c$	0.3191	0.5688
	GB		*B	$1.137 < b/c < 1.296$	0.1833	0.1833
	BB		BB	$1.120 < b/c$		
	BB		GB	$1.120 < b/c < 11.66$		
CDD	GB	BB	BB	$25.54 < b/c$	0.0004	0.0004