

Searching for Realizations of Finite Metric Spaces in Tight Spans

Sven Herrmann^a, Vincent Moulton^{a,*}, Andreas Spillner^b

^a*School of Computing Sciences, University of East Anglia, Norwich, NR4 7TJ, United Kingdom*

^b*Department of Mathematics and Computer Science, University of Greifswald, 17487 Greifswald, Germany*

Abstract

An important problem that commonly arises in areas such as internet traffic-flow analysis, phylogenetics and electrical circuit design, is to find a representation of any given metric D on a finite set by an edge-weighted graph, such that the total edge length of the graph is minimum over all such graphs. Such a graph is called an *optimal realization* and finding such realizations is known to be NP-hard. Recently Varone presented a heuristic greedy algorithm for computing optimal realizations. Here we present an alternative heuristic that exploits the relationship between realizations of the metric D and its so-called tight span T_D . The tight span T_D is a canonical polytopal complex that can be associated to D , and our approach explores parts of T_D for realizations in a way that is similar to the classical simplex algorithm. We also provide computational results illustrating the performance of our approach for different types of metrics, including l_1 -distances and two-decomposable metrics for which it is provably possible to find optimal realizations in their tight spans.

Keywords: combinatorial optimization, metric, graph, realization, tight span

*Corresponding author

Email addresses: `sherrmann@mathematik.tu-darmstadt.de` (Sven Herrmann),
`vincent.moulton@cmp.uea.ac.uk` (Vincent Moulton),
`andreas.spillner@uni-greifswald.de` (Andreas Spillner)

1. Introduction

An important problem that commonly arises in areas such as internet traffic-flow analysis [9], phylogenetics [2] and electrical circuit design [18], is to realize any given metric D on some finite set X by an edge-weighted graph with X labeling its vertex set, often with the additional requirement that the total edge length of the graph is minimum. This can be useful, for example, for visualizing the metric, or for trying to better understand its structural properties. More formally this optimization problem can be stated as follows. A *realization* (G, ω, τ) of D is a connected graph $G = (V, E)$ with vertex set V and edge set E , together with an edge-weighting $\omega : E \rightarrow \mathbb{R}_{>0}$ and a labeling map $\tau : X \rightarrow V$ such that, for all $x, y \in X$, $D(x, y)$ equals $D_G(\tau(x), \tau(y))$, that is, the length of a shortest path from $\tau(x)$ to $\tau(y)$ in G (cf. Figure 1(a) and (b)). The problem then is to find an *optimal* realization of D , that is, a realization of D that has minimum total edge length over all possible realizations of D .

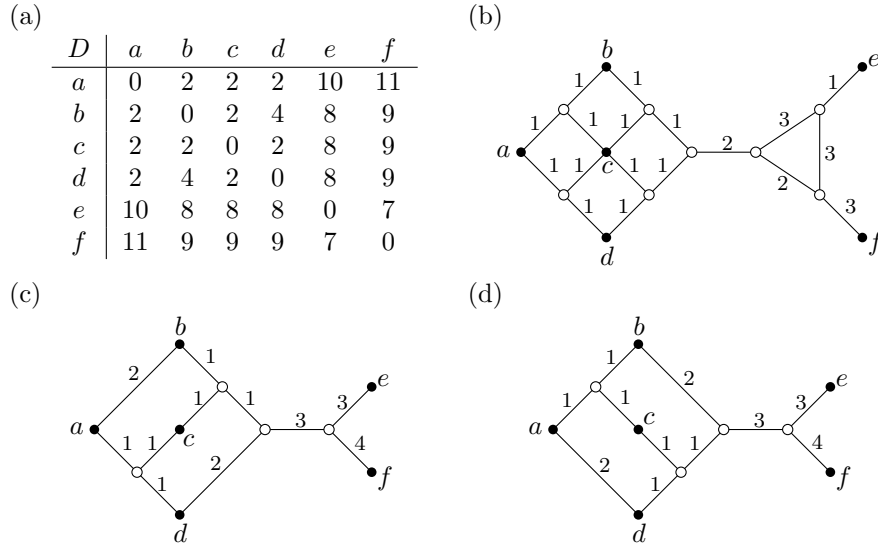


Figure 1: (a) A metric D on $X = \{a, b, c, d, e, f\}$. (b) A realization of (X, D) that is not optimal. Vertices associated with an element of X are drawn as black dots, the remaining vertices are drawn as empty circles. (c),(d) Two optimal realizations of (X, D) .

Early work on optimal realizations started with [18] (see also [29] for a comprehensive list of references), which focused mainly on special classes of metrics such as, for example, those that admit an optimal realization where

the underlying graph is a tree (so-called *treelike* metrics). Subsequently it was found that *every* metric D on a finite set X has an optimal realization [23], although this need not be unique (cf. Figure 1(c) and (d)). There even always exists an optimal realization of (X, D) with $O(|X|^4)$ vertices [12, p. 392], which implies that there is an exhaustive algorithm to search for an optimal realization. However, it was also shown that computing an optimal realization is NP-hard [1, 30]. More recently, there has been renewed interest in computational aspects of this problem. For example, in [21, 22] (see also [13]) a way to break up the problem of computing an optimal realization into subproblems using so-called *cut points* is presented, and in [29] a heuristic is presented for computing optimal realizations.

Here we present an alternative heuristic for systematically computing optimal realizations that exploits the relationship between optimal realizations of a metric D and its so-called *tight span* T_D [12, 24]. In brief (see Section 2 for details), T_D is a polytopal complex (essentially a union of polytopes) that can be canonically associated to D which is itself a (non-finite) metric space and into which the metric D can be canonically embedded. Remarkably, in [12] it is shown that the 1-skeleton G_D of T_D (i.e., the edge-weighted graph formed essentially by taking all of the 0- and 1-dimensional faces of T_D) is always a realization of D . Moreover, Dress conjectured [12, (3.20)] that some optimal realization of D can always be obtained by removing some set of edges from G_D .

While Dress' conjecture is still open for metrics in general, recently it has been shown to hold for the class of so-called *two-decomposable* metrics [20, Theorem 1.2], a class which includes treelike metrics and l_1 -distances between points in the plane (see Section 3 for more details). In particular, this and the aforementioned result in [12] suggest that it could be useful to consider G_D as a "search space" in which to look for some optimal realization of D (or at least some interesting realization of D which has relatively small total edge length).

Guided by this principle, given an arbitrary finite metric D , in Section 4 we propose a heuristic for computing a realization of D that is a subgraph of G_D . This heuristic explores parts of T_D in a way similar to the classical simplex algorithm [11]. Moreover, it does not explicitly compute G_D , whose vertex set can have cardinality that is exponential in $|X|$ (see e.g. [19] for some explicit bounds). We also show that the heuristic is guaranteed to find optimal realizations for some simple types of metrics.

Since, as mentioned above, the problem of finding optimal realizations is

NP-hard, we assess the performance of our new heuristic using two strategies. First, we consider a special instance of the problem where we take metrics to be l_1 -distances between points in the plane. In Section 5 we show that finding optimal realizations of such a metric D in G_D is equivalent to the so-called *minimum Manhattan network* problem (which was also recently shown to be NP-hard [7]). This allows us to compare the realizations computed by our heuristic with realizations computed using a mixed integer linear program (MIP) for the minimum Manhattan network problem presented in [3] (see also [26] for a comprehensive list of references on other approaches for solving this well-studied problem). Second, in Section 6 we describe a mixed integer program (MIP) for computing a *minimal subrealization* of a realization of some metric, that is, a subrealization with minimum total edge length. This allows us to obtain some impression of how close the realizations computed by our heuristic are to a minimal subrealization of G_D in case $|X|$ is not too large. Moreover, in case the metric is two-decomposable, a minimal subrealization of G_D is (by the aforementioned result in [20]) an optimal realization and so we can compare the realizations computed by our new heuristic with optimal ones for this special class of metrics.

Based on these considerations, in Section 7 we present simulations for l_1 -distances, two-decomposable metrics and random metrics to assess the performance of our heuristic. An implementation of this heuristic is freely available for download at www.uea.ac.uk/cmp/research/cmpbio/CoMRiT/. This includes the algorithm for efficiently computing cut points as described in [13] and auxiliary programs that allow to generate the MIP description for the minimum Manhattan network problem, as well as for the problem of computing a minimal subrealization so that they can be solved using existing MIP solvers (we used the solver that is part of the GNU linear programming kit (www.gnu.org/software/glpk/) in our experiments). We conclude the paper with a brief discussion of some possible future directions in Section 8.

2. Preliminaries

In this section, we first recall the formal definition of the tight span of a metric, a concept that has been discovered and re-discovered several times in the literature (see e.g. [8, 12, 24]). We also recall some facts concerning tight spans and optimal realizations that will be used later on (for more on this see e.g. [14, Chapter 5]).

2.1. Some tight span theory

A *finite metric space* is a pair (X, D) consisting of a finite non-empty set X and a symmetric bivariate map $D : X \times X \rightarrow \mathbb{R}_{\geq 0}$ such that $D(x, x) = 0$ and $D(x, z) \leq D(x, y) + D(y, z)$ for all $x, y, z \in X$. To emphasize that $D(x, y) = 0$ does not necessarily imply $x = y$, such a map D is often called a *pseudometric*, but we will simply refer to D as a *metric* here. A map $h : X \rightarrow X'$ from a metric space (X, D) into a metric space (X', D') is an *isometric embedding* if $D'(h(x), h(y)) = D(x, y)$ for all $x, y \in X$.

Now, given any finite metric space (X, D) , the *tight span* T_D is defined to be the polytopal complex (see e.g. [25]) that is the union of the bounded faces of the polyhedron

$$P_D := \{f \in \mathbb{R}^X : f(x) + f(y) \geq D(x, y) \text{ for all } x, y \in X\}.$$

Viewed as a subset of \mathbb{R}^X , T_D can be endowed with the l_∞ -metric which is defined by

$$D_\infty(f, g) = \max\{|f(x) - g(x)| : x \in X\}$$

for all $f, g \in T_D$ so that (T_D, D_∞) is also a (non-finite!) metric space. Note that there exists a canonical isometric embedding of (X, D) into (T_D, D_∞) , the so-called *Kuratowski embedding* [27], that maps every $x \in X$ to $k_x : X \rightarrow \mathbb{R} : y \mapsto D(x, y)$. Note that the map k_x is a 0-dimensional face (or vertex) of T_D for every $x \in X$ and, therefore, it is contained in the 1-skeleton G_D .

Later we will use the fact that the tight span can be viewed as a hull of the given metric space similar to the convex hull associated to a set of points in Euclidean space. To make this more precise, define a map $h : X \rightarrow X'$ from a metric space (X, D) into a metric space (X', D') to be *non-expansive* if $D'(h(x), h(y)) \leq D(x, y)$ for all $x, y \in X$, and a metric space (X', D') to be *injective* if for every metric space (X, D) and every subset $Y \subseteq X$ any non-expansive map of the subspace $(Y, D|_Y)$ into (X', D') can be extended to a non-expansive map of (X, D) into (X', D') . The tight span satisfies the following universal property [12, 24]:

Lemma 1. *Any isometric embedding of a metric space (X, D) into an injective metric space (X', D') can be extended to an isometric embedding of (T_D, D_∞) into (X', D') .*

2.2. Tight spans and optimal realizations

We now present a key relationship between realizations and tight spans that was first discovered by Dress. Let (X, D) be an arbitrary finite metric

space and $G_D = (V_D, E_D)$ the graph that forms the 1-skeleton of T_D . Defining the map $\omega_D : E_D \rightarrow \mathbb{R}_{\geq 0}$ by putting $\omega_D(\{u, v\}) = D_\infty(u, v)$ for all edges $\{u, v\}$ of G_D and the map $\tau_D : X \rightarrow V_D$ by putting $\tau_D(x) = k_x$ for all $x \in X$, it is shown in [12, Theorem 5] that $(G_D = (V_D, E_D), \omega_D, \tau_D)$ is a realization of (X, D) (see also [14, Theorem 5.15]). Moreover, in [12] it is shown that, for any optimal realization $(G = (V, E), \omega, \tau)$ of (X, D) , there exists a map $h : V \rightarrow T_D$ with $h(\tau(x)) = k_x$ for all $x \in X$ that preserves certain distances, that is, $\omega(\{u, v\}) = D_\infty(h(u), h(v))$ for all edges $\{u, v\} \in E$. While this suggests that every optimal realization of (X, D) is somehow 'contained' in T_D , in [1] it was shown that there exists an infinite family of optimal realizations of a certain metric D^* on six points, for which no member is isomorphic to some subrealization of the 1-skeleton of T_{D^*} . Still, as mentioned in the introduction, it is not known whether or not there always exists some optimal realization of (X, D) that is a subrealization of $(G_D = (V_D, E_D), \omega_D, \tau_D)$.

3. Two-decomposable metrics

Before we present our heuristic in the next section, we shall briefly consider a special class of finite metrics D , the two-decomposable metrics, for which it is *known* that G_D always contains a subrealization that is an optimal realization of D . As mentioned in the introduction, these metrics are of interest as we can in principle compute optimal realizations for them exactly and thus measure the accuracy of our heuristic for computing realizations for small metric spaces.

We first need to recall some relevant concepts. A *split* S of a finite set X is a bipartition $\{A, B\}$ of X into two non-empty subsets A and B , also denoted by $A|B$. For any $x \in X$, that set in S that contains x is denoted by $S(x)$ and the other set by $\overline{S}(x)$. Two splits $A|B$ and $A'|B'$ of X are *compatible* if at least one of the intersections $A \cap A'$, $A \cap B'$, $B \cap A'$ and $B \cap B'$ is empty. Otherwise the two splits are *incompatible*. A set Σ of splits of X is called a *split system* (on X). A split system Σ is *two-compatible* if there is no subset $\Sigma' \subseteq \Sigma$ with $|\Sigma'| = 3$ and any two distinct splits in Σ' are incompatible.

Now, for any split S of X , define the metric D_S on X putting, for all $x, y \in X$, $D_S(x, y) = 0$ if $S(x) = S(y)$ and $D_S(x, y) = 1$ otherwise. A metric D on X is *two-decomposable* if there exists a two-compatible split system Σ on X and a weighting $\lambda : \Sigma \rightarrow \mathbb{R}_{> 0}$ with $D = \sum_{S \in \Sigma} \lambda(S) \cdot D_S$. We also say

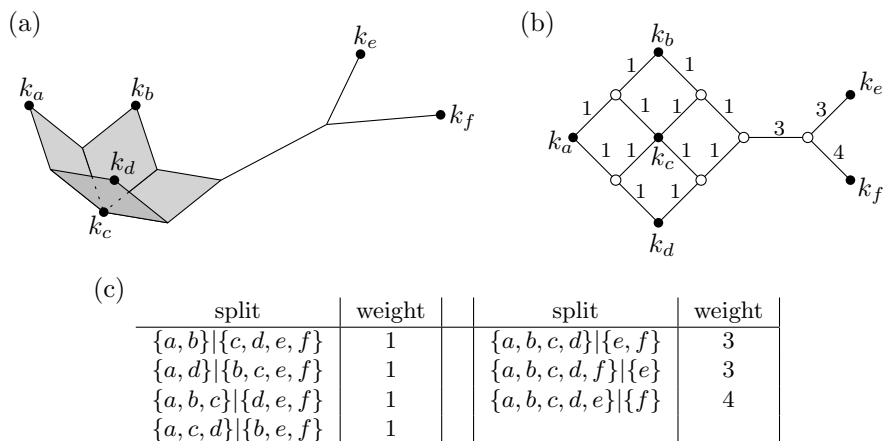


Figure 2: (a) The tight span T_D of the metric D in Figure 1(a). It consists of four maximal 2-dimensional faces surrounding the vertex k_c , and three maximal 1-dimensional faces all of which have a vertex in common (and which form the “fork” in the figure). (b) The 1-skeleton G_D of T_D . (c) A weighted two-compatible split system that induces D .

that D is induced by Σ and the weighting λ . Later we will use the following result [20, Theorem 1.2]:

Theorem 2. *Let D be a two-decomposable metric on X . Then there always exists an optimal realization that is a subrealization of (G_D, ω_D, τ_D) . In particular, there exists an optimal realization $(G = (V, E), \omega, \tau)$ of (X, D) such that there exists an injective map $h : V \rightarrow T_D$ with $w(\{u, v\}) = D_\infty(h(u), h(v))$ for all edges $\{u, v\} \in E$ and $h(\tau(x)) = k_x$ for all $x \in X$.*

We illustrate this theorem in Figure 2. More specifically, the metric D in Figure 1(a) is two-decomposable, and its tight span is depicted in Figure 2(a). The realization G_D is pictured in Figure 2(b), and a two-compatible split system associated to D is given in Figure 2(c). Note that both of the optimal realizations for D given in Figure 1(c) and (d) can be obtained from G_D by removing precisely two edges.

We now prove two simple but useful facts concerning the relationship between l_1 -distances between points in the plane, two-decomposable metrics and treelike metrics. For a point $p \in \mathbb{R}^2$ we denote by $x(p)$ and $y(p)$ the x - and y -coordinate of p , respectively, and the l_1 -distance between two points $p, q \in \mathbb{R}^2$ by $D_1(p, q) = |x(p) - x(q)| + |y(p) - y(q)|$. Then we have:

Lemma 3. *Let P be a finite non-empty set of points in \mathbb{R}^2 . Then the metric $D_1|_P$ is*

(i) *two-decomposable.*

(ii) *the sum of two treelike metrics.*

Proof. (i) Let Σ_v be the set of those splits $A|B$ of P for which there exists a real number r such that $A = \{p \in P : x(p) < r\}$ and $B = \{p \in P : x(p) > r\}$. Similarly, let Σ_h be the set of those splits $A|B$ of P for which there exists a real number r such that $A = \{p \in P : y(p) < r\}$ and $B = \{p \in P : y(p) > r\}$. For every $S \in \Sigma_v$, put $\alpha(S) = \min\{x(b) - x(a) : a \in A, b \in B\}$ and, for every $S \in \Sigma_h$ put $\beta(S) = \min\{y(b) - y(a) : a \in A, b \in B\}$. Note that any two splits in Σ_v as well as any two splits in Σ_h are compatible. Hence, the split system $\Sigma := \Sigma_v \cup \Sigma_h$ is two-compatible.

Now, define, for any split S in Σ , the weight

$$\lambda(S) = \begin{cases} \alpha(S), & \text{if } S \in \Sigma_v \setminus \Sigma_h, \\ \beta(S), & \text{if } S \in \Sigma_h \setminus \Sigma_v, \\ \alpha(S) + \beta(S), & \text{if } S \in \Sigma_h \cap \Sigma_v. \end{cases}$$

It is not hard to check that $D_1|_P = \sum_{S \in \Sigma} \lambda(S) \cdot D_S$, implying that $D_1|_P$ is indeed two-decomposable.

(ii) Continuing to use the notation introduced in the proof of (i), note that we have $D_1|_P = D_v + D_h$ with $D_v = \sum_{S \in \Sigma_v} \alpha(S) \cdot D_S$ and $D_h = \sum_{S \in \Sigma_h} \beta(S) \cdot D_S$. Therefore, it remains to note that D_v and D_h are treelike in view of the fact that a metric space (D', X') is treelike if there exists a system Σ' of pairwise compatible splits of X' and a map $\lambda' : \Sigma' \rightarrow \mathbb{R}_{>0}$ with $D' = \sum_{S \in \Sigma'} \lambda'(S) \cdot D_S$ [4]. \square

4. Computing a realization in the tight span

We now present our algorithm for computing realizations using the tight span. We also prove that it is guaranteed to yield an optimal solution for some special types of metrics. Given a finite metric space (X, D) , the basic idea of our algorithm is to select, for each pair $\{x, y\}$ of distinct elements in X , a shortest path from k_x to k_y in G_D . The union of these paths is then a realization of (X, D) . This is summarized in the form of pseudo-code in Algorithm 1.

Pseudocode for the function `find_path` is presented in Algorithm 2. This function essentially computes, for any vertex u of G_D and any $x \in X$, a shortest path from u to k_x in G_D . To avoid computing the whole graph

Algorithm 1: The basic algorithm.

Input: A finite metric space (X, D) **Output:** A realization of (X, D)

```
1 Initialize the graph  $G = (V, E)$  with  $V = \{k_x : x \in X\}$ ,  $E = \emptyset$ ;  
2 Form a list  $L$  of all pairs  $\{x, y\} \in \binom{X}{2}$ ;  
3 foreach  $\{x, y\} \in L$  do  
4   | find_path( $D, k_x, y, G$ );  
   | /* Adds, if necessary, edges of  $G_D$  to  $G$  so that, after  
   | the call,  $G$  contains a path of length  $D(x, y)$  from  $k_x$   
   | to  $k_y$ . */  
5 end  
6 return  $(G = (V, E), \omega_D|_E, \tau_D)$ ;
```

Algorithm 2: Compute a path using the existing partial realization.

Function: `find_path(D, u, x, G)`

```
1 Initialize  $v = u$ ;  
2 if  $u$  is a vertex of  $G$  then  
3   | Let  $M$  be the set of those vertices  $w$  of  $G$  for which  
4   | there is a path of length  $D_\infty(u, w)$  from  $u$  to  $w$  in  $G$   
5   | and  $D_\infty(u, x) = D_\infty(u, w) + D_\infty(w, x)$ ;  
6   | Let  $v$  be a vertex in  $M$  with  $D_\infty(v, x)$  minimum;  
7 end  
8 else  
9   | Add  $u$  to  $G$ ;  
10 end  
11 if  $v$  equals  $k_x$  then  
12   | return;  
13 end  
14 Make a simplex step from  $v$  to arrive at vertex  $w$ ;  
15 Add the edge  $\{v, w\}$  to  $G$ ;  
16 find_path( $D, w, x, G$ );
```

G_D , it constructs such a path edge by edge employing the polyhedron P_D as follows. It computes in polynomial time from the description of P_D all vertices v of G_D that are adjacent to u in G_D . Among these vertices, one

with $D_\infty(u, k_x) = D_\infty(u, v) + D_\infty(v, k_x)$ that minimizes $D_\infty(v, k_x)$ is selected. We refer to this as a *simplex step* from u that *arrives* at vertex v , since this is similar to one step in Dantzig’s well-known simplex algorithm [11].

To make use of the fact that certain edges of G_D might have been added to G in previous rounds of the **foreach**-loop in Algorithm 1, the function `find_path` first explores whether the current graph G already contains edges that can serve as the initial part of a suitable path from u to k_x . One would expect that the choice of the order in which pairs are processed in the **foreach**-loop has some impact on how many edges can be re-used in subsequent rounds. We found that ordering the pairs according to increasing distances between them tends to work well in practice. Then, in particular, for any elements $x, y, z \in X$ with $D(x, y) + D(y, z) = D(x, z)$, no edges will be added when processing the pair $\{x, z\}$.

Note that our algorithm is guaranteed to output an optimal realization for any treelike metric and any metric that corresponds to the shortest path distances between the pairs of vertices of a graph that is a cycle. The former follows from the fact that, for any treelike metric, G_D is a tree [12], and the latter is an immediate consequence of the fact that we process the pairs of elements in X according to increasing distances between them. Moreover, using the decomposition of a given metric according to [21, 22] as a preprocessing step, it follows that an optimal realization can be obtained for a given metric D if the decomposition of D yields only subinstances for which our algorithm outputs an optimal realization. In particular, it follows that our algorithm produces optimal realizations for all inputs given in the appendix of [29].

5. Minimum Manhattan networks and optimal realizations

In this section, using properties of the tight span, we give a concise proof of the fact that the problem of computing a minimum Manhattan network is nothing other than the problem of computing an optimal realization for a special class of finite metric spaces (see also [15] for related work). This allows us to directly compare our heuristic for computing realizations with some existing algorithms for computing minimum Manhattan networks. Note that this fact seems to have not been pointed out before in the literature and has some interesting consequences for the computational complexity of constructing an optimal realization which we shall also point out.

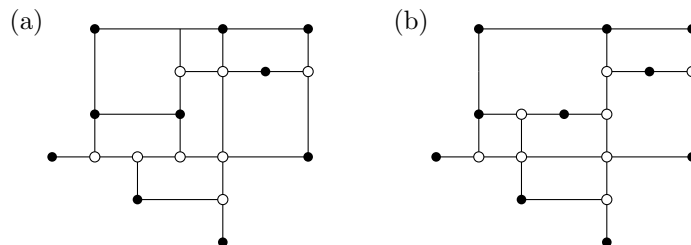


Figure 3: (a) A Manhattan network for the set P of points drawn as black dots. Other vertices of the network are drawn as empty circles. The network is not minimum. (b) A minimum Manhattan network for P .

To state the main result of this section, we first introduce some more notation. A *Manhattan network* $(G = (V, E), \omega)$ consists of a finite graph G whose vertex set $V \subseteq \mathbb{R}^2$ is a set of points in the plane and a map ω that assigns to each edge $\{p, q\} \in E$ as its length the l_1 -distance $D_1(p, q)$ between the points p and q . In addition, we require that, for every edge $\{p, q\} \in E$, the straight line segment $\overline{p, q}$ with endpoints p and q is either horizontal or vertical and, for any two distinct edges $e_1 = \{p_1, q_1\}$ and $e_2 = \{p_2, q_2\}$ in E , the straight line segments $\overline{p_1, q_1}$ and $\overline{p_2, q_2}$ do not *cross*, that is, $\overline{p_1, q_1} \cap \overline{p_2, q_2} \subseteq e_1 \cap e_2$. For any path \mathbf{p} from p to q in G , $\ell(\mathbf{p})$ denotes the length of \mathbf{p} , and \mathbf{p} is *monotone* if $D_1(p, q) = \ell(\mathbf{p})$.

Now, given a finite set of points $P \subseteq \mathbb{R}^2$, a *Manhattan network for P* is a Manhattan network $(G = (V, E), \omega)$ with $P \subseteq V$ such that for any two distinct $p, q \in P$ there exists a monotone path from p to q in G . Such a network is called *minimum* if its total length is minimum among all Manhattan networks for P (cf. Figure 3). The *minimum Manhattan network problem* has been studied by several researchers over the last few years (for a comprehensive list of references for this problem see e.g. [26]). We have the following relationship between minimum Manhattan networks and optimal realizations:

Theorem 4. *Let P be a finite non-empty set of points in \mathbb{R}^2 . Then, for any minimum Manhattan network $(G = (V, E), \omega)$ for P , $(G = (V, E), \omega, id_P)$ is an optimal realization of $(P, D_1|_P)$, where id_P is the identity map on P .*

Proof. By definition, any Manhattan network for P is, up to adding the map id_P , a realization of $(P, D_1|_P)$. Hence, it suffices to show that there exists a Manhattan network for P whose total length is at most the total length of some optimal realization of $(P, D_1|_P)$.

Consider an optimal realization $(G = (V, E), \omega, \tau)$ of $(P, D_1|_P)$ such that there exists an injective map $h : V \rightarrow T_{D_1|_P}$ with $w(\{u, v\}) = D_\infty(h(u), h(v))$ for all edges $\{u, v\} \in E$ and $h(\tau(p)) = k_p$ for all $p \in P$. By Lemma 3 and Theorem 2, such an optimal realization always exists.

Now, since the metric space (\mathbb{R}^2, D_1) is injective (see e.g. [5]), it follows that for every finite set P of points in \mathbb{R}^2 there exists an isometric embedding of $(T_{D_1|_P}, D_\infty)$ into (\mathbb{R}^2, D_1) that maps every $k_p, p \in P$, to p . Therefore, there exists an injective map $g : V \rightarrow \mathbb{R}^2$ with $w(\{u, v\}) = D_1(g(u), g(v))$ for all edges $\{u, v\} \in E$ and $g(\tau(p)) = p$ for all $p \in P$. To obtain a Manhattan network for P , start with the points in $g(V)$ and then add, step by step, for every $\{u, v\} \in E$, edges to obtain a monotone path from $g(u)$ to $g(v)$ (if an edge e on this monotone path crosses an edge e' added in some previous step, we place an additional vertex at the point where e and e' cross to remove the crossing). Note that in the resulting Manhattan network \mathcal{N} the length of a shortest path between $g(u)$ and $g(v)$ can be at most the length of a shortest path between u and v in G for all $u, v \in V$. This implies that there is a monotone path from p to q in \mathcal{N} for all $p, q \in P$. Hence, \mathcal{N} is indeed a Manhattan network for P . Finally, the total length of \mathcal{N} is, by construction, not larger than the total length of G , as required. \square

Before concluding this section, we point out some interesting implications of the last result:

Corollary 5. *Computing an optimal realization of a finite metric space (X, D) is NP-hard even if*

- (i) *D is two-decomposable, or*
- (ii) *D is the sum of two treelike metrics on X .*

Proof. In [7] it is shown that computing (even just the total edge length of) a minimum Manhattan network is NP-hard. In view of Theorem 4, this implies that computing an optimal realization of $(P, D_1|_P)$ for a given point set P is NP-hard. By Lemma 3(i) the metric $D_1|_P$ is two-decomposable. This establishes (i). Alternatively, this also follows from the NP-hardness proof in [1]: It can be checked that the metric that arises from applying the reduction is always two-decomposable.

In Lemma 3(ii) it was shown that $D_1|_P$ is even the sum of two treelike metrics on P . This establishes (ii). \square

6. Finding minimal subrealizations

In a similar spirit to finding optimal realizations, there is a whole family of so-called *inverse shortest path* problems (see e.g. [10] and the references therein). In these problems, one has a collection of allowed edit operations on graphs such as, for example, deleting edges or, if a graph has weights assigned to its edges, changing these weights. Each edit operation has an associated cost. Then, given a graph G and required distances between certain pairs of vertices in G , a minimum cost editing of G is sought so that in the resulting graph the shortest path distances between the specified pairs equal the given distances. The problem of finding a minimal subrealization mentioned in the introduction can be viewed as yet another variant of this theme and we will briefly collect some facts about it in this section.

First note that, in view of the fact that the problem of computing a minimum Manhattan network is NP-hard [7] and the fact that there is always a minimum Manhattan network that is contained in the grid induced by the given point set (see e.g. [3]), we have:

Proposition 6. *The problem of computing a minimal subrealization of a given realization (G, ω, τ) is NP-hard even if G is a two-dimensional grid graph.*

Next note that, following a similar approach to the one used in [3] for computing a minimum Manhattan network, one can phrase the problem of computing a minimal subrealization as a MIP. For the convenience of the reader, we include below the description of the MIP that we used for benchmarking in the computational experiments and that yields, for any given realization $(G = (V, E), \omega, \tau)$ of a finite metric space (X, D) , a subgraph $G' = (V', E')$ of G with minimum total edge length such that $(G', \omega|_{E'}, \tau)$ is also a realization of (X, D) :

- For every edge $\{u, v\} \in E$, we introduce two directed edges (u, v) from u to v and (v, u) from v to u . Let \overline{E} denote the set of these directed edges.
- For every edge $\{u, v\} \in E$, we have a binary variable $x_{\{u, v\}}$ indicating whether or not $\{u, v\}$ is an edge of G' .
- For any two distinct elements $x, y \in X$, we send one unit of flow from $\tau(x)$ to $\tau(y)$ that ensures that there is at least one path from x to y

of length $D(x, y)$ in G' . To describe this flow, we introduce, for every directed edge $(u, v) \in \overline{E}$, a real-valued variable $f_{(u,v)\{x,y\}}$.

- For any two distinct elements $x, y \in X$, the variables must satisfy the following constraints:

- (1) $x_{\{u,v\}} \geq f_{(u,v)\{x,y\}} \geq 0$ and $x_{\{u,v\}} \geq f_{(v,u)\{x,y\}} \geq 0$ for all $\{u, v\} \in E$.

- (2) $\sum_{u, \{u,v\} \in E} (f_{(u,v)\{x,y\}} - f_{(v,u)\{x,y\}}) = 0$ for all $v \in V \setminus \{\tau(x), \tau(y)\}$.

- (3) $\sum_{u, \{u,v\} \in E} (f_{(u,v)\{x,y\}} - f_{(v,u)\{x,y\}}) = -1$ for $v = \tau(x)$.

- (4) $\sum_{u, \{u,v\} \in E} (f_{(u,v)\{x,y\}} - f_{(v,u)\{x,y\}}) = 1$ for $v = \tau(y)$.

- (5) $\sum_{\{u,v\} \in E} w(\{u, v\}) \cdot (f_{(u,v)\{x,y\}} + f_{(v,u)\{x,y\}}) \leq D_G(\tau(x), \tau(y))$.

- The objective function is

$$\sum_{\{u,v\} \in E} w(\{u, v\}) \cdot x_{\{u,v\}} \rightarrow \min.$$

In practice, we found that the size of the MIP can often be reduced considerably by only introducing the variable $f_{(u,v)\{x,y\}}$ for those edges $\{u, v\} \in E$ that actually lie on some shortest path from $\tau(x)$ to $\tau(y)$ in G .

7. Computational Experiments

To perform computational experiments, we have implemented the algorithm described in Section 4 in C++ as an extension to the mathematical software system `polymake` [16]. In this implementation, we apply, as a preprocessing step, the decomposition of a given metric according to [21, 22].

The experiments are designed to give an impression of the range of inputs that can be attacked by our algorithm in terms of size and also how close the realization produced by our algorithm is to an optimal realization. For each size n of the ground set of the metric space, 100 randomly generated inputs were considered and we present the mean run time t of our algorithm (including the preprocessing) and the mean ratio r_{sg} between the length of the realization produced by our algorithm and a minimal subrealization of (G_D, ω_D, τ_D) (if available). The variance of these values was usually quite low and is omitted.

n	t	t_{man}	r_{sg}	t_{TS}	t_{solve}	r_{TS}
5	0.28	0.24	1.01	0.01	0.40	0.93
10	0.65	0.41	1.15	0.07	2.23	0.66
15	1.46	0.70	1.22	4.11	18.90	0.55
20	3.07	1.12	1.27	254.49	386.28	0.50
25	7.78	1.47	1.30	15075.02	7690.96	0.46
30	11.49	2.04	1.34	*	*	*
35	21.25	2.84	1.37	*	*	*
40	37.99	4.03	1.39	*	*	*
45	64.61	5.68	1.41	*	*	*
50	105.42	7.89	1.42	*	*	*
55	167.75	11.27	1.43	*	*	*
60	256.51	16.66	1.44	*	*	*
65	379.84	22.79	1.45	*	*	*
70	555.02	31.90	1.47	*	*	*
75	791.90	43.60	1.48	*	*	*
80	1110.62	61.06	1.49	*	*	*
85	1838.51	116.24	1.50	*	*	*
90	2229.85	124.47	1.50	*	*	*

Table 1: Results of the computational experiments for instances of the minimum Manhattan network problem.

In the tables, t_{TS} denotes the time to compute the whole tight span (if the size of the tight span admitted to compute it using `polymake`), t_{solve} denotes the time needed to solve the MIP described in Section 6 using the solver `glpkso1` from the GNU linear programming kit, and r_{TS} denotes the ratio of the length of the realization produced by our algorithm to the total edge length of the whole 1-skeleton of the tight span. A \star indicates that the corresponding value could not be obtained because the 1-skeleton of the tight span was too large or at least too large to solve the resulting MIP. All run times were taken on a Intel(R) Core(TM)2 Quad CPU 2.66GHz machine running CentOS 5.6 using only one core.

7.1. Manhattan networks

Inputs were generated by choosing n random points on an integer $10^6 \times 10^6$ grid. In addition to the MIP described in Section 6, we also used the MIP presented in [3] to compute an optimal realization for each input point set. The run time t_{man} for solving this alternative MIP using `glpkso1` is also given in Table 1. As can be seen, the realizations we obtain are usually within a factor c of the optimum that is slowly growing with n reaching $c \approx \frac{3}{2}$ for the largest instances considered in our experiments. Note that there exist several polynomial time algorithms that *guarantee* to produce a realization

n	t	t_{TS}	t_{solve}	r_{sg}	r_{TS}
5	0.46	0.01	0.43	1.02	0.95
10	1.46	0.07	2.05	1.10	0.77
15	3.00	3.49	6.83	1.16	0.70
20	5.44	225.32	43.73	1.19	0.66
25	9.18	13174.89	314.37	1.22	0.63
30	12.87	*	*	*	*
35	24.13	*	*	*	*
40	38.62	*	*	*	*
45	75.90	*	*	*	*
50	114.40	*	*	*	*
55	169.91	*	*	*	*
60	250.89	*	*	*	*
65	363.25	*	*	*	*
70	506.94	*	*	*	*
75	587.90	*	*	*	*
80	844.98	*	*	*	*
85	1090.04	*	*	*	*
90	1319.21	*	*	*	*
100	2143.58	*	*	*	*

n	t	t_{TS}	t_{solve}	r_{sg}	r_{TS}
5	0.45	0.01	0.49	1.04	0.81
10	1.06	0.07	2.00	1.16	0.67
15	2.29	3.49	9.42	1.17	0.59
20	21.05	222.07	83.64	1.22	0.58

Table 2: Results of the computational experiments for metrics that are the sum of two treelike metrics (left) and general two-decomposable metrics (right).

whose length is within a constant factor of the optimum — currently, for the best known algorithms, the factor is 2 [6, 17, 28].

7.2. Two-decomposable metrics

Recall that, in case the metric D is two-decomposable, we know that there exists an optimal realization that is a subrealization of (G_D, ω_D, τ_D) (see Section 3). Hence, r_{sg} is actually the ratio between the length of the realization produced by our algorithm and the length of an optimal realization. We tested two types of two-decomposable metrics (cf. Table 2):

Metrics that are the sum of two treelike metrics: We choose two random binary trees with n leaves, took the set of these leaves as the ground set of the metric space and assigned uniformly distributed lengths (between 1 and 10^6) to the edges of the trees. Then we formed the sum of the two treelike metrics realized by the binary trees.

Metrics resulting from random two-compatible split systems: We generated random two-compatible split systems of size $2n$ by generating random splits and adding them to an initially empty system if it remains two-compatible after adding the split. The metric considered in the experiment is the metric induced by the resulting split system where we again assigned uniformly distributed weights to the splits.

n	t	t_{TS}	t_{solve}	r_{sg}	r_{TS}
5	0.48	0.01	0.53	1.04	0.90
6	0.72	0.01	1.80	1.06	0.74
7	0.88	0.02	3.46	1.10	0.56
8	1.35	0.04	10.12	1.15	0.39
9	1.31	0.12	758.07	1.20	0.26
10	1.32	0.35	33652.08	1.21	0.18
15	3.52	300.29	*	*	0.01
25	15.97	*	*	*	*
30	40.47	*	*	*	*
35	84.81	*	*	*	*
40	181.73	*	*	*	*
45	330.98	*	*	*	*
50	545.36	*	*	*	*
55	749.25	*	*	*	*
60	1204.18	*	*	*	*
65	2081.53	*	*	*	*

Table 3: Results of the computational experiments for general metrics.

7.3. Random metrics

Finally, we generated random metrics on a ground set with n elements by choosing each pairwise distance uniformly between 10^6 and $2 \cdot 10^6$. The results are presented in Table 3. Note that in this experiment it is not known whether (G_D, ω_D, τ_D) contains an optimal realization of the given metric as a subrealization. Therefore, the value r_{sg} is only a lower bound on the ratio between the length of the realization produced by our algorithm and the length of an optimal realization.

8. Discussion

Our computational experiments suggest that it might be interesting to investigate whether our heuristic (or a suitable variant of it) yields a constant-factor approximation algorithm for computing an optimal realization, at least for certain classes of metrics such as, for example, two-decomposable metrics.

We also see that our algorithm can produce realizations for metric spaces with up to 50 elements, even in the case of general random metrics. Note also that all computations are done with arbitrary precision rationals/integers, to ensure combinatorial accuracy. Using floating point numbers instead (which would make sense at least for the general random metrics, that is, generic metrics) could further speed up the computations.

In future work, it could also be interesting to try and develop an exact, exponential time algorithm for computing an optimal realization. This would

be helpful for benchmarking heuristics but would also allow to check Dress' conjecture for more examples. We expect that this could at least give some interesting further insights into the structure of the problem.

Acknowledgments

We would like to thank the two reviewers for their helpful comments.

References

- [1] I. Althöfer. On optimal realizations of finite metric spaces by graphs. *Discrete and Computational Geometry*, 3:103–122, 1988.
- [2] H.-J. Bandelt and A. Dress. Split decomposition: a new and useful approach to phylogenetic analysis of distance data. *Molecular Phylogenetics and Evolution*, 1:242–252, 1992.
- [3] M. Benkert, A. Wolff, F. Widmann, and T. Shirabe. The minimum Manhattan network problem: approximations and exact solutions. *Computational Geometry*, 35:188–208, 2006.
- [4] P. Buneman. The recovery of trees from measures of dissimilarity. In F. Hodson et al., editor, *Mathematics in the Archaeological and Historical Sciences*, pages 387–395. Edinburgh University Press, 1971.
- [5] N. Catusse, V. Chepoi, and Y. Vaxès. Embedding into the rectilinear plane in optimal $O(n^2)$ time. *Theoretical Computer Science*, 412:2425–2433, 2011.
- [6] V. Chepoi, K. Nouioua, and Y. Vaxès. A rounding algorithm for approximating minimum Manhattan networks. *Theoretical Computer Science*, 390:56–69, 2008.
- [7] F. Chin, Z. Guo, and H. Sun. Minimum Manhattan network is NP-complete. In *Proc. Annual Symposium on Computational Geometry*, pages 393–402. ACM press, 2009.
- [8] M. Chrobak and L. Larmore. Generosity helps or an 11-competitive algorithm for three servers. *Journal of Algorithms*, 16:234–263, 1994.

- [9] F. Chung, M. Garrett, R. Graham, and D. Shallcross. Distance realization problems with applications to internet tomography. *Journal of Computer and System Sciences*, 63:432–448, 2001.
- [10] T. Cui and D. Hochbaum. Complexity of some inverse shortest path lengths problems. *Networks*, 56:20–29, 2010.
- [11] G. Dantzig. *Linear programming and extensions*. Princeton University Press, Princeton, N.J., 1963.
- [12] A. Dress. Trees, tight extensions of metric spaces, and the cohomological dimension of certain groups: a note on combinatorial properties of metric spaces. *Advances in Mathematics*, 53:321–402, 1984.
- [13] A. Dress, K. Huber, J. Koolen, V. Moulton, and A. Spillner. An algorithm for computing cutpoints in finite metric spaces. *Journal of Classification*, 27:158–172, 2010.
- [14] A. Dress, K. Huber, J. Koolen, V. Moulton, and A. Spillner. *Basic phylogenetic combinatorics*. Cambridge University Press, 2012.
- [15] D. Eppstein. Optimally fast incremental Manhattan plane embedding and planar tight span construction. *Journal of Computational Geometry*, 2:144–182, 2011.
- [16] E. Gawrilow and M. Joswig. `polymake`: a framework for analyzing convex polytopes. In *Polytopes–combinatorics and computation (Oberwolfach, 1997)*, volume 29 of *DMV Sem.*, pages 43–73. Birkhäuser, Basel, 2000.
- [17] Z. Guo, H. Sun, and H. Zhu. A fast 2-approximation algorithm for the minimum Manhattan network problem. In *Proc. International Conference Algorithmic Aspects in Information and Management*, volume 5034 of *LNCS*, pages 212–223. Springer, 2008.
- [18] S. Hakimi and S. Yau. Distance matrix of a graph and its realizability. *Quarterly of Applied Mathematics*, 22:305–317, 1964.
- [19] S. Herrmann and M. Joswig. Bounds on the f -vectors of tight spans. *Contributions to Discrete Mathematics*, 2:161–184, 2007.

- [20] S. Herrmann, J. Koolen, A. Lesser, V. Moulton, and T. Wu. Optimal realisations of two-dimensional, totally-decomposable metrics, 2011. preprint arXiv:1108.0290.
- [21] A. Hertz and S. Varone. The metric bridge partition problem: partitioning of a metric space into two subspaces linked by an edge in any optimal realization. *Journal of Classification*, 24:235–249, 2007.
- [22] A. Hertz and S. Varone. The metric cutpoint partition problem. *Journal of Classification*, 25:159–175, 2008.
- [23] W. Imrich, J. Simões-Pereira, and C. Zamfirescu. On optimal embeddings of metrics in graphs. *Journal of Combinatorial Theory, Series B*, 36:1–15, 1984.
- [24] J. Isbell. Six theorems about metric spaces. *Commentarii Mathematici Helvetici*, 39:65–74, 1964.
- [25] V. Klee and P. Kleinschmidt. Convex polytopes and related complexes. In R. Graham, M. Grötschel, and L. Lovász, editors, *Handbook of Combinatorics, Part I*, pages 875–917. Elsevier, 1999.
- [26] C. Knauer and A. Spillner. A fixed-parameter algorithm for the minimum manhattan network problem. *Journal of Computational Geometry*, 2:189–204, 2011.
- [27] C. Kuratowski. Quelques problèmes concernant les espaces métriques non-séparables. *Fundamenta Mathematica*, 25:534–545, 1935.
- [28] K. Nouioua. *Enveloppes de Pareto et réseaux de Manhattan*. PhD thesis, L’Université de la Méditerranée, 2005.
- [29] S. Varone. A constructive algorithm for realizing a distance matrix. *European Journal of Operational Research*, 174:102–111, 2006.
- [30] P. Winkler. Isometric embeddings in products of complete graphs. *Discrete Applied Mathematics*, 7:221–225, 1984.