

Band Selection and Classification of Hyperspectral Images using Mutual Information: An algorithm based on minimizing the error probability using the inequality of Fano

Elkebir Sarhrouni *
LRIT, FSR, UMV-A
Rabat, Morocco
Email: sarhrouni436@yahoo.fr

Ahmed Hammouch
LRIT, FSR, UMV-A
LRGE, ENSET, UMV-SOUISSI
Rabat, Morocco
Email: hammouch_a@yahoo.com

Driss Aboutajdine
LRIT, FSR, UMV-A
Rabat, Morocco
Email: aboutaj@fsr.ac.ma

Abstract—Hyperspectral image is a substitution of more than a hundred images, called bands, of the same region. They are taken at juxtaposed frequencies. The reference image of the region is called Ground Truth map (GT). The problematic is how to find the good bands to classify the pixels of regions; because the bands can be not only redundant, but a source of confusion, and decreasing so the accuracy of classification. Some methods use Mutual Information (MI) and threshold, to select relevant bands. Recently there is an algorithm selection based on mutual information, using bandwidth rejection and a threshold to control and eliminate redundancy. The band top ranking the MI is selected, and if its neighbors have sensibly the same MI with the GT, they will be considered redundant and so discarded. This is the most inconvenient of this method, because this avoids the advantage of hyperspectral images: some precious information can be discarded. In this paper we will make difference between useful and useless redundancy. A band contains useful redundancy if it contributes to decreasing error probability. According to this scheme, we introduce new algorithm using also mutual information, but it retains only the bands minimizing the error probability of classification. To control redundancy, we introduce a complementary threshold. So the good band candidate must contribute to decrease the last error probability augmented by the threshold. This process is a wrapper strategy; it gets high performance of classification accuracy but it is expensive than filter strategy.

Index Terms—Hyperspectral images, classification, feature selection, error probability, redundancy.

I. INTRODUCTION

In the feature classification domain, the choice of data affects widely the results. For the Hyperspectral image, the bands don't all contain the information; some bands are irrelevant like those affected by various atmospheric effects, see Figure.4, and decrease the classification accuracy. And there exist redundant bands to complicate the learning system and product incorrect prediction [14]. Even the bands contain enough information about the scene they may not predict the classes correctly if the dimension of space images, see Figure.3, is so large that needs many cases to detect the relationship between the bands and

the scene (Hughes phenomenon) [10]. We can reduce the dimensionality of hyperspectral images by selecting only the relevant bands (feature selection or subset selection methodology), or extracting, from the original bands, new bands containing the maximal information about the classes, using any functions, logical or numerical (feature extraction methodology) [11][9]. Here we focus on the feature selection using mutual information. Hyperspectral images have three advantages regarding the multispectral images [6], see Figure.1

First: the hyperspectral image contains more than a hundred images but the multispectral contains three at ten images.

Second: hyperspectral image has a spectral resolution (the central wavelength divided by the width of spectral band) about a hundred, but that of multispectral is about ten.

Third: the bands of a hyperspectral image are regularly spaced, those of multispectral image are large and irregularly spaced.

Comment: when we reduce hyperspectral images dimensionality, we must save the precision and high discrimination of substances given by hyperspectral image.

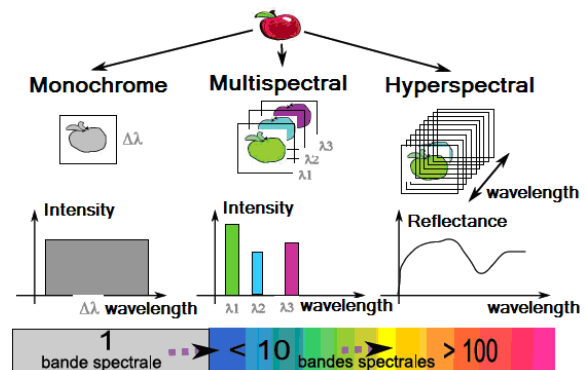


Fig. 1. Precision and discrimination added by hyperspectral images

In this paper we use the Hyperspectral image AVIRIS 92AV3C (Airborne Visible Infrared Imaging Spectrometer). [2]. It contains 220 images taken on the region "Indiana Pine" at "north-western Indiana", USA [1]. The 220 called bands are taken between 0.4m and 2.5m. Each band has 145 lines and 145 columns. The ground truth map is also provided, but only 10366 pixels are labeled fro 1 to 16. Each label indicates one from 16 classes. The zeros indicate pixels how are not classified yet, Figure.2.

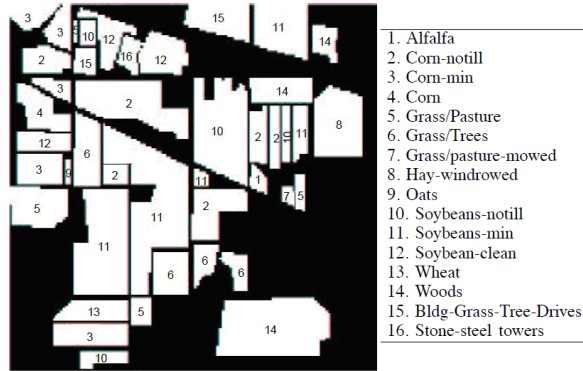


Fig. 2. The Ground Truth map of AVIRIS 92AV3C and the 16 classes

The hyperspectral image AVIRIS 92AV3C contains numbers between 955 and 9406. Each pixel of the ground truth map has a set of 220 numbers (measures) along the hyperspectral image. This numbers (measures) represent the reflectance of the pixel in each band. So the pixel is shown as vector off 220 components. Figure.3 shows the vector pixels notion [7]. So reducing dimensionality means selecting only the dimensions caring a lot of information regarding the classes.

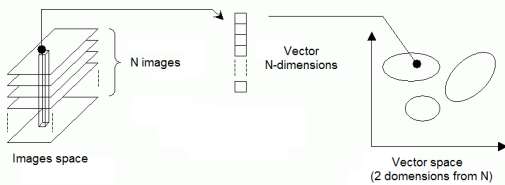


Fig. 3. The notion of pixel vector

We can also note that not all classes are carrier of information. In Figure. 4, for example, we can show the effects of atmospheric affects on bands: 155, 220 and other bands. This hyperspectral image presents the problematic of dimensionality reduction.

II. MUTUAL INFORMATION BASED SELECTION

In this paragraph we inspect a recent method called band selection scheme using mutual information, and a rejection bandwidth algorithm to eliminate redundancy [3]. [7].

A. Definition of mutual information

This is a measure of exchanged information between tow ensembles of random variables A and B :

$$I(A, B) = \sum \log_2 p(A, B) \frac{p(A, B)}{p(A) \cdot p(B)}$$

Considering the ground truth map, and bands as ensembles of random variables, we calculate their interdependence.

Geo [3] uses also the average of bands 170 to 210, to product an estimated ground truth map, and use it instead of the real truth map. Their curves are similar. Figure 4.

B. Bands selection using mutual information

From the mutual information curve, we can make threshold, and we retain the bands that have mutual information value above threshold. But the adjacent bands are possibly redundant. Geo[3] propose an algorithm to eliminate redundancy. Its described in [3] as following: "Let B_m be the band that maximizes the mutual information. And N the number of B_m neighboring bands. We define:

$$d(n) = \Delta(MI(n) - MI(n - 1))$$

If $\max_n d(n)$ is down to a *threshold* only, B_m is retained", i.e. its N neighbors will be discarded, because they my be redundante . Let X be the number of bands to be selected. At some point in the selection process, let S be the set of selected bands, and let R be the set of remaining bands. We initialize the process with $SS=$ and $R=1,2,,,220$.

Algorithm 1 Proposed dimensionality Reduction and Redundancy control

```

while  $|SS| < X$  do
  Select band indexs  $S = \text{argmax}_s MI(s)$ 
  Neighbours set  $N = \{n | n = S - (B + 1), , S, , S + B\}$ 
  if  $\max_s d(n) < \text{threshold}$  then
     $SS \leftarrow SS \cup S$  and  $R \leftarrow R \setminus SS \setminus N$ 
  else
     $SS \leftarrow SS \cup S$  and  $R \leftarrow R \setminus SS$ 
  end if
end while

```

For more details refer to [3].

C. Discussion and critics of method

This algorithm is applied at mutual information calculated with the estimated ground truth map Figure.4. Like at [3] 50The most inconvenient of this method is how it measures redundancy: small values of $d(n) = (MI(n) - MI(n-1))$ doesnt necessary an expression of redundancy. Its seed at [3] that the neighboring bands are possibly redundant. So with this method, the advantage (the precision viewed at section I) of hyperspectral images regarding the multispectral images is avoid, because the precious information can be avoided.

D. Partial conclusion

In this section we inspect the effectiveness of mutual information based selection for hyperspectral images. In the next step we use also the mutual information.

One inconvenient if this filter approach is the time made to adjust manually the parameters. It can be expensive. But the most inconvenient is that reduce redundancy by eliminating the precision given by the notion of hyperspectral images. We propose now an algorithm avoiding only useless redundancy. We apply this rule: "If a band decreases the error probability, it will be retained even if it contains redundant information".

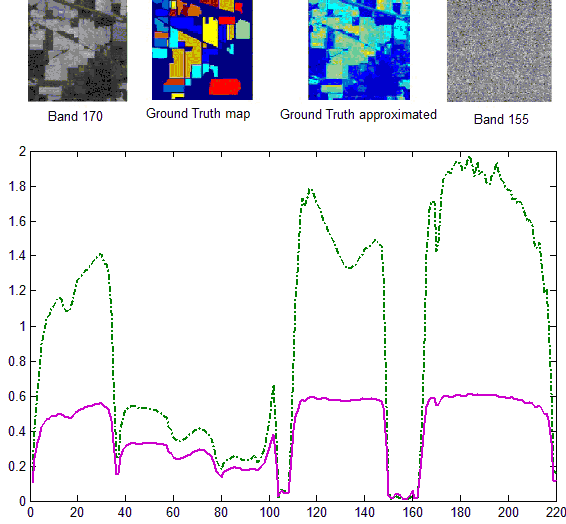


Fig. 4. Mutual information of AVIRIS with the Ground Truth map (solid line) and with the ground approximated by averaging bands 170 to 210 (dashed line).

III. THE MEASURE OF ERROR PROBABILITY

A. Inequality of Fano

Here we inspect the inequality of Fano [8]:

$$\frac{H(C/X) - 1}{\text{Log}_2(N_c)} \leq P_e \leq \frac{H(C/X)}{\text{Log}_2(N_c)}$$

with :

$$\frac{H(C/X) - 1}{\text{Log}_2(N_c)} = \frac{H(C) - I(C; X) - 1}{\text{Log}_2(N_c)}$$

and :

$$P_e \leq \frac{H(C) - I(C; X)}{\text{Log}_2(N_c)} = \frac{H(C/X)}{\text{Log}_2(N_c)}$$

The expression of conditional entropy $H(C/X)$ is calculated between the ground truth map (i.e. the classes C) and the subset of bands candidates X . N_c is the number of classes. So when the features X have a higher value of mutual information with the ground truth map, (is more near to the ground truth map), the error probability will be lower. But its difficult to compute this conjoint mutual information $I(C; X)$, regarding the high dimensionality [14]. This propriety makes Mutual

Information a good criterion to measure resemblance between two bands, like its exploited in section II. Furthermore, we will interest at case of one feature candidate X .

Corollary: for one feature X , as X approaches the ground truth map, the interval P_e is very small.

B. Algorithm based on inequality of Fano

Our idea is based on this observation: the band that has higher value of Mutual Information with the ground truth map can be a good approximation of it. So we note that the subset of selected bands are the good ones, if they can generate an estimated reference map, sensibly equal the ground truth map. Its clearly that an Incremental Wrapper-based Subset Selection (IWSS) approach[16] [13].

Our process of band selection will be as following: we order the bands according to value of its mutual information with the ground truth map. Then we initialize the selected bands ensemble with the band that has highest value of MI. At a point of process, we build an approximated reference map C_{est} with the already selected bands, and we put it instead of X for computing the error probability (P_e); the latest band added (at those already selected) must make P_e decreasing, if else it will be discarded from the ensemble retained. Then we introduce a complementary threshold T_h to control redundancy. So the band to be selected must make error probability less than ($P_e - T_h$), where P_e is calculated before adding it. The algorithm following shows more detail of the process:

Let SS be the ensemble of bands already selected and S the band candidate to be selected. $Build_{estimated}C()$ is a procedure to construct the estimated reference map. P_e is initialized with a value P_e^* . X the number of bands to be selected, SS is empty and $R = 1..220$.

Algorithm 2 Proposed for Dimentionality Reduction and Redundancy control

```

while  $|SS| < X$  do
  Select band indexs  $S = \text{argmax}_s \text{MI}(s)$ 
   $SS \leftarrow SS \cup S$  and  $R \leftarrow R \setminus S$ 
   $C_{est} = Build_{estimated}C(SS)$ 
   $P_e = \frac{H(C/C_{est})}{\text{Log}_2(N_c)} - \frac{H(C/C_{est}) - 1}{\text{Log}_2(N_c)}$ ;
  if  $P_e \leq P_e^* - T_h$  then
     $P_e \leftarrow P_e^*$ 
  else
     $SS \leftarrow SS \setminus S$ 
  end if
end while

```

C. Results and analysis

We apply this algorithm on the hyperspectral image AVIRIS 92AV3C [1], in the same conditions of section 2. 3.

The procedure to construct the estimated reference map C_{est} is the same SVM classifier used for classification.

TABLE I
RESULTS ILLUSTRATE ELIMINATION OF REDUNDANCY USING
ALGORITHM BASED ON INEQUALITY OF FANO, FOR THRESHOLDS (Th)

Bands retained	Th					
	0.00	0.001	0.008	0.015	0.020	0.030
10	55.43	55.43	55.58	53.09	60.06	71.62
18	59.09	59.09	64.41	73.70	82.62	90.00
20	63.08	63.08	68.50	76.15	84.36	-
25	66.02	66.12	74.62	84.41	89.06	-
27	69.47	69.47	76.00	86.73	91.70	-
30	73.54	73.54	79.04	88.68	-	-
35	76.06	76.06	81.38	92.36	-	-
40	78.96	79.41	86.48	-	-	-
45	80.58	80.60	89.09	-	-	-
50	81.63	81.20	91.14	-	-	-
53	82.27	81.22	92.67	-	-	-
60	86.13	86.23	-	-	-	-
70	86.97	87.55	-	-	-	-
80	89.11	89.42	-	-	-	-
90	90.55	90.92	-	-	-	-
100	92.50	93.18	-	-	-	-
102	92.62	93.34	-	-	-	-
114	93.34	-	-	-	-	-

Table. I shows the results obtained for several thresholds. We can see the effectiveness selection bands of our algorithm, and the important effect of avoiding redundancy.

Figure.5 shows more detail of the accuracy curves, versus number of bands retained, for several thresholds. This covers all behaviors of the algorithm:

First: For the highest threshold values (0.1, 0.05, 0.03 and 0.02) we obtain a hard selection: a few more informative bands are selected; the accuracy of classification is 90% with less than 20 bands selected.

Second: For the medium threshold values (0.015, 0.012, 0.010, 0.008, 0.006), some redundancy is allowed, in order to made increasing the classification accuracy.

Tired: For the small threshold values (0.001 and 0), the redundancy allowed becomes useless, we have the same accuracy with more bands.

Finally: for the negative thresholds, for example -0.01, we allow all bands to be selected, and we have no action of the algorithm. This corresponds at selection bay ordering bands on mutual information . The performance is low.

We can not here that [15] uses two axioms to characterize feature selection. Sufficiency axiom: the subset selected feature must be able to reproduce the training simples without losing information. The necessity axiom "simplest among different alternatives is preferred for prediction". In the algorithm proposed, reducing error probability between the truth map and the estimated minimize the information loosed for the samples training and also the predicate ones.

We note also that we can use the number of features selected like condition to stop the search; so we can obtain an hybrid approach filter-wrapper[16].

Partial conclusion: the algorithm proposed is a very good method to reduce dimensionality of hyperspectral images.

We illustrate in Figure .6, the Ground Truth map originally displayed, like at Figure .1, and the scene classified with our

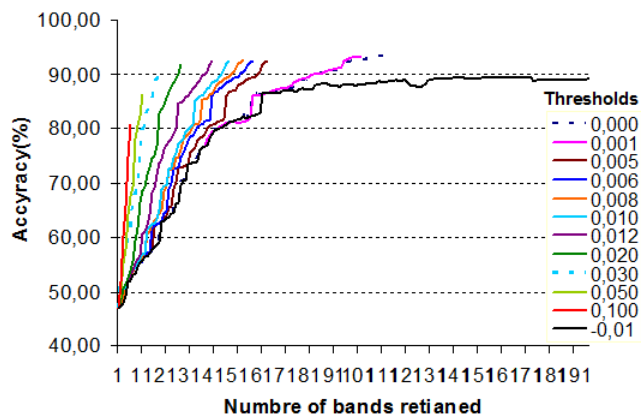


Fig. 5. Accuracy of classification using the algorithm based on inequality of Fano, using numerous thresholds.

TABLE II
ACCURACY OF CLASSIFICATION(%) OF EACH CLASS FOR NUMEROUS THRESHOLDS (Th)

Class	Total pixels	Th					
		0.00	0.001	0.008	0.015	0.020	0.030
1 :	54	86.96	82.61	86.96	83.96	78.26	86.96
2 :	1434	91.07	89.40	89.54	89.12	88.01	83.96
3 :	834	89.93	90.89	89.69	86.09	83.69	81.53
4 :	234	96.32	83.76	86.32	87.18	87.18	86.32
5 :	597	95.93	95.53	94.34	95.93	95.93	95.53
6 :	747	98.60	98.60	98.32	98.60	98.32	98.32
7 :	26	84.62	84.62	84.62	84.62	84.62	84.62
8 :	489	98.37	98.37	98.78	97.96	98.78	98.78
9 :	20	100	100	100	100	100	100
10:	968	92.15	92.98	91.32	91.74	90.91	89.05
11:	2468	93.84	94.17	92.54	92.71	91.90	91.25
12:	614	91.21	93.49	92.83	92.18	88.93	87.30
13:	212	98.06	98.06	98.06	98.06	98.06	98.06
14:	1294	97.53	97.86	97.22	97.84	97.99	97.53
15:	390	79.52	77.71	75.90	74.10	78.92	64.46
16:	95	93.48	93.48	93.48	93.48	93.48	93.48

method, for threshold as 0.03, so 18 bands selected.

Table II indicates the classification accuracy of each class, for several thresholds.

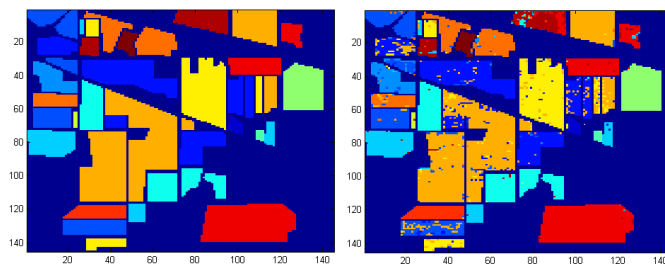


Fig. 6. Original Grand Truth map(in the left) and the map produced by our algorithm according to the threshold 0.03 i.e 18 bands (in the right). Accuracy=90%.

First :we can not the effectiveness of this algorithm for particularly the classes with a few number of pixels, for example class number 9.

Second: we can not that 18 bands (i.e. threshold 0.03) are sufficient to detect materials contained in the region. Its also shown in Figure .6

Tired: one of important comment is that most of class accuracy change lately when the threshold changes between 0.03 and 0.015

IV. CONCLUSION

In this paper we presented the necessity to reduce the number of bands, in classification of Hyperspectral images. Then we have comment results of a filtering redundancy mutual information based scheme. We carried out their effectiveness to select bands able to classify the pixels of ground truth. And also we have carried out their inconvenient as: the elimination of precision by discarding neighboring bands having sensibly the same mutual information with the ground truth map. We introduce an algorithm also based on mutual information and using a measure of error probability (inequality of Fano). To choice a band, it must contributes to reduce error probability. A complementary threshold is added to avoid redundancy. So each band retained has to contribute to reduce error probability by a step equal to threshold even if it carries a redundant information. We can tell that we conserve the useful redundancy by adjusting the complementary threshold. This algorithm is a feature selection methodology. But its a wrapper approach, because we use the classifier to make the estimated reference map. This is a limitation that must be avoided by searching another procedure to estimate reference map more rapidly, in order to implement it in a real time applications. This scheme is very interesting to investigate and improve, considering its performance.

REFERENCES

- [1] D. Landgrebe, On information extraction principles for hyperspectral data: A white paper, Purdue University, West Lafayette, IN, Technical Report, School of Electrical and Computer Engineering, 1997. Tlchargeable ici : <http://dynamo.ecn.purdue.edu/~landgreb/whitepaper.pdf>.
- [2] <ftp://ftp.ecn.purdue.edu/biehl/MultiSpec/>
- [3] "Band Selection for Hyperspectral Image Classification Using Mutual Information" par:Baofeng Guo, Steve R. Gunn, R. I. Damper Senior Member, IEEE and J. D. B. Nelson. IEEE GEOSCIENCE AND REMOTE SENSING LETTERS, Vol .3, NO .4, OCTOBER 2006.
- [4] "Customizing Kernel Functions for SVM-Based Hyperspectral Image Classification" Baofeng Guo, Steve R. Gunn, R. I. Damper, Senior Member, IEEE, and James D. B. Nelson. IEEE TRANSACTIONS ON IMAGE PROCESSING, VOL. 17, NO. 4, APRIL 2008.
- [5] Chih-Chung Chang and Chih-Jen Lin, LIBSVM: a library for support vector machines. ACM Transactions on Intelligent Systems and Technology , 2:27:1–27:27, 2011. Software available at <http://www.csie.ntu.edu.tw/~cjlin/libsvm>.
- [6] Nathalie GORRETTA-MONTEIRO , Proposition d'une approche de segmentation d'images hyperspectrales. PhD thesis. Universite Montpellier II. Fvrier 2009.
- [7] " Amlioration de la classification automatique des fonds marins par la fusion multicapteurs acoustiques". Thse de David Kernis. ENST BRETAGNE, universit de Rennes. Chapitre3, Rduction de dimensionalit et classification,Page.48. Avril 2007.
- [8] Kwak, N and Choi, C. "Featutre extraction based on direct calculation of mutual information".IJPRAI VOL. 21, NO. 7, PP. 1213-1231, NOV. 2007 (2007).
- [9] "Dimensionality Reduction Based on ICA Regression Problem". Nojun Kwak and C. Kim. ARTIFICIAL NEURAL NETWORKS-ICANN 2006. Lecture Notes in Computer Science, 2006, Isbn 978-3-540-38625-4, Volume 1431/2006.
- [10] "On the mean accuracy of statistical pattern recognizers". Huges, G. Information Theory, IEEE Transactionon Jan 1968, Volume 14, Issue:1, p:55-63, ISSN 0018-9448 DOI: 10.1109/TIT.1968.1054102.
- [11] YANG, Yiming, and Jan O. PEDERSEN, 1997.A comparative study of feature selection in text categorization. In: ICML. 97: Proceedings of the Fourteenth International Conference on Machine Learning. San Francisco, CA, USA:Morgan Kaufmann Publishers Inc., pp. 412.420.
- [12] "A comparison of methods for multiclass support vector machines" Chih-Wei Hsu; Chih-Jen Lin;Dept. of Comput. Sci. Inf. Eng., Nat Taiwan Univ. Taipei Mar 2002, Volume: 13 I:2;pages: 415 - 425 ISSN: 1045-9227, IAN: 7224559, DOI: 10.1109/72.991427
- [13] "Incremental Wrapper-based subset Selection with replacement: An advantageous alternative to sequential forward selection" Bermejo, P.; Gamez, J.A.; Puerta, J.M.;Comput. Syst. Dept., Univ. de Castilla-La Mancha, Albacete; Computational Intelligence and Data Mining, 2009. CIDM '09. IEEE Symposium on March 30 2009-April 2 2009, pages: 367 - 374, ISBN: 978-1-4244-2765-9, IAN: 10647089, DOI: 10.1109/CIDM.2009.4938673
- [14] "Efficient Feature Selection via Analysis of Relevance and Redundancy", Lei Yu, Huan Liu, Department of Computer Science and Engineering; Arizona State University, Tempe, AZ 85287-8809, USA, Journal of Machine Learning Research 5 (2004) 1205-1224.
- [15] Hui Wang, David Bell, and Fionn Murtagh, "Feature subset selection based on relevance" , Vistas in Astronomy, Volume 41, Issue 3, 1997, Pages 387-396.
- [16] P. Bermejo, J.A. Gmez, and J.M. Puerta, "A GRASP algorithm for fast hybrid (filter-wrapper) feature subset selection in high-