

# Counter Attack on Byzantine Generals: Parameterized Model Checking of Fault-tolerant Distributed Algorithms

Annu John, Igor Konnov, Ulrich Schmid, Helmut Veith, Josef Widder  
Vienna University of Technology (TU Wien)

**Abstract**—We introduce an automated parameterized verification method for fault-tolerant distributed algorithms (FTDA). FTDAs are parameterized by both the number of processes and the assumed maximum number of Byzantine faulty processes. At the center of our technique is a parametric interval abstraction (PIA) where the interval boundaries are arithmetic expressions over parameters. Using PIA for both data abstraction and a new form of counter abstraction, we reduce the parameterized problem to finite-state model checking. We demonstrate the practical feasibility of our method by verifying several variants of the well-known distributed algorithm by Srikanth and Toueg. Our semi-decision procedures are complemented and motivated by an undecidability proof for FTDA verification which holds even in the absence of interprocess communication. To the best of our knowledge, this is the first paper to achieve parameterized automated verification of Byzantine FTDA.

## I. INTRODUCTION

*Parameterized Model Checking.* In its original formulation [16], Model Checking was concerned with efficient procedures for the evaluation of a temporal logic specification  $\varphi$  over a finite Kripke structure  $K$ , i.e., decision procedures for  $K \models \varphi$ . Since  $K$  can be extremely large, a multitude of logic-based algorithmic methods including symbolic verification [43], [8] and predicate abstraction [32] were developed to make this decidable problem tractable for practical applications. Finite-state models are, however, not always an adequate modeling formalism for software and hardware:

(i) Infinite-state models. Many programs and algorithms are most naturally modeled by unbounded variables such as integers, lists, stacks etc. Modern model checkers are using predicate abstraction [32] in combination with SMT solvers to reduce an infinite-state model  $I$  to a finite state model  $h(I)$  that is amenable to finite state model checking. The construction of  $h$  assures soundness, i.e., for a given specification logic such as ACTL\*, we can assure by construction that  $h(I) \models \varphi$  implies  $I \models \varphi$ . The major drawback of abstraction is incompleteness: if  $h(I) \not\models \varphi$  then it does in general not follow that  $I \not\models \varphi$ . (Note that ACTL\* is not closed under negation.) Counterexample-guided abstraction refinement (CEGAR) [14], [7] addresses this problem by an adaptive procedure, which analyzes the abstract counterexample for  $h(I) \not\models \varphi$  on  $h(I)$  to find a concrete counterexample or obtain

a better abstraction  $h'(I)$ . For abstraction to work in practice, it is crucial that the abstract domain from which  $h$  and  $h'$  are chosen is tailored to the problem class and possibly the specification. Abstraction thus is a semi-decision procedure whose usefulness has to be demonstrated by practical examples.

(ii) An orthogonal modeling and verification problem is parameterization: Many software and hardware artifacts are naturally represented by an infinite class of structures  $\mathbf{K} = \{K_1, K_2, \dots\}$  rather than a single structure. Thus, the verification question is  $\forall i K_i \models \varphi$ , where  $i$  is called the parameter. In the most important examples of this class, the parameter  $i$  is standing for the number of replications of a concurrent component, e.g., the number of processes in a distributed algorithm, or the number of caches in a cache coherence protocol. It is easy to see that even in the absence of concurrency, parameterized model checking is undecidable [5]; more interestingly, undecidability even holds for networks of constant size processes arranged in a ring with a single token for communication [51], [26]. Although several approaches have been made to identify decidable classes for parameterized verification [26], [24], [54], no decidable formalism has been found which covers a reasonably large class of interesting problems. The diversity of problem domains for parameterized verification and the difficulty of the problem gave rise to many approaches including regular model checking [2] and abstraction [45], [15]—the method discussed in this paper. Again, the challenge in abstraction is to find an abstraction  $h(\mathbf{K})$  such that  $h(\mathbf{K}) \models \varphi$  implies  $K_i \models \varphi$  for all  $i$ .

Most previous research on parameterized model checking focused on concurrent systems with  $n+c$  processes where  $n$  is the parameter and  $c$  is a *constant*:  $n$  of the processes are *identical* copies;  $c$  processes represent the non-replicated part of the system, e.g., cache directories, shared memory, dispatcher processes etc. [31], [35], [44], [15]. Most of the work on parameterized model checking considers only safety. Notable exceptions are [37], [45] where several notions of fairness are considered in the context of abstraction to verify liveness.

*Fault-tolerant Distributed Algorithms.* In this paper, we are addressing the problem of parameterized verification of fault-tolerant distributed algorithms (FTDA). This work is part of an interdisciplinary effort by the authors to develop a tool basis for the automated verification, and, in the long run, deployment of FTDAs [36], [38]. FTDAs constitute a core

Supported in part by the Austrian National Research Network S11403-N23 (RiSE) of the Austrian Science Fund (FWF), and by the Vienna Science and Technology Fund (WWTF) grant PROSEED.

topic of the distributed algorithms community with a rich body of results [41], [6]. FTDAs are more difficult than the standard setting of parameterized model checking because *a certain number  $t$  of the  $n$  processes can be faulty*. In the case of e.g. Byzantine faults, this means that the faulty processes can send messages in an unrestricted manner. Importantly, the upper bound  $t$  for the faulty processes is also a parameter, and is essentially a fraction of  $n$ . The relationship between  $t$  and  $n$  is given by a *resilience condition*, e.g.,  $n > 3t$ . Thus, one has to reason about all systems with  $n - f$  non-faulty and  $f$  faulty processes, where  $f \leq t$  and  $n > 3t$ .

From a more operational viewpoint, FTDAs typically consist of multiple processes that communicate by message passing over a completely connected communication graph. Since a sender can be faulty, a receiver cannot wait for a message from a specific sender process. Therefore, most FTDAs use counters to reason about their environment. If, for instance, a process receives a certain message  $m$  from more than  $t$  distinct processes, it can conclude that one of the senders is non-faulty. A large class of FTDAs expresses these counting arguments using *threshold guards*:

```
if received <m> from t+1 distinct processes
then action(m);
```

Note that threshold guards generalize existential and universal guards [24], i.e., rules that wait for messages from at least one or all processes, respectively. As can be seen from the above example, and as discussed in [36], existential and universal guards are not sufficient to capture advanced FTDA.

*Contribution.* We consider parameterized verification of FTDA with threshold guards and resilience conditions. We start by introducing a framework based on a new form of control flow automata that captures the semantics of threshold-guarded fault-tolerant distributed algorithms. Based on this framework, we show that the parameterized model checking problem under consideration is undecidable, even for FTDA *without* interprocess communication and without arithmetic operations. Thus, we are led to propose a novel two-step abstraction technique. Both steps are based on *parametric interval abstraction* (PIA), a generalization of interval abstraction where the interval borders are parameters rather than constants. Using the PIA domain, we obtain a finite-state model checking problem in two steps:

**Step 1: PIA data abstraction.** We evaluate the threshold guards over the parametric intervals. Thus, we abstract away unbounded variables and parameters from the process code. We obtain a parameterized system where the replicated processes are finite-state and independent of the parameters.

**Step 2: PIA counter abstraction.** We use a new form of counter abstraction where the process counters are abstracted to PIA. As Step 1 guarantees that we need only finitely many counters, PIA counter abstraction yields a finite-state system.

It is interesting to note that the intermediate model obtained by Step 1 still falls in the undecidable class obtained above.

To evaluate the precision of our abstractions, we implemented our abstraction technique in a tool chain, and

conducted experiments on several FTDA. Our experiments showed the need for abstraction refinement to deal with spurious counterexamples [14]. We encountered spurious behaviors that are due to parameterized abstraction and fairness; this required novel refinement techniques, which we also discuss in this paper. In addition to refinement of PIA counter abstraction, which is automated in a loop using a model checker and an SMT solver, we are also exploiting simple user-provided invariant candidates to refine the abstraction similar to the CMP method [44], [52].

Thus, we are able to verify several variants of the well-known distributed broadcast algorithm by Srikanth and Toueg [48], [49] in the Byzantine setting as well as the (simpler) algorithm verified by Fisman et al. [29]. To the best of our knowledge, this is the first paper to achieve parameterized automated verification of Byzantine FTDA.

*Related work.* Traditionally, correctness of FTDA was shown by handwritten proofs [41], [6], and, in some cases, by proof assistants [40], [47], [12], [39]. Completely automated model checking or synthesis methods are usually not parameterized [53], [50], [9]. Our work stands in the tradition of parameterized model checking for protocols [10], [31], [25], [45], [15], i.e., for mutual exclusion, cache coherence etc. In particular, the techniques by Pnueli et al. [45], namely, counter abstraction and justice preservation are keystones of our work.

The first work that addresses parameterized model checking of FTDA uses regular model checking [3], [2], and was conducted by Fisman et al. [29]. They model a parameterized system consisting of  $n$  processes as a transducer, which translates a global state—modeled as a word of length  $n$ —into the next global state of the same length. Consequently, their models are limited to processes whose local state space and transition relation are *finite, fixed, and independent of parameters*, in particular, of  $n$  in their case. Such models were sufficient to verify a folklore reliable broadcast algorithm RBC (cf. e.g., [11]) that tolerates crash faults, and where every process stores whether it has received at least one message. However, these models are not sufficient to capture more involved FTDA that contain threshold guards as in our case.

Moreover, as [29] explain, the presence of a resilience condition such as  $n > 3t$  would require them to intersect the regular languages which describe sets of states with context-free languages which enforce the resilience condition.

Our framework captures the RBC algorithm, and more advanced algorithms that use threshold guards over parameters and resilience conditions.

To the best of our knowledge, the current paper is the first in which a distributed algorithm that tolerates Byzantine faults has been automatically verified for *all* system sizes and *all* admissible numbers of faulty processes.

Our technique applies to FTDA, which are an important aspect of distributed systems, but by far not the only one. While there is other work in the verification and synthesis of distributed systems, they do not focus on algorithmic verification of safety and liveness properties for fault tolerant distributed algorithms. In this broader class of distributed

systems literature, the work by Abdulla and Johnson [1] and Mayr [42] appears most closely related to ours because they address faults. However, their “lossy systems” contain very different fault assumptions, which are not part of the problem class we consider here.

Regarding our abstraction technique, an abstract domain similar to PIA was developed in [46]. It was used in the framework of abstract interpretation [18], and was developed as a generalization of the polyhedra domain. Starting from a similar domain, [46] is thus taking a direction that is substantially different from parameterized model checking.

Let us conclude the introduction with a note on terminology: Fault-tolerant broadcast protocols are distributed algorithms which *achieve* reliable all-to-all communication on top of (partially) unreliable communication, or in the presence of processes that may send conflicting information to different processes. This notion of “broadcast” should not be confused with broadcast systems where the computational model contains broadcast *primitives* that ensure that processes can send information to all others, as e.g., in [28].

## II. SYSTEM MODEL WITH MULTIPLE PARAMETERS

We define the parameters, local variables of the processes, and shared variables referring to a single *domain*  $D$  that is totally ordered and has the operations addition and subtraction. In this paper we will assume that  $D = \mathbb{N}_0$ .

We start with some notation. Let  $Y$  be a finite set of variables ranging over  $D$ . We will denote by  $D^{|Y|}$ , the set of all  $|Y|$ -tuples of variable values. In order to simplify notation, given  $\mathbf{s} \in D^{|Y|}$ , we use the expression  $\mathbf{s}.y$ , to refer to the value of a variable  $y \in Y$  in vector  $\mathbf{s}$ . For two vectors of variable values  $\mathbf{s}$  and  $\mathbf{s}'$ , by  $\mathbf{s} =_X \mathbf{s}'$  we denote the fact that for all  $x \in X$ ,  $\mathbf{s}.x = \mathbf{s}'.x$  holds.

*Process.* The set of variables  $V$  is  $\{sv\} \cup \Lambda \cup \Gamma \cup \Pi$ : The variable  $sv$  is the *status variable* that ranges over a finite set  $SV$  of *status values*. The finite set  $\Lambda$  contains variables that range over the domain  $D$ . The variable  $sv$  and the variables from  $\Lambda$  are *local variables*. The finite set  $\Gamma$  contains the *shared variables* that range over  $D$ . The finite set  $\Pi$  is a set of *parameter variables* that range over  $D$ , and the *resilience condition*  $RC$  is a predicate over  $D^{|\Pi|}$ . In our example,  $\Pi = \{n, t, f\}$ , and the resilience condition  $RC(n, t, f)$  is  $n > 3t \wedge f \leq t \wedge t > 0$ . Then, we denote the set of *admissible parameters* by  $\mathbf{P}_{RC} = \{\mathbf{p} \in D^{|\Pi|} \mid RC(\mathbf{p})\}$ .

A process operates on states from the set  $S = SV \times D^{|\Lambda|} \times D^{|\Gamma|} \times D^{|\Pi|}$ . Each process starts its computation in an initial state from a set  $S^0 \subseteq S$ . A relation  $R \subseteq S \times S$  defines *transitions* from one state to another, with the restriction that the values of parameters remain unchanged, i.e., for all  $(s, t) \in R$ ,  $s =_{\Pi} t$ . Then, a *parameterized process skeleton* is a tuple  $\mathbf{Sk} = (S, S^0, R)$ .

We get a process instance by fixing the parameter values  $\mathbf{p} \in D^{|\Pi|}$ : one can restrict the set of process states to  $S|_{\mathbf{p}} = \{s \in S \mid s =_{\Pi} \mathbf{p}\}$  as well as the set of transitions to  $R|_{\mathbf{p}} = R \cap (S|_{\mathbf{p}} \times S|_{\mathbf{p}})$ . Then, a *process instance* is a process skeleton  $\mathbf{Sk}|_{\mathbf{p}} = (S|_{\mathbf{p}}, S^0|_{\mathbf{p}}, R|_{\mathbf{p}})$  where  $\mathbf{p}$  is constant.

*System Instances.* For fixed admissible parameters  $\mathbf{p}$ , a distributed system is modeled as an asynchronous parallel composition of identical processes  $\mathbf{Sk}|_{\mathbf{p}}$ . The number of processes depends on the parameters. To formalize this, we define the size of a system (the number of processes) using a function  $N: \mathbf{P}_{RC} \rightarrow \mathbb{N}_0$ , for instance, when modeling only correct processes explicitly,  $n - f$  for  $N(n, t, f)$ .

Given  $\mathbf{p} \in \mathbf{P}_{RC}$ , and a process skeleton  $\mathbf{Sk} = (S, S^0, R)$ , a system instance is defined as an asynchronous parallel composition of  $N(\mathbf{p})$  process instances, indexed by  $i \in \{1, \dots, N(\mathbf{p})\}$ , with standard interleaving semantics. Let  $\text{AP}$  be a set of atomic propositions. A *system instance*  $\text{Inst}(\mathbf{p}, \mathbf{Sk})$  is a Kripke structure  $(S_I, S_I^0, R_I, \text{AP}, \lambda_I)$  where:

- The set of (*global*) *states* is  $S_I = \{(\sigma[1], \dots, \sigma[N(\mathbf{p})]) \in (S|_{\mathbf{p}})^{N(\mathbf{p})} \mid \forall i, j \in \{1, \dots, N(\mathbf{p})\}, \sigma[i] =_{\Gamma \cup \Pi} \sigma[j]\}$ . Informally, a global state  $\sigma$  is a Cartesian product of the state  $\sigma[i]$  of each process  $i$ , with identical values of parameters and shared variables at each process.
- $S_I^0 = (S^0)^{N(\mathbf{p})} \cap S_I$  is the set of *initial (global) states*, where  $(S^0)^{N(\mathbf{p})}$  is the Cartesian product of initial states of individual processes.
- A transition  $(\sigma, \sigma')$  from a global state  $\sigma \in S_I$  to a global state  $\sigma' \in S_I$  belongs to  $R_I$  iff there is an index  $i$ ,  $1 \leq i \leq N(\mathbf{p})$ , such that:
  - (MOVE) The  $i$ -th process *moves*:  $(\sigma[i], \sigma'[i]) \in R|_{\mathbf{p}}$ .
  - (FRAME) The values of the local variables of the other processes are preserved: for every process index  $j \neq i$ ,  $1 \leq j \leq N(\mathbf{p})$ , it holds that  $\sigma[j] =_{\{sv\} \cup \Lambda} \sigma'[j]$ .
- $\lambda_I: S_I \rightarrow 2^{\text{AP}}$  is a state labeling function.

*Remark 1:* The set of global states  $S_I$  and the transition relation  $R_I$  are preserved under every transposition  $i \leftrightarrow j$  of process indices  $i$  and  $j$  in  $\{1, \dots, N(\mathbf{p})\}$ . That is, every system  $\text{Inst}(\mathbf{p}, \mathbf{Sk})$  is *fully symmetric* by construction.

*Remark 2:* We call a pair of resilience condition and system size function  $(RC, N)$  *natural* if  $\{N(\mathbf{p}) \mid RC(\mathbf{p})\}$  is infinite. From now on we consider only families of system instances with natural  $(RC, N)$ , as this implies that there is no bound on the number of processes.

*Atomic Propositions.* We define the set of atomic proposition  $\text{AP}$  to be the disjoint union of  $\text{AP}_{SV}$  and  $\text{AP}_D$ . The set  $\text{AP}_{SV}$  contains propositions that capture comparison against a given status value  $Z \in SV$ , i.e.,  $[\forall i. sv_i = Z]$  and  $[\exists i. sv_i = Z]$ . Further, the set of atomic propositions  $\text{AP}_D$  captures comparison of variables  $x, y$ , and a linear combination  $c$  of parameters from  $\Pi$ ;  $\text{AP}_D$  consists of propositions of the form  $[\exists i. x_i + c < y_i]$  and  $[\forall i. x_i + c \geq y_i]$ .

The labeling function  $\lambda_I$  of a system instance  $\text{Inst}(\mathbf{p}, \mathbf{Sk})$  maps a state  $\sigma$  to expressions  $p$  from  $\text{AP}$  as follows (the existential case is defined accordingly using disjunctions):

$$[\forall i. sv_i = Z] \in \lambda_I(\sigma) \text{ iff } \bigwedge_{1 \leq i \leq N(\mathbf{p})} (\sigma[i].sv = Z)$$

$[\forall i. x_i + c \geq y_i] \in \lambda_I(\sigma)$  iff

$$\bigwedge_{1 \leq i \leq N(\mathbf{p})} (\sigma[i].x + c(\mathbf{p}) \geq \sigma[i].y)$$

**Temporal Logic.** We specify properties using formulas of temporal logic  $LTL_X$  over  $AP_{SV}$ . We use the standard definitions of paths and  $LTL_X$  semantics [13]. A formula of  $LTL_X$  is defined inductively as: (i) a literal  $p$  or  $\neg p$ , where  $p \in AP_{SV}$ , or (ii)  $\mathbf{F}\varphi$ ,  $\mathbf{G}\varphi$ ,  $\varphi \mathbf{U}\psi$ ,  $\varphi \mathbf{V}\psi$ , and  $\varphi \wedge \psi$ , where  $\varphi$  and  $\psi$  are  $LTL_X$  formulas.

**Fairness.** We are interested in verifying safety and liveness properties. The latter can be usually proven only in the presence of fairness constraints. As in [37], [45], we consider verification of safety and liveness in systems with *justice* fairness constraints. We define fair paths of a system instance  $\text{Inst}(\mathbf{p}, \mathbf{Sk})$  using a set of justice constraints  $J \subseteq AP_D$ . A path  $\pi$  of a system  $\text{Inst}(\mathbf{p}, \mathbf{Sk})$  is *J-fair* iff for every  $p \in J$  there are infinitely many states  $\sigma$  in  $\pi$  with  $p \in \lambda_I(\sigma)$ . By  $\text{Inst}(\mathbf{p}, \mathbf{Sk}) \models_J \varphi$  we denote that the formula  $\varphi$  holds on all *J-fair* paths of  $\text{Inst}(\mathbf{p}, \mathbf{Sk})$ .

**Definition 3 (PMCP):** Given a parameterized system description containing

- a domain  $D$ ,
- a parameterized process skeleton  $\mathbf{Sk} = (S, S_0, R)$ ,
- a resilience condition  $RC$  (generating a set of admissible parameters  $\mathbf{P}_{RC}$ ),
- a system size function  $N$ ,
- justice requirements  $J$ ,

and an  $LTL_X$  formula  $\varphi$ , the *parameterized model checking problem* (PMCP) is to verify

$$\forall \mathbf{p} \in \mathbf{P}_{RC}. \text{Inst}(\mathbf{p}, \mathbf{Sk}) \models_J \varphi.$$

### III. THRESHOLD-GUARDED FAULT-TOLERANT DISTRIBUTED ALGORITHMS

#### A. Framework for FTDAs

We give a formalization that is adequate for threshold-guarded FTDAs, and suitable for verification. It captures threshold guards as discussed in Section I as a core primitive. FTDAs are usually described in steps that consist of a loop-free sequence of small steps.

Further, we model faults (e.g., Byzantine) that have the effect that correct processes receive more or less messages than actually should have been sent. We model the send operation by an increase of a global variable, and the receive by a non-deterministic choice that captures faults and asynchrony in communication. By this, we model the effect of faulty processes rather than modeling them explicitly. The soundness of the modeling approach requires involved arguments discussed in [36]. These arguments are in the area of distributed computing theory and out of scope of the current paper.

To address all these issues, we propose a variant of control flow automata. Henzinger et al. [33] introduced CFA as a framework to describe the control flow of a program, using a graph where the edges are labeled with instructions.

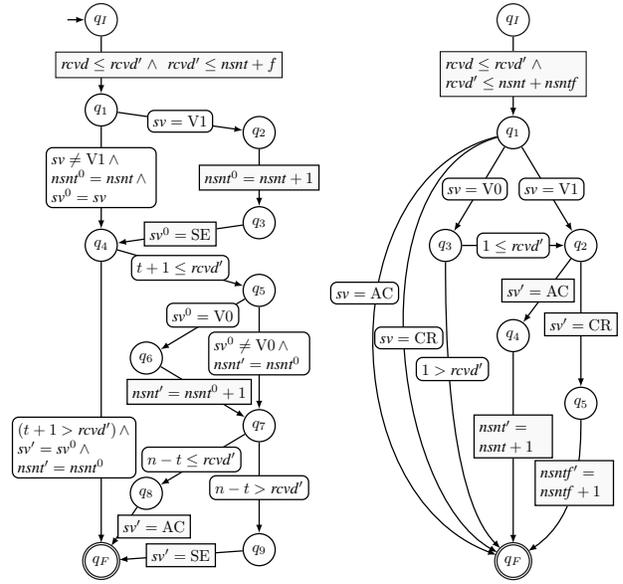


Fig. 1. CFA of our case study for Byzantine faults. Fig. 2. CFA of FTDA from [29] (if  $x'$  is not assigned, then  $x' = x$ ).

Formally, a *guarded control flow automaton* (CFA) is an edge-labeled directed acyclic graph  $\mathcal{A} = (Q, q_I, q_F, E)$  with a finite set  $Q$  of nodes called locations, an initial location  $q_I \in Q$ , and a final location  $q_F \in Q$ . A path from  $q_I$  to  $q_F$  is used to describe one step of a distributed algorithm. The edges have the form  $E \subseteq Q \times \text{guard} \times Q$ , where *guard* is defined as an expression of one of the following forms where  $a_0, \dots, a_{|\Pi|} \in \mathbb{Z}$ , and  $\Pi = \{p_1, \dots, p_{|\Pi|}\}$ :

- if  $Z \in SV$ , then  $sv = Z$  and  $sv \neq Z$  are *status guards*;
- if  $x$  is a variable in  $D$  and  $\triangleleft \in \{\leq, >\}$ , then

$$a_0 + \sum_{1 \leq i \leq |\Pi|} a_i \cdot p_i \triangleleft x$$

is a *threshold guard*;

- if  $y, z_1, \dots, z_k$  are variables in  $D$  for  $k \geq 1$ , and  $\triangleleft \in \{=, \neq, <, \leq, >, \geq\}$ , and  $a_0, \dots, a_{|\Pi|} \in \mathbb{Z}$ , then

$$y \triangleleft z_1 + \dots + z_k + (a_0 + \sum_{1 \leq i \leq |\Pi|} a_i \cdot p_i)$$

is a *comparison guard*;

- a conjunction  $g_1 \wedge g_2$  of guards  $g_1$  and  $g_2$  is a *guard*.

Status guards are used to capture the basic control flow. Threshold guards capture the core primitive of the FTDA's we consider. Finally, comparison guards are used to model send and receive operations.

**Obtaining a Skeleton from a CFA.** One step of a process skeleton is defined by a path from  $q_I$  to  $q_F$  in a CFA. Given  $SV, \Lambda, \Gamma, \Pi, RC$ , and a CFA  $\mathcal{A}$ , we define the process skeleton  $\text{Sk}(\mathcal{A}) = (S, S^0, R)$  induced by  $\mathcal{A}$  as follows: The set of variables used by the CFA is  $W \supseteq \Pi \cup \Lambda \cup \Gamma \cup \{sv'\} \cup \{x' \mid x \in \Lambda \cup \Gamma \cup \{sv\}\}$ .

Informally, a variable  $x$  corresponds to the value before a step and the variable  $x'$  to the value after the step. A path  $p$  from  $q_I$  to  $q_F$  of CFA induces a conjunction of all the guards along it. We call a mapping  $v$  from  $W$  to the values from the respective domains a *valuation*. We may write  $v \models p$  to denote that the valuation  $v$  satisfies the guards of the path  $p$ . We are now in the position to define the mapping between a CFA  $\mathcal{A}$  and the transition relation of a process skeleton  $\text{Sk}(\mathcal{A})$ : If there is a path  $p$  and a valuation  $v$  with  $v \models p$ , then  $v$  defines a single transition  $(s, t)$  of a process skeleton  $\text{Sk}(\mathcal{A})$ , if for each variable  $x \in \Lambda \cup \Gamma \cup \{sv\}$  it holds that  $s.x = v(x)$  and  $t.x = v(x')$  and for each parameter variable  $z \in \Pi$ ,  $s.z = t.z = v(z)$ .

Finally, to specify  $S^0$ , all variables of the skeleton that range over  $D$  are initialized to 0, and  $sv$  ranging over  $SV$  takes an initial value from a fixed subset of  $SV$ .

*Remark 4:* It might seem restrictive that our guards do not contain, e.g., increment, assignments, non-deterministic choice from a range of values. However, all these statements can be translated in our form using the SSA transformation algorithm from [19]. For instance, Figure 1 has been obtained from a CFA (given in the appendix in Figure 4) that contains the mentioned statements.

*Definition 5 (PMCP for CFA):* We define the Parameterized Model Checking Problem for CFA  $\mathcal{A}$  by specializing Definition 3 to the parameterized process skeleton  $\text{Sk}(\mathcal{A})$ .

### B. Undecidability of PMCP for CFA

We call a CFA where all guards are status guards a *non-communicating* CFA. In this section we argue that the problem from Definition 5 is undecidable even if the CFA is non-communicating.<sup>1</sup>

The outline of the proof is similar to the undecidability proofs in [31], [26]: one of the processes plays the role of a *control process* that simulates the program of a two counter machine (2CM), and the other processes are *data processes* that each store at most one digit of one of the two counters encoded in unary representation. The control processes increments or decrements a counter by a handshake with a data process. In system instances that contain  $n$  data processes, this is sufficient to simulate  $n$  steps of a 2CM. If the parameterized model checking problem under consideration is defined for a natural  $(RC, N)$ , then for arbitrarily many steps there is some system instance that simulates at least that many steps of the 2CM. Undecidability of the parameterized model checking problem then follows from the undecidability of the non-halting problem for 2CMs.

Esparza [27] has shown that test for zero statements of a 2CM can be simulated with a temporal logic specification using an atomic proposition “test for zero”. Given the proof strategies from [31], [26], the only technical difficulty that remains is to ensure a handshake between non-communicating CFAs. We do so by enforcing a handshake using sequences of status values the CFAs go through, and an  $\text{LTL}_X$  specification

which acts as a scheduler that ensures a specific interleaving between the updates of the status variables of the two CFAs.

*Theorem 6:* Let  $\mathcal{M}$  be a two counter machine, and  $(RC, N)$  be a natural pair of resilience condition and system size function. One can efficiently construct a non-communicating CFA  $\mathcal{A}(\mathcal{M})$  and an  $\text{LTL}_X$  property  $\varphi_{\text{nonhalt}}(\mathcal{M})$  such that the following two statements are equivalent:

- $\mathcal{M}$  does not halt.
- $\forall \mathbf{p} \in \mathbf{P}_{RC}, \text{Inst}(\mathbf{p}, \text{Sk}(\mathcal{A})) \models_{\emptyset} \varphi_{\text{nonhalt}}(\mathcal{M})$ .

*Corollary 7:* PMCP for CFAs is undecidable even if CFAs contain status guards only.

As discussed in Section III-A, we model faults by the influence they have on values of variables in the domain  $D$ . As we do not restrict the set of local and global variables, the result also applies if these sets are non-empty. Moreover, in this kind of modeling, the atomic propositions  $[\exists i. sv_i = Z]$  range over correct processes only. Hence, the undecidability result also holds for FTDA. If one chooses to model faults differently, i.e., by changing the transition relation of a process, then the decidability depends on the way the transition relation is modified. For instance, certain problems are decidable in lossy systems [1], [42]. However, lossy systems are not suitable for modeling the FTDAs we consider.

Notwithstanding this undecidability results, the rest of the paper is concerned with abstraction techniques for threshold-based FTDA. In this context, Corollary 7 shows that the model checking problem we obtain after the first abstraction step (mentioned in the introduction) is still undecidable. As discussed in the introduction, abstraction always has to be accompanied by a case study along with practical experiments.

### C. Case Study

The distributed algorithm by Srikanth and Toueg [48], [49] is one of the most basic distributed algorithms that has applications in a wide area of distributed computing. It is a basic building block that has been used in various environments (degrees of synchrony, fault assumptions, etc.) and many other more complicated distributed algorithms, such as consensus [23], [4], software and hardware clock synchronization [48], [30], approximate agreement [22], and  $k$ -set agreement [21]. Figure 1 shows the guarded control flow automaton of the core of Srikanth and Toueg’s algorithm.

In our experiments we consider additional three algorithms that are based on similar algorithmic ideas.<sup>2</sup> They deal with different fault models and resilience conditions; the algorithms are: (BYZ), which is the algorithm from Figure 1, for  $t$  Byzantine faults if  $n > 3t$ , (SYMM) for  $t$  symmetric (identical Byzantine [6]) faults if  $n > 2t$ , (OMIT) for  $t$  send omission faults if  $n > 2t$ , and (CLEAN) for  $t$  clean crash faults if  $n > t$ . For comparison with the results by Fisman et al. [29], we also verified the RBC algorithm whose CFA is given in Figure 2. In this paper we verify the following safety and

<sup>1</sup>The detailed construction and proof are given in Appendix A.

<sup>2</sup>Their CFA is given in Figure 5 in the appendix.

liveness specifications for the algorithms: <sup>3</sup>

$$[\forall i. sv_i \neq V1] \rightarrow \mathbf{G} [\forall j. sv_j \neq AC] \quad (\text{U})$$

$$[\forall i. sv_i = V1] \rightarrow \mathbf{F} [\exists j. sv_j = AC] \quad (\text{C})$$

$$\mathbf{G} (\neg [\exists i. sv_i = AC]) \vee \mathbf{F} [\forall j. sv_j = AC] \quad (\text{R})$$

However, from the literature we know that we cannot expect to verify these FTDA without putting additional constraints on the environment, e.g., communication fairness, i.e., every message sent is eventually received. To capture this, we use justice requirements, e.g.,  $J = \{[\forall i. rcvd_i \geq nsnt]\}$  in the Byzantine case.

#### IV. ABSTRACTION SCHEME

The input to our abstraction method is the infinite parameterized family  $\mathcal{F} = \{\text{Inst}(\mathbf{p}, \text{Sk}(\mathcal{A})) \mid \mathbf{p} \in \mathbf{P}_{RC}\}$  of Kripke structures specified via a CFA  $\mathcal{A}$ . The family  $\mathcal{F}$  has two principal sources of unboundedness: unbounded variables in the process skeleton  $\text{Sk}(\mathcal{A})$ , and the unbounded number of processes  $N(\mathbf{p})$ . We deal with these two aspects separately, using two abstraction steps, namely the *PIA data abstraction* and the *PIA counter abstraction*. In both abstraction steps we use the parametric interval abstraction PIA that we introduce in Section IV-A.

##### A. Abstract Domain of Parametric Intervals (PIA)

Given a CFA  $\mathcal{A}$ , let  $\mathcal{G}_{\mathcal{A}}$  be the set of all linear combinations  $a_0 + \sum_{1 \leq i \leq |\Pi|} a_i \cdot p_i$  that are met in the left-hand sides of  $\mathcal{A}$ 's threshold guards. Every expression  $\varepsilon$  of  $\mathcal{G}_{\mathcal{A}}$  defines a function  $f_\varepsilon: \mathbf{P}_{RC} \rightarrow D$ . Let  $\mathcal{T} = \{0, 1\} \cup \{f_\varepsilon \mid \varepsilon \in \mathcal{G}_{\mathcal{A}}\}$  be a finite *threshold set* of cardinality  $\mu + 1$ . For convenience, we name elements of  $\mathcal{T}$  as  $\vartheta_0, \vartheta_1, \dots, \vartheta_\mu$  with  $\vartheta_0$  corresponding to the constant function 0, and  $\vartheta_1$  corresponding to the constant function 1. For instance, the CFA in Figure 1 has the threshold set  $\{\vartheta_0, \vartheta_1, \vartheta_2, \vartheta_3\}$ , where  $\vartheta_2(n, t, f) = t + 1$  and  $\vartheta_3(n, t, f) = n - t$ .

Then, we define the domain of parametric intervals:

$$\widehat{D} = \{I_j \mid 0 \leq j \leq \mu\}$$

Our abstraction rests on an implicit property of many fault-tolerant distributed algorithms, namely, that the resilience condition  $RC$  induces an order on the thresholds used in the algorithm (e.g.,  $t + 1 < n - t$ ). Assuming such an order does not limit the application of our approach: In cases where only a partial order is induced by  $RC$ , one can simply enumerate all finitely many total orders. As parameters, and thus thresholds, are kept unchanged in a run, one can verify an algorithm for each threshold order separately, and then combine the results. We may thus restrict the threshold sets we consider by:

*Definition 8:* The finite set  $\mathcal{T}$  is uniformly ordered if for all  $\mathbf{p} \in \mathbf{P}_{RC}$ , and all  $\vartheta_j(\mathbf{p})$  and  $\vartheta_k(\mathbf{p})$  in  $\mathcal{T}$  with  $0 \leq j < k \leq \mu$ , it holds that  $\vartheta_j(\mathbf{p}) < \vartheta_k(\mathbf{p})$ .

<sup>3</sup>In addition, for the RBC algorithm, we also verified the specification, which was verified in [29] (called A in Table I)

Definition 8 allows us to properly define the *parameterized abstraction function*  $\alpha_{\mathbf{p}}: D \rightarrow \widehat{D}$  and the *parameterized concretization function*  $\gamma_{\mathbf{p}}: \widehat{D} \rightarrow 2^D$ .

$$\alpha_{\mathbf{p}}(x) = \begin{cases} I_j & \text{if } x \in [\vartheta_j(\mathbf{p}), \vartheta_{j+1}(\mathbf{p})[ \text{ for some } 0 \leq j < \mu \\ I_\mu & \text{otherwise.} \end{cases}$$

$$\gamma_{\mathbf{p}}(I_j) = \begin{cases} [\vartheta_j(\mathbf{p}), \vartheta_{j+1}(\mathbf{p})[ & \text{if } j < \mu \\ [\vartheta_\mu(\mathbf{p}), \infty[ & \text{otherwise.} \end{cases}$$

From  $\vartheta_0(\mathbf{p}) = 0$  and  $\vartheta_1(\mathbf{p}) = 1$ , it immediately follows that for all  $\mathbf{p} \in \mathbf{P}_{RC}$ , we have  $\alpha_{\mathbf{p}}(0) = I_0$ ,  $\alpha_{\mathbf{p}}(1) = I_1$ , and  $\gamma_{\mathbf{p}}(I_0) = \{0\}$ . Moreover, from the definitions of  $\alpha$ ,  $\gamma$ , and Definition 8 one immediately obtains:

*Proposition 9:* For all  $\mathbf{p}$  in  $\mathbf{P}_{RC}$ , and for all  $a$  in  $D$ , it holds that  $a \in \gamma_{\mathbf{p}}(\alpha_{\mathbf{p}}(a))$ .

*Definition 10:*  $I_k \leq I_\ell$  iff  $k \leq \ell$ .

The PIA domain has similarities to predicate abstraction since the interval borders are naturally expressed as predicates, and computations over PIA are directly reduced to SMT solvers. However, notions such as the order of Definition 10 are not naturally expressed in terms of predicate abstraction.

##### B. PIA data abstraction

Our parameterized data abstraction is based on two abstraction ideas. First, the variables used in a process skeleton are unbounded and we have to map those unbounded variables to a fixed-size domain. If we fix parameters  $\mathbf{p} \in \mathbf{P}_{RC}$ , then an interval abstraction [18] is a natural solution to the problem of unboundedness. Second, we want to produce a single process skeleton that does not depend on parameters  $\mathbf{p} \in \mathbf{P}_{RC}$  and captures the behavior of *all* process instances. This can be done by using ideas from existential abstraction [17], [20], [37] and sound abstraction of fairness constraints [37]. Our contribution consists of combining these two ideas to arrive at parametric interval data abstraction.

Our abstraction maps values of unbounded variables to parametric intervals  $I_j$ , whose boundaries are symbolic expressions over parameters. This abstraction differs from interval abstraction [18] in that the interval bounds are not numeric. However, for every instance, the boundaries are *constant* because the parameters are fixed. We hence do not have to deal with symbolic ranges over *variables* in the sense of [46].

We now discuss an existential abstraction of a formula  $\Phi$  that is either a threshold or a comparison guard (we consider other guards later). To this end we introduce notation for sets of vectors satisfying  $\Phi$ . According to Section III-A, formula  $\Phi$  has two kinds of free variables: parameter variables from  $\Pi$  and data variables from  $\Lambda \cup \Gamma$ . Let  $\mathbf{x}^p$  be a vector of parameter variables  $(x_1^p, \dots, x_{|\Pi|}^p)$  and  $\mathbf{x}^v$  be a vector of variables  $(x_1^v, \dots, x_k^v)$  over  $D^k$ . Given a  $k$ -dimensional vector  $\mathbf{d}$  of values from  $D$ , by

$$\mathbf{x}^p = \mathbf{p}, \mathbf{x}^v = \mathbf{d} \models \Phi$$

we denote that  $\Phi$  is satisfied on concrete values  $x_1^v =$

$d_1, \dots, x_k^v = d_k$  and parameter values  $\mathbf{p}$ . We define:

$$\begin{aligned} \|\Phi\|_E &= \{\hat{\mathbf{d}} \in \widehat{D}^k \mid \exists \mathbf{p} \in \mathbf{P}_{RC} \exists \mathbf{d} = (d_1, \dots, d_k) \in D^k. \\ &\quad \hat{\mathbf{d}} = (\alpha_{\mathbf{p}}(d_1), \dots, \alpha_{\mathbf{p}}(d_k)) \wedge \mathbf{x}^p = \mathbf{p}, \mathbf{x}^v = \mathbf{d} \models \Phi\} \end{aligned}$$

Hence,  $\|\Phi\|_E$  contains all vectors of abstract values that correspond to some concrete values satisfying  $\Phi$ . Note carefully, that parameters do not appear anymore due to existential quantification. A PIA *existential abstraction* of  $\Phi$  is defined to be a formula  $\hat{\Phi}$  over a vector of variables  $\hat{\mathbf{x}} = \hat{x}_1, \dots, \hat{x}_k$  over  $\widehat{D}^k$  such that  $\{\hat{\mathbf{d}} \in \widehat{D}^k \mid \hat{\mathbf{x}} = \hat{\mathbf{d}} \models \hat{\Phi}\} \supseteq \|\Phi\|_E$ .

*Computing PIA abstractions.* The central property of our abstract domain is that it allows to abstract comparisons against thresholds (i.e., threshold guards) in a precise way. That is, we can abstract formulas of the form  $\vartheta_j(\mathbf{p}) \leq x_1$  by  $I_j \leq \hat{x}_1$  and  $\vartheta_j(\mathbf{p}) > x_1$  by  $I_j > \hat{x}_1$ . In fact, this abstraction is precise in the following sense.

*Proposition 11:* For all  $\mathbf{p} \in \mathbf{P}_{RC}$  and all  $a \in D$ :

$\vartheta_j(\mathbf{p}) \leq a$  iff  $I_j \leq \alpha_{\mathbf{p}}(a)$ , and  $\vartheta_j(\mathbf{p}) > a$  iff  $I_j > \alpha_{\mathbf{p}}(a)$ .

For all comparison guards we are going to use a general form (well-known from the literature), namely:

$$\hat{\Phi}_E = \bigvee_{(\hat{d}_1, \dots, \hat{d}_k) \in \|\Phi\|_E} \hat{x}_1 = \hat{d}_1 \wedge \dots \wedge \hat{x}_k = \hat{d}_k$$

*Proposition 12:* If  $\Phi$  is a formula over variables  $x_1, \dots, x_k$  over  $D$ , then  $\hat{\Phi}_E$  is a PIA existential abstraction.

If the domain  $\widehat{D}$  is small (as it is in our case), then one can enumerate all vectors of abstract values in  $\widehat{D}^k$  and check which belong to our abstraction  $\|\Phi\|_E$ , using an SMT solver.

*Transforming CFA.* We now describe a general method to abstract guard formulas, and thus construct an abstract process skeleton. To this end, we denote by  $\alpha_E$  a mapping from a concrete formula  $\Phi$  to some existential abstraction of  $\Phi$  (not necessarily constructed as above). By fixing  $\alpha_E$ , we can define an abstraction of a guard of a CFA:

$$abst(g) = \begin{cases} \alpha_E(g) & \text{if } g \text{ is a threshold guard} \\ \alpha_E(g) & \text{if } g \text{ is a comparison guard} \\ g & \text{if } g \text{ is a status guard} \\ abst(g_1) \wedge abst(g_2) & \text{otherwise, i.e., } g \text{ is } g_1 \wedge g_2 \end{cases}$$

By slightly abusing the notation, for a CFA  $\mathcal{A}$  by  $abst(\mathcal{A})$  we denote the CFA that is obtained from  $\mathcal{A}$  by replacing every guard  $g$  with  $abst(g)$ . Note that  $abst(\mathcal{A})$  contains only guards over  $sv$  and over abstract variables over  $\widehat{D}$ .

*Definition 13:* We define a mapping  $h_{\mathbf{p}}^{dat}$  from valuations  $v$  of a CFA  $\mathcal{A}$  to valuations  $\hat{v}$  of CFA  $abst(\mathcal{A})$  as follows: for each variable  $x$  over  $D$ ,  $\hat{v}.x = \alpha_{\mathbf{p}}(v.x)$ , and for each variable  $y$  over  $SV$ ,  $\hat{v}.y = v.y$ .

The following theorem follows immediately from the definition of existential abstraction and  $abst(\mathcal{A})$ :

*Theorem 14:* For all guards  $g$ , all  $\mathbf{p}$  in  $\mathbf{P}_{RC}$ , and for all valuations  $v$  with  $v =_{\Pi} \mathbf{p}$ : if  $v \models g$ , then  $h_{\mathbf{p}}^{dat}(v) \models abst(g)$ .

For model checking purposes we have to reason about the Kripke structures that are built using the skeletons obtained

from CFAs. We denote by  $\mathbf{Sk}_{abs}(\mathcal{A})$ , the process skeleton that is induced by CFA  $abst(\mathcal{A})$ . Analogously to  $h_{\mathbf{p}}^{dat}$ , we define the parameterized abstraction mapping  $\bar{h}_{\mathbf{p}}^{dat}$  that maps global states from  $\text{Inst}(\mathbf{p}, \mathbf{Sk}(\mathcal{A}))$  to global states from  $\text{Inst}(\mathbf{p}, \mathbf{Sk}_{abs}(\mathcal{A}))$ . After that, we obtain Theorem 16 from Theorem 14 and the construction of system instances.

*Definition 15:* Let  $\sigma$  be a state of  $\text{Inst}(\mathbf{p}, \mathbf{Sk}(\mathcal{A}))$ , and  $\hat{\sigma}$  be a state of the abstract instance  $\text{Inst}(\mathbf{p}, \mathbf{Sk}_{abs}(\mathcal{A}))$ . Then,  $\hat{\sigma} = \bar{h}_{\mathbf{p}}^{dat}(\sigma)$  if for each variable  $y \in \Lambda \cup \Gamma \cup \Pi$ ,  $\hat{\sigma}.y = \alpha_{\mathbf{p}}(\sigma.y)$ , and  $\hat{\sigma}.sv = \sigma.sv$ .

*Theorem 16:* For all  $\mathbf{p} \in \mathbf{P}_{RC}$ , and for all CFA  $\mathcal{A}$ , if system instance  $\text{Inst}(\mathbf{p}, \mathbf{Sk}(\mathcal{A})) = (S_I, S_I^0, R_I, AP, \lambda_I)$  and system instance  $\text{Inst}(\mathbf{p}, \mathbf{Sk}_{abs}(\mathcal{A})) = (S_{\hat{I}}, S_{\hat{I}}^0, R_{\hat{I}}, AP, \lambda_{\hat{I}})$ , then: if  $(\sigma, \sigma') \in R_I$ , then  $(\bar{h}_{\mathbf{p}}^{dat}(\sigma), \bar{h}_{\mathbf{p}}^{dat}(\sigma')) \in R_{\hat{I}}$ .

Theorem 16 is the first step to prove simulation. In order to actually do so, we now define the labeling function  $\lambda_{\hat{I}}$ . For propositions from  $p \in AP_{SV}$ ,  $\lambda_{\hat{I}}(\hat{\sigma})$  is defined in the same way as  $\lambda_I$ . Similarly to [37] for propositions from  $p \in AP_D$ , which are used in justice constraints, we define:

$[\exists i. x_i + c < y_i] \in \lambda_{\hat{I}}(\hat{\sigma})$  iff

$$\bigvee_{1 \leq i \leq N(\mathbf{p})} \hat{\sigma}[i] \models \alpha_E(\{x + c(\mathbf{p}) < y\})$$

$[\forall i. x_i + c \geq y_i] \in \lambda_{\hat{I}}(\hat{\sigma})$  iff

$$\bigwedge_{1 \leq i \leq N(\mathbf{p})} \hat{\sigma}[i] \models \alpha_E(\{x + c(\mathbf{p}) \geq y\})$$

From Theorem 16, the definition of  $\bar{h}_{\mathbf{p}}^{dat}$  with respect to the variable  $sv$ , and the definition of  $\lambda_{\hat{I}}$ , one immediately obtains the following theorems. Theorem 18 ensures that justice constraints  $J$  in the abstract system  $\text{Inst}(\mathbf{p}, \mathbf{Sk}_{abs}(\mathcal{A}))$  are a sound abstraction of justice constraints  $J$  in  $\text{Inst}(\mathbf{p}, \mathbf{Sk}(\mathcal{A}))$ .

*Theorem 17:* For all  $\mathbf{p} \in \mathbf{P}_{RC}$ , and for all CFA  $\mathcal{A}$ , it holds  $\text{Inst}(\mathbf{p}, \mathbf{Sk}(\mathcal{A})) \preceq \text{Inst}(\mathbf{p}, \mathbf{Sk}_{abs}(\mathcal{A}))$ , with respect to  $AP_{SV}$ .

*Theorem 18:* Let  $\pi = \{\sigma_i\}_{i \geq 1}$  be a  $J$ -fair path of  $\text{Inst}(\mathbf{p}, \mathbf{Sk}(\mathcal{A}))$ . Then  $\hat{\pi} = \{\bar{h}_{\mathbf{p}}^{dat}(\sigma_i)\}_{i \geq 1}$  is a  $J$ -fair path of  $\text{Inst}(\mathbf{p}, \mathbf{Sk}_{abs}(\mathcal{A}))$ .

### C. PIA counter abstraction

In this section, we present a counter abstraction inspired by [45] which maps a system instance composed of *identical finite state* process skeletons to a single finite state system. We use the PIA domain  $\widehat{D}$  along with abstractions  $\alpha_E(\{x' = x + 1\})$  and  $\alpha_E(\{x' = x - 1\})$  for the counters.

Let us consider a process skeleton  $\mathbf{Sk} = (S, S_0, R)$ , where  $S = SV \times \tilde{D}^{|\Lambda|} \times \tilde{D}^{|\Gamma|} \times \tilde{D}^{|\Pi|}$  that is defined using an arbitrary finite domain  $\tilde{D}$ . (Note that we do not require that the skeleton is obtained from a CFA.) Our counter abstraction over the abstract domain  $\widehat{D}$  proceeds in two stages, where the first stage is only a change in representation, but not an abstraction.

*Stage 1: Vector Addition System with States (VASS).* Let  $L = \{\ell \in SV \times \tilde{D}^{|\Lambda|} \mid \exists s \in S. \ell =_{\{sv\} \cup \Lambda} s\}$  be the set of *local states* of a process skeleton. As the domain  $\tilde{D}$  and the set of local variables  $\Lambda$  are finite,  $L$  is finite. We write

the elements of  $L$  as  $\ell_1, \dots, \ell_{|L|}$ . We define the counting function  $K: S_I \times L \rightarrow D$  such that  $K(\sigma, \ell)$  is the number of processes  $i$  whose local state is  $\ell$  in global state  $\sigma$ , i.e.,  $\sigma[i] =_{\{sv\} \cup \Lambda} \ell$ . Thus, we represent the system state  $\sigma \in S_I$  as a tuple  $(g_1, \dots, g_k, K[\sigma, \ell_1], \dots, K[\sigma, \ell_{|L|}])$ , i.e., by the shared global state and by the counters for the local states. If a process moves from local state  $\ell_i$  to local state  $\ell_j$ , the counters of  $\ell_i$  and  $\ell_j$  will decrement and increment, respectively.

*Stage 2: Abstraction of VASS.* We abstract the counters  $K$  of the VASS representation using the PIA domain to obtain a finite state Kripke structure  $\mathbf{C}(\mathbf{Sk})$ . To compute  $\mathbf{C}(\mathbf{Sk}) = (S_C, S_C^0, R_C, AP, \lambda_C)$  we proceed as follows:

A state  $w \in S_C$  is given by values of shared variables from the set  $\Gamma$ , ranging over  $\hat{D}^{|\Gamma|}$ , and by a vector  $(\kappa[\ell_1], \dots, \kappa[\ell_{|L|}])$  over the abstract domain  $\hat{D}$  from Section IV-A. More concisely,  $S_C = \hat{D}^{|L|} \times \hat{D}^{|\Gamma|}$ .

*Definition 19:* The parameterized abstraction mapping  $\bar{h}_{\mathbf{p}}^{cnt}$  maps a global state  $\sigma$  of the system  $\text{Inst}(\mathbf{p}, \mathbf{Sk})$  to a state  $w$  of the abstraction  $\mathbf{C}(\mathbf{Sk})$  such that: For all  $\ell \in L$  it holds that  $w.\kappa[\ell] = \alpha_{\mathbf{p}}(K[\sigma, \ell])$ , and  $w =_{\Gamma} \sigma$ .

From the definition, one can see how to construct the initial states. Informally, we require (1) that the initial shared states of  $\mathbf{C}(\mathbf{Sk})$  correspond to initial shared states of  $\mathbf{Sk}$ , (2) that there are actually  $N(\mathbf{p})$  processes in the system, and (3) that initially all processes are in an initial state.

The intuition<sup>4</sup> for the construction of the transition relation is as follows: Like in VASS, a step that brings a process from local state  $\ell_i$  to  $\ell_j$  can be modeled by decrementing the (non-zero) counter of  $\ell_i$  and incrementing the counter of  $\ell_j$ . Like Pnueli, Xu, and Zuck [45] we use the idea of representing counters in an abstract domain, and performing increment and decrement using existential abstraction. They used a three-valued domain representing 0, 1, or more processes. As we are interested, e.g., in the fact whether at least  $t + 1$  or  $n - t$  processes are in a certain state, the domain from [45] is too coarse for us. Therefore, we use counters from  $\hat{D}$ , and we increment and decrement counters using the formulas  $\alpha_E(\{x' = x + 1\})$  and  $\alpha_E(\{x' = x - 1\})$ .

*Theorem 20:* For all  $\mathbf{p} \in \mathbf{P}_{RC}$ , and all finite state process skeletons  $\mathbf{Sk}$ , let system instance  $\text{Inst}(\mathbf{p}, \mathbf{Sk}) = (S_I, S_I^0, R_I, AP, \lambda_I)$ , and  $\mathbf{C}(\mathbf{Sk}) = (S_C, S_C^0, R_C, AP, \lambda_C)$ . Then: if  $(\sigma, \sigma') \in R_I$ , then  $(\bar{h}_{\mathbf{p}}^{cnt}(\sigma), \bar{h}_{\mathbf{p}}^{cnt}(\sigma')) \in R_C$ .

To prove simulation, we now define the labeling function  $\lambda_C$ . Here we consider propositions from  $AP_D \cup AP_{SV}$  in the form of  $[\exists i. \Phi(i)]$  and  $[\forall i. \Phi(i)]$ . Formula  $\Phi(i)$  is defined over variables from the  $|\Pi|$ -dimensional vector  $\mathbf{x}^p$  of parameters, a  $k$ -dimensional vector  $\mathbf{x}^\ell$  of local variables and  $sv$ , an  $m$ -dimensional vector of global variables  $\mathbf{x}^g$ . Then, the labeling function is defined by

$[\exists i. \Phi(i)] \in \lambda_C(w)$  if and only if

$$\bigvee_{\ell \in L} (\mathbf{x}^\ell =_{\Lambda} \ell, \mathbf{x}^g =_{\Gamma} w \models \text{abst}(\Phi(i)) \wedge w.k[\ell] \neq I_0)$$

<sup>4</sup>A formal definition of the transition relation is given in Appendix C.

$[\forall i. \Phi(i)] \in \lambda_C(w)$  if and only if

$$\bigwedge_{\ell \in L} (\mathbf{x}^\ell =_{\Lambda} \ell, \mathbf{x}^g =_{\Gamma} w \models \text{abst}(\Phi(i)) \vee w.k[\ell] = I_0)$$

*Theorem 21:* For all  $\mathbf{p} \in \mathbf{P}_{RC}$ , and for all finite state process skeletons  $\mathbf{Sk}$ ,  $\text{Inst}(\mathbf{p}, \mathbf{Sk}) \preceq \mathbf{C}(\mathbf{Sk})$ , w.r.t.  $AP_{SV}$ .

*Theorem 22:* If  $\pi = \{\sigma_i\}_{i \geq 1}$  is a  $J$ -fair path of  $\text{Inst}(\mathbf{p}, \mathbf{Sk})$ , then the path  $\hat{\pi} = \{\bar{h}_{\mathbf{p}}^{cnt}(\sigma_i)\}_{i \geq 1}$  is a  $J$ -fair path of  $\mathbf{C}$ .

From Theorems 17, 18, 21, 22, and [13, Thm. 16] we obtain the following central corollary in the form necessary for our parameterized model checking problem.

*Corollary 23 (Soundness of data & counter abstraction):*

For all CFA  $\mathcal{A}$ , and for all formulas  $\varphi$  from  $\text{LTL}_{\mathcal{X}}$  over  $AP_{SV}$  and justice constraints  $J \subseteq AP_D$ : if  $\mathbf{C}(\mathbf{Sk}_{abs}(\mathcal{A})) \models_J \varphi$ , then for all  $\mathbf{p} \in \mathbf{P}_{RC}$  it holds  $\text{Inst}(\mathbf{p}, \mathbf{Sk}(\mathcal{A})) \models_J \varphi$ .

## V. ABSTRACTION REFINEMENT

Due to our parametric existential abstraction of comparison guards, which may be imprecise, we have to deal with several kinds of spurious behavior.

The first one is caused by spurious transitions. Consider a transition  $\tau$  of  $\mathbf{C}(\mathbf{Sk}_{abs}(\mathcal{A}))$ . We say that the transition  $\tau$  is spurious w.r.t.  $\mathbf{p} \in \mathbf{P}_{RC}$ , if there is no transition in  $\text{Inst}(\mathbf{p}, \mathbf{Sk}(\mathcal{A}))$  that is a concretization of  $\tau$ . This situation can be detected by known techniques [14] for a fixed  $\mathbf{p}$ . However, it is not sound to remove  $\tau$  from  $\mathbf{C}(\mathbf{Sk}_{abs}(\mathcal{A}))$ , unless  $\tau$  is spurious w.r.t. *all*  $\mathbf{p} \in \mathbf{P}_{RC}$ . We call transitions that are spurious w.r.t. all admissible parameters *uniformly spurious*. Detecting such transitions is a challenge and to the best of our knowledge, this problem has not been investigated before. To detect such transitions, we use one more intermediate abstraction in the form of VASS that abstracts local variables as in Section IV-B and keeps concrete shared variables and process counters.

Independently of uniformly spurious transitions, parametric abstraction leads to the second interesting problem. Consider transitions  $\tau_1$  and  $\tau_2$  of  $\mathbf{C}(\mathbf{Sk}_{abs}(\mathcal{A}))$  that are not spurious w.r.t.  $\mathbf{p}_1$  and  $\mathbf{p}_2$  in  $\mathbf{P}_{RC}$ , respectively, for  $\mathbf{p}_1 \neq \mathbf{p}_2$ . It can be the case that a path  $\tau_1, \tau_2$  is in  $\mathbf{C}(\mathbf{Sk}_{abs}(\mathcal{A}))$  and there is no  $\mathbf{p}_3 \in \mathbf{P}_{RC}$  such that the concretization of  $\tau_1, \tau_2$  is a path in  $\text{Inst}(\mathbf{p}_3, \mathbf{Sk}(\mathcal{A}))$ , i.e., the path  $\tau_1, \tau_2$  is uniformly spurious. We detect such spurious behavior by invariants. These invariants are provided by the user as invariant candidates, and then automatically checked to actually be invariant using an SMT solver.

As observed by [45], counter abstraction may lead to justice suppression. Given a counter-example in the form of a lasso, we detect whether its loop contains only unjust states. If this is the case, we refine  $\mathbf{C}(\mathbf{Sk}_{abs}(\mathcal{A}))$  by adding a justice requirement, which is consistent with existing requirements in all concrete instances  $\text{Inst}(\mathbf{p}, \mathbf{Sk}(\mathcal{A}))$ . This refinement is similar to an idea from [45].

Below, we give a general framework for a sound refinement of  $\mathbf{C}(\mathbf{Sk}_{abs}(\mathcal{A}))$ .<sup>5</sup>

<sup>5</sup>In the appendix, we provide techniques that allow us to do refinement in practice in Sections E-A and E-B.

To simplify presentation, we define a *monster system* as a (possibly infinite) Kripke structure  $\mathbf{Sys}_\omega = (S_\omega, S_\omega^0, R_\omega, \text{AP}, \lambda_\omega)$ , whose state space and transition relation are disjoint unions of state spaces and transition relations of system instances  $\text{Inst}(\mathbf{p}, \mathbf{Sk}(\mathcal{A})) = (S_{\mathbf{p}}, S_{\mathbf{p}}^0, R_{\mathbf{p}}, \text{AP}, \lambda_{\mathbf{p}})$  over all admissible parameters:

$$S_\omega = \bigcup_{\mathbf{p} \in \mathbf{P}_{RC}} S_{\mathbf{p}}, \quad S_\omega^0 = \bigcup_{\mathbf{p} \in \mathbf{P}_{RC}} S_{\mathbf{p}}^0, \quad R_\omega = \bigcup_{\mathbf{p} \in \mathbf{P}_{RC}} R_{\mathbf{p}}$$

$$\lambda_\omega : S_\omega \rightarrow 2^{\text{AP}} \text{ and } \forall \mathbf{p} \in \mathbf{P}_{RC}, \forall s \in S_{\mathbf{p}}. \lambda_\omega(s) = \lambda_{\mathbf{p}}(s)$$

Using abstraction mappings  $\bar{h}_{\mathbf{p}}^{\text{dat}}$  and  $\bar{h}_{\mathbf{p}}^{\text{cnt}}$  we define an abstraction mapping  $\bar{h}^{\text{dc}} : S_\omega \rightarrow S_{\mathbf{C}}$  from  $\mathbf{Sys}_\omega$  to  $\mathbf{C}(\mathbf{Sk}_{\text{abs}}(\mathcal{A}))$ : If  $\sigma \in S_{\mathbf{p}}$ , then  $\bar{h}^{\text{dc}}(\sigma) = \bar{h}_{\mathbf{p}}^{\text{cnt}}(\bar{h}_{\mathbf{p}}^{\text{dat}}(\sigma))$ .

**Definition 24:** A sequence  $T = \{\sigma_i\}_{i \geq 1}$  is a *concretization* of path  $\hat{T} = \{w_i\}_{i \geq 1}$  from  $\mathbf{C}(\mathbf{Sk}_{\text{abs}}(\mathcal{A}))$  if and only if  $\sigma_1 \in S_\omega^0$  and for all  $i \geq 1$  it holds  $\bar{h}^{\text{dc}}(\sigma_i) = w_i$ .

**Definition 25:** A path  $\hat{T}$  of  $\mathbf{C}(\mathbf{Sk}_{\text{abs}}(\mathcal{A}))$  is a *spurious path* iff every concretization  $T$  of  $\hat{T}$  is not a path in  $\mathbf{Sys}_\omega$ .

While for finite state systems there are methods to detect whether a path is spurious [14], we are not aware of a method to detect whether a path  $\hat{T}$  in  $\mathbf{C}(\mathbf{Sk}_{\text{abs}}(\mathcal{A}))$  corresponds to a path in the (concrete) infinite monster system  $\mathbf{Sys}_\omega$ . Therefore, we limit ourselves to detecting and refining uniformly spurious transitions and unjust states.

**Definition 26:** An abstract transition  $(w, w') \in R_{\mathbf{C}}$  is *uniformly spurious* iff there is no transition  $(\sigma, \sigma') \in R_\omega$  with  $w = \bar{h}^{\text{dc}}(\sigma)$  and  $w' = \bar{h}^{\text{dc}}(\sigma')$ .

**Definition 27:** An abstract state  $w \in S_{\mathbf{C}}$  is *unjust under*  $q \in \text{AP}_D$  iff there is no concrete state  $\sigma \in S_\omega$  with  $w = \bar{h}^{\text{dc}}(\sigma)$  and  $q \in \lambda_\omega(\sigma)$ .

We give a general criterion that ensures soundness of abstraction, when removing uniformly spurious transitions. In other words, removing a transition does not affect the property of transition preservation.

**Theorem 28:** Let  $T \subseteq R_{\mathbf{C}}$  be a set of spurious transitions. Then for every transition  $(\sigma, \sigma') \in R_\omega$  there is a transition  $(\bar{h}^{\text{dc}}(\sigma), \bar{h}^{\text{dc}}(\sigma'))$  in  $R_{\mathbf{C}} \setminus T$ .

From the theorem it follows that the system  $\mathbf{C}_{\text{ref}} = (S_{\mathbf{C}}, S_{\mathbf{C}}^0, R_{\mathbf{C}} \setminus T, \text{AP}, \lambda_{\mathbf{C}})$  still simulates  $\mathbf{Sys}_\omega$ .

After the criterion of removing individual transitions, we now consider infinite counterexamples of  $\mathbf{C}(\mathbf{Sk}_{\text{abs}}(\mathcal{A}))$ , which have a form of lassos  $w_1 \dots w_k (w_{k+1} \dots w_m)^\omega$ . For such a counterexample  $\hat{T}$  we denote the set of states in the lasso's loop by  $U$ . We then check, whether all states of  $U$  are unjust under some justice constraint  $q \in J$ . If this is the case,  $\hat{T}$  is a spurious counterexample, because the justice constraint  $q$  is violated. Note that it is sound to only consider infinite paths, where states outside of  $U$  appear infinitely often; in fact, this is a justice requirement. To refine  $\mathbf{C}$ 's unjust behavior we add a corresponding justice requirement. Formally, we augment  $J$  (and  $\text{AP}_D$ ) with a propositional symbol  $[\text{off } U]$ . Further, we augment the labelling function  $\lambda_{\mathbf{C}}$  such that every  $w \in S_{\mathbf{C}}$  is labelled with  $[\text{off } U]$  if and only if  $w \in U$ .

**Theorem 29:** Let  $J \subseteq \text{AP}_D$  be a set of justice requirements,  $q \in J$ , and  $U \subseteq S_{\mathbf{C}}$  be a set of unjust states under  $q$ . Let

$M \models \varphi?$	RC	Spin Time	Spin Memory	Spin States	Spin Depth	#R	Total Time
$Byz \models U$	(A)	2.2 s	83 MB	483k	9154	0	3 s
$Byz \models C$	(A)	2.6 s	87 MB	614k	12966	6	18 s
$Byz \models R$	(A)	6.6 s	101 MB	1122k	14820	8	21 s
$Sym \models U$	(A)	0.1 s	68 MB	18k	897	0	1 s
$Sym \models C$	(A)	0.1 s	68 MB	19k	1221	3	5 s
$Sym \models R$	(A)	0.2 s	69 MB	40k	1669	8	12 s
$Omt \models U$	(A)	0.1 s	68 MB	4k	487	0	1 s
$Omt \models C$	(A)	0.1 s	68 MB	6k	627	3	9 s
$Omt \models R$	(A)	0.1 s	68 MB	8k	704	5	9 s
$Cln \models U$	(A)	0.3 s	68 MB	30k	1371	0	2 s
$Cln \models C$	(A)	0.3 s	68 MB	35k	2043	6	10 s
$Cln \models R$	(A)	1.1 s	69 MB	51k	2647	20	60 s
$RBC \models U$	—	0.1 s	68 MB	0.8k	232	0	1 s
$RBC \models A$	—	0.1 s	68 MB	1.7k	333	0	1 s
$RBC \models R$	—	0.1 s	68 MB	1.2k	259	0	1 s
$RBC \not\models C$	—	0.1 s	68 MB	0.8k	232	0	2 s
$Byz \not\models U$	(B)	7.2 s	168 MB	3160k	23120	12	85 s
$Byz \not\models C$	(B)	3.2 s	100 MB	1123k	17829	6	28 s
$Byz \not\models R$	(B)	0.4 s	71 MB	136k	6387	9	23 s
$Byz \models U$	(C)	4.0 s	103 MB	1192k	11073	0	5 s
$Byz \models C$	(C)	8.9 s	175 MB	3781k	36757	19	104 s
$Byz \not\models R$	(C)	3.0 s	110 MB	1451k	24656	43	165 s
$Sym \not\models U$	(B)	0.1 s	68 MB	31k	1503	1	1 s
$Sym \not\models C$	(B)	0.1 s	68 MB	32k	1837	3	3 s
$Sym \models R$	(B)	0.2 s	69 MB	54k	2161	6	16 s
$Omt \models U$	(D)	0.1 s	68 MB	6k	544	0	1 s
$Omt \not\models C$	(D)	0.1 s	68 MB	6k	544	0	2 s
$Omt \not\models R$	(D)	0.1 s	68 MB	0.1k	481	0	4 s

TABLE I  
EXPERIMENTAL DATA ON ABSTRACTION OF ALGORITHMS TOLERANT TO FAULTS: BYZANTINE, SYMMETRIC, OMISSION, CLEAN CRASHES. RBC CORRESPONDS TO THE RELIABLE BROADCAST ALGORITHM ALSO CONSIDERED IN [29]. CHECKED UNDER DIFFERENT RESILIENCE CONDITIONS (RC): (A)  $n > 3t \wedge f \leq t$ ; (B)  $n > 3t \wedge f \leq t + 1$ ; (C)  $n \geq 3t \wedge f \leq t$ ; (D)  $n \geq 2t \wedge f \leq t$ . RBC WORKS FOR  $n \geq t \geq f$ . RUN ON A 3.3GHZ INTEL® CORE™ 4GB MACHINE.

$\pi = \{\sigma_i\}_{i \geq 1}$  be an arbitrary fair path of  $\mathbf{Sys}_\omega$  under  $J$ . The path  $\hat{\pi} = \{\bar{h}^{\text{dc}}(\sigma_i)\}_{i \geq 1}$  is a fair path in  $\mathbf{C}(\mathbf{Sk}_{\text{abs}}(\mathcal{A}))$  under  $J \cup \{[\text{off } U]\}$ .

From this we derive that loops containing only unjust states can be eliminated, and thus  $\mathbf{C}(\mathbf{Sk}_{\text{abs}}(\mathcal{A}))$  be refined.

## VI. EXPERIMENTAL EVALUATION

To show practicability of the abstraction, we have implemented the PIA abstractions and the refinement loop in OCaml as a prototype tool BYMC. We evaluated it on the algorithms and the specifications discussed in Section III-C, and conducted experiments that are summarized in Table I.

We extended the PROMELA language [34] with constructs to express  $\Pi$ ,  $\text{AP}$ ,  $\text{RC}$ , and  $N$ . BYMC receives a description of a CFA  $\mathcal{A}$  in this extended PROMELA, and then syntactically extracts the thresholds. The tool chain uses the Yices SMT solver for existential abstraction, and generates the counter abstraction  $\mathbf{C}(\mathbf{Sk}_{\text{abs}}(\mathcal{A}))$  in standard Promela, such that we can use Spin to do finite state model checking. Finally, BYMC also implements the refinements introduced in Section V and refines the Promela code for  $\mathbf{C}(\mathbf{Sk}_{\text{abs}}(\mathcal{A}))$  by introducing predicates capturing spurious transitions and unjust states.

The column “#R” gives the numbers of refinement steps. In the cases where it is greater than zero, refinement was

necessary, and “Spin Time” refers to the SPIN running time after the last refinement step.

In the cases (A) we used resilience conditions as provided by the literature, and verified the specification. The model RBC represents the reliable broadcast algorithm also considered in [29].

In the bottom part of Table I we used different resilience conditions under which we expected the algorithms to fail. The cases (B) capture the case where more faults occur than expected by the algorithm designer, while the cases (C) and (D) capture the cases where the algorithms were designed by assuming wrong resilience conditions. We omit (CLEAN) as the only sensible case  $n = t = f$  (all processes are faulty) results into a trivial abstract domain of one interval  $[0, \infty)$ .

## VII. CONCLUSIONS

We presented a novel technique to model check fault-tolerant distributed algorithms. To this end, we extended the standard setting of parameterized model checking to processes which use threshold guards, and are parameterized with a resilience condition. As a case study we have chosen the core of several broadcasting algorithms under different failure models, including the one by Srikanth and Toueg [49] that tolerates Byzantine faults. These algorithms are widely applied in the literature: typically, multiple (possibly an unbounded number of) instances are used in combination. As future work, we plan to use compositional model checking techniques [44] for parameterized verification of such algorithms.

*Acknowledgments.* We are grateful to Javier Esparza for valuable discussions on decidability of VASS.

## REFERENCES

- [1] P. Abdulla and B. Jonsson, “Verifying programs with unreliable channels,” in *LICS*, jun 1993, pp. 160–170.
- [2] P. A. Abdulla, “Regular model checking,” *International Journal on Software Tools for Technology Transfer*, vol. 14, pp. 109–118, 2012.
- [3] P. A. Abdulla, B. Jonsson, M. Nilsson, J. d’Orso, and M. Saksena, “Regular model checking for LTL(MSO),” *STTT*, vol. 14, no. 2, pp. 223–241, 2012.
- [4] M. K. Aguilera, C. Delporte-Gallet, H. Fauconnier, and S. Toueg, “Consensus with Byzantine failures and little system synchrony,” in *DSN*. IEEE Computer Society, 2006, pp. 147–155.
- [5] K. Apt and D. Kozen, “Limits for automatic verification of finite-state concurrent systems,” *IPL*, vol. 15, pp. 307–309, 1986.
- [6] H. Attiya and J. Welch, *Distributed Computing*, 2nd ed. Wiley, 2004.
- [7] T. Ball, R. Majumdar, T. D. Millstein, and S. K. Rajamani, “Automatic predicate abstraction of c programs,” in *PLDI*, 2001, pp. 203–213.
- [8] A. Biere, A. Cimatti, E. M. Clarke, M. Fujita, and Y. Zhu, “Symbolic model checking using SAT procedures instead of BDDs,” in *DAC*, 1999, pp. 317–320.
- [9] B. Bonakdarpour, S. S. Kulkarni, and F. AbuJarad, “Symbolic synthesis of masking fault-tolerant distributed programs,” *Distributed Computing*, vol. 25, no. 1, pp. 83–108, 2012.
- [10] M. C. Browne, E. M. Clarke, and O. Grumberg, “Reasoning about networks with many identical finite state processes,” *Inf. Comput.*, vol. 81, pp. 13–31, 1989.
- [11] T. D. Chandra and S. Toueg, “Unreliable failure detectors for reliable distributed systems,” *JACM*, vol. 43, no. 2, pp. 225–267, March 1996.
- [12] B. Charron-Bost and S. Merz, “Formal verification of a consensus algorithm in the heard-of model,” *IJSI*, vol. 3, no. 2–3, pp. 273–303, 2009.
- [13] E. Clarke, O. Grumberg, and D. Peled, *Model Checking*. MIT Press, 1999.
- [14] E. Clarke, O. Grumberg, S. Jha, Y. Lu, and H. Veith, “Counterexample-guided abstraction refinement for symbolic model checking,” *J. ACM*, vol. 50, no. 5, pp. 752–794, 2003.
- [15] E. Clarke, M. Talupur, and H. Veith, “Proving Ptolemy right: the environment abstraction framework for model checking concurrent systems,” in *TACAS’08/ETAPS’08*. Springer, 2008, pp. 33–47.
- [16] E. M. Clarke and E. A. Emerson, “Design and synthesis of synchronization skeletons using branching-time temporal logic,” in *Logic of Programs*, ser. LNCS, vol. 131, 1981, pp. 52–71.
- [17] E. M. Clarke, O. Grumberg, and D. E. Long, “Model checking and abstraction,” *ACM TOPLAS*, vol. 16, no. 5, pp. 1512–1542, 1994.
- [18] P. Cousot and R. Cousot, “Abstract interpretation: a unified lattice model for static analysis of programs by construction or approximation of fixpoints,” in *POPL*. ACM, 1977, pp. 238–252.
- [19] R. Cytron, J. Ferrante, B. K. Rosen, M. N. Wegman, and F. K. Zadeck, “Efficiently computing static single assignment form and the control dependence graph,” *ACM TOPLAS*, vol. 13, no. 4, pp. 451–490, 1991.
- [20] D. Dams, R. Gerth, and O. Grumberg, “Abstract interpretation of reactive systems,” *ACM TOPLAS*, vol. 19, no. 2, pp. 253–291, 1997.
- [21] R. De Prisco, D. Malkhi, and M. K. Reiter, “On k-set consensus problems in asynchronous systems,” *IEEE Trans. Parallel Distrib. Syst.*, vol. 12, no. 1, pp. 7–21, 2001.
- [22] D. Dolev, N. A. Lynch, S. S. Pinter, E. W. Stark, and W. E. Weihl, “Reaching approximate agreement in the presence of faults,” *J. ACM*, vol. 33, no. 3, pp. 499–516, 1986.
- [23] C. Dwork, N. Lynch, and L. Stockmeyer, “Consensus in the presence of partial synchrony,” *JACM*, vol. 35, no. 2, pp. 288–323, 1988.
- [24] E. A. Emerson and V. Kahlon, “Reducing model checking of the many to the few,” in *CADE*, ser. LNCS. Springer, 2000, vol. 1831, pp. 236–254.
- [25] ———, “Exact and efficient verification of parameterized cache coherence protocols,” in *CHARME*, ser. LNCS, vol. 2860, 2003, pp. 247–262.
- [26] E. Emerson and K. Namjoshi, “Reasoning about rings,” in *POPL*, 1995, pp. 85–94.
- [27] J. Esparza, “Decidability of model checking for infinite-state concurrent systems,” *Acta Informatica*, vol. 34, no. 2, pp. 85–107, 1997.
- [28] J. Esparza, A. Finkel, and R. Mayr, “On the verification of broadcast protocols,” in *LICS*. IEEE Computer Society, 1999, pp. 352–359.
- [29] D. Fisman, O. Kupferman, and Y. Lustig, “On verifying fault tolerance of distributed protocols,” in *TACAS*, ser. LNCS, vol. 4963. Springer, 2008, pp. 315–331.
- [30] M. Fuegger, U. Schmid, G. Fuchs, and G. Kempf, “Fault-Tolerant Distributed Clock Generation in VLSI Systems-on-Chip,” in *EDCC-6*. IEEE Computer Society Press, 2006, pp. 87–96.
- [31] S. M. German and A. P. Sistla, “Reasoning about systems with many processes,” *J. ACM*, vol. 39, pp. 675–735, 1992.
- [32] S. Graf and H. Saïdi, “Construction of abstract state graphs with pvs,” in *CAV*, ser. LNCS, vol. 1254, 1997, pp. 72–83.
- [33] T. A. Henzinger, R. Jhala, R. Majumdar, and G. Sutre, “Lazy abstraction,” in *POPL*. ACM, 2002, pp. 58–70.
- [34] G. Holzmann, *The SPIN Model Checker*. Addison-Wesley, 2003.
- [35] C. Ip and D. Dill, “Verifying systems with replicated components in  $\text{mur}\phi$ ,” in *CAV*, ser. LNCS. Springer, 1996, vol. 1102, pp. 147–158.
- [36] A. John, I. Konnov, U. Schmid, H. Veith, and J. Widder, “Starting a dialog between model checking and fault-tolerant distributed algorithms,” *arXiv CoRR*, vol. abs/1210.3839, 2012.
- [37] Y. Kesten and A. Pnueli, “Control and data abstraction: the cornerstones of practical formal verification,” *STTT*, vol. 2, pp. 328–342, 2000.
- [38] I. Konnov, H. Veith, and J. Widder, “Who is afraid of Model Checking Distributed Algorithms?” 2012, unpublished contribution to: CAV Workshop (*EC*)<sup>2</sup>. <http://forsyte.at/download/ec2-konnov.pdf>.
- [39] L. Lamport, “Byzantizing paxos by refinement,” in *DISC*, ser. LNCS, vol. 6950. Springer, 2011, pp. 211–224.
- [40] P. Lincoln and J. Rushby, “A formally verified algorithm for interactive consistency under a hybrid fault model,” in *FTCS*, 1993, pp. 402–411.
- [41] N. Lynch, *Distributed Algorithms*. Morgan Kaufman, 1996.
- [42] R. Mayr, “Undecidable problems in unreliable computations,” *Theoretical Computer Science*, vol. 297, no. 1–3, pp. 337–354, 2003.
- [43] K. McMillan, *Symbolic model checking*. Kluwer, 1993.
- [44] K. L. McMillan, “Parameterized verification of the flash cache coherence protocol by compositional model checking,” in *CHARME*, ser. LNCS, vol. 2144, 2001, pp. 179–195.
- [45] A. Pnueli, J. Xu, and L. Zuck, “Liveness with  $(0,1,\infty)$ -counter abstraction,” in *CAV*, ser. LNCS. Springer, 2002, vol. 2404, pp. 93–111.

- [46] S. Sankaranarayanan, F. Ivancic, and A. Gupta, "Program analysis using symbolic ranges," in *SAS*, ser. LNCS, vol. 4634, 2007, pp. 366–383.
- [47] U. Schmid, B. Weiss, and J. Rushby, "Formally verified Byzantine agreement in presence of link faults," in *ICDCS*, 2002, pp. 608–616.
- [48] T. K. Srikanth and S. Toueg, "Optimal clock synchronization," *Journal of the ACM*, vol. 34, no. 3, pp. 626–645, 1987.
- [49] T. Srikanth and S. Toueg, "Simulating authenticated broadcasts to derive simple fault-tolerant algorithms," *Dist. Comp.*, vol. 2, pp. 80–94, 1987.
- [50] W. Steiner, J. M. Rushby, M. Sorea, and H. Pfeifer, "Model checking a fault-tolerant startup algorithm: From design exploration to exhaustive fault simulation," in *DSN*, 2004, pp. 189–198.
- [51] I. Suzuki, "Proving properties of a ring of finite-state machines," *Inf. Process. Lett.*, vol. 28, no. 4, pp. 213–214, 1988.
- [52] M. Talupur and M. R. Tuttle, "Going with the flow: Parameterized verification using message flows," in *FMCAD*, 2008, pp. 1–8.
- [53] T. Tsuchiya and A. Schiper, "Verification of consensus algorithms using satisfiability solving," *Dist. Comp.*, vol. 23, no. 5–6, pp. 341–358, 2011.
- [54] S. Wöhrle and W. Thomas, "Model checking synchronized products of infinite transition systems," *LMCS*, vol. 3, no. 4, 2007.

APPENDIX A  
UNDECIDABILITY OF LIVENESS PROPERTIES

In this section we show that the non-halting problem of a two counter machine (2CM) is reducible to the parameterized model checking problem as defined above, that is, using a parameter  $n$ , a CFA  $\mathcal{A}$  to construct an instance  $\text{Inst}(n+1, \text{Sk}(\mathcal{A}))$ , an  $\text{LTL}_X$  formula that uses  $\mathbf{G}$ ,  $\mathbf{F}$ , and atomic propositions  $[\exists i. sv_i = Z]$ . We show that  $\text{Inst}(n+1, \text{Sk}(\mathcal{A}))$  simulates at least  $n$  steps of the 2CM, and that therefore the general parameterized model checking problem as formulated in Section II is undecidable. Note that  $\mathbf{G}$ ,  $\mathbf{F}$ , and  $[\exists i. sv_i = Z]$  are required to express the liveness property (R) of our FTDA.

The CFA  $\mathcal{A}$  contains the functionalities of a *control process* that simulates the program of the 2CM, as well as of *data processes* that each store at most one digit of one of the two counters  $B$  and  $C$  encoded in unary representation. For simplicity of presentation, we say that if a data process does not store a digit for  $B$  or  $C$ , then it stores a digit for a counter  $D$ . Counter  $D$  thus serves as a capacity (initially set to  $n$ ), from which  $B$  and  $C$  can borrow (and return) digits, that is, initially all data processes' status variable corresponds to  $D$ . Our CFA  $\mathcal{A}$  uses only the status variable  $sv$ , while the sets of local and global variables can be empty. We consider paths where exactly one process plays the role of the control process, and the remaining  $n$  processes are data processes. This can be encoded using  $\mathbf{G}$ ,  $\mathbf{F}$ , and  $[\exists i. sv_i = Z]$ .

Intuitively, whenever the control process has to increase or decrease the value of a counter, this is done by a handshake of the control with a data process; up to this point, our proof follows ideas from [31], [26], [27]. In contrast to these papers, however, our system model does not provide primitives for such a handshake, which leads to the central contribution for our proof: we “move” this handshake into the specification without using the “next time” operator not present in  $\text{LTL}_X$ . In addition, as in [27], also the test for zero is moved into the specification using our propositions  $\neg[\exists i. sv_i = Z]$ . We start with some preliminary definitions.

A *two counter machine* (2CM)  $\mathcal{M}$  is a list of  $m+1$  statements over two counters  $B$  and  $C$ . A statement at location  $v$  uses a counter  $\mathcal{C}(v) \in \{B, C\}$  and has one of the following forms (note, that the machine halts at location  $m$ ):

$$v : \text{inc } \mathcal{C}(v); \text{ goto } w \quad (1)$$

$$v : \text{if } \mathcal{C}(v) = 0 \text{ then goto } w' \quad (2)$$

$$\quad \text{else dec } \mathcal{C}(v); \text{ goto } w'' \quad (3)$$

$$m : \text{halt} \quad (4)$$

The control flow of the machine  $\mathcal{M}$  is defined by the labelled graph  $(\mathcal{V}, \mathcal{E}, \mathcal{C})$ , where  $\mathcal{V} = \{v \mid 0 \leq v \leq m\}$  is the set of locations,  $\mathcal{E} = \mathcal{E}_+ \cup \mathcal{E}_0 \cup \mathcal{E}_- \cup \{m, m\}$  is the set of edges, and  $\mathcal{C} : \mathcal{V} \rightarrow \{B, C\}$  is the labelling function which maps a location to the counter used in this location. The sets  $\mathcal{E}_+$ ,  $\mathcal{E}_0$ ,  $\mathcal{E}_-$  are defined as follows:

- $\mathcal{E}_+ = \{(v, w) \mid \text{statement at } v \text{ goes to } w \text{ as in (1)}\}$ ;

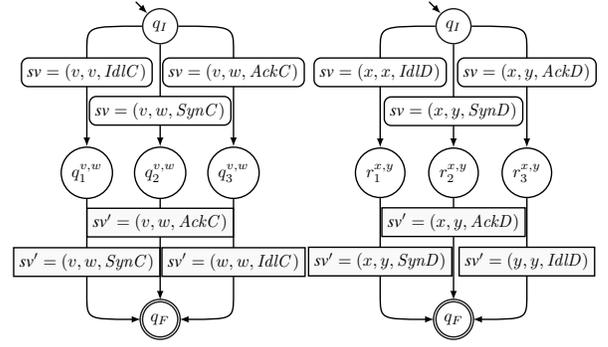


Fig. 3. CFA  $J(v, w)$  for  $(v, w) \in \mathcal{E}_+$  and  $I(x, y)$  for  $\text{inc } y$  (and  $\text{dec } x$ ).

- $\mathcal{E}_0 = \{(v, w') \mid \text{statement at } v \text{ goes to } w' \text{ as in (2)}\}$ ;
- $\mathcal{E}_- = \{(v, w'') \mid \text{statement at } v \text{ goes to } w'' \text{ as in (3)}\}$ .

In what follows, we model a handshake between the control process and a data process in order to implement an increment as in (1) or decrement as in (3). The handshake is guaranteed by a combination of steps both in the control and the data processes and by a constraint formulated in  $\text{LTL}_X$  as follows.

We define the set  $SV_C$  of status values of the control process and the set  $SV_D$  be the set of status values of a data process:

$$SV_C = \bigcup_{v, w \in \mathcal{V}} \{(v, v, \text{IdlC}), (v, w, \text{SynC}), (v, w, \text{AckC})\}$$

$$SV_D = \bigcup_{x, y \in \{B, C, D\}} \{(x, x, \text{IdlD}), (x, y, \text{SynD}), (x, y, \text{AckD})\}$$

For each  $(f, t, h) \in SV_C \cup SV_D$ ,  $f$  is the state before a handshake,  $t$  is the scheduled state after a handshake, and  $h$  is the status of the handshake.

Consider an edge  $(v, w) \in \mathcal{E}_+$  and  $x = D$  and  $y = \mathcal{C}(v)$ , that is, in location  $v$  the counter  $\mathcal{C}(v)$  is incremented, and then the control goes to location  $w$ . Incrementing the counter is done by a handshake during which the control process goes from  $v$  to  $w$ , while a data process goes from  $D$  (the capacity) to  $\mathcal{C}(v)$ .

To do so, we construct two CFAs  $J(v, w)$  and  $I(x, y)$  shown in Figure 3:  $J(v, w)$  goes from location  $v$  of  $\mathcal{M}$  to location  $w$  in three steps  $\text{SynC} \rightarrow \text{AckC} \rightarrow \text{IdlC}$ , whereas  $I(x, y)$  transfers one digit from counter  $x$  to counter  $y$  in steps  $\text{SynD} \rightarrow \text{AckD} \rightarrow \text{IdlD}$ . To actually enforce the handshake synchronization, we add the following formula  $HS(v, w, x, y)$  that must hold in every state of a system instance:

$$[\exists k. sv_k = (x, y, \text{SynD})] \rightarrow [\exists k. sv_k = (v, w, \text{SynC})] \wedge \quad (5)$$

$$[\exists k. sv_k = (x, y, \text{AckD})] \rightarrow \neg[\exists k. sv_k = (x, y, \text{SynD})] \wedge \quad (6)$$

$$[\exists k. sv_k = (x, y, \text{AckD})] \rightarrow [\exists k. sv_k = (v, w, \text{AckC})] \wedge \quad (7)$$

$$[\exists k. sv_k = (w, w, \text{IdlC})] \rightarrow (\neg[\exists k. sv_k = (x, y, \text{SynD})] \wedge \neg[\exists k. sv_k = (x, y, \text{AckD})]) \quad (8)$$

In what follows, we will consider the union of CFAs, where union is defined naturally as the union of the sets of nodes and the union of the sets of edges (note that the CFAs are joint at the initial node  $q_I$ , and the final node  $q_F$ ).

We are now ready to prove the central result: Let  $M$  be a system of  $K$  processes  $\text{Inst}(K, \text{Sk}(J(v, w) \cup I(x, y)))$  and  $\sigma_0$  be a global state of  $M$  such that

$$\begin{aligned}\sigma_1[1].sv &= (v, v, \text{Idl}C) \text{ and} \\ \sigma_1[k].sv &= (x, x, \text{Idl}D) \text{ for all } 2 \leq k \leq K.\end{aligned}$$

The constraints (5)-(8) impose a synchronization behavior:

*Proposition 30:* Let  $\pi$  be an infinite path  $\{\sigma_i\}_{i \geq 1}$  of  $M$  starting with  $\sigma_1$ . If  $\pi \models \mathbf{G} HS(v, w, x, y)$ , then there exists an index  $\ell$  such that  $2 \leq \ell \leq K$  and

$$\begin{aligned}\sigma_7[1].sv &= (w, w, \text{Idl}C) \\ \sigma_7[\ell].sv &= (y, y, \text{Idl}D) \\ \sigma_7[k].sv &= (x, x, \text{Idl}D) \text{ for } 2 \leq k \leq K, k \neq \ell.\end{aligned}$$

*Proof:* We consider all states in the prefix  $\sigma_1, \dots, \sigma_7$ . To prove the proposition, it is sufficient to show that the prefix  $\sigma_1, \dots, \sigma_7$  is as follows for some process  $\ell$  such that  $2 \leq \ell \leq K$ :

	step	$\sigma_i[1]$	$\sigma_i[\ell]$	$\sigma_i[k], k \neq \ell$
$\sigma_1$	1	$(v, v, \text{Idl}C)$	$(x, x, \text{Idl}D)$	$(x, x, \text{Idl}D)$
$\sigma_2$	$\ell$	$(v, w, \text{Syn}C)$	$(x, x, \text{Idl}D)$	$(x, x, \text{Idl}D)$
$\sigma_3$	1	$(v, w, \text{Syn}C)$	$(x, y, \text{Syn}D)$	$(x, x, \text{Idl}D)$
$\sigma_4$	$\ell$	$(v, w, \text{Ack}C)$	$(x, y, \text{Syn}D)$	$(x, x, \text{Idl}D)$
$\sigma_5$	$\ell$	$(v, w, \text{Ack}C)$	$(x, y, \text{Ack}D)$	$(x, x, \text{Idl}D)$
$\sigma_6$	1	$(v, w, \text{Ack}C)$	$(y, y, \text{Idl}D)$	$(x, x, \text{Idl}D)$
$\sigma_7$		$(w, w, \text{Idl}C)$	$(y, y, \text{Idl}D)$	$(x, x, \text{Idl}D)$

Now we show that other possible executions contradict to the lemma's hypothesis. Recall that a single step of a process corresponds to a path of its CFA from  $q_I$  to  $q_F$ .

*State  $\sigma_1$ .* By the hypothesis of the lemma.

*State  $\sigma_2$ .* As data processes are blocked in  $\sigma_1$  by (5), only process 1 can move.

*State  $\sigma_3$ .* Suppose by contradiction that process 1 makes a step in  $\sigma_2$ . Then  $\sigma'_3[1] = (v, w, \text{Ack}C)$ . In such a  $\sigma'_3$ , process 1 is blocked by (8), and the other processes are blocked by (5). It follows that no process can make a further step, and  $\pi$  cannot be infinite, which provides the required contradiction. Hence, there is some data process  $\ell$  which makes the step.

*State  $\sigma_4$ .* In  $\sigma_3$  process  $\ell$  is blocked by (7). Further, suppose by contradiction that data process  $k \neq \ell$  makes a step resulting in  $\sigma'_4[k] = (x, y, \text{Syn}D)$ . Then due to (5), in  $\sigma'_4$ , process 1 is blocked. Moreover, due to (6), processes  $\ell$  and  $k$  are also blocked in  $\sigma'_4$ . It follows that in the path starting with  $\sigma'_4$ , all data processes move from  $(x, x, \text{Idl}D)$  to  $(x, y, \text{Syn}D)$ . As we have finitely many processes, eventually all data processes will stop at  $(x, y, \text{Syn}D)$ . In this state, every process will be blocked by (5) and (6). This contradicts the assumption that  $\pi$  is infinite.

*State  $\sigma_5$ .* In  $\sigma_4$  every process  $k > 1$  different from  $\ell$  is blocked by the same argument as in state  $\sigma_3$  (they all eventually group and are blocked in  $(x, y, \text{Syn}D)$ ). Process 1 cannot move due to (8).

*State  $\sigma_6$ .* In  $\sigma_5$  process 1 cannot move by (8). As process 1 resides in  $(v, w, \text{Ack}C)$  — and thus not in  $(v, w, \text{Syn}C)$  — by (5), every data process  $k > 1$  different from  $\ell$  is blocked.

*State  $\sigma_7$ .* In  $\sigma_6$ , every data process  $k > 1$  different from  $\ell$  is blocked due to (5), as process 1 resides at  $(v, w, \text{Ack}C)$ . Process  $\ell$  cannot move because<sup>6</sup> its CFA contains no guard  $sv = (y, y, \text{Idl}D)$ . ■

Using  $J(v, w)$  and  $I(x, y)$  we can simulate (1) for  $(v, w) \in \mathcal{E}_+$  by instantiating  $J(v, w)$  and  $I(D, \mathcal{C}(v))$ . Moreover, we can simulate (3) for  $(v, w') \in \mathcal{E}_-$  by instantiating  $J(v, w')$  and  $I(\mathcal{C}(v), D)$ . Finally, we can simulate (2) for  $(v, w') \in \mathcal{E}_0$  (that is, the test for zero) by instantiating  $J(v, w')$  and adding one more temporal constraint  $EQ_0(v, w')$ :

$$[\exists k. sv_k = (v, w', \text{Syn}C)] \rightarrow \neg[\exists k. sv_k = (\mathcal{C}(v), \mathcal{C}(v), \text{Idl}D)]$$

Now we can construct the CFA  $\mathcal{A}(\mathcal{M})$  that simulates  $\mathcal{M}$ . This CFA is a union of CFAs constructed for edges of  $\mathcal{E}$ . If

$$Q_J = \bigcup_{(v, w) \in \mathcal{E}} J(v, w),$$

then

$$\mathcal{A}(\mathcal{M}) = Q_J \cup \bigcup_{(v, w) \in \mathcal{E}_+} I(D, \mathcal{C}(v)) \cup \bigcup_{(v, w) \in \mathcal{E}_-} I(\mathcal{C}(v), D).$$

Further we define a specification which ensures that there is always exactly one control process,  $CP$ , as

$$\bigwedge_{q \in Q_J} \bigwedge_{q' \in Q_J \setminus \{q\}} \neg[\exists k. sv_k = q] \vee \neg[\exists k. sv_k = q']$$

We specify the non-halting property  $\varphi_{\text{nonhalt}}$  as follows:

$$\begin{aligned}\mathbf{G} \left( \neg[\exists k. sv_k = (m, m, \text{Idl}C)] \right) \vee \\ \mathbf{F} \neg \left( CP \wedge \bigwedge_{(v, w) \in \mathcal{E}_0} EQ_0(v, w) \wedge \right. \\ \left. \bigwedge_{(v, w) \in \mathcal{E}_+ \cup \mathcal{E}_-} HS(v, w, \mathcal{C}(v), \mathcal{C}(v)) \right)\end{aligned}$$

We can specify two initial process states: One is where the process stays in  $sv_C = (\ell_0, \ell_0, \text{Idl}C)$ ; Another one is where the process  $sv_D = (D, D, \text{Idl}D)$ . Then  $SV_0 = \{sv_C, sv_D\}$ .

**Theorem 6.** Let  $\mathcal{M}$  be a two counter machine, and  $(RC, N)$  be a natural pair of resilience condition and system size function. One can efficiently construct a non-communicating CFA  $\mathcal{A}(\mathcal{M})$  and an LTL-X property  $\varphi_{\text{nonhalt}}(\mathcal{M})$  such that the following two statements are equivalent:

- $\mathcal{M}$  does not halt.
- $\forall \mathbf{p} \in \mathbf{P}_{RC}, \text{Inst}(\mathbf{p}, \text{Sk}(\mathcal{A})) \models_{\emptyset} \varphi_{\text{nonhalt}}(\mathcal{M})$ .

## APPENDIX B CFAS OF FTDA

In this section we give examples of the CFAs we use for our experiments in Figure 4 and 5. They have been formalized as discussed in [36]. In the body of the current paper, we use

<sup>6</sup>In a proof for the composition of several such automata, one would apply  $HS$  and (5) for different counters to obtain the same conclusion.

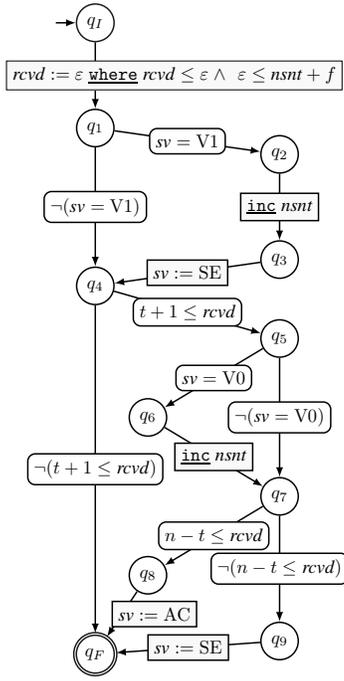


Fig. 4. Example CFA of a FTDA as formalized in [36].

slightly different CFA definitions, namely without increments, assignments, and non-deterministic choice from a range of values.

Using the algorithm from [19], the CFA in Figure 1 is obtained from the CFA in Figure 4: In contrast to the original CFA from Figure 4, for the CFA in Figure 1 in every path from  $q_I$  to  $q_F$ , each variable appears at most once in the left-hand side for every assignment in the original CFA. Every variable  $x$  has several copies:  $x$  for the initial value,  $x'$  for the final one, and  $x^1, x^2, \dots$  for intermediate ones.

## APPENDIX C

### DETAILS OF THE COUNTER ABSTRACTION

1) *Initial states.*: Let  $L_0$  be a set  $\{\ell \mid \ell \in L \wedge \exists s_0 \in S_0. \ell = \{sv\} \cup s_0\}$ ; it captures initial local states. Then  $w_0 \in S_C^0$  if and only the following conditions are met:

$$\begin{aligned} \exists \mathbf{p} \in \mathbf{P}_{RC} \exists k_1 \dots \exists k_{|L|}. \sum_{1 \leq i \leq |L|} k_i = N(\mathbf{p}) \wedge \\ \forall i: 1 \leq i \leq |L|. \alpha_{\mathbf{p}}(k_i) = w_0.\kappa[\ell_i] \end{aligned}$$

$$\forall i: 1 \leq i \leq |L|. (\ell_i \notin L_0) \rightarrow (w_0.\kappa[\ell_i] = I_0)$$

$$\exists s_0 \in S_0. w_0 =_{\Gamma} s_0$$

Less formally: Concrete counter values are mapped to  $w_0.\kappa[\ell_i]$  using  $\alpha_{\mathbf{p}}$ ; We consider only combinations of counters that give a system size  $N(\mathbf{p})$ ; Every counter  $\kappa[\ell_i]$  is initialized to zero, if the local state  $\ell_i$  is met in no initial state  $s_0 \in S_0$ ; a shared variable  $g$  of  $w_0$  may be initialized to a value  $v$  only if there is some initial state  $s_0 \in S_0$  with  $s_0.g = v$ .

2) *Transition relation.*: We now formalize the transition relation  $R_C$  of  $\mathbf{C}(\mathbf{Sk})$ . The formal definition of when for two states  $w$  and  $w'$  of the counter abstraction it holds that  $(w, w') \in R_C$  is given below in (9) to (18). We will discuss each of these formulas separately. We start from the transition relation  $R$  of the process skeleton  $\mathbf{Sk}$  from which we abstract. Recall that  $(s, s') \in R$  means that a process can go from  $s$  to  $s'$ . From (10) and (13) we get that, FROM is the local state of  $s$ , and TO is the local state of  $s'$ .

In the abstraction, if FROM  $\neq$  TO, a step from  $s$  to  $s'$  is represented by increasing the counter at index TO by 1 and decreasing the one at FROM by 1. Otherwise, that is, if FROM = TO, the counter of FROM should not change. Here “increase” and “decrease” is performed using the corresponding functions over the abstract domain  $\hat{D}$ , and the mentioned updates of the counters are enforced in (16), (17), and (15). Further, the counters of all local states different from FROM and TO should not change, which we achieved by (18). Performing such a transition should only be possible if there is actually a process in state  $s$ , which means in the abstraction that the corresponding counter is greater than  $I_0$ . We enforce this restriction by (12).

By the above, we abstract the transition with respect to local states. However,  $s$  and  $s'$  also contain the shared variables. We have to make sure that the shared variables are updated in the abstraction in the same way they are updated in the concrete system, which is achieved in (11) and (14).

We thus arrive at the formal definition of the abstract transition relation:  $R_C$  consists of all pairs  $(w, w')$  for which there exist  $s$  and  $s'$  in  $S$ , and FROM and TO in  $L$  such that equations (9)–(18) hold:

$$(s, s') \in R \quad (9) \quad w.\kappa[\text{FROM}] \neq I_0 \quad (12)$$

$$\text{FROM} = \{sv\} \cup s \quad (10) \quad \text{TO} = \{sv\} \cup s' \quad (13)$$

$$w =_{\Gamma} s \quad (11) \quad w' =_{\Gamma} s' \quad (14)$$

$$(\text{TO} = \text{FROM}) \rightarrow w'.\kappa[\text{FROM}] = w.\kappa[\text{FROM}] \quad (15)$$

$$\begin{aligned} (\text{TO} \neq \text{FROM}) \rightarrow \\ (x = w.\kappa[\text{TO}], x' = w'.\kappa[\text{TO}] \models \alpha_E(\{x' = x + 1\})) \quad (16) \end{aligned}$$

$$\begin{aligned} (\text{TO} \neq \text{FROM}) \rightarrow \\ (x = w.\kappa[\text{FROM}], x' = w'.\kappa[\text{FROM}] \models \\ \alpha_E(\{x' = x - 1\})) \quad (17) \end{aligned}$$

$$\begin{aligned} \forall i: 1 \leq i \leq |L|. (\ell_i \neq \text{FROM} \wedge \ell_i \neq \text{TO}) \rightarrow \\ w'.\kappa[\ell_i] = w.\kappa[\ell_i] \quad (18) \end{aligned}$$

## APPENDIX D

### DETAILED PROOFS

*Simulation.* In order to compare the behavior of system instances we use the notion of simulation. Given two Kripke structures  $M_1 = (S_1, S_1^0, R_1, \text{AP}, \lambda_1)$  and  $M_2 = (S_2, S_2^0, R_2, \text{AP}, \lambda_2)$ , a relation  $H \subseteq S_1 \times S_2$  is a simulation

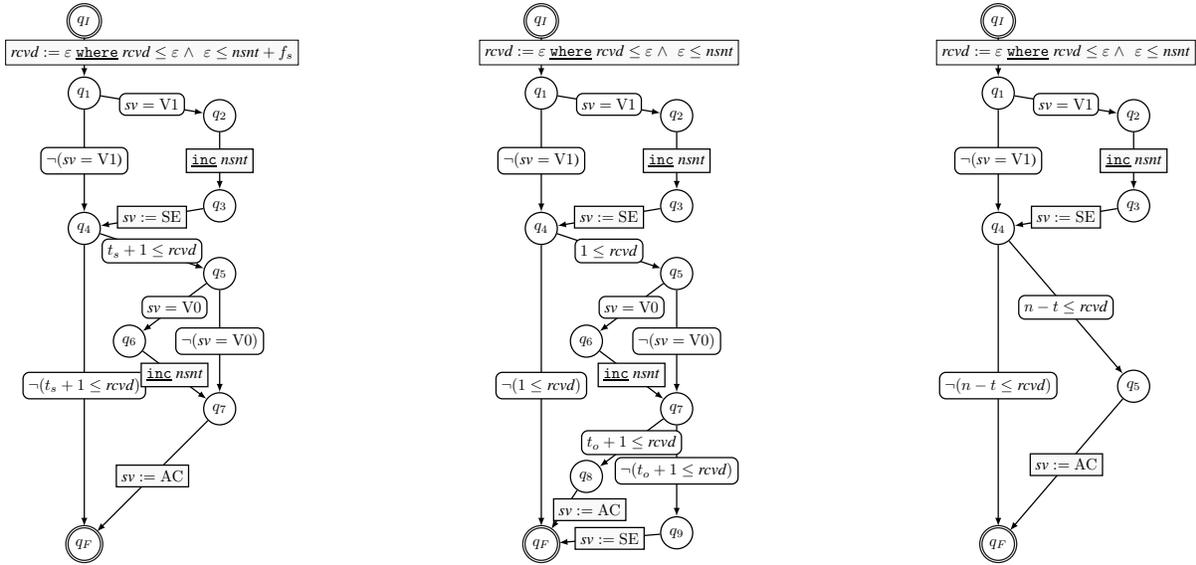


Fig. 5. Control flow automata for the steps of the FTDA from left to right tolerating symmetric faults, omission faults, and clean crashes; faults are modeled by fairness constraints not shown.

relation with respect to a set of atomic propositions  $AP' \subseteq AP$  iff for every pair of states  $(s_1, s_2) \in H$  the following conditions hold:

- $\lambda_1(s_1) \cap AP' = \lambda_2(s_2) \cap AP'$
- for every state  $t_1$ , with  $(s_1, t_1) \in R_1$ , there is a state  $t_2$  with the property  $(s_2, t_2) \in R_2$  and  $(t_1, t_2) \in H$ .

If there is a simulation relation  $H$  on  $M_1$  and  $M_2$  such that, for every initial state  $s_1^0 \in S_1^0$  there is an initial state  $s_2^0 \in S_2^0$  with the property  $(s_1^0, s_2^0) \in H$ , then we write  $M_1 \preceq M_2$ . In this case we say  $M_1$  is simulated by  $M_2$ .

#### A. The Proofs.

**Proposition 11.** For all  $\mathbf{p} \in \mathbf{P}_{RC}$  and all  $a \in D$ :

$\vartheta_j(\mathbf{p}) \leq a$  iff  $I_j \leq \alpha_{\mathbf{p}}(a)$ , and  $\vartheta_j(\mathbf{p}) > a$  iff  $I_j > \alpha_{\mathbf{p}}(a)$ .

*Proof:* Fix an arbitrary  $\mathbf{p} \in \mathbf{P}_{RC}$ .

*Case  $a \geq \vartheta_j(\mathbf{p})$ .* ( $\Rightarrow$ ) Fix an arbitrary  $a \in D$  satisfying  $a \geq \vartheta_j(\mathbf{p})$ . Let  $k$  be a maximum number such that  $a \geq \vartheta_k(\mathbf{p})$ . Then  $\alpha_{\mathbf{p}}(a) = I_k$ . By Definition of  $\alpha_{\mathbf{p}}$  we have  $k \geq j$  and thus, by Definition 10,  $I_k \geq I_j$ . It immediately gives  $\alpha_{\mathbf{p}}(a) \geq I_j$ .

( $\Leftarrow$ ) Let  $a \in D$  be a value satisfying  $\alpha_{\mathbf{p}}(a) \geq I_j$ . There is  $k$  such that  $\alpha_{\mathbf{p}}(a) = I_k$  and  $a \geq \vartheta_k(\mathbf{p})$ . From  $\alpha_{\mathbf{p}}(a) \geq I_j$  it follows that  $I_k \geq I_j$  and, by Definition 10,  $k \geq j$ . Then by Definition 8 we have  $\vartheta_k(\mathbf{p}) \geq \vartheta_j(\mathbf{p})$  and by transitivity  $a \geq \vartheta_j(\mathbf{p})$ .

*Case  $a < \vartheta_j(\mathbf{p})$ .* ( $\Rightarrow$ ) Fix an arbitrary  $a \in D$  satisfying  $a < \vartheta_j(\mathbf{p})$ . Let  $k$  be a maximum number such that  $a \geq \vartheta_k(\mathbf{p})$ . Then  $\alpha_{\mathbf{p}}(a) = I_k$ .

Consider the case when  $k \geq j$ . By Definition 10 it implies  $I_k \geq I_j$ . It immediately gives  $\alpha_{\mathbf{p}}(a) \geq I_j$ , which contradicts the assumption  $a < \vartheta_j(\mathbf{p})$ . Thus, the only case is  $k < j$ .

By Definition 10,  $k < j$  implies  $I_k \leq I_j$ . As we excluded the case  $k = j$  we have  $I_k \leq I_j$ ,  $I_k \neq I_j$  or, equivalently,  $\alpha_{\mathbf{p}}(a) = I_k < I_j$ .

( $\Leftarrow$ ) Let  $a \in D$  be a value satisfying  $\alpha_{\mathbf{p}}(a) < I_j$  or, equivalently,  $\alpha_{\mathbf{p}}(a) \leq I_j$  and  $\alpha_{\mathbf{p}}(a) \neq I_j$ . There exists  $k$  such that  $\alpha_{\mathbf{p}}(a) = I_k$  and either (a)  $a < \vartheta_{k+1}(\mathbf{p})$  or (b)  $k = \mu$ . From the assumption we have  $I_k \leq I_j$  and  $I_k \neq I_j$ . From this we conclude: (c)  $k \neq \mu$  excluding (b); (d)  $I_{k+1} \leq I_j$ . From (d) by Definition 10,  $k + 1 \leq j$ . This implies by Definition 8,  $\vartheta_{k+1}(\mathbf{p}) \leq \vartheta_j(\mathbf{p})$ . From this and (a) we conclude that  $a < \vartheta_j(\mathbf{p})$ . ■

**Proposition 12.** If  $\Phi$  is a formula over variables  $x_1, \dots, x_k$  over  $D$ , then  $\hat{\Phi}_E$  is a PIA existential abstraction.

*Proof:* Consider an arbitrary  $\mathbf{d} \in \|\Phi\|_E$ . As  $\mathbf{d} \in \|\Phi\|_E$ , it satisfies the conjunct  $\hat{x}_1 = \hat{d}_1 \wedge \dots \wedge \hat{x}_k = \hat{d}_k$  and thus satisfies the disjunction  $\hat{\Phi}$ , i.e.  $\mathbf{x} = \mathbf{d} \models \hat{\Phi}_E$ . As  $\mathbf{d}$  is chosen arbitrarily, we conclude that  $\|\Phi\|_E \subseteq \{\hat{\mathbf{x}} \in \hat{D}^k \mid \hat{\mathbf{x}} \models \hat{\Phi}_E\}$ . ■

**Theorem 16.** For all  $\mathbf{p} \in \mathbf{P}_{RC}$ , and for all CFA  $\mathcal{A}$ , if system instance  $Inst(\mathbf{p}, Sk(\mathcal{A})) = (S_I, S_I^0, R_I, AP, \lambda_I)$  and system instance  $Inst(\mathbf{p}, Sk_{abs}(\mathcal{A})) = (S_{\hat{I}}, S_{\hat{I}}^0, R_{\hat{I}}, AP, \lambda_{\hat{I}})$ , then: if  $(\sigma, \sigma') \in R_I$ , then  $(\bar{h}_{\mathbf{p}}^{dat}(\sigma), \bar{h}_{\mathbf{p}}^{dat}(\sigma')) \in R_{\hat{I}}$ .

*Proof:* Let  $R$  and  $R_{abs}$  be the transition relations of  $Sk(\mathcal{A})$  and  $Sk_{abs}(\mathcal{A})$  respectively. From  $(\sigma, \sigma') \in R_I$  and the definition of  $Inst(\mathbf{p}, Sk(\mathcal{A}))$  it follows that there is a process index  $i : 1 \leq i \leq N(\mathbf{p})$  such that  $(\sigma[i], \sigma'[i]) \in R$  and other processes do not change their local states.

Let  $v$  be a valuation of  $\mathcal{A}$ . By the definition of  $Sk(\mathcal{A})$  from  $(\sigma[i], \sigma'[i]) \in R$  we have that CFA  $\mathcal{A}$  has a path  $q_1, g_1, q_2, \dots, q_k$  such that  $q_1 = q_I$ ,  $q_k = q_F$  and for every guard  $g_j$  it holds that  $v \models g_j$ . Moreover, for any  $x \in \Pi \cup \text{AUT} \cup \{sv\}$  it holds  $v(x) = \sigma[i].x$  and  $v(x') = \sigma'[i].x$ .

We choose the same path in  $abs(\mathcal{A})$  and construct the valuation  $h_{\mathbf{p}}^{dat}(v)$ . From Theorem 14 we have that for every guard  $g_j$  it holds that  $h_{\mathbf{p}}^{dat}(v) \models g_j$ . Hence, the path  $q_1, g_1, q_2, \dots, q_k$  is a path of CFA  $abs(\mathcal{A})$  as well.

By the definitions of  $h_{\mathbf{p}}^{dat}$  and  $\bar{h}_{\mathbf{p}}^{dat}$  we have that for every

$x \in \Pi \cup \Lambda \cup \Gamma \cup \{sv\}$  it holds  $h_{\mathbf{p}}^{dat}(v)(x) = \bar{h}_{\mathbf{p}}^{dat}(\sigma)[i].x$  and  $h_{\mathbf{p}}^{dat}(v)(x') = \bar{h}_{\mathbf{p}}^{dat}(\sigma')[i].x$ . By the definition of  $\mathbf{Sk}_{abs}(\mathcal{A})$  it immediately follows that  $(\bar{h}_{\mathbf{p}}^{dat}(\sigma), \bar{h}_{\mathbf{p}}^{dat}(\sigma')) \in R_{abs}$ .

Finally,  $(\bar{h}_{\mathbf{p}}^{dat}(\sigma), \bar{h}_{\mathbf{p}}^{dat}(\sigma')) \in R_{abs}$  implies that  $(\bar{h}_{\mathbf{p}}^{dat}(\sigma), \bar{h}_{\mathbf{p}}^{dat}(\sigma')) \in R_{\hat{f}}$ . ■

**Theorem 18.** *Let  $\pi = \{\sigma_i\}_{i \geq 1}$  be a  $J$ -fair path of  $\text{Inst}(\mathbf{p}, \mathbf{Sk}(\mathcal{A}))$ . Then  $\hat{\pi} = \{\bar{h}_{\mathbf{p}}^{dat}(\sigma_i)\}_{i \geq 1}$  is a  $J$ -fair path of  $\text{Inst}(\mathbf{p}, \mathbf{Sk}_{abs}(\mathcal{A}))$ .*

*Proof:* By inductively applying Theorem 16 to  $\pi$  we conclude that  $\hat{\pi}$  is indeed a path of  $\text{Inst}(\mathbf{p}, \mathbf{Sk}_{abs}(\mathcal{A}))$ .

Fix an arbitrary justice constraint  $q \in J \subseteq \text{AP}_D$ ; infinitely many states on  $\pi$  are labelled with  $q$ . Fix a state  $\sigma$  on  $\pi$  with  $q \in \lambda_I$ . We show that  $q \in \lambda_{\hat{f}}(\bar{h}_{\mathbf{p}}^{dat}(\sigma))$ . Consider two cases:

*Case 1.* Proposition  $q$  has a form  $[\exists i. \Phi(i)]$ , where  $\Phi$  has free variables of two types: a vector of parameters  $\mathbf{x}^p = x_1^p, \dots, x_{|\Pi|}^p$  from  $\Pi$  and a vector of variables  $\mathbf{x}^v = x_1^v, \dots, x_k^v$ . There is a process index  $i : 1 \leq i \leq N(\mathbf{p})$  such that  $\sigma[i] \models \Phi(i)$ . Hence,  $\mathbf{x}^p = \mathbf{p}, x_1^v = \sigma[i].x_1, \dots, x_k^v = \sigma[i].x_k \models \Phi(i)$ . From the definition of the existential approximation it follows that  $(\alpha_{\mathbf{p}}(\sigma[i].x_1), \dots, \alpha_{\mathbf{p}}(\sigma[i].x_k)) \in \|\Phi(i)\|_E$ . Thus,  $\hat{x}_1^v = \alpha_{\mathbf{p}}(\sigma[i].x_1), \dots, \hat{x}_k^v = \alpha_{\mathbf{p}}(\sigma[i].x_k) \models \alpha_E(\Phi(i))$ . As for every  $x_j : 1 \leq j \leq k$  the value  $\bar{h}_{\mathbf{p}}^{dat}(\sigma)[i].x_j$  is exactly  $\hat{x}_j^v$ , we arrive at  $\bar{h}_{\mathbf{p}}^{dat}(\sigma)[i] \models \alpha_E(\Phi(i))$ . Then by the construction of  $\lambda_{\hat{f}}$  it holds that  $[\exists i. \Phi(i)] \in \lambda_{\hat{f}}(\bar{h}_{\mathbf{p}}^{dat}(\sigma))$ .

*Case 2.* Proposition  $q$  has a form  $[\forall i. \Phi(i)]$ , where  $\Phi$  has free variables of two types: a vector of parameters  $\mathbf{x}^p = x_1^p, \dots, x_{|\Pi|}^p$  from  $\Pi$  and a vector of variables  $\mathbf{x}^v = x_1^v, \dots, x_k^v$ . Then for every process index  $i : 1 \leq i \leq N(\mathbf{p})$  it holds  $\sigma[i] \models \Phi(i)$ . By fixing an arbitrary  $i : 1 \leq i \leq N(\mathbf{p})$  and repeating exactly the same argument as in the Case 1, we show that  $\bar{h}_{\mathbf{p}}^{dat}(\sigma)[i] \models \alpha_E(\Phi(i))$ . As  $i$  is chosen arbitrarily, we conclude that  $\bigwedge_{1 \leq i \leq N(\mathbf{p})} \bar{h}_{\mathbf{p}}^{dat}(\sigma)[i] \models \alpha_E(\Phi(i))$ . By the construction of  $\lambda_{\hat{f}}$  it holds that  $[\forall i. \Phi(i)] \in \lambda_{\hat{f}}(\bar{h}_{\mathbf{p}}^{dat}(\sigma))$ .

From Cases 1 and 2 we conclude that  $q \in \lambda_{\hat{f}}(\bar{h}_{\mathbf{p}}^{dat}(\sigma))$ . As we chose  $\sigma$  to be an arbitrary state on  $\pi$  labelled with  $q$  and we know that there are infinitely many such states on  $\pi$ , we have shown that there are infinitely many states  $\bar{h}_{\mathbf{p}}^{dat}(\sigma)$  on  $\hat{\pi}$  labelled with  $q$ . Finally, as  $q$  was chosen to be an arbitrary justice constraint from  $J$ , we conclude that every justice constraint  $q \in J$  appears infinitely often on  $\hat{\pi}$ .

This proves that  $\hat{\pi}$  is a fair path. ■

**Theorem 20.** *For all  $\mathbf{p} \in \mathbf{P}_{RC}$ , and all finite state process skeletons  $\mathbf{Sk}$ , let system instance  $\text{Inst}(\mathbf{p}, \mathbf{Sk}) = (S_I, S_I^0, R_I, \text{AP}, \lambda_I)$ , and  $\mathbf{C}(\mathbf{Sk}) = (S_C, S_C^0, R_C, \text{AP}, \lambda_C)$ . Then: if  $(\sigma, \sigma') \in R_I$ , then  $(\bar{h}_{\mathbf{p}}^{cnt}(\sigma), \bar{h}_{\mathbf{p}}^{cnt}(\sigma')) \in R_C$ .*

*Proof:* We have to show that if  $(\sigma, \sigma') \in R_I$ , then  $w = \bar{h}_{\mathbf{p}}^{cnt}(\sigma)$  and  $w' = \bar{h}_{\mathbf{p}}^{cnt}(\sigma')$  satisfy (9) to (18). We first note that as  $(\sigma, \sigma') \in R_I$ , it follows from the (MOVE) property of transition relations that there is a process index  $i$  such that  $(\sigma[i], \sigma'[i]) \in R_I$ ; we will use the existence of  $i$  in the following:

(9). Abbreviating  $s = \sigma[i]$  and  $s' = \sigma'[i]$ , (9) follows.

(10) and (13). Follows immediately from the definition of  $L$ .

(12). From the definition of  $\bar{h}_{\mathbf{p}}^{cnt}$  it follows that  $w.\kappa[\text{FROM}] = \alpha_{\mathbf{p}}(K(\sigma, \text{FROM}))$ .

From the existence of the index  $i$  it follows that  $K(\sigma, \text{FROM}) \geq 1$ . Hence, we have  $K(\sigma, \text{FROM}) \neq 0$  and from the definition of  $\alpha_{\mathbf{p}}$  it follows that  $\alpha_{\mathbf{p}}(K(\sigma, \text{FROM})) \neq 0$ . From  $\alpha_{\mathbf{p}}(1) = I_1$  and Definition 10 of total order we conclude (12), i.e.  $\alpha_{\mathbf{p}}(K(\sigma, \text{FROM})) \neq I_0$ .

(11) and (14). Follows immediately from the definition of  $\bar{h}_{\mathbf{p}}^{cnt}$ .

(15). Since  $\text{TO} = \text{FROM}$ , it follows from (10) and (13) that  $s = \{sv\} \cup \Lambda s'$ . Thus the process with index  $i$  does not change its local state. Moreover from the property (FRAME) of transition relations, all processes other than  $i$  maintain their local state. It follows that for all  $\ell$  in  $L$ ,  $K(\sigma, \ell) = K(\sigma', \ell)$ , and further that  $\alpha_{\mathbf{p}}(K(\sigma, \ell)) = \alpha_{\mathbf{p}}(K(\sigma', \ell))$ , and in particular  $\alpha_{\mathbf{p}}(K(\sigma, \text{FROM})) = \alpha_{\mathbf{p}}(K(\sigma', \text{FROM}))$ . Then (15) follows from the definition of  $\bar{h}_{\mathbf{p}}^{cnt}$ .

(16) and (17). From the property (FRAME) of transition relations, all processes other than  $i$  maintain their local state. Since  $\text{TO} \neq \text{FROM}$  it follows that  $i$  changes its local state. It follows that

$$K(\sigma', \text{TO}) = K(\sigma, \text{TO}) + 1, \quad (19)$$

$$K(\sigma', \text{FROM}) = K(\sigma, \text{FROM}) - 1. \quad (20)$$

From the definition of  $\bar{h}_{\mathbf{p}}^{cnt}$  we have

$$w'.\kappa[\text{TO}] = \alpha_{\mathbf{p}}(K(\sigma', \text{TO})) \text{ and}$$

$$w.\kappa[\text{TO}] = \alpha_{\mathbf{p}}(K(\sigma, \text{TO}))$$

$$w'.\kappa[\text{FROM}] = \alpha_{\mathbf{p}}(K(\sigma', \text{FROM})) \text{ and}$$

$$w.\kappa[\text{FROM}] = \alpha_{\mathbf{p}}(K(\sigma, \text{FROM}))$$

From Proposition 9 follows that

$$K(\sigma', \text{TO}) \in \gamma_{\mathbf{p}}(w'.\kappa[\text{TO}]) \text{ and}$$

$$K(\sigma, \text{TO}) \in \gamma_{\mathbf{p}}(w.\kappa[\text{TO}]) \quad (21)$$

$$K(\sigma', \text{FROM}) \in \gamma_{\mathbf{p}}(w'.\kappa[\text{FROM}]) \text{ and}$$

$$K(\sigma, \text{FROM}) \in \gamma_{\mathbf{p}}(w.\kappa[\text{FROM}]). \quad (22)$$

Point (16) follows from (19), (21), and the definition of existential abstraction  $\alpha_E$ , while (17) follows from (20), (22), and the definition of existential abstraction  $\alpha_E$ .

(18). From property (FRAME) processes other than  $i$  do not move. The move of process  $i$  does not change the number of processes in states other than FROM and TO. Consequently, for all local states  $\ell$  different from FROM and TO it holds that  $K(\sigma', \ell) = K(\sigma, \ell)$ . It follows that  $\alpha_{\mathbf{p}}(K(\sigma', \ell)) = \alpha_{\mathbf{p}}(K(\sigma, \ell))$ , and (18) follows from the definition of  $\bar{h}_{\mathbf{p}}^{cnt}$ . ■

**Theorem 21.** *For all  $\mathbf{p} \in \mathbf{P}_{RC}$ , and for all finite state process skeletons  $\mathbf{Sk}$ ,  $\text{Inst}(\mathbf{p}, \mathbf{Sk}) \preceq \mathbf{C}(\mathbf{Sk})$ , w.r.t.  $\text{AP}_{SV}$ .*

*Proof:* Due to Theorem 20, it is sufficient to show that if a proposition  $p \in \text{AP}_{SV}$  holds in state  $\sigma$  of  $\text{Inst}(\mathbf{p}, \mathbf{Sk})$  then

it also holds in state  $\bar{h}_{\mathbf{p}}^{cnt}(\sigma)$  and vice versa. We distinguish two types of propositions.

If  $p = [\forall i. sv_i = Z]$  and  $p \in \lambda_I(\sigma)$ , then by the definition of  $\lambda_I$  we have  $\bigwedge_{1 \leq i \leq N(\mathbf{p})} (\sigma[i].sv = Z)$ . Thus, in global state  $\sigma$  all processes are in a local state with  $sv = Z$ . In other words, no process is in a local state with  $sv \neq Z$ . It follows that each local state  $\ell$  satisfies in  $\sigma$  that  $\ell.sv = Z$  or  $K(\sigma, \ell) = 0$ . From the definition of  $\bar{h}_{\mathbf{p}}^{cnt}$  and the definition of  $\lambda_{\mathbf{C}}$  this case follows. The same argument works in the opposite direction.

If  $p = [\exists i. sv_i = Z]$  and  $p \in \lambda_I(\sigma)$ , then by the definition of  $\lambda_I$  we have  $\bigvee_{1 \leq i \leq N(\mathbf{p})} (\sigma[i].sv = Z)$ . Thus, in global state  $\sigma$  there is a process in a local state  $\ell$  with  $sv = Z$ . It follows that  $K(\sigma, \ell) > 0$ . From the definition of  $\bar{h}_{\mathbf{p}}^{cnt}$  and the definition of  $\lambda_{\mathbf{C}}$  the case follows. The same argument works in the opposite direction.

This two cases conclude the proof.  $\blacksquare$

**Theorem 22.** *If  $\pi = \{\sigma_i\}_{i \geq 1}$  is a  $J$ -fair path of  $\text{Inst}(\mathbf{p}, \text{Sk})$ , then the path  $\hat{\pi} = \{\bar{h}_{\mathbf{p}}^{cnt}(\sigma_i)\}_{i \geq 1}$  is a  $J$ -fair path of  $\mathbf{C}$ .*

*Proof:* By inductively applying Theorem 20 to  $\pi$  we conclude that  $\hat{\pi}$  is indeed a path of  $\mathbf{C}$ .

Fix an arbitrary justice constraint  $q \in J \subseteq \text{AP}_D$ ; infinitely many states on  $\pi$  are labelled with  $q$ . Fix an arbitrary state  $\sigma$  on  $\pi$  such that  $q \in \lambda_I$ . We show that  $q \in \lambda_{\mathbf{C}}(\bar{h}_{\mathbf{p}}^{cnt}(\sigma))$ .

Propositions from  $\text{AP}_D$  have the form of  $[\exists i. \Phi(i)]$  and  $[\forall i. \Phi(i)]$ , where each  $\Phi(i)$  has free variables of two types: a vector of parameters  $\mathbf{x}^p = x_1^p, \dots, x_{|\Pi|}^p$  from  $\Pi$ , a vector of local variables  $x^\ell = x_1^\ell, \dots, x_k^\ell$  from  $\Lambda$ , and a vector of global variables  $x^g = x_1^g, \dots, x_m^g$  from  $\Gamma$ .

$[\exists i. \Phi(i)] \in \lambda_{\mathbf{C}}(w)$  iff

$$\bigvee_{\ell \in L} (\mathbf{x}^\ell = \ell, \mathbf{x}^g =_{\Gamma} w \models \alpha_E(\Phi(i)) \wedge w.k[\ell] \neq I_0) \quad (23)$$

$[\forall i. \Phi(i)] \in \lambda_{\mathbf{C}}(w)$  iff

$$\bigwedge_{\ell \in L} (\mathbf{x}^\ell = \ell, \mathbf{x}^g =_{\Gamma} w \models \alpha_E(\Phi(i)) \vee w.k[\ell] = I_0) \quad (24)$$

Consider two cases: *Existential case* (23). There is a process index  $i : 1 \leq i \leq N(\mathbf{p})$  such that  $\hat{\sigma}[i] \models \alpha_E(\Phi(i))$ .

Consider a local state  $\ell \in L$  with  $\ell =_L \hat{\sigma}[i]$ . As  $\hat{\sigma}[i] \models \alpha_E(\Phi(i))$  it follows that  $x_1^\ell = \ell.x_1^\ell, \dots, x_k^\ell = \ell.x_k^\ell, x_1^g = w.x_1^g, \dots, x_m^g = w.x_m^g \models \alpha_E(\Phi(i))$ . As  $i$  is the index of a process with  $\ell =_L \hat{\sigma}[i]$ , it immediately follows that  $K(w, \ell) \neq 0$ . From the definition of  $\alpha$  it follows that for every  $\mathbf{p} \in \mathbf{P}_{RC}$  it holds  $\alpha_{\mathbf{p}}(K(w, \ell)) \neq I_0$ . Thus, by the definition of  $\bar{h}_{\mathbf{p}}^{cnt}$  we have  $w.k[\ell] \neq I_0$ .

Hence, both requirements of equation (23) are met for  $\ell$  and from the property of disjunction we have  $q \in \lambda_{\mathbf{C}}(w)$ .

*Universal case* (24). Then for every process index  $i : 1 \leq i \leq N(\mathbf{p})$  it holds  $\hat{\sigma}[i] \models \alpha_E(\Phi(i))$ .

By fixing an arbitrary  $i : 1 \leq i \leq N(\mathbf{p})$ , choosing  $\ell \in L$  with  $\ell =_L w$  and by repeating exactly the same argument as in the existential case, we show that  $x_1^\ell = \ell.x_1^\ell, \dots, x_k^\ell = \ell.x_k^\ell, x_1^g = w.x_1^g, \dots, x_m^g = w.x_m^g \models \alpha_E(\Phi(i))$ . Thus, for

every  $\ell \in L$  such that there exists  $i : 1 \leq i \leq N(\mathbf{p})$  with  $\ell =_L w$  the disjunct for  $\ell$  in 24 holds true.

Consider  $\ell' \in L$  such that for every  $i : 1 \leq i \leq N(\mathbf{p})$  it holds  $\ell' \neq_L w$ . It immediately follows that  $K(w, \ell') = 0$ ; from the definition of  $\alpha_{\mathbf{p}}$  we have that  $\alpha_{\mathbf{p}}(K(w, \ell')) = I_0$  and thus  $\kappa[\ell'] = I_0$ . Then for  $\ell'$  the disjunct in 24 holds true as well.

Thus, we conclude that the conjunction in the right-hand side of the equation (24) holds, which immediately results in  $q \in \lambda_{\mathbf{C}}(w)$ .

From Universal case and Existential Case we conclude that  $q \in \lambda_{\mathbf{C}}(w)$ . As we chose  $\hat{\sigma}$  to be an arbitrary state on  $\pi$  labelled with  $q$  and we know that there are infinitely many such states on  $\pi$ , we have shown that there are infinitely many states  $\bar{h}_{\mathbf{p}}^{cnt}(\hat{\sigma})$  on  $\hat{\pi}$  labelled with  $q$ . Finally, as  $q$  was chosen to be an arbitrary justice constraint from  $J$ , we conclude that every justice constraint  $q \in J$  appears infinitely often on  $\hat{\pi}$ .

This proves that  $\hat{\pi}$  is a fair path.  $\blacksquare$

**Theorem 28.** *Let  $T \subseteq R_{\mathbf{C}}$  be a set of spurious transitions. Then for every transition  $(\sigma, \sigma') \in R_{\omega}$  there is a transition  $(\bar{h}^{dc}(\sigma), \bar{h}^{dc}(\sigma'))$  in  $R_{\mathbf{C}} \setminus T$ .*

*Proof:* Assume that there is transition  $(\sigma, \sigma') \in R_{\omega}$  with  $w = \bar{h}^{dc}(\sigma)$ ,  $w' = \bar{h}^{dc}(\sigma')$ , and  $(w, w') \in R_{\mathbf{C}} \cap T$ . As  $T$  is a set of uniformly spurious transitions, we have that the transition  $(w, w')$  is uniformly spurious. Consider a pair of states  $\rho, \rho' \in S_{\omega}$  with the property  $\bar{h}^{dc}(\rho) = w$  and  $\bar{h}^{dc}(\rho') = w'$ . From Definition 26 it follows that  $(\rho, \rho') \notin R_{\omega}$ . This contradicts the assumption  $(\sigma, \sigma') \in R_{\omega}$  as we can take  $\rho = \sigma$  and  $\rho' = \sigma'$ .  $\blacksquare$

**Theorem 29.** *Let  $J \subseteq \text{AP}_D$  be a set of justice requirements,  $q \in J$ , and  $U \subseteq S_{\mathbf{C}}$  be a set of unjust states under  $q$ . Let  $\pi = \{\sigma_i\}_{i \geq 1}$  be an arbitrary fair path of  $\text{Sys}_{\omega}$  under  $J$ . The path  $\hat{\pi} = \{\bar{h}^{dc}(\sigma_i)\}_{i \geq 1}$  is a fair path in  $\mathbf{C}(\text{Sk}_{\text{abs}}(\mathcal{A}))$  under  $J \cup \{[\text{off } U]\}$ .*

*Proof:* Consider an arbitrary fair path  $\pi = \{\sigma_i\}_{i \geq 1}$  of  $\text{Sys}_{\omega}$  under  $J$ . Assume that  $\hat{\pi} = \{\bar{h}^{dc}(\sigma_i)\}_{i \geq 1}$  is fair under  $J$ , but it becomes unfair under  $J \cup \{[\text{off } U]\}$ .

If  $\hat{\pi}$  is unfair under  $\{[\text{off } U]\}$ , then  $\hat{\pi}$  does not have infinitely many states labelled with  $[\text{off } U]$ . Thus,  $\hat{\pi}$  must have an infinite suffix  $\text{suf}(\hat{\pi})$ , where each  $w \in \text{suf}(\hat{\pi})$  has the property  $[\text{off } U] \notin \lambda_{\mathbf{C}}$ . From the definition of  $[\text{off } U]$  we immediately conclude that every state  $w \in \text{suf}(\hat{\pi})$  belongs to  $U$ , i.e.,  $w$  is unjust under  $q \in J$ .

Using the suffix  $\text{suf}(\hat{\pi})$  we reconstruct a corresponding suffix  $\text{suf}(\pi)$  of  $\pi$  (by skipping the prefix of the same length as in  $\hat{\pi}$ ). From the fact that every state of  $\text{suf}(\hat{\pi})$  is unjust under  $q$  we know that every state  $\sigma \in \text{suf}(\pi)$  violates the constraint  $q$  as well, namely,  $q \notin \lambda_{\omega}(\sigma)$ . Thus,  $\pi$  has at most finitely many states labelled with  $q \in J$ . It immediately follows from the definition of fairness that  $\pi$  is not fair under  $J$ . This contradicts the assumption of the theorem.  $\blacksquare$

A. Detecting Spurious Transitions and Unjust States

In this section we show symbolic techniques to detect spurious transitions and unfair states for our specific PIA abstractions. We are concerned with symbolic representations that can be encoded as a formula of an SMT solver. While there are systems where one can encode the monster system  $\text{Sys}_\omega$  (Section V) in an SMT solver [37], [45], it is not obvious how to do this for threshold-based distributed algorithms, which have a parameterized local state space.

Our method consists of using a model for refinement that abstracts only local state space, but is finer than  $\{\text{Inst}(\mathbf{p}, \text{Sk}_{abs}(\mathcal{A}))\}_{\mathbf{p} \in \mathbf{P}_{RC}}$ . Thus, we introduce a family  $\{\text{Inst}(\mathbf{p}, \text{Sk}_\Lambda(\mathcal{A}))\}_{\mathbf{p} \in \mathbf{P}_{RC}}$ , where  $\text{Sk}_\Lambda(\mathcal{A})$  is a skeleton obtained by applying a data abstraction similar to Section IV-B, but shared variables  $\Gamma$  preserve their concrete values. Because guards operate on variables both in the abstract and concrete domain, we have to define a finer abstraction of guards.

We need some additional notation. In Section IV-A we introduced set  $\mathcal{G}_\mathcal{A}$  of linear combinations met in threshold guards of CFA  $\mathcal{A}$ . Let  $\varepsilon_i$  be such an expression that induces the threshold function  $\vartheta_j$  for  $0 \leq j \leq \mu$ . Note, that  $\varepsilon_0$  stands for 0 and  $\varepsilon_1$  stands for 1. We construct a formula  $in(y, I_a)$  expressing that a variable  $y$  lies within the interval captured by  $I_a$ . (Note that parameter variables are free in the formula.)

$$in(y, I_a) \equiv (I_a = I_\mu \wedge \varepsilon_a \leq y) \vee (I_a \neq I_\mu \wedge \varepsilon_a \leq y < \varepsilon_{a+1})$$

The abstraction of CFA guards is defined in Figure 6.

Similarly to Section IV-B we construct a CFA  $abst_\Lambda(\mathcal{A})$  and then use a process skeleton  $\text{Sk}_\Lambda(\mathcal{A})$  induced by  $abst_\Lambda(\mathcal{A})$ . For every parameter values  $\mathbf{p} \in \mathbf{P}_{RC}$  one can construct an instance  $\text{Inst}(\mathbf{p}, \text{Sk}_\Lambda(\mathcal{A}))$  using  $\text{Sk}_\Lambda(\mathcal{A})$ . We are going to show that this abstraction is coarser than  $\text{Inst}(\mathbf{p}, \text{Sk}(\mathcal{A}))$  and finer than  $\text{Inst}(\mathbf{p}, \text{Sk}_{abs}(\mathcal{A}))$  due to:

*Proposition 31:*  $\text{Sk}(\mathcal{A}) \preceq \text{Sk}_\Lambda(\mathcal{A}) \preceq \text{Sk}_{abs}(\mathcal{A})$ .

Now we encode the whole family  $\{\text{Inst}(\mathbf{p}, \text{Sk}_\Lambda(\mathcal{A}))\}_{\mathbf{p} \in \mathbf{P}_{RC}}$  using the VASS representation introduced in Section IV-C. A global state of the system  $\text{VS}_\Lambda$  is represented by a vector of parameter values, a vector of shared variable values, and a vector of process counters:  $(\mathbf{p}, \mathbf{g}, \mathbf{K})$ , where  $\mathbf{p} \in \mathbf{P}_{RC}$ ,  $\mathbf{g} \in D^{|\Gamma|}$ ,  $\mathbf{K} \in \mathbb{N}_0^{|\mathcal{L}|}$ . Moreover,  $N(\mathbf{p}) = \sum_{1 \leq i \leq |\mathcal{L}|} \mathbf{K}_i$ .

One can define a formula  $Init(\mathbf{p}, \mathbf{g}, \mathbf{K})$  that captures the initial states  $(\mathbf{p}, \mathbf{g}, \mathbf{K})$  similarly to the initial states of  $\text{C}(\text{Sk}_{abs}(\mathcal{A}))$ .

$\text{VS}_\Lambda$  makes a step from a global state  $(\mathbf{p}, \mathbf{g}, \mathbf{K})$  to a global state  $(\mathbf{p}', \mathbf{g}', \mathbf{K}')$  when:

- $\mathbf{p}' = \mathbf{p}$ ;
- there is a step  $(s, s') \in R$  of the skeleton  $\text{Sk}_\Lambda(\mathcal{A})$ , where a process moves from the local state  $\text{FROM} =_\Lambda s$  to the local state  $\text{TO} =_\Lambda s'$ ;
- at least one process stays in FROM, i.e.  $\mathbf{K}'_{\text{FROM}} > 0$ ;
- the counters are updated as  $\mathbf{K}'_{\text{FROM}} = \mathbf{K}_{\text{FROM}} - 1$  and  $\mathbf{K}'_{\text{TO}} = \mathbf{K}_{\text{TO}} + 1$ ;

- other counters do not change values, i.e.  $\forall i : 1 \leq i \leq |L|. (i \neq \text{FROM} \wedge i \neq \text{TO}) \rightarrow \mathbf{K}'_i = \mathbf{K}_i$ .

We can encode these constraints by a symbolic formula  $Step(\mathbf{p}, \mathbf{g}, \mathbf{K}, \mathbf{p}', \mathbf{g}', \mathbf{K}')$ .

The function  $\lambda \text{VS}_\Lambda$  labels states with justice constraints similar to the equations that define  $\lambda_C$  in Section IV-C. We omit the formal definition here.

*Proposition 32:* System  $\text{VS}_\Lambda$  simulates system  $\text{Sys}_\omega$ .

This allows us to use the following strategy. We take a transition  $\tau$  of  $\text{C}(\text{Sk}_{abs}(\mathcal{A}))$  and try to replay it in  $\text{VS}_\Lambda$ . If  $\tau$  is not reproducible in  $\text{VS}_\Lambda$ , due to Proposition 28,  $\tau$  is a spurious transition in  $\text{Sys}_\omega$  and it can be removed. The following proposition provides us with a condition to check if  $\tau$  can be replayed in  $\text{VS}_\Lambda$ :

*Proposition 33:* Let  $(w, w') \in R_C$  be a transition of  $\text{C}(\text{Sk}_{abs}(\mathcal{A}))$ . If there exists a transition  $(\sigma, \sigma') \in R_\omega$  such that  $w = \bar{h}^{dc}(\sigma)$  and  $w' = \bar{h}^{dc}(\sigma')$ , then there exists a transition  $Step(\mathbf{p}, \mathbf{g}, \mathbf{K}, \mathbf{p}, \mathbf{g}', \mathbf{K}')$  of  $\text{VS}_\Lambda$  satisfying the following condition:

$$\bigwedge_{1 \leq i \leq |\mathcal{L}|} (in(\mathbf{K}_i, w.\kappa[i]) \wedge in(\mathbf{K}'_i, w'.\kappa[i])) \wedge \bigwedge_{1 \leq j \leq |\Gamma|} (in(\mathbf{g}_j, w.g_j) \wedge in(\mathbf{g}'_j, w'.g_j))$$

In other words, if the formula from Proposition 34 is unsatisfiable, the transition  $(w, w')$  can be removed safely.

Further, we check whether an abstract state  $w \in S_C$  is an unjust one. If it is, then Proposition 33 allows us to refine justice constraints. The following proposition provides us with a condition that a state is unjust in  $\text{VS}_\Lambda$ :

*Proposition 34:* Let  $w \in S_C$  be a state of  $\text{C}(\text{Sk}_{abs}(\mathcal{A}))$  and  $q \in \text{AP}_D$  be a proposition expressing a justice constraint. If there exists a state  $\sigma \in S_\omega$  such that  $w = \bar{h}^{dc}(\sigma)$  and  $q \in \lambda_\omega(\sigma)$ , then there exists a state  $(\mathbf{p}, \mathbf{g}, \mathbf{K})$  of  $\text{VS}_\Lambda$  satisfying the following condition:

$$q \in \lambda \text{VS}_\Lambda((\mathbf{p}, \mathbf{g}, \mathbf{K})) \wedge \bigwedge_{1 \leq i \leq |\mathcal{L}|} in(\mathbf{K}_i, w.\kappa[i]) \wedge \bigwedge_{1 \leq j \leq |\Gamma|} in(\mathbf{g}_j, w.g_j)$$

In other words, if the formula from Proposition 34 is unsatisfiable, there is no state  $\sigma \in S_\omega$  with  $q \in \lambda_\omega(\sigma)$  abstracted to  $w$ . Thus,  $w$  is unjust.

*Remark 35:* The system  $\text{VS}_\Lambda$  and the constraints of Propositions 33 and 34 can be encoded in an SMT solver. By checking satisfiability we detect spurious transitions and unjust states. Moreover, unsatisfiable cores allow us to prune several spurious transitions and unjust states at once.

B. Invariant Candidates Provided by the User

In the transition-based approach of the previous section we cannot detect paths of being spurious in the case they do not contain uniformly spurious transitions (cf. beginning of Section V). In this case a human guidance might help: An expert gives an invariant candidate. Assuming the invariant

$$\text{abst}_\Lambda(g) = \begin{cases} \alpha_E(g) & \text{if } g \text{ is a threshold guard} \\ \bigvee_{(I_a, I_b) \in \|g\|_E} \hat{x} = I_a \wedge \text{in}(y, I_b) & \text{if } g \text{ is a comparison guard over } x \in \Lambda, y \in \Gamma \\ g & \text{if } g \text{ is either a comparison guard over } x, y \in \Gamma \text{ or a status guard} \\ \text{abst}_\Lambda(g_1) \wedge \text{abst}_\Lambda(g_2) & \text{if } g \text{ is } g_1 \wedge g_2 \end{cases}$$

Fig. 6. The abstraction of local variables in CFA guards.

candidate is expressed as a formula  $Inv$  over a global state  $(\mathbf{p}, \mathbf{g}, \mathbf{K})$  of  $\text{VS}_\Lambda$ , the invariant candidate can be automatically proven to indeed being an invariant by verifying satisfiability of the formulas:

$$Init(\mathbf{p}, \mathbf{g}, \mathbf{K}) \rightarrow Inv(\mathbf{p}, \mathbf{g}, \mathbf{K}) \quad (25)$$

$$\begin{aligned} Inv(\mathbf{p}, \mathbf{g}, \mathbf{K}) \wedge Step(\mathbf{p}, \mathbf{g}, \mathbf{K}, \mathbf{p}, \mathbf{g}', \mathbf{K}') \\ \rightarrow Inv(\mathbf{p}, \mathbf{g}', \mathbf{K}') \end{aligned} \quad (26)$$

Then a transition  $(w, w') \in R_C$  is spurious if the following formula is not satisfiable:

$$\begin{aligned} & Inv(\mathbf{p}, \mathbf{g}, \mathbf{K}) \wedge \\ & Step(\mathbf{p}, \mathbf{g}, \mathbf{K}, \mathbf{p}, \mathbf{g}', \mathbf{K}') \wedge Inv(\mathbf{p}, \mathbf{g}', \mathbf{K}') \wedge \\ & \bigwedge_{1 \leq i \leq |L|} (\text{in}(\mathbf{K}_i, w.\kappa[i]) \wedge \text{in}(\mathbf{K}'_i, w'.\kappa[i])) \wedge \\ & \bigwedge_{1 \leq j \leq |\Gamma|} (\text{in}(\mathbf{g}_i, w.g_j) \wedge \text{in}(\mathbf{g}'_j, w'.g_j)) \end{aligned}$$

If we receive a counterexample  $\hat{T}$  that cannot be refined with the techniques from the previous section, we test each transition of  $\hat{T}$  against the above formula. If the formula is unsatisfiable for a transition  $(w, w') \in \hat{T}$ , it is sound to remove it from  $\mathbf{C}(\text{Sk}_{abs}(\mathcal{A}))$  due to Theorem 28, Equations (25), (26), and the formula above.

*Example 36:* To give an impression, how simple an invariant can be, for our case study (cf. Section II) the relay specification required us to introduce the following invariant candidate: If  $L_s = \{\ell \in L \mid \ell.sv = \text{SE} \vee \ell.sv = \text{AC}\}$ , then the following formula is an invariant  $nsnt = \sum_{\ell \in L_s} \mathbf{K}_\ell$ . Intuitively, it captures the obvious property that the number of messages sent is equal to the number of processes that have sent a message. This property was, however, lost in the course of abstraction.