

# Improving transcriptome assembly through error correction of high-throughput sequence reads

Matthew D MacManes<sup>1\*</sup> and Michael B. Eisen<sup>1,2</sup>

**1** UC Berkeley. California Institute of Quantitative Biology, Berkeley, CA, USA

**2** Howard Hughes Medical Institute

\* Corresponding author: [macmanes@gmail.com](mailto:macmanes@gmail.com), Twitter: [@PeroMHC](https://twitter.com/PeroMHC)

## Abstract

The study of functional genomics—particularly in non-model organisms has been dramatically improved over the last few years by use of transcriptomes and RNAseq. While these studies are potentially extremely powerful, a computationally intensive procedure—the *de novo* construction of a reference transcriptome must be completed as a prerequisite to further analyses. The accurate reference is critically important as all downstream steps, including estimating transcript abundance are critically dependent on the construction of an accurate reference. Though a substantial amount of research has been done on assembly, only recently have the pre-assembly procedures been studied in detail. Specifically, several stand-alone error correction modules have been reported on, and while they have shown to be effective in reducing errors at the level of sequencing reads, how error correction impacts assembly accuracy is largely unknown. Here, we show via use of a simulated and empiric dataset, that applying error correction to sequencing reads has significant positive effects on assembly accuracy, and should be applied to all datasets. A list of commands with will allow for the production of REPTILE corrected reads is available at <https://gist.github.com/macmanes/5878728>

## 1 Introduction

2 The popularity of genome enabled biology has increased dramatically, particularly for researchers study-  
3 ing non-model organisms, during the last few years. For many, the primary goal of these works is to  
4 better understand the genomic underpinnings of adaptive (Linnen et al., 2013; Narum et al., 2013) or  
5 functional (Muñoz Merida et al., 2013; Hsu et al., 2012) traits. While extremely promising, the study  
6 of functional genomics in non-model organisms typically requires the generation of a reference tran-  
7 scriptome to which comparisons are made. Although compared to genome assembly (Bradnam et al.,  
8 2013; Earl et al., 2011), transcriptome assembly is less challenging, significant hurdles still exist (see  
9 Francis et al. (2013); Vijay et al. (2013); Pyrkosz et al. (2013) for examples of the types of challenges).

10

11 The process of transcriptome assembly is further complicated by the error-prone nature of high-throughput  
12 sequencing reads. With regards to Illumina sequencing, error is distributed non-randomly over the length

13 of the read, with the rate of error increasing from 5' to 3' end (Liu et al., 2012). These errors are over-  
14 whelmingly substitution errors (Yang et al., 2013), with the global error rate being between 1% and  
15 3%. While beyond the focus of this paper, the accuracy of *de novo* transcriptome assembly, sequencing  
16 errors may have important implications for SNP calling, and the estimation of nucleotide polymorphism  
17 and the estimation of transcript abundance.

18

19 With regards to assembly, sequencing read error has both technical and 'real-world' importance. Be-  
20 cause most transcriptome assemblers use a *de Bruijn* graph representation of sequence connectedness,  
21 sequencing error can dramatically increase the size and complexity of the graph, and thus increase both  
22 RAM requirements and runtime (Conway and Bromage, 2011; Pell et al., 2012). More important, how-  
23 ever, are their effects on assembly accuracy. Before the current work, sequence assemblers were thought  
24 to efficiently handle error given sufficient sequence coverage. While this is largely true, sequence error  
25 may lead to assembly error at the nucleotide level despite high coverage, and therefore should be cor-  
26 rected, if possible. In addition, there may be technical, biological, or financial reasons why extremely  
27 deep coverage may not be possible, therefore, a more general solution is warranted.

28

29 While the vast majority of computational genomics research has focused on either assembly (Chaisson et al.,  
30 2004; Miller et al., 2010; Earl et al., 2011; Bradnam et al., 2013) or transcript abundance estimation  
31 (Soneson and Delorenzi, 2013; Marioni et al., 2008; Mortazavi et al., 2008; Pyrkosz et al., 2013), up  
32 until recently, research regarding the dynamics of pre-assembly procedures has largely been missing.  
33 However, error correction has become more popular, with several software packages becoming available  
34 for error correction, e.g. ALLPATHSLG error correction (Gnerre et al., 2011), QUAKE (Kelley et al.,  
35 2010), ECHO (Kao et al., 2011), REPTILE (Yang et al., 2010), SOAPdenovo (Liu et al., 2011), SGA  
36 (Simpson and Durbin, 2010) and SEECER (Le et al., 2013). While these packages have largely focused  
37 on the error correction of genomic reads (with exception to SEECER, which was designed for RNAseq  
38 reads), they may likely be used as effectively for RNAseq reads.

39

40 Recently a review (Yang et al., 2013) evaluating several of these methods in their ability to correct

41 genomic sequence read error was published. However, the application of these techniques to RNAseq  
42 reads, as well as an understanding of how error correction influences accuracy of the *de novo* transcrip-  
43 tome assembly has not been evaluated. Here we aim to evaluate several of the available error correction  
44 methods. Though an understanding of the error correction process itself, including it's interaction with  
45 coverage may be a useful exercise, our initial efforts described here, focus on the the effects of error cor-  
46 rection on assembly, the resource which forms the basis of all downstream (e.g. differential expression,  
47 SNP calling) steps.

48

49 To accomplish this, we simulated 30 million paired-end Illumina reads and assembled uncorrected reads,  
50 as well as reads corrected by each of the evaluated correction methods, which were chosen to represent  
51 the breadth of computational techniques used for sequence read error correction. Though we focus on  
52 the simulated dataset, we corroborate our findings through use of an empirically derived Illumina dataset.  
53 For both datasets, we evaluate assembly content, number of errors incorporated into the assembly, and  
54 mapping efficiency in an attempt to understand the effects of error correction on assembly. Although  
55 Illumina is just one of the available high-throughput sequencing technologies currently available, we  
56 chose to limit our investigation to this single, most widely used technology, though similar investigations  
57 will become necessary as the sequencing technology evolves.

58

59 Because the *de novo* assembly is a key resource for all subsequent studies of gene expression and allelic  
60 variation, the production of an error-free reference is absolutely critical. Indeed, error in the reference  
61 itself will have potential impacts on the results of downstream analyses. These types of error may be  
62 particularly problematic in *de novo* assemblies of non-model organisms, where experimental validation  
63 of sequence accuracy may be impossible. Though methods for the correction of sequencing reads have  
64 been available for the last few years, their adoption has been limited, seemingly because a demonstration  
65 of their effects has been lacking. Here, we show that error correction has a large effect on assembly  
66 quality, and therefore argue that it should become a routine part of workflow involved in processing Illu-  
67 mina mRNA sequence data. Though this initial work focuses on the results of error correction; arguably  
68 the most logical candidate for study, future work will attempt to gain a deeper understanding of error

69 in the error correction process itself.

70

## 71 Results

72 Thirty million 100nt paired-end (PE) reads were simulated using the program FLUX SIMULATOR  
73 (Griebel et al., 2012). Simulated reads were based on the coding portion of the *Mus musculus* genome  
74 and included coverage of about 60k transcripts with average depth of 70X. Thirty million reads were sim-  
75 ulated as this corresponds to the sequencing effort suggested by (Francis et al., 2013) as an appropriate  
76 effort, balancing coverage with the accumulation of errors, particularly in non-model animal transcrip-  
77 tomics. These reads were qualitatively similar to several published datasets (MacManes and Lacey, 2012;  
78 Chen et al., 2011). Sequence error was simulated to follow the well-characterized Illumina error profile  
79 (Supplementary Figure 1). Similarly, patterns of gene expressions were typical of many mammalian  
80 tissues (Supplementary Figure 2), and follows a Poisson distribution with  $\lambda=1$  (Auer and Doerge,  
81 2011; Hu et al., 2011; Jiang and Wong, 2009).

82

83 In addition to the simulated dataset, error correction was applied to an empirically derived Illumina  
84 dataset. This dataset consists of 50 million 76nt paired-end Illumina sequence reads from *Mus muscu-*  
85 *lus* mRNA, and is available as part of the Trinity software package (Haas et al., 2013; Grabherr et al.,  
86 2011). Because we were interested in comparing the two datasets, we randomly selected 30 mil-  
87 lion PE reads from the total 50 million reads for analyses. The simulated read dataset is available  
88 at <https://www.dropbox.com/s/mp8fu0tijox69ki/simulated.reads.tar.gz>, while the empirical  
89 dataset is at <https://www.dropbox.com/s/rkl0ihqom28smb2/empiric.reads.tar.gz>. [Of note,  
90 these datasets are to be moved to Dryad upon acceptance for publication. ]

91

92 Error correction of the simulated and empiric datasets was completed using the SEECER, ALLPATH-  
93 SLG, SGA, and REPTILE error correction modules. Details regarding the specific numbers of nucleotide  
94 changes and the proportion of reads being affected are detailed in (Table 1). Despite the fact that each  
95 software package attempted to solve the same basic problem, runtime considerations and results were

96 quite different. TRINITY assembly using the uncorrected simulated reads produced an assembly con-  
97 sisting of 78.43Mb, while the assembly of empirically derived reads was 74.24Mb.

98

99 **Table 1**

100

Simulated Dataset	Total Reads	Num reads corr	Num nt corr	Runtime
Raw reads	30M PE	n/a	n/a	n/a
ALLPATHSLG Corr.	30M PE	?	139,592,317	~ 8hrs
SGA Corr.	30M PE	?	19,826,919	~ 38 minutes
REPTILE Corr.	30M PE	2,047,088	7,782,594	~ 3 hours
SEECER Corr.	30M PE	8,782,350	14,033,709	~ 5 hours

101

102

Table 1. Number of raw sequencing reads, sequencing reads corrected, nu-  
cleotides (nt) corrected, and approximate runtime for each of the datasets.

103

104

Note that neither ALLPATHS nor SGA provides information regarding the num-  
ber of reads affected by the correction process.

105

## 106 **Simulated Data**

107

Analyses focused on a high-confidence subset of the data, as defined as being 99% similar to the reference  
over at least 90% of its length. The high-confidence subset of the simulated uncorrected read assembly  
(n=38459 contigs) contained approximately 54k nucleotide mismatches (Figure 1), corresponding to an  
mean error rate of 1.40 mismatches per contig (SD=7.38, max=178). There did not appear to be an  
obvious relationship between gene expression and the quality of the assembled transcripts  
(Figure 2). While the rate of error is low, and indeed a testament to the general utility the *de Bruijn*  
graph approach for sequence assembly, a dramatic improvement in accuracy would be worth pursuing,  
if possible.

115

116


Error correction of simulated reads using REPTILE was a laborious process, with multiple (>5) indi-  
vidual executions of the program required for parameter optimization. While each individual run was

117

118 relatively quick, the total time exceed 12 hours, with manual intervention and decision making required  
119 at each execution. Error correction resulted in the correction of 7.8M nucleotides (of a total ~ 5B  
120 nucleotides contained in the sequencing read dataset). The resultant assembly contains an average of  
121 1.23 mismatches per contig (SD=6.46, max=152). The absolute number of errors decreased by ~ 12%  
122 (Figure 1), which represents substantial improvement, particularly given that the high confidence subset  
123 of the Reptile-corrected assembly was the largest (n= 38670 contigs) of any of the methods (Table 2).

124

125 **Figure 1**

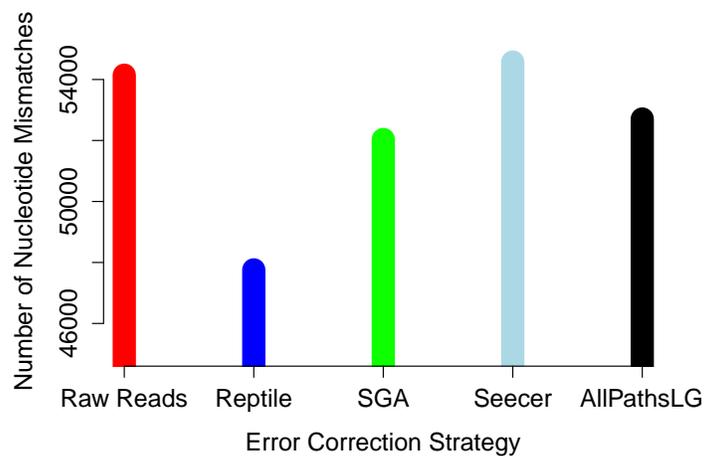

126

127 Fig. 1. The global estimate of nucleotide mismatch decreases with error cor-  
128 rection. The assembly done with REPTILE corrected reads has approximately  
129 10% fewer errors than does the raw read assembly.


130 ALLPATHSLG error correction software implemented by far the most aggressive correction, selected  
131 optimized parameters in an automated fashion, and did so within a 4 hour runtime. ALLPATHSLG  
132 corrected nearly 140M nucleotides (again, out of a total ~ 5B nucleotides contained in the sequencing  
133 reads), which resulted in a final assembly with 52706 nucleotide errors, corresponding to a decrease in  
134 error of approximately 2.7%.

135

136 SEECER, is the only dedicated error-correction software package dedicated to RNAseq reads. Though  
137 SEECER is expected to handle RNAseq datasets better than the other correction programs, its results  
138 were disappointing. More than 14 million nucleotides were changed, affecting approximately 8.8M se-  
139 quencing reads. Upon assembly 54,574 nucleotide errors remained, which is equivalent to the number  
140 of errors contained in the assembly of uncorrected reads.

141

142 **Figure 2**

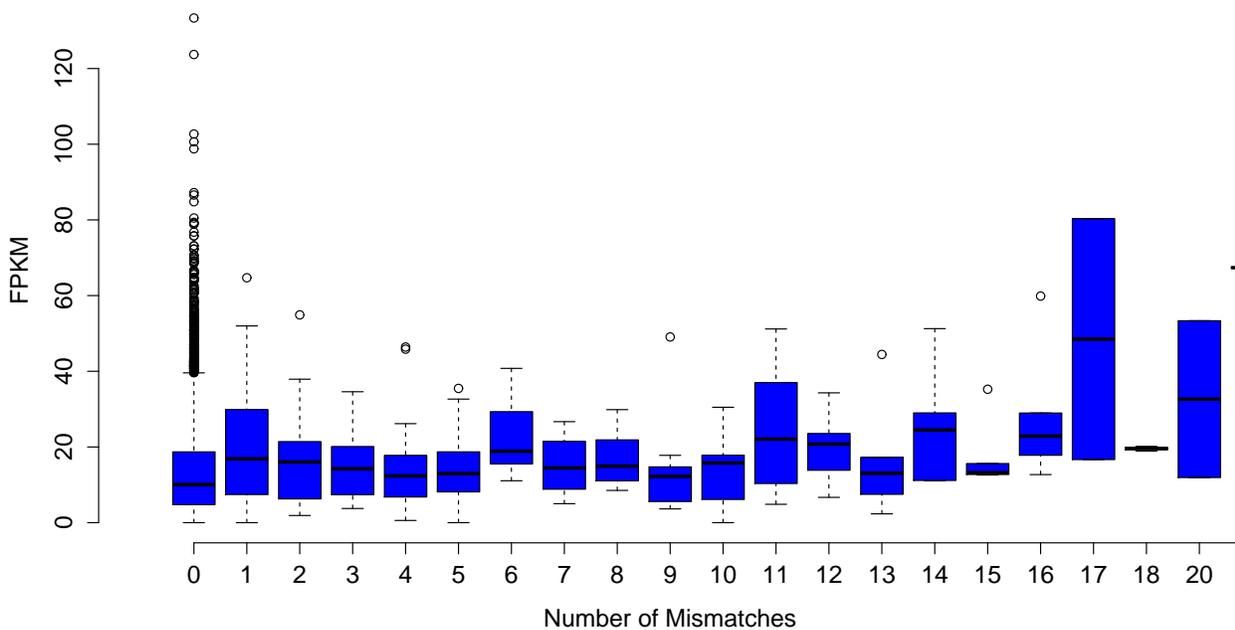

143

144 Fig. 2. The number of nucleotide mismatches in a given contig is not related to  
145 gene expression. On average, in the assembly of uncorrected simulated reads,  
146 poorly expressed transcripts are no more error prone than are highly expressed  
147 transcripts.

148 Lastly, SGA error correction was implemented on the simulated read dataset. SGA, is the fastest of  
149 all error correction modules, and finished correcting the simulated dataset in 38 minutes. The software  
150 applied corrections to 19.8M nucleotides. It's correction resulted in a modest improvement in error,

151 with a reduction in error of approximately 4% over the assembly of uncorrected errors.

152

153 Assembly content, aside from fine-scaled differences at the nucleotide level, as described above, were  
154 equivalent. Assemblies consisted of between 63,099 (REPTILE) – 65,468 (SEECER) putative transcripts  
155 greater than 200nt in length. N50 ranged from 2319 (REPTILE) – 2403nt (SGA). The high-confidence  
156 portion of the assemblies ranged in size from 38407 contigs (SEECER assembly) to 38670 contigs in the  
157 REPTILE assembly. Assemblies are detailed in Table 2, and available at <http://dx.doi.org/10.6084/m9.figshare.7>

158

159 **Table 2**

160

Dataset	Error Corr. Method	Raw Assembly Size	High Conf. Size
Simulated Reads			
	None	64491 (78Mb)	38459 (27Mb)
	ALLPATHSLG	64682 (78Mb)	38628 (27Mb)
	SGA	65059 (80Mb)	38619 (27Mb)
	REPTILE	63099 (73Mb)	38670 (25Mb)
	SEECER	65468 (80Mb)	38407 (27Mb)
Empiric Reads			
	None	57338 (74Mb)	21406 (24Mb)
	ALLPATHSLG	53884 (66Mb)	21204 (23Mb)
	SGA	56707 (75Mb)	21323 (24Mb)
	REPTILE	53780 (60Mb)	21850 (22Mb)
	SEECER	57311 (75Mb)	21268 (24Mb)

161

162

163

164

Table 2. Assembly details. High confidence datasets included only contigs that matched a single reference, had sequence similarity >99%, and covered  $\geq 90\%$  of length of reference.

165 The proportion of reads mapping to each assembled dataset was equivalent as well, ranging from 92.44%  
166 using raw reads to 94.89% in SGA corrected reads. Assemblies did not appear to differ in general patterns  
167 of contiguity, (Figure 3), though it should be noted that the most successful error corrector, REPTILE  
168 had both the smallest assembly size *and* largest number of high confidence contigs. Taken together,  
169 these patterns suggest that error correction may have a significant effect on the structure of assembly;  
170 though its major effects are in enhancing resolution at the level of the nucleotide. Indeed, while we did  
171 not find, nor expect to find large differences in these global metrics, we do expect to see a significant  
172 effect on transcriptome based studies of marker development and population genetics, which are en-  
173 deavors fundamentally linked to polymorphism, estimates of which can easily be confused by sequence  
174 error.

175

## 176 Empirical Data


177 The high-confidence subset of the uncorrected empirical read assembly (n=21406 contigs) contained  
178 approximately 14.7k nucleotide mismatches, corresponding to an mean error rate of .68 mismatches  
179 per contig (SD=3.60 max=197). Error correction procedures were implemented as described above.  
180 Indeed, the resultant patterns of correction were recapitulated. Error correction using REPTILE were  
181 most favorable, and resulted in a reduction in the number of nucleotide errors by more than 10%, to  
182 approximately 13k. As above, the high-confidence portion of the REPTILE-corrected dataset was the  
183 largest, with 21580 contigs, which is slightly larger than the assembly of uncorrected reads. Similar to  
184 what was observed in the simulated dataset, the high-confidence portion of the ALLPATHS corrected  
185 assembly was the smallest of any of the datasets, and contained the most error. Of interest, the SGA  
186 correction performed well, similar to as in simulated reads, decreasing error by more than 9%.

187

188 Empirical assemblies contained between 53780 (REPTILE) and 57338 (uncorrected assembly) contigs  
189 greater than 200nt in length. N50 ranged from between 2412 (REPTILE) and 2666nt (SEECER) in  
190 length. As above, assemblies did not differ widely in their general content or structure; instead effects  
191 were limited to differences at nucleotide level. Assemblies are available at <http://dx.doi.org/10.6084/m9.figshare>

192

193 **Figure 3**

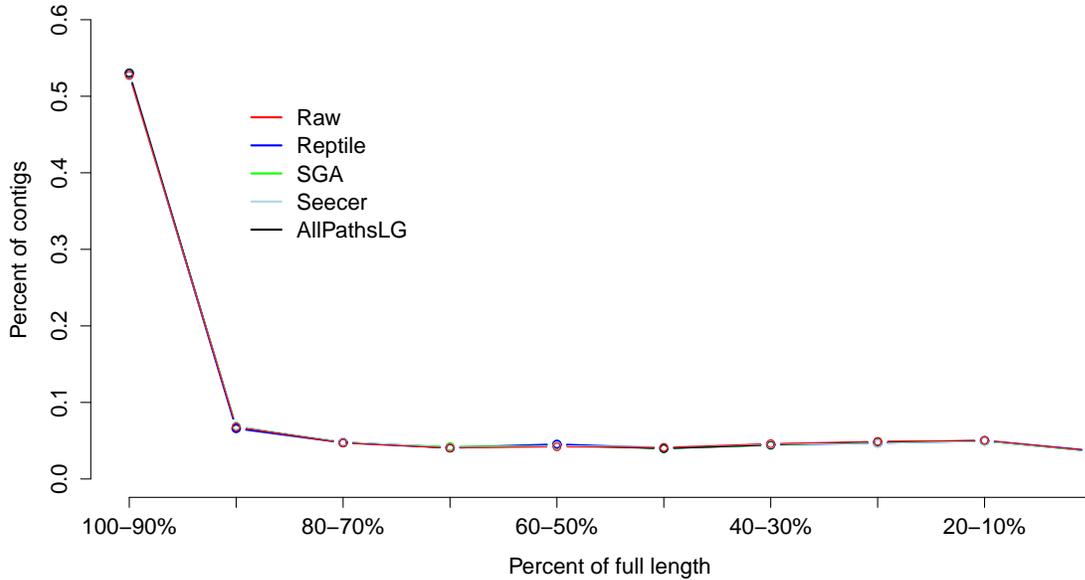

194

195 Fig. 3. Assembly contiguity did not vary significantly between assemblies  
196 of reads using the different error correction methods. Each error correction  
197 methods, as well as assembly of raw reads, produced an assembly that is dom-  
198 inated by full length (both start and stop codon present) or nearly full length  
199 assembled transcripts.

## 200 Discussion

201 Though the methods for error correction have become increasingly popular within the last few years,  
202 their adoption in general genome or transcriptome assembly pipelines has lagged. One potential reason  
203 for this lag has been that their effects on assembly, particularly in RNAseq, has not been demonstrated.  
204 Here, we attempt to evaluate the effects of four different error correction algorithms on assembly- ar-  
205 guably the step upon which all downstream steps (e.g. differential expression, functional genomics, SNP

206 discovery, etc.) is based. We use both simulated and empirically derived data to show a significant  
207 effect of correction on assembly— especially when using the error corrector REPTILE. This particular  
208 method, while relatively labor intensive to implement, reduces error by more than 10%, and results in  
209 a larger high-confidence subset relative to other methods. Aside from a reduction in the total number  
210 of errors, REPTILE correction both reduced variation in nucleotide error, and reduced the maximum  
211 number of errors in a single contig.

212

213 Interesting, SEECER, the only error correction method designed for RNAseq reads, performed relatively  
214 poorly. In simulated reads, SEECER slightly increased the number of errors in the assembly, though with  
215 applied to empirically derived reads, results were more favorable, decreasing error by  $\sim 3\%$ . Though  
216 the effects of coverage on correction efficiency were not explored in the manuscript describing SEECER  
217 (Le et al., 2013), their empirical dataset contained nearly 90 million sequencing reads, a size 3X larger  
218 than the dataset we analyze here. Future work investigating the effects of coverage on error correction  
219 is necessary.

220


221 In addition to this, how error correction interacts with the more complicated reconstructions, splice  
222 variants for instance, is an outstanding question. Indeed, reads traversing a splicing junction may  
223 be particularly problematic for error correctors, as coverage on opposite sides of the junction may  
224 be different owing to differences in isoform expression, which could masquerade as error. Alternative  
225 splicing is known to negatively affect both assembly and mapping (Vijay et al., 2013; Sammeth, 2009;  
226 Pyrkosz et al., 2013), and given that many computational strategies are shared between these techniques  
227 and error correction suggests that similarly, error correction should be affected by splicing. Indeed, many  
228 of the most error-rich contigs were those where multiple isoforms were present. As such, considering this  
229 potential source of error in error correction should be considered during error correction. Computational  
230 strategies that distinguish these alternative splicing events from real error are currently being developed.

231

232 The effects of read coverage on the efficiency of error correction are likely strong. Aside from the  
233 suggestion that SEECER's relatively poor performance owed to low coverage data relative to the dataset

234 tested during the development of that software (Le et al., 2013), other supporting evidence exists.  
235 Approximately 5% of reads are miscorrected. When looking at a sample (n=50000) of these reads, the  
236 contig to which that read maps is on average more lowly expressed than appropriately corrected reads  
237 (Figure 4, Wilcoxon rank sum test,  $W = 574733$ , p-value = 0.00022), which suggests that low coverage  
238 may reduce the efficiency of error correction. In addition, miscorrected reads, whose average expression  
239 is lower, tend to have more corrections than to the appropriately corrected reads (Figure 5, t test,  $t =$   
240  $-2.1755$ ,  $df = 7164.8$ , p-value = 0.029).


241 **Figure 4**

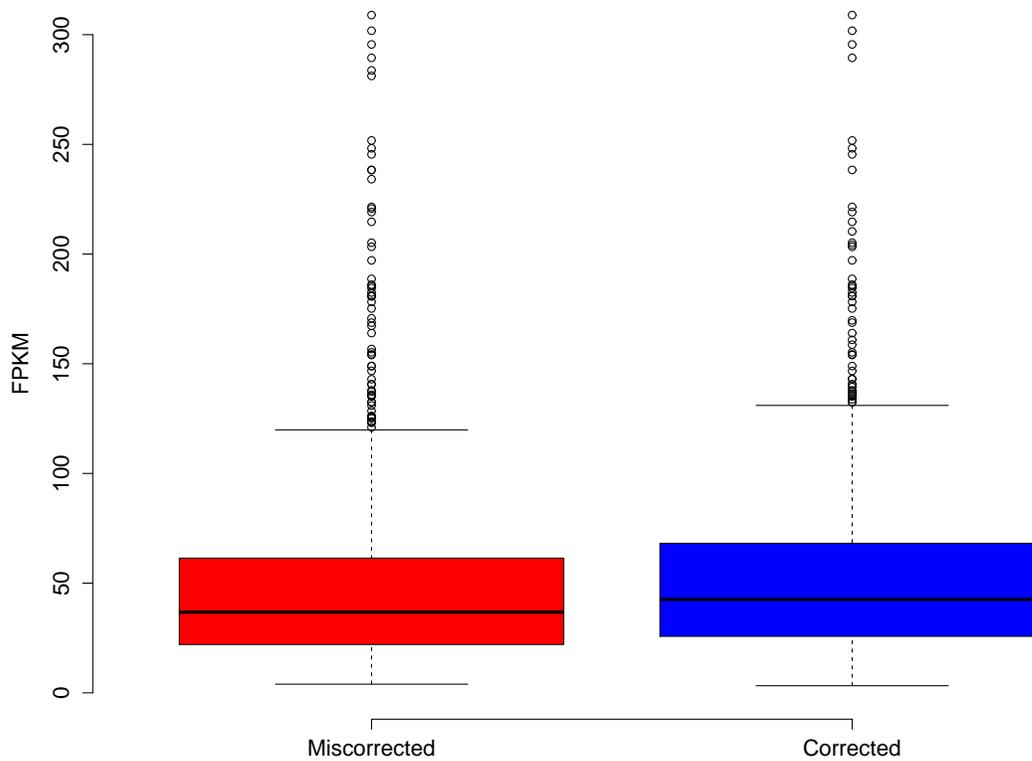

242

243 Fig. 4. Reads miscorrected by REPTILE have lower expression, on average,  
244 than to appropriately corrected reads.

245 **Figure 5**

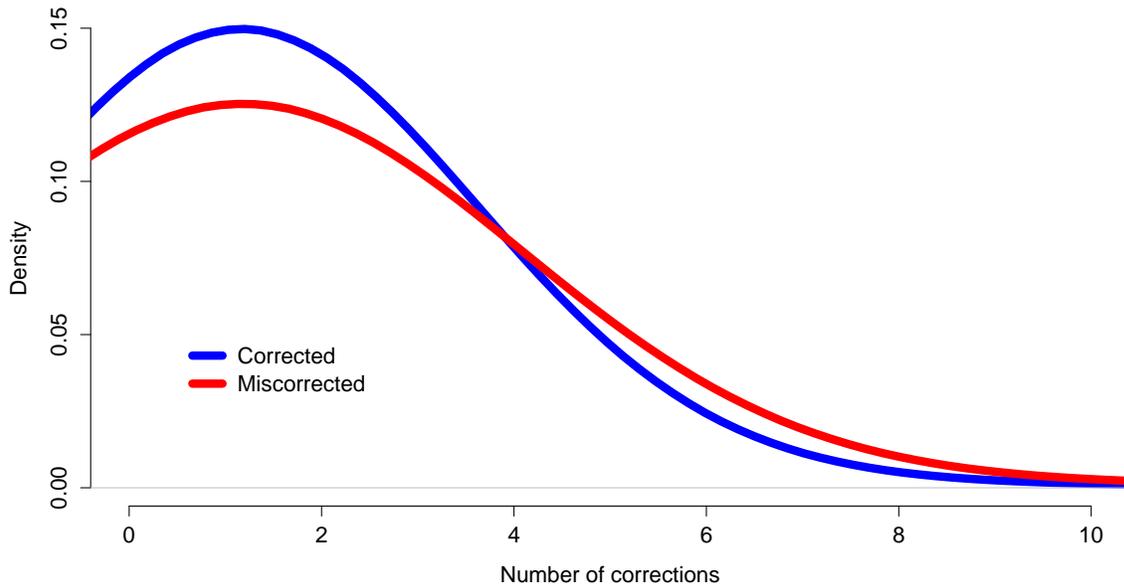

246

247

Fig. 5. Reads miscorrected by REPTILE have more corrections, on average,  
 248 than to appropriately corrected reads.

248

249 Though sequence read error correction failed to have a large effect on global assembly metrics, there  
 250 was substantial improvement at the nucleotide level. Indeed, these more fine scaled effects are both  
 251 harder to assay, particularly in non-model organisms, and also potentially more damaging. For instance,  
 252 one popular application for transcriptome assembly is population genomics. Most population genomics  
 253 analysis are fundamentally based on estimates of polymorphism, and higher polymorphism, stemming  
 254 from error, may bias results in unpredictable ways. In addition to error's effects on estimation of poly-  
 255 morphism, researchers interested in studying functional biology may also be impacted. Here, insertion  
 256 errors may create nonsensical amino acid translation of a coding sequence, while more common sub-  
 257 stitution errors may form premature stop codons. Though errors remain even after error correction, a  
 258 reduction in magnitude of error is certainly something worth pursuing.

## 259 **Methods**

260 Because we were interested in understanding the effects of error correction on the assembly of vertebrate  
261 transcriptome assembly, we elected to use coding sequences greater than 200nt in length from the *Mus*  
262 *musculus* reference genome (GRCm37.71), available at [http://uswest.ensembl.org/Mus\\_musculus/Info/Index](http://uswest.ensembl.org/Mus_musculus/Info/Index).  
263 Thirty million 100nt paired-end Illumina reads were simulated with the program FLUX SIMULATOR  
264 (Griebel et al., 2012) which attempts to simulate a realistic Illumina RNAseq dataset, incorporating  
265 biases related to library construction and sequencing. Thirty million PE reads were simulated as this  
266 sequencing effort was suggested to be optimal for studies of whole-animal non-model transcriptomes  
267 (Francis et al., 2013). Sequencing error increased along the length of the read, as per program default.  
268 Patterns of gene expression were modeled to follow patterns typically seen in studies of Eukaryotic  
269 gene expression. The FLUX SIMULATOR requires the use of a parameter file, which is available at  
270 <https://gist.github.com/macmanes/5859902>.

271  
272 In addition to analyses conducted on a simulated dataset, we used the well-characterized mouse dataset  
273 included with the Trinity software package (<http://sourceforge.net/projects/trinityrnaseq/files/misc/Mouse>)  
274 to validate the observed patterns using an empirically derived dataset. To enable comparison between  
275 the simulated and empiric dataset, we randomly selected a subset of this dataset consisting of 30 million  
276 PE reads.

277  
278 Quality metrics for simulated and experimental raw reads were generated using the program SOLEX-  
279 AQA (Cox et al., 2010), and visualized using R (R Core Development Team, 2011). Patterns of gene  
280 expression were validated using the software packages BOWTIE2 (Trapnell et al., 2010) and EXPRESS  
281 (Roberts and Pachter, 2012). All computational work was performed on a 16-core 36GB RAM Linux  
282 Ubuntu workstation.

283  
284 Error correction was performed on both simulated and empirical datasets using four different error cor-  
285 rection software packages. These included SEECER, ALLPATHSLG error correction, REPTILE, and  
286 SGA. These specific methods were chosen in an attempt to cover the breadth of analytical methods

287 currently used for error correction. Indeed, each of these programs implements a different computational  
288 strategy for error correction, and therefore their success, and ultimate effects on assembly accuracy are  
289 expected to vary. In addition, several of these packages have been included in a recent review of error  
290 correction methods, with one of these (REPTILE) having been shown to be amongst the most accurate  
291 (Yang et al., 2013).

292

293 Though error correction has been a part of the ALLPATHSLG genome assembler for the past sev-  
294 eral versions, only recently has a stand-alone version of their python-based error correction module  
295 (<http://www.broadinstitute.org/software/allpaths-lg/blog/?p=577>), which leverages sev-  
296 eral of the AllPaths subroutines, become available. With exception to the minimum kmer frequency,  
297 which was set to 0 (unique kmers retained in the final corrected dataset), the ALLPATHSLG error cor-  
298 rection software was run using default settings for correcting errors contained within the raw sequencing  
299 reads. Code for running the program is available at <https://gist.github.com/macmanes/5859931>.

300

301 Error correction using the software package REPTILE requires the optimization of several parameters  
302 via an included set of scripts, and therefore several runs of the program. To correct errors contained  
303 within the raw dataset, we set kmer size to 25 ( $KmerLen=25$ ), and the maximum error rate to 2%  
304 ( $MaxErrRare=0.02$ ).  $Kmer=25$  was selected to most closely match the kmer size used by the assem-  
305 bler TRINITY. We empirically determined optimal values for  $T\_expGoodCnt$  and  $T\_card$  using multiple  
306 independent program executions. REPTILE requires the use of a parameter file, which is available at  
307 <https://gist.github.com/macmanes/5859947>.

308

309 The software package SGA was also used to correct simulated and empiric Illumina reads. This pro-  
310 gram, like ALLPATHS-LG, allows its error correction module to be applied independent of the rest of  
311 the pipeline. These preliminary steps, preprocessing, indexing, and error correction were run with default  
312 settings, with exception to the kmer size, which was set to 25.

313

314 Lastly, the software package SEECER was used to error correct the raw read dataset. The software

315 package is fundamentally different than the other packages, in that it was designed for with RNAseq  
316 reads in mind. We ran SEECER using default settings.

317

318 Transcriptome assemblies were generated using the default settings of the program TRINITY (Grabherr et al.,  
319 2011). Code for running TRINITY is available at <https://gist.github.com/macmanes/5859956>.

320 Assemblies were evaluated using a variety of different metrics. First, BLAST+ (Camacho et al., 2009)

321 was used to match assembled transcripts to their reference. TRANSDCODER (<http://transdecoder.sourceforge.net>)

322 was used to identify full-length transcripts. For analysis of nucleotide mismatch, we elected to analyze

323 a 'high-confidence' portion of our dataset as multiple hits and low quality BLAT matches could signif-

324 icantly bias results. To subset the data, we chose to include only contigs whose identity was  $\geq 99\%$

325 similar to, and covering at least 90% of the reference sequence. The program BLAT (Kent, 2002)

326 was used to identify and count nucleotide mismatches between reconstructed transcripts in the high-

327 confidence datasets and their corresponding reference. Differences were visualized using the program R.

328

## 329 **Conclusions**

330 To evaluate the effects of correction of sequencing error on assembly accuracy, we generated a simulated

331 Illumina dataset, which consisted of 30M paired-end reads. In addition, we applied the selected error

332 correction strategy to an empirically derived *Mus musculus* dataset. We attempted error correction

333 using four popular error correction software packages, and evaluated their effect on assembly. Though

334 originally developed with genome sequencing in mind, we found that all tested methods do correct mR-

335 NAseq reads, and increase assembly accuracy, though REPTILE appeared to have the most favorable

336 effect. This study demonstrates the utility of error correction, and proposes that it become a routine

337 step in the processing of Illumina sequence data.

338

## 339 Acknowledgments

340 This paper was greatly improved by suggestions from members of the Eisen Lab, and from two named  
341 reviewers, C. Titus Brown and Mick Watson.

## 342 References

- 343 Auer, P.L., Doerge, R.W., 2011. A Two-Stage Poisson Model for Testing RNA-Seq Data. *Statistical*  
344 *Applications in Genetics and Molecular Biology* 10, 1–26.
- 345 Bradnam, K.R., Fass, J.N., Alexandrov, A., Baranay, P., Bechner, M., Boisvert<sup>10</sup>, S., Chapman, J.A.,  
346 Chapuis, G., Chikhi, R., Chitsaz, H., Chou, W.C., Corbeil, J., Del Fabbro, C., Docking, T.R., Durbin,  
347 R., Earl, D., Emrich, S., Fedotov, P., Fonseca, N.A., Ganapathy, G., Gibbs, R.A., Gnerre, S.,  
348 Godzaridis, É., Goldstein, S., Haimel, M., Hall, G., Haussler, D., Hiatt, J.B., Ho, I.Y., Howard,  
349 J., Hunt, M., Jackman, S.D., Jaffe, D.B., Jarvis, E., Jiang, H., Kazakov, S., Kersey, P.J., Kitzman,  
350 J.O., Knight, J.R., Koren, S., Lam, T.W., Lavenier, D., Laviolette, F., Li, Y., Li, Z., Liu, B., Liu, Y.,  
351 Luo, R., MacCallum, I., MacManes, M.D., Maillet, N., Melnikov, S., Vieira, B.M., Naquin, D., Ning,  
352 Z., Otto, T.D., Paten, B., Paulo, O.S., Phillippy, A.M., Pina-Martins, F., Place, M., Przybylski, D.,  
353 Qin, X., Qu, C., Ribeiro, F.J., Richards, S., Rokhsar, D.S., Ruby, J.G., Scalabrin, S., Schatz, M.C.,  
354 Schwartz, D.C., Sergushichev, A., Sharpe, T., Shaw, T.I., Shendure, J., Shi, Y., Simpson, J.T., Song,  
355 H., Tsarev, F., Vezzi, F., Vicedomini, R., Wang, J., Worley, K.C., Yin, S., Yiu, S.M., Yuan, J., Zhang,  
356 G., Zhang, H., Zhou, S., Korf, I.F., 2013. Assemblathon 2: evaluating *de novo* methods of genome  
357 assembly in three vertebrate species. *arXiv.org* [arXiv:1301.5406v1](https://arxiv.org/abs/1301.5406v1).
- 358 Camacho, C., Coulouris, G., Avagyan, V., Ma, N., Papadopoulos, J., Bealer, K., Madden, T.L., 2009.  
359 BLAST+: architecture and applications. *BMC Bioinformatics* 10, 421.
- 360 Chaisson, M., Pevzner, P., Tang, H.X., 2004. Fragment assembly with short reads. *Bioinformatics*  
361 (Oxford, England) 20, 2067–2074.
- 362 Chen, Z., Liu, J., Ng, H.K.T., Nadarajah, S., Kaufman, H.L., Yang, J.Y., Deng, Y., 2011. Statistical  
363 methods on detecting differentially expressed genes for RNA-seq data. *BMC Systems Biology* 5, S1.
- 364 Conway, T.C., Bromage, a.J., 2011. Succinct data structures for assembling large genomes. *Bioinform-*  
365 *atics (Oxford, England)* 27, 479–486.
- 366 Cox, M.P., Peterson, D.A., Biggs, P.J., 2010. SolexaQA: At-a-glance quality assessment of Illumina  
367 second-generation sequencing data. *BMC Bioinformatics* 11, 485.
- 368 Earl, D., Bradnam, K., St John, J., Darling, A., Lin, D., Fass, J., Yu, H.O.K., Buffalo, V., Zerbino,  
369 D.R., Diekhans, M., Nguyen, N., Ariyaratne, P.N., Sung, W.K., Ning, Z., Haimel, M., Simpson, J.T.,  
370 Fonseca, N.A., Birol, I., Docking, T.R., Ho, I.Y., Rokhsar, D.S., Chikhi, R., Lavenier, D., Chapuis,  
371 G., Naquin, D., Maillet, N., Schatz, M.C., Kelley, D.R., Phillippy, A.M., Koren, S., Yang, S.P., Wu,  
372 W., Chou, W.C., Srivastava, A., Shaw, T.I., Ruby, J.G., Skewes-Cox, P., Betegon, M., Dimon, M.T.,  
373 Solovyev, V., Seledtsov, I., Kosarev, P., Vorobyev, D., Ramirez-Gonzalez, R., Leggett, R., MacLean,  
374 D., Xia, F., Luo, R., Li, Z., Xie, Y., Liu, B., Gnerre, S., Maccallum, I., Przybylski, D., Ribeiro,  
375 F.J., Yin, S., Sharpe, T., Hall, G., Kersey, P.J., Durbin, R., Jackman, S.D., Chapman, J.A., Huang,

376 X., DeRisi, J.L., Caccamo, M., Li, Y., Jaffe, D.B., Green, R.E., Haussler, D., Korf, I., Paten, B.,  
377 2011. Assemblathon 1: A competitive assessment of *de novo* short read assembly methods. *Genome*  
378 *Research* 21, 2224–2241.

379 Francis, W.R., Christianson, L.M., Kiko, R., Powers, M.L., Shaner, N.C., Haddock, S.H.D., 2013. A  
380 comparison across non-model animals suggests an optimal sequencing depth for *de novo* transcriptome  
381 assembly. *BMC Genomics* 14, 167.

382 Gnerre, S., MacCallum, I., Przybylski, D., Ribeiro, F.J., Burton, J.N., Walker, B.J., Sharpe, T., Hall, G.,  
383 Shea, T.P., Sykes, S., Berlin, A.M., Aird, D., Costello, M., Daza, R., Williams, L., Nicol, R., Gnirke,  
384 a., Nusbaum, C., Lander, E.S., Jaffe, D.B., 2011. High-quality draft assemblies of mammalian  
385 genomes from massively parallel sequence data. *Proceedings of the National Academy of Sciences*  
386 108, 1513–1518.

387 Grabherr, M.G., Haas, B.J., Yassour, M., Levin, J.Z., Thompson, D.A., Amit, I., Adiconis, X., Fan, L.,  
388 Raychowdhury, R., Zeng, Q., Chen, Z., Mauceli, E., Hacohen, N., Gnirke, a., Rhind, N., di Palma, F.,  
389 Birren, B.W., Nusbaum, C., Lindblad-Toh, K., Friedman, N., Regev, A., 2011. Full-length transcrip-  
390 tome assembly from RNA-Seq data without a reference genome. *Nature Biotechnology* 29, 644–652.

391 Griebel, T., Zacher, B., Ribeca, P., Raineri, E., Lacroix, V., Guigó, R., Sammeth, M., 2012. Modelling  
392 and simulating generic RNA-Seq experiments with the flux simulator. *Nucleic Acids Research* 40,  
393 10073–10083.

394 Haas, B.J., Papanicolaou, A., Yassour, M., Grabherr, M., Blood, P., Bowden, J., Couger, M., Eccles,  
395 D., Li, B., Lieber, M., MacManes, M.D., Ott, M., Orvis, J., Pochet, N., Strozzi, F., Weeks, N.,  
396 Westerman, R., William, T., Dewey, C.N., Henschel, R., LeDuc, R.G., Friedman, N., Regev, A., 2013.  
397 *De novo* transcript sequence reconstruction from RNA-seq using the Trinity platform for reference  
398 generation and analysis. *Nature protocols* , 1–21.

399 Hsu, J.C., Chien, T.Y., Hu, C.C., Chen, M.J.M., Wu, W.J., Feng, H.T., Haymer, D.S., Chen, C.Y.,  
400 2012. Discovery of Genes Related to Insecticide Resistance in *Bactrocera dorsalis* by Functional  
401 Genomic Analysis of a *De Novo* Assembled Transcriptome. *PLOS ONE* 7, e40950.

402 Hu, M., Zhu, Y., Taylor, J.M.G., Liu, J.S., Qin, Z.S., 2011. Using Poisson mixed-effects model to  
403 quantify transcript-level gene expression in RNA-Seq. *Bioinformatics (Oxford, England)* 28, 63–68.

404 Jiang, H., Wong, W.H., 2009. Statistical inferences for isoform expression in RNA-Seq. *Bioinformatics*  
405 (Oxford, England) 25, 1026–1032.

406 Kao, W.C., Chan, a.H., Song, Y.S., 2011. ECHO: a reference-free short-read error correction algorithm.  
407 *Genome Research* 21, 1181–1192.

408 Kelley, D.R., Schatz, M.C., Salzberg, S.L., 2010. Quake: quality-aware detection and correction of  
409 sequencing errors. *Genome Biology* 11, R116.

410 Kent, W.J., 2002. BLAT—The BLAST-Like Alignment Tool. *Genome Research* 12, 656–664.

411 Le, H.S., Schulz, M.H., McCauley, B.M., Hinman, V.F., Bar-Joseph, Z., 2013. Probabilistic error  
412 correction for RNA sequencing. *Nucleic Acids Research* .

- 413 Linnen, C.R., Poh, Y.P., Peterson, B.K., Barrett, R.D.H., Larson, J.G., Jensen, J.D., Hoekstra, H.E.,  
414 2013. Adaptive Evolution of Multiple Traits Through Multiple Mutations at a Single Gene. *Science*  
415 (New York, NY) 339, 1312–1316.
- 416 Liu, B., Yuan, J., Yiu, S.M., Li, Z., Xie, Y., Chen, Y., Shi, Y., Zhang, H., Li, Y., Lam, T.W., Luo, R.,  
417 2012. COPE: an accurate k-mer-based pair-end reads connection tool to facilitate genome assembly.  
418 *Bioinformatics* (Oxford, England) 28, 2870–2874.
- 419 Liu, Y., Schmidt, B., Maskell, D.L., 2011. Parallelized short read assembly of large genomes using *de*  
420 *Bruijn* graphs. *BMC Bioinformatics* 12, 354.
- 421 MacManes, M.D., Lacey, E.A., 2012. The Social Brain: Transcriptome Assembly and Characterization of  
422 the Hippocampus from a Social Subterranean Rodent, the Colonial Tuco-Tuco (*Ctenomys sociabilis*).  
423 *PLOS ONE* 7, e45524.
- 424 Marioni, J.C., Mason, C.E., Mane, S.M., Stephens, M., Gilad, Y., 2008. RNA-seq: An assessment of  
425 technical reproducibility and comparison with gene expression arrays. *Genome Research* 18, 1509–  
426 1517.
- 427 Muñoz Merida, A., Gonzalez-Plaza, J.J., Canada, A., Blanco, A.M., Garcia-Lopez, M.d.C., Rodriguez,  
428 J.M., Pedrola, L., Sicardo, M.D., Hernandez, M.L., De la Rosa, R., Belaj, A., Gil-Borja, M., Luque,  
429 F., Martinez-Rivas, J.M., Pisano, D.G., Trelles, O., Valpuesta, V., Beuzon, C.R., 2013. De Novo  
430 Assembly and Functional Annotation of the Olive (*Olea europaea*) Transcriptome. *DNA Research* 20,  
431 93–108.
- 432 Miller, J.R., Koren, S., Sutton, G., 2010. Assembly algorithms for next-generation sequencing data.  
433 *Genomics* 95, 315–327.
- 434 Mortazavi, A., Williams, B.A., Mccue, K., Schaeffer, L., Wold, B., 2008. Mapping and quantifying  
435 mammalian transcriptomes by RNA-Seq. *Nature Methods* 5, 621–628.
- 436 Narum, S.R., Campbell, N.R., Meyer, K.A., Miller, M.R., Hardy, R.W., 2013. Thermal adaptation and  
437 acclimation of ectotherms from differing aquatic climates. *Molecular Ecology* , 1–8.
- 438 Pell, J., Hintze, A., Canino-Koning, R., Howe, A., Tiedje, J.M., Brown, C.T., 2012. Scaling metagenome  
439 sequence assembly with probabilistic *de Bruijn* graphs. *Proceedings of the National Academy of*  
440 *Sciences* 109, 13272–13277.
- 441 Pyrkosz, A.B., Cheng, H., Brown, C.T., 2013. RNA-Seq Mapping Errors When Using Incomplete Refer-  
442 ence Transcriptomes of Vertebrates. <http://arxiv.org/abs/1303.2411v1> arXiv:1303.2411v1.
- 443 R Core Development Team, F., 2011. R: A Language and Environment for Statistical Computing .
- 444 Roberts, A., Pachter, L., 2012. Streaming fragment assignment for real-time analysis of sequencing  
445 experiments. *Nature Methods* , 1–7.
- 446 Sammeth, M., 2009. Complete alternative splicing events are bubbles in splicing graphs. *Journal of*  
447 *computational biology : a journal of computational molecular cell biology* 16, 1117–1140.
- 448 Simpson, J.T., Durbin, R., 2010. Efficient construction of an assembly string graph using the FM-index.  
449 *Bioinformatics* (Oxford, England) 26, i367–i373.

- 450 Sonesson, C., Delorenzi, M., 2013. A comparison of methods for differential expression analysis of  
451 RNA-seq data. *BMC Bioinformatics* 14, 91.
- 452 Trapnell, C., Williams, B.A., Pertea, G., Mortazavi, A., Kwan, G., van Baren, M.J., Salzberg, S.L., Wold,  
453 B.J., Pachter, L., 2010. Transcript assembly and quantification by RNA-Seq reveals unannotated  
454 transcripts and isoform switching during cell differentiation. *Nature Biotechnology* 28, 511–U174.
- 455 Vijay, N., Poelstra, J.W., Künstner, A., Wolf, J.B.W., 2013. Challenges and strategies in transcriptome  
456 assembly and differential gene expression quantification. A comprehensive *in silico* assessment of  
457 RNA-seq experiments. *Molecular Ecology* 22, 620–634.
- 458 Yang, X., Chockalingam, S.P., Aluru, S., 2013. A survey of error-correction methods for next-generation  
459 sequencing. *Briefings In Bioinformatics* 14, 56–66.
- 460 Yang, X., Dorman, K.S., Aluru, S., 2010. Reptile: representative tiling for short read error correction.  
461 *Bioinformatics (Oxford, England)* 26, 2526–2533.