

# Isoform reconstruction using short RNA-Seq reads by maximum likelihood is NP-hard

Tianyang Li

Rui Jiang

Xuegong Zhang\*

MOE Key Laboratory of Bioinformatics  
and Bioinformatics Division,  
TNLIST/Department of Automation,  
Tsinghua University,  
Beijing, China, 100084

\*Correspondence: zhangxg@tsinghua.edu.cn

**Abstract**—Maximum likelihood is a popular technique for isoform reconstruction. Here, we show that isoform reconstruction using short RNA-Seq reads by maximum likelihood is NP-hard.

## I. INTRODUCTION

Isoform reconstruction is a key step in RNA-Seq analysis. Tools such as CEM [1], iReckon [2], NSMAP [3], and Montebello [4] use maximum likelihood for isoform reconstruction. The maximum likelihood approach has been observed to be computationally expensive. Here, we show that isoform reconstruction using short RNA-Seq reads by maximum likelihood is NP-hard.

## II. RESULTS

A Poisson mixture model [5]–[7] is used for isoform reconstruction. We represent a gene as a directed acyclic graph  $G = (V, E)$  where each vertex in  $G$  represents an exon, and a path in  $G$  represents an isoform of this gene [8], [9]. In the model [7], the likelihood of observing  $N_s$  at each read 3' end location equivalence class  $s$  is

$$\prod_{s \in S} \frac{e^{-\lambda_s} \lambda_s^{N_s}}{N_s!} \quad (1)$$

Here  $S$  is the set of all read 3' end location equivalence classes, and

$$\lambda_s = \sum_{i \in I_s} a_{is} \theta_i \quad (2)$$

where  $I_s$  is the set of isoforms compatible with  $s$ ,  $\theta_i$  is isoform  $i$ 's expression level, and  $a_{is} > 0$  is the sampling rate for read 3' end location equivalence class  $s$  on isoform  $i$  [6].

To reconstruct isoforms, we seek to maximize the likelihood (1) with a set  $I$  consisting of isoforms, and each isoform's expression level  $\theta_i$ ,  $i \in I$ . In order to explain all observed reads, we must be able to align each read to at least one isoform in  $I$ . However, because there are a large number of possible isoforms, and it is generally believed that a gene only has a small number of highly expressed isoforms, we

instead try to find  $I$  and  $\theta_i$ ,  $i \in I$  that maximize the following penalized likelihood

$$e^{-K \|I\|_0} \prod_{s \in S} \frac{e^{-\lambda_s} \lambda_s^{N_s}}{N_s!} \quad (3)$$

where  $\|I\|_0$  is the number of  $\theta_i > 0$ ,  $i \in I$ , and  $K > 0$  is a real constant. Note that setting  $k = \frac{1}{2} \log(\sum_{s \in S} N_s)$  is equivalent to using the Bayesian information criterion [10] for an equivalent multinomial model [7], [11].

To show the hardness of isoform reconstruction by maximizing the penalized likelihood (3), we consider the following decision problem

### M-ISIFORM.

**INSTANCE:** A set of reads aligned to a gene where the read count at a read 3' end location equivalence class  $s$  the read count is  $N_s$ .

**QUESTION:** Does there exist an isoform set  $I$  with at most  $m$  isoforms such that  $\prod_{s \in S} \frac{e^{-\lambda_s} \lambda_s^{N_s}}{N_s!} \geq p$ ?

**Theorem 1.** M-ISIFORM is NP-complete.

## III. DISCUSSION

We can avoid computationally determining a gene's isoform set if laboratory protocols can be used to find the gene's existing isoforms. It is possible to use methods such as paired-end tag sequencing [12], and single-molecule sequencing [13] to determine a gene's isoforms. We expect these and related technologies to mature in the foreseeable future, reducing the demand for computational resources.

Haplotype inference [14], [15], a similar problem, is also known to be NP-hard [16]. We believe that haplotype inference will also benefit from technologies offering longer sequencing reads.

## IV. PROOF

The proof borrows ideas from [17], where a network flow approach is used for isoform reconstruction. To show that M-ISIFORM is NP-complete, we reduce 3-PARTITION [18], [19], a strongly NP-complete problem, to M-ISIFORM. We

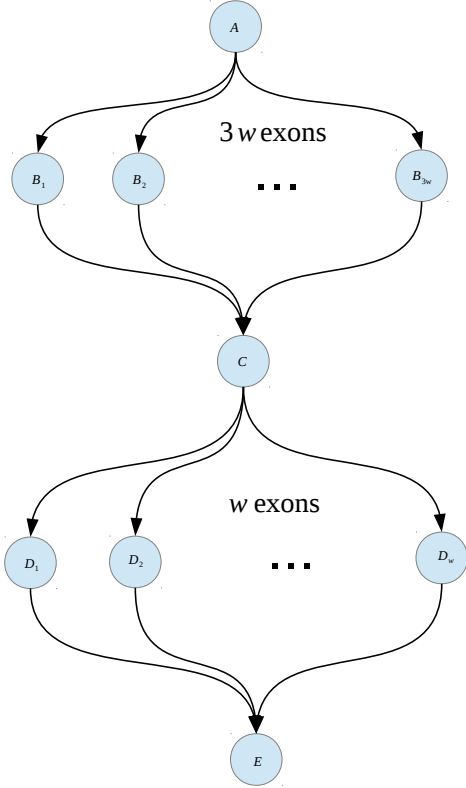


Fig. 1: A gene structure for an instance of 3-PARTITION

use an approach similar to the one used in [20], where flows are split into paths.

*Proof of Theorem 1:* 3-PARTITION is stated in [18] as follows

### 3-PARTITION.

**INSTANCE:** Set  $X$  of  $3w$  elements, a bound  $Y \in \mathbb{Z}^+$ , and a size  $u(x) \in \mathbb{Z}^+$  for each  $x \in X$  such that  $\frac{Y}{4} < u(x) < \frac{Y}{2}$  and such that  $\sum_{x \in X} u(x) = wY$ .

**QUESTION:** Can  $X$  be partitioned into  $w$  disjoint sets  $X_1, X_2, \dots, X_w$  such that, for  $1 \leq i \leq w$ ,  $\sum_{x \in X_i} u(x) = Y$  (note that each  $X_i$  must therefore contain exactly three elements from  $X$ )?

For an instance of 3-PARTITION, we create a gene with structure as shown in Figure 1. Let  $E \in \mathbb{Z}^+$  be a fixed constant, we make each exon  $R$  bp long, and each read  $R + 1$  bp long. At each bp in exon  $A$ , for  $1 \leq i \leq 3w$  we have  $u(x_i)$  reads starting at this location going to exon  $B_i$ , thus there are  $\sum_{1 \leq i \leq 3w} u(x_i)$  reads starting at this location. For  $1 \leq i \leq 3w$ , at each bp in exon  $B_i$ , we have  $u(x_i)$  reads starting at this location going to exon  $C$ . At each bp in exon  $C$ , for  $1 \leq i \leq w$  we have  $Y$  reads starting at this location going to exon  $D_i$ , thus there are  $zY$  reads starting at this location. For  $1 \leq i \leq w$ , at each bp in exon  $D_i$ , we have  $Y$  reads starting at this location going to exon  $E$ . We will show

that this instance of 3-PARTITION has a solution if and only if there exists an isoform set  $I$  with at most  $3z$  isoforms such that  $\prod_{s \in S} \frac{e^{-\lambda_s} \lambda_s^{N_s}}{N_s!} \geq \prod_{s \in S} \frac{e^{-N_s} N_s^{N_s}}{N_s!}$ .

It is easy to see that  $\prod_{s \in S} \frac{e^{-\lambda_s} \lambda_s^{N_s}}{N_s!} \geq \prod_{s \in S} \frac{e^{-N_s} N_s^{N_s}}{N_s!}$  if and only if  $\forall s \in S, \lambda_s = N_s$ .

If we have a solution to this instance of 3-PARTITION, it is easy to verify that an isoform set with  $3z$  isoforms where  $\theta_i = u(x_i)$ ,  $1 \leq i \leq 3z$ , and isoform  $i$  consists of exons  $A, B_i, C, D_j$  ( $j$  satisfies  $x_i \in A_j$ ), and  $E$  is a solution to this particular instance of M-ISIFORM.

If we have a solution to this particular instance of M-ISIFORM, we show that there also exists a solution to the instance of 3-PARTITION. In this case, the isoform set must have exactly  $3z$  isoforms, because at least  $3z$  isoforms are required to explain all the reads. Thus, for  $1 \leq i \leq 3z$  we have  $\theta_i = u(x_i)$ . Because we also have  $\forall s \in S, \lambda_s = N_s$ , and  $\forall x \in X, \frac{Y}{4} < u(x) < \frac{Y}{2}$  we can see that for  $1 \leq j \leq w$  exon  $D_j$  has exactly three isoforms passing through it, and  $\sum_i$  passes through  $D_j$   $\theta_i = Y$ . Therefore, we have a solution to the instance of 3-PARTITION.

It is easy to see that M-ISIFORM is in NP if we use the real RAM model [21]. Because 3-PARTITION is strongly NP-complete [18], [19], we conclude that M-ISIFORM is NP-complete. ■

### ACKNOWLEDGMENTS

We thank Feng Zeng for insightful discussions.

### REFERENCES

- [1] W. Li and T. Jiang, "Transcriptome assembly and isoform expression level estimation from biased RNA-Seq reads," *Bioinformatics*, vol. 28, no. 22, pp. 2914–2921, 2012. [Online]. Available: <http://bioinformatics.oxfordjournals.org/content/28/22/2914.abstract>
- [2] A. M. Mezlini, E. J. Smith, M. Fiume, O. Buske, G. Savich, S. Shah, S. Aparicion, D. Chiang, A. Goldenberg, and M. Brudno, "iReckon: Simultaneous isoform discovery and abundance estimation from RNA-seq data," *Genome Research*, 2012. [Online]. Available: <http://genome.cshlp.org/content/early/2012/11/29/gr.142232.112.abstract>
- [3] Z. Xia, J. Wen, C.-C. Chang, and X. Zhou, "NSMAP: A method for spliced isoforms identification and quantification from RNA-Seq," *BMC Bioinformatics*, vol. 12, no. 1, p. 162, 2011. [Online]. Available: <http://www.biomedcentral.com/1471-2105/12/162>
- [4] D. Hiller and W. Wong, "Simultaneous Isoform Discovery and Quantification from RNA-Seq," *Statistics in Biosciences*, pp. 1–19, 2012. [Online]. Available: <http://dx.doi.org/10.1007/s12561-012-9069-2>
- [5] H. Jiang and W. H. Wong, "Statistical inferences for isoform expression in rna-seq," *Bioinformatics*, vol. 25, no. 8, pp. 1026–1032, 2009. [Online]. Available: <http://bioinformatics.oxfordjournals.org/content/25/8/1026.abstract>
- [6] J. Salzman, H. Jiang, and W. H. Wong, "Statistical Modeling of RNA-Seq Data," *ArXiv e-prints*, Jun. 2011.
- [7] L. Pachter, "Models for transcript quantification from RNA-Seq," *ArXiv e-prints*, Apr. 2011.
- [8] S. Heber, M. Alekseyev, S.-H. Sze, H. Tang, and P. A. Pevzner, "Splicing graphs and EST assembly problem," *Bioinformatics*, vol. 18, no. suppl 1, pp. S181–S188, 2002. [Online]. Available: [http://bioinformatics.oxfordjournals.org/content/18/suppl\\_1/S181.abstract](http://bioinformatics.oxfordjournals.org/content/18/suppl_1/S181.abstract)
- [9] M. Guttman, M. Garber, J. Z. Levin, J. Donaghey, J. Robinson, X. Adiconis, L. Fan, M. J. Koziol, A. Gnirke, C. Nusbaum, and et al., "Ab initio reconstruction of cell type-specific transcriptomes in mouse reveals the conserved multi-exonic structure of lincRNAs." *Nature Biotechnology*, vol. 28, no. 5, pp. 503–510, 2010. [Online]. Available: <http://www.ncbi.nlm.nih.gov/pubmed/20436462>

- [10] G. Schwarz, "Estimating the dimension of a model," *Annals of Statistics*, vol. 6, no. 2, pp. 461–464, 1978. [Online]. Available: <http://projecteuclid.org/euclid.aos/1176344136>
- [11] C. Trapnell, B. A. Williams, G. Pertea, A. Mortazavi, G. Kwan, M. J. Van Baren, S. L. Salzberg, B. J. Wold, and L. Pachter, "Transcript assembly and quantification by RNA-Seq reveals unannotated transcripts and isoform switching during cell differentiation." *Nature Biotechnology*, vol. 28, no. 5, pp. 511–515, 2010. [Online]. Available: <http://www.ncbi.nlm.nih.gov/pubmed/20436464>
- [12] M. J. Fullwood, C.-L. Wei, E. T. Liu, and Y. Ruan, "Next-generation DNA sequencing of paired-end tags (PET) for transcriptome and genome analyses," *Genome Research*, vol. 19, no. 4, pp. 521–532, 2009. [Online]. Available: <http://genome.cshlp.org/content/19/4/521.abstract>
- [13] S. Koren, M. C. Schatz, B. P. Walenz, J. Martin, J. T. Howard, G. Ganapathy, Z. Wang, D. A. Rasko, W. R. McCombie, E. D. Jarvis, and et al., "Hybrid error correction and de novo assembly of single-molecule sequencing reads," *Nature Biotechnology*, vol. 30, no. 7, pp. 693–700, 2012. [Online]. Available: <http://www.ncbi.nlm.nih.gov/pubmed/22750884>
- [14] L. M. Li, J. H. Kim, and M. S. Waterman, "Haplotype reconstruction from SNP alignment." *Journal of Computational Biology*, vol. 11, no. 2-3, pp. 505–516, 2004. [Online]. Available: <http://www.ncbi.nlm.nih.gov/pubmed/15285905>
- [15] E. Xing, R. Sharan, and M. I. Jordan, "Bayesian haplotype inference via the Dirichlet process," in *Proceedings of the Twenty-first International Conference on Machine Learning*, ser. ICML '04. New York, NY, USA: ACM, 2004, pp. 111–. [Online]. Available: <http://doi.acm.org/10.1145/1015330.1015423>
- [16] R. Sharan, B. Halldorsson, and S. Istrail, "Islands of Tractability for Parsimony Haplotyping," *Computational Biology and Bioinformatics, IEEE/ACM Transactions on*, vol. 3, no. 3, pp. 303–311, 2006.
- [17] A. Tomescu, A. Kuosmanen, R. Rizzi, and V. Makinen, "A novel min-cost flow method for estimating transcript expression with RNA-Seq," *BMC Bioinformatics*, vol. 14, no. Suppl 5, p. S15, 2013. [Online]. Available: <http://www.biomedcentral.com/1471-2105/14/S5/S15>
- [18] M. R. Garey and D. S. Johnson, *Computers and Intractability: A Guide to the Theory of NP-Completeness*. New York, NY, USA: W. H. Freeman & Co., 1990.
- [19] M. Garey and D. Johnson, "Complexity Results for Multiprocessor Scheduling under Resource Constraints," *SIAM Journal on Computing*, vol. 4, no. 4, pp. 397–411, 1975. [Online]. Available: <http://epubs.siam.org/doi/abs/10.1137/0204035>
- [20] B. Vatinlen, F. Chauvet, P. Chrtienne, and P. Mahey, "Simple bounds and greedy algorithms for decomposing a flow into a minimal set of paths," *European Journal of Operational Research*, vol. 185, no. 3, pp. 1390 – 1401, 2008. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S0377221706006552>
- [21] F. P. Preparata and M. I. Shamos, *Computational Geometry: An Introduction*. New York, NY, USA: Springer-Verlag New York, Inc., 1985.