

An Improved Parameterized Algorithm for the Independent Feedback Vertex Set Problem

Yinglei Song*

Abstract

In this paper, we develop a new parameterized algorithm for the INDEPENDENT FEEDBACK VERTEX SET (IFVS) problem. Given a graph $G = (V, E)$, the goal of the problem is to determine whether there exists a vertex subset $F \subseteq V$ such that $V - F$ induces a forest in G and F is an independent set. We show that there exists a parameterized algorithm that can determine whether a graph contains an IFVS of size k or not in time $O(4^k n^2)$. To our best knowledge, this result improves the known upper bound for this problem, which is $O^*(5^k n^{O(1)})$.

Keywords: independent feedback vertex set, parameterized algorithm, dynamic programming

1 Introduction

A *feedback vertex set* in a graph $G = (V, E)$ is a vertex subset $F \subseteq V$ such that vertices in $V - F$ induce a forest in G . Feedback vertex sets have important applications in deadlock recovery in the development of operating systems [20] and database management systems [15]. Moreover, F is an *independent feedback vertex set* if it induces an independent set in G .

In the past two decades, the FEEDBACK VERTEX SET (FVS) problem has been intensively studied. The goal of the problem is to determine whether a graph contains a FVS of size k or not. In [13], it is shown that the problem is NP-complete. So far, a few exact algorithms have been developed to compute a minimum FVS in a graph. For example, in [18], an algorithm that needs $O(1.9053^n)$ time was developed to find a minimum FVS in a graph, this algorithm is also the first one that breaks the trivial $O(2^n n)$ bound. In [8], an elegant algorithm that can enumerate all induced forests in a graph is used to find the minimum FVS. This algorithm needs $O(1.7548^n)$ computation time. Recently, the upper bound of this problem is improved to $O(1.7347^n)$ [9].

Parameterized computation provides another potentially practical solution for problems that are computationally intractable. Specifically, one or a few parameters in some intractable problems can be identified and parameterized computation studies whether efficient algorithms exist for these problems while some or all of the parameters are small. A parameterized problem may contain a few parameters $k_1, k_2, \dots, k_l$ and the problem is *fixed parameter tractable* if it can be solved in time $O(f(k_1, k_2, \dots, k_l)n^c)$, where f is a function of $k_1, k_2, \dots, k_l$, n is the size of the problem and c is a constant independent of all parameters. For example, the VERTEX COVER problem is to determine whether a graph $G = (V, E)$ contains a vertex cover of size at most k or not. The problem is NP-complete. However, a simple parameterized algorithm can solve the problem in time $O(2^k |V|)$ [6]. In practice, this algorithm can be used to efficiently solve the VERTEX COVER problem when the parameter k is fixed and small. On the other hand, some problems do not have known efficient parameterized solutions and are therefore parameterized intractable. Similar to the conventional complexity theory, a

*School of Computer Science and Engineering, Jiangsu University of Science and Technology, Zhenjiang, Jiangsu 212003, China. Email: yingleisong@gmail.com.

hierarchy of complexity classes has been constructed to describe the parameterized complexity of these problems [6]. For example, the INDEPENDENT SET problem is to decide whether a graph contains an independent set of size k or not and has been shown to be $W[1]$ -complete [7]. It cannot be solved with an efficient parameterized algorithm unless all problems in $W[1]$ are fixed parameter tractable. A thorough investigation on these parameterized complexity classes are provided in [6].

The parameterized FVS problem uses the size of an FVS as the parameter k . In [1, 5, 6, 7, 4, 10, 11, 12, 16, 17], it is shown that the problem is fixed parameter tractable and a few algorithms that can solve the problem in time $O(2^{O(k)}n^{O(1)})$ are developed. In [3], it is shown that the problem can be solved in time $O(5^kkn^2)$. Recently, the upper bound of this problem is further improved to $O(3.83^kkn^2)$ [2].

Although the FVS problem has attracted a lot of attention from researchers in computer science, little effort has been made toward the IFVS problem. Recently, it is shown that the FVS problem can be reduced to the IFVS problem in polynomial time while preserving the parameter k [14]. The reduction is simply subdividing each graph edge once. The IFVS problem is thus more general than the FVS problem. In [14], it is shown that the IFVS problem can be solved in time $O^*(5^kn^{O(1)})$.

In this paper, we develop a new parameterized algorithm that can determine whether a graph contains an IFVS of size k or not in time $O(4^kn^2)$. Our algorithm follows the *iterative compression* approach developed in [19]. This technique has been used to develop parameterized algorithms for many problems [4, 5, 11]. Specifically, given a graph G , the process starts with an empty graph and adds vertices one by one to reconstruct G . When a vertex is added, edges are also added to join the vertex with its neighbors that have been included in the graph. A series of graph $G_0, G_1, \dots, G_n$ can thus be constructed during the process, where G_0 is an empty graph and $G_n = G$. Starting with G_2 , the approach processes each G_i ($2 \leq i \leq n$) to determine whether it contains an IFVS of size k or not. If the answer is “yes”, the approach finds such a set F_i in G_i and continues to process G_{i+1} , otherwise the approach outputs “no” since G does not contain an IFVS of size k if one of its subgraph does not contain such an IFVS. The approach outputs “yes” if eventually G is found to contain an IFVS of size k . A detailed description of the approach can be found in [19] and some other related work such as [4, 5, 11].

It is not difficult to see that, the key part of the above approach is to develop an algorithm that can determine whether G_{i+1} contains an IFVS of size k or not, given an FVS of size $k+1$. The FVS can be obtained by including all vertices in F_i and the additional vertex that is added to G_i to create G_{i+1} . The major contribution of this paper is the development of such an algorithm. Other than using a branching approach, we develop a dynamic programming based algorithm that can accomplish the task in time $O(4^kn)$. Since the graph contains n vertices in total, the total amount of computation time needed by the approach is thus at most $O(4^kn^2)$. Based on the simple parameter preserving polynomial time reduction that reduces the FVS problem to IFVS problem, we also immediately obtain a parameterized algorithm that solves the FVS problem in time $O(4^kn^2)$.

2 Notations and Preliminaries

The graphs in this paper are undirected graphs without loops. For a given graph $G = (V, E)$ and a vertex subset $V' \subseteq V$, $G[V']$ is the subgraph induced on the vertices in V' . A vertex u is a *neighbor* of V' if it is joined to one of the vertices in V' by an edge in G . We use $N_G[V']$ to denote the set of neighbors of V' in G . We may omit the subscript G when the underlying graph is clear in the context. Given two graphs $G_1 = (V_1, E_1)$ and $G_2 = (V_2, E_2)$, we use $G_1 \cup G_2$ to denote the graph $(V_1 \cup V_2, E_1 \cup E_2)$. Furthermore, to simplify the notation, we use $G - V'$ to denote subgraph $G[V - V']$. A vertex subset V' is a *feedback vertex cover* in G if $G - V'$ is a forest. The objective of our algorithm is to find a feedback vertex cover that contains minimum number of vertices.

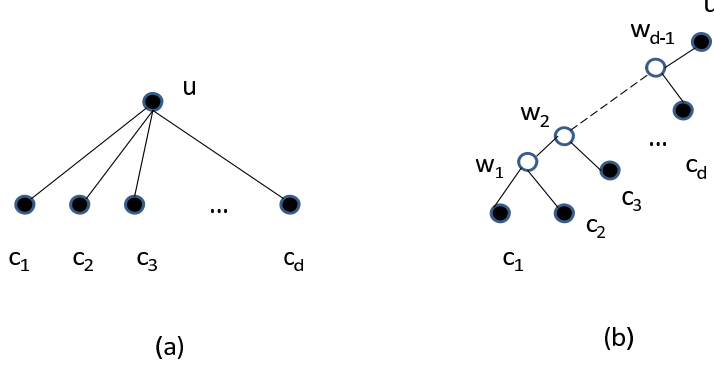


Figure 1: The conversion the algorithm uses to convert a tree in $G[V - F]$ into a binary tree. (a) An internal node u that has d children $c_1, c_2, \dots, c_d$; (b) A path of $d - 1$ white vertices $w_1, w_2, \dots, w_{d-1}$ are added to convert the tree into a binary tree.

3 The Algorithm

Our algorithm is based on the following Lemma.

Lemma 3.1 Given a graph $G = (V, E)$ and an FVS F in G , a minimum IFVS in G can be computed in time $O(4^{|F|}|V|)$.

PROOF. Since F is an FVS, $G[V - F]$ is a forest. As the first step of the algorithm, we arbitrarily choose a vertex in each tree in $G[V - F]$ as the root of the tree. We color each vertex in $V - F$ with black. We then check the number of children of each vertex in the tree and find those that have more than two children. For each such vertex u , we remove the edges that join it with its children $c_1, c_2, \dots, c_d$, where d is the number of children in the tree. We then create a path of white vertices $w_1, w_2, \dots, w_{d-1}$. w_{d-1} is joined to u with an edge. To construct a binary tree, w_1 is joined to c_1 and c_2 with two edges and each white vertex w_t ($2 \leq t \leq d - 1$) in the path is joined to c_{t+1} with an edge. Each white vertex w_t is said to be *equal* to u . We use H to denote the resulting forest. The number of white vertices in H is at most

$$\sum_{i=1}^{|V|-|F|} d_i \leq 2(|V| - |F|) \quad (1)$$

where d_i 's are the degrees of all vertices in $G[V - F]$. The number of vertices in H is thus at most $3(|V| - |F|)$. Figure 1 illustrates the approach the algorithm uses to convert T_i into a binary tree.

In order to find a minimum IFVS F' , we consider the vertices in $F' \cap F$ first. We enumerate all subsets in F . For each such subset S , we check whether S is an independent set and $G[F - S]$ is acyclic, if it is not the case, S cannot be $F' \cap F$ and we can continue to the next subset. Otherwise, we need to find a minimum subset $S' \subseteq G - F$ such that $S' \cup S$ form an IFVS in G .

Without loss of generality, we assume $G[F - S]$ contains l connected components $C_1, C_2, \dots, C_l$ and let $C = \{C_1, C_2, \dots, C_l\}$. Since H is a forest, for each tree $T_i \in H$, we use a dynamic programming algorithm to find a minimum subset S'_i in T_i such that $(T_i - S'_i) \cup (F - F')$ is acyclic. We then obtain S' by taking the union of S'_i 's for all T_i 's in $G - F$.

We use r_i to denote the root of T_i . The algorithm starts with the leaves of the T_i and follows a

bottom-up order to scan through all vertices in T_i . For a tree node u in T_i and a set $S_u \subseteq C$, we consider the following two cases.

1. u is not in the IFVS, there exists a path that connects u to each component in S_u in the subtree rooted at u in T_i . Moreover, none of the vertices in the path are in the IFVS,
2. u is in the IFVS.

The algorithm maintains dynamic programming table $M[u, S_u]$ for case 1 and table $P[u]$ for case 2. The two tables store the minimum number of vertices that can be included in the IFVS in the subtree rooted at T_u .

For a leaf node v of T_i and a subset S_v of connected components in $G[V - F]$, the values of $M[v, S_v]$ are initialized to be 0 if S_v is the set of components that are directly connected to v with an edge. Otherwise, $M[v, S_v]$ is set to be $|V| + 1$. If $v \in N_G(S)$, v is not in the IFVS, we thus set $P[v]$ to be $|V| + 1$, otherwise $P[v]$ is set to be 1.

For an internal node u in T_i , since T_i is a binary tree, we use c_1, c_2 to denote its children in T_i . In the case where $u \in N_G(S)$, u cannot be in the IFVS and we thus set $P[u]$ to be $|V| + 1$. Otherwise, both $M[u, P[u]]$ and $P[u]$ need to be determined with the recursion relations of the dynamic programming.

Next, we determine the recursion relations of the dynamic programming. For a black vertex u , we use W_u to denote the set of connected components in $G[F - S]$ that are directly connected to u with an edge. If W_u contains a component that is not in S_u , $M[u, S_u]$ is set to be $|V| + 1$, since u is connected to any component in W_u regardless of its child nodes in T_i . For a white vertex u , $W_u = W_b$, where b is the black vertex that is equal to u in T_i . The algorithm thus only needs to compute the values of $M[u, S_u]$ for these S_u 's that are supersets of W_u .

We now assume $W_u \subset S_u$ and u has two children. Based on the color of u , we use the following recursion relations to compute $M[u, W_u]$ and $M[u, S_u]$, if u is a black vertex, the recursion relation to compute $M[u, S_u]$ are

$$M[u, W_u] = \min \{M[c_1, \epsilon] + M[c_2, \epsilon], M[c_1, \epsilon] + P[c_2], P[c_1] + M[c_2, \epsilon], P[c_1] + P[c_2]\} \quad (2)$$

$$M[u, S_u] = \min \left\{ \min_{S_{c_1}, S_{c_2}} \{M[c_1, S_{c_1}] + M[c_2, S_{c_2}]\}, M[c_1, S_u - W_u] + P[c_2], P[c_1] + M[c_2, S_u - W_u] \right\} \quad (3)$$

where S_{c_1} and S_{c_2} are disjoint subsets of S_u and $S_u - W_u = S_{c_1} \cup S_{c_2}$. The algorithm exhaustively enumerates all such subsets and computes the minimum value of $M[c_1, S_{c_1}] + M[c_2, S_{c_2}]$ over all possible subsets S_{c_1} and S_{c_2} .

If u is a white vertex and both c_1 and c_2 are black vertices, the recursion relation to compute $M[u, S_u]$ is the same as above. If u is white and one of c_1, c_2 is white, without loss of generality, we assume c_1 is white. Since u and c_1 represents the same vertex in G , if u is not in the IFVS, c_1 cannot be in the IFVS. The recursion relation is thus

$$M[u, W_u] = \min \{M[c_1, W_u] + M[c_2, \epsilon], M[c_1, W_u] + P[c_2]\} \quad (4)$$

$$M[u, S_u] = \min \left\{ \min_{S_{c_1}, S_{c_2}} \{M[c_1, S_{c_1} \cup W_u] + M[c_2, S_{c_2}]\}, M[c_1, S_u] + P[c_2] \right\} \quad (5)$$

where S_{c_1} and S_{c_2} are disjoint subsets of S_u and $S_{c_1} \cup S_{c_2} = S_u - W_u$.

If u is black and $u \notin N_G(S)$, since none of c_1 and c_2 are included in the IFVS, the recursion relation to compute $P[u]$ is as follows.

$$P[u] = \min_{S_u} \{M[c_1, S_u]\} + \min_{S_u} \{M[c_2, S_u]\} + 1 \quad (6)$$

where the minimum is taken over all possible subsets S_u of C .

If u is white, $u \notin N_G(S)$, and both c_1 and c_2 are black, the recursion for computing $P[u]$ is the same as above. If u is white and one of c_1, c_2 is white, without loss of generality, we assume c_1 is white. Since u and c_1 represents the same vertex and c_2 is not included in the IFVS, the recursion relation is

$$P[u] = P[c_1] + \min_{S_u} \{M[c_2, S_u]\} \quad (7)$$

where the minimum is taken over all possible subsets S_u of C .

If u has only one child, u must be black and we use c to denote its child. If c is black, we use the following recursion relations to compute $M[u, W_u]$, $M[u, S_u]$, and $P[u]$.

$$M[u, W_u] = \min \{M[c, \epsilon], P[c]\} \quad (8)$$

$$M[u, S_u] = M[c, S_u - W_u] \quad (9)$$

$$P[u] = \min_{S_u} \{M[c, S_u]\} + 1 \quad (10)$$

where the minimum is taken over all possible subsets S_u of C .

If c is white, c is equal to u , we use the following recursion relations to compute $M[u, S_u]$ and $P[u]$.

$$M[u, S_u] = M[c, S_u] \quad (11)$$

$$P[u] = P[c] \quad (12)$$

After the dynamic programming tables are filled by the algorithm, for each T_i ($1 \leq k \leq l$), we can find the minimum of $P[r_i]$, $M[r_i, S_{r_i}]$ for all subsets S_{r_i} 's of C . We then follow a top-down trace back procedure to find S'_i . Note that the above recursions split S_u into two disjoint subsets S_{c_1} and S_{c_2} , which can guarantee that no cycles are formed if u is not included in the IFVS. The correctness of this algorithm can thus be easily proved with the principle of induction and its recursion relations.

Before the dynamic programming starts, the algorithm needs to construct H from the trees in $G[V - F]$, it needs at most $O(|V|)$ time. In addition, the algorithm also needs to compute W_u for each internal node in the trees in H and $N_G(S)$. However, since S contains at most $|F|$ vertices, this needs at most $O(|F||V|)$ time.

During the dynamic programming process, for a given node u and S_u , the algorithm needs to consider all possible disjoint pairs of subsets S_{c_1} and S_{c_2} , such that $S_{c_1} \cup S_{c_2} = S_u - W_u$. We denote $t = |S_u|$, the number of such pairs is at most 2^t . The total amount of computation time needed by the dynamic programming on one single vertex in T_i is thus at most

$$O\left(\sum_{t=0}^l 2^t \binom{l}{t}\right) = O(3^l) \quad (13)$$

where the right hand side of the equation can be directly obtained with the binomial theorem.

Since H contains at most $3(|V| - |F|)$ vertices, the dynamic programming algorithm can find S' in time $O(3^l|V|)$. For each $S \subseteq F$ such that $G[F - S]$ is acyclic, we can find a feedback vertex cover $S \cup S'$. The one that contains the minimum number of vertices is a minimum IFVS. The total amount of the computation time needed by the algorithm is thus at most

$$O\left(\sum_{l=1}^{|F|} 3^l \binom{|F|}{l} |V|\right) = O(4^{|F|}|V|) \quad (14)$$

The right hand side of the equation again is the direct result of applying the binomial theorem to the left hand side. The theorem has been proved. $\square$

Based on the algorithm we have developed in Lemma 3.1, we can use the iterative compression technique developed in [19] to develop a parameterized algorithm that can determine whether a graph contains an IFVS of size k in time $O(4^k n^2)$. We thus have the following theorem.

Theorem 3.1 Given a graph $G = (V, E)$ and a positive integer parameter k , there exists a parameterized algorithm that can determine whether G contains an IFVS of size k or not in time $O(4^k |V|^2)$.

PROOF. We use the iterative compression technique to develop the algorithm. Let $n = |V|$, the algorithm can be sketched as follows.

1. Starting with an empty graph G_0 , add vertices one by one to reconstruct graph G , when a vertex u_i is added to G_i ($0 \leq i < n$), edges are added to G_i to join u_i with its neighbors in G that have been included in G_i to construct G_{i+1} . We thus can obtain a series of graphs $G_0, G_1, \dots, G_n$, where G_0 is an empty graph and $G_n = G$;
2. Arbitrarily choose one vertex from G_2 and include it in set F_2 ;
3. For each $i = 2$ to $n - 1$, given $F_i \cup \{u_i\}$, use the algorithm presented in the proof of Lemma 3.1 to compute a minimum IFVS F_{i+1} in G_{i+1} , if F_{i+1} contains more than k vertices, return “no”;
4. return “yes”.

For computation time, step 1 can be accomplished in time $O(n^2)$. From Lemma 3.1, the computation time needed by step 3 is at most

$$\sum_{i=2}^n O(4^k i) = O(4^k n^2) \quad (15)$$

The theorem has been proved. □

In [14], it is shown that the FVS problem can be reduced to the IFVS problem through a simple polynomial time reduction that also preserves the parameter k . Theorem 3.1 thus implies there exists a dynamic programming based algorithm that solves the FVS problem in time $O(4^k n^2)$. In fact, it is not difficult to see that the algorithm presented in the proof of Lemma 3.1 can be slightly changed to solve the FVS problem.

4 Conclusions

In this paper, we develop a new parameterized algorithm that can determine whether a graph contains an IFVS of size k or not in time $O(4^k n^2)$. To our best knowledge, this result improves the previously known upper bound for this problem, which is $O^*(5^k n^{O(1)})$. Our technique combines a dynamic programming approach with the recently developed iterative compression technique, which has been proved to be useful for developing parameterized algorithms for many NP-complete problems.

Our algorithm does not employ the method of branching, which is an often used approach for developing exact and parameterized algorithms. Indeed, the IFVS is a subset with certain global structural properties. In general, a branching algorithm employs the local structure of a graph and can hardly be used to further improve the upper bound of the problem. However, we are still looking for the possibility to combine our method and the branching approach to further improve the upper bound of this problem. In fact, recent work [9] has shown that this combination can lead to improved upper bound results for many NP-hard graph optimization problems.

References

- [1] Bodlaender H., “On Disjoint Cycles”, *International Journal on Foundations of Computer Science*, 5(1):59-68, 1994.
- [2] Y. Cao, J. Chen, and Y. Liu, “On Feedback Vertex Set New Measure and New Structures”, *SWAT 2010*, 93-104, 2010.
- [3] J. Chen, F. V. Fomin, Y. Liu, S. Lu, and Y. Villanger, “Improved algorithms for feedback vertex set problems”, *Journal of Computer System Science*, 74(7): 1188-1198, 2008.
- [4] F. K. H. Dehne, M. R. Fellows, M. A. Langston, F. A. Rosamond, and K. Stevens, “An $O(2^{O(k)}n^3)$ Algorithm for The Undirected Feedback Vertex Cover Problem”, *Proceedings of the 11th Annual International Conference on Computing and Combinatorics*, pp. 859-869, 2005 (COCOON 2005).
- [5] M. Dom, J. Guo, F. Huffner, R. Niedermeier, and A. Trub, “Fixed-parameter tractability results for feedback set problems in tournaments”, *Algorithms and complexity*, volume 3998 of Lecture Notes in Computer Science, pages 320-331. Springer, Berlin, 2006.
- [6] Downey, R., Fellows, M., “Fixed parameter tractability and completeness”, *Complexity Theory: Current Research*, pp. 191-225. Cambridge University Press, 1992.
- [7] Downey, R., Fellows, M., *Parameterized Complexity*, Springer-Verlag, New York, 1999.
- [8] F. V. Fomin, S. Gaspers, and A. V. Pyatkin, “Finding A Minimum Feedback Vertex Cover in Time $O(1.7548^n)$ ”, *Proceedings of 2006 International Workshop on Parameterized and Exact Computation*, 2006 (IWPEC 2006).
- [9] F. V. Fomin, S. Gaspers, S. Saurabh, and A. A. Stepanov, “On Two Techniques of Combining Branching and Treewidth”, *Proceedings of the 17th International Symposium on Algorithm and Computation*, 2006 (ISAAC 2006).
- [10] J. Guo, R. Niedermeier, and S. Wernicke, “Parameterized Complexity of Generalized Vertex Cover Problems”, *Proceedings of the 9th Workshop on Algorithms and Data Structures*, pp. 36-48, 2005 (WADS 2005).
- [11] J. Guo, J. Gramm, F. H. Huffner, R. Niedermeier, and S. Wernicke, “Compression-based fixed-parameter algorithms for feedback vertex set and edge bipartization”, *Journal of Computer and System Science*, 72(8):1386-1396, 2006.
- [12] I. Kanj, M. Pelsmajer, and M. Schaefer, “Parameterized Algorithms for Feedback Vertex Set”, *Proceedings of 2004 International Workshop on Parameterized and Exact Computation*, pp. 234-247, 2004 (IWPEC 2004).
- [13] R. M. Karp, “Reducibility Among Combinatorial Problems”, *Complexity of Computer Computations*, Plenum Press, New York, pp. 85-103, 1972.
- [14] N. Misra, G. Philip, V. Raman, and, S. Saurabh, “On Parameterized Independent Feedback Vertex Set”, *Proceedings of COCOON 2011*, pp. 98-109, 2011.
- [15] H. G. Molina, J. D. Ullman, and J. Widom, *Database Systems: The Complete Book (2nd Edition)*, Pearson Prentice Hall, 2009.
- [16] V. Raman, S. Saurabh, and C. R. Subramanian, “Faster Fixed Parameter Tractable Algorithms for Undirected Feedback Vertex Set”, *ACM Transactions on Algorithms*, 2(3): 403-415, 2006.

- [17] Raman, V., Saurabh, S., Subramanian, C., “Faster fixed parameter tractable algorithms for undirected feedback vertex set”, *ISAAC 2002, LNCS vol. 2518*, pp. 241-248. Springer, 2002.
- [18] I. Razgon, “Exact Computation of Maximum Induced Forest”, *Proceedings of the 10th Scandinavian Workshop on Algorithm Theory*, pp. 241-248, 2002.
- [19] B. Reed, K. Smith, and A. Vetta, “Finding odd cycle transversals”, *Operations Research Letters*, 32(4):299-301, 2004.
- [20] A. Silberschatz, P. B. Galvin, and G. Gagne, *Operating System Concepts, 9th Edition*, John Wiley and Sons, Inc., 2012.