

000
001
002
003
004
005
006
007
008
009
010
011
012
013
014
015
016
017
018
019
020
021
022
023
024
025
026
027
028
029
030
031
032
033
034
035
036
037
038
039
040
041
042
043
044
045
046
047
048
049
050
051
052
053
054

055
056
057
058
059
060
061
062
063
064
065
066
067
068
069
070
071
072
073
074
075
076
077
078
079
080
081
082
083
084
085
086
087
088
089
090
091
092
093
094
095
096
097
098
099
100
101
102
103
104
105
106
107
108
109

Predict Information Diffusion using a Latent Representation Space

Abstract

Information propagation is a hard task where the goal is to predict users behavior. We introduce an extension of a model which make use of a kernel to modelize diffusion in a latent space. This extension introduce a threshold to differentiate if users are contaminated or not.

1. Introduction

The emergence of Social Networks and Social Media sites has motivated a large amount of recent research. Different generic tasks, such as Social Network Analysis, Social Network annotation, Community Detection or Link Prediction, are currently studied. Another active research topic is the study of temporal propagation of information through this type of media. It aims at studying how interactions between users, like sharing a link on facebook or retweeting something on Twitter, effects the spread of items such as pictures, videos or gossip on the internet. While the study of this word-of-mouth phenomenon pre-dates the development of computer science, the amount of data made available by the growth of online social networks offers an unprecedented field of study and enabled new developments. Propagation models aim at predicting and understanding the dynamic of observed propagation.

In this paper, we propose a new diffusion model based on the heat diffusion. It aims to project users in a latent space where propagation occurs like the heat diffusion. This projection is based on the order in which users have been infected in cascades of the train dataset. In order to be able to find which users have been infected and not only who is the most likely to be infected, we define a threshold to split users in two groups: infected or not. This model is an extension of the CDK model (Content Diffusion Kernel) presented in (Bourigault et al., 2014) where no threshold was defined.

Preliminary work. Under review by the International Conference on Machine Learning (ICML). Do not distribute.

2. Notations

Traditionally, diffusion on networks is represented with the notion of *cascade*. A cascade is a sequence of users infected by some information (for instance, it could be the list of users who "liked" a specific YouTube video). A cascade describes to whom and when an item spreads through the network, but not *how* diffusion happens: while it is easy to know *when* a user got infected by some content, it is usually not possible to know *who* infected him.

Given a social network composed of a set of N users $\mathcal{U} = (u_1, \dots, u_N)$, cascades correspond to sets of users infected by the propagated information. Depending on the kind of network and the task in concern, the propagated information can for instance correspond to a given topic, a particular url, a specific tag, etc... In the following, we consider \mathcal{C} as a set of cascades over a given network, and two sets of distinct cascades: $\mathcal{C}_\ell \subseteq \mathcal{C}$ the set of training cascades and $\mathcal{C}_t \subseteq \mathcal{C}$ the set of testing cascades. A cascade $c \in \mathcal{C}$ is defined as:

- A source $s^c \in \mathcal{U}$ which is the user at the source of the cascade - i.e, the first user that published the item concerned by the diffusion.
- A set of contaminated users $S^c \subset \mathcal{U}$ such that $u_i \in S^c$ means that u_i has participated to the cascade c \bar{S}^c is the set of users who have not participated in c .
- A contamination timestamp function defined over S^c such that $t^c(u_i)$ corresponds to the timestamp at which $u_i \in S^c$ has first participated in the cascade. We consider that the contamination timestamp of the source is equal to 0.

3. Model

The proposed model aims at predicting information diffusion. The central idea of this model is to map the observed information diffusion process into a heat diffusion process in a continuous (euclidean) space. To perform this, we learn diffusion kernels that capture the dynamics of diffusion from a set of training cascades. Let us denote $\mathcal{Z} = \mathbb{R}^n$ an euclidean space of dimension n - also called *latent space*. Learning such

a diffusion kernel comes down in our case to learning a mapping of each node of the network to a particular location in \mathcal{Z} such that, for a given metric, the latent space explains the contamination timestamps observed in the training cascades.

Learning using a diffusion kernel We define a diffusion kernel $K(t, y, x)$ such that $K : \mathbb{R}^+ \times \mathcal{X} \times \mathcal{X} \rightarrow \mathbb{R}$ which models the heat diffusion in a latent space. It corresponds here to the contamination propensity of a node x at time t given a particular information source y . For learning the kernel function, there is however no full supervision available - this would correspond to a continuous time function giving the heat evolution at any point. The observations only provide the contamination time of the different nodes in a cascade. This partial supervision will be used to constrain the kernel to contaminate the different nodes **in their actual temporal order of infection**.

In practice, we will use the following constraints:

- Given two nodes u_i and u_j such that u_i and u_j are contaminated during cascade c - i.e $u_i \in S^c$ and $u_j \in S^c$ - and respecting $t^c(u_i) < t^c(u_j)$, K_Z must be defined such that $\forall t, K_Z(t, s^c, u_i) > K_Z(t, s^c, u_j)$
- We define a heat threshold h_τ which determine the heat users have to reach to be contaminated. Thus:
 - Given a node u_i such that u_i is contaminated during a cascade c , K_Z must be defined such that $\exists t, K_Z(t, s^c, u_i) > h_\tau$
 - Given a node u_i such that u_i is not contaminated during a cascade c , K_Z must be defined such that $\forall t, K_Z(t, s^c, u_i) < h_\tau$

These constraints basically aim at finding embeddings such that users who are contaminated first are closer to the source of the contamination than users contaminated later (or not contaminated at all). h_τ is a unique heat threshold which split users in two groups in order to determine which users will be contaminated and not only an order of contamination. Based on the heat equation, we can thus easily rewrite these three constraints as:

$$\begin{aligned} \forall u_i \in S^c, \quad & \|z_{s^c} - z_{u_i}\|^2 < \tau \\ \forall u_i \in \bar{S}^c, \quad & \tau < \|z_{s^c} - z_{u_i}\|^2 \\ \forall (u_i, u_j) \in S^c \times S^c \\ & t^c(u_i) < t^c(u_j) \Rightarrow \|z_{s^c} - z_{u_i}\|^2 < \|z_{s^c} - z_{u_j}\|^2 \end{aligned} \quad (1)$$

where τ is a distance threshold. It corresponds to the distance from the source of the diffusion beyond which users are not contaminated: their heat never reach h_τ .

By the use of classical hinge loss functions, these constraints can be handled by defining a ranking objective Δ_{rank} such as:

$$\begin{aligned} \Delta_{rank}(K_Z(\cdot, s^c, \cdot), c, \tau) = & \\ & \sum_{u_i \in S^c} \max(0, 1 - (\tau - \|z_{s^c} - z_{u_i}\|^2)) \\ & + \sum_{u_i \in \bar{S}^c} \max(0, 1 - (\|z_{s^c} - z_{u_i}\|^2 - \tau)) \\ & + \sum_{\substack{u_i, u_j \in S^c \times S^c \\ t^c(u_i) < t^c(u_j)}} \max(0, 1 - (\|z_{s^c} - z_{u_j}\|^2 - \|z_{s^c} - z_{u_i}\|^2)) \end{aligned} \quad (2)$$

Learning Algorithm The final training objective is:

$$\mathcal{L}_{rank}(Z, \tau) = \sum_{c \in \mathcal{C}_\ell} \Delta_{rank}(K_Z(\cdot, s^c, \cdot), c, \tau) \quad (3)$$

We name this model "Content Diffusion Kernel with Threshold" (CDKT). Different methods can be used to optimize the objective function. We propose to use a classical stochastic gradient descent method, which iterates until having reached a stop criterion (typically a number of iterations without significant improvement of the global loss). After having randomly initialized¹ all embeddings for nodes in \mathcal{U} , the algorithm samples at each iteration a cascade c from the training set \mathcal{C}_ℓ and two nodes u_i and u_j with u_j a node that is either non-infected, or contaminated after u_i in the diffusion process described by cascade c . If constraints defined in equation 1 are not respected with a sufficient margin² for this cascade c and the nodes u_i and u_j , embeddings z_{u_i} , z_{u_j} , z_{s^c} and τ are modified towards their respective steepest gradient direction with a learning rate α which is a decreasing function of the number of iterations. The learning process is illustrated in algorithm 1.

4. Experimentations

Datasets We tested our model on several datasets from various online sources: *ICWSM* (Burton et al., 2009), *Memetracker* (Leskovec et al., 2009) and *Digg*. The first two datasets are sets of blog posts crawled from the web. We define a cascade as a set of posts

¹Different initialization strategies can be adopted. In our experiments, we used an uniform initialization between -1 and 1.

²As defined by the hinge loss function, see equation 2.

Algorithm 1 Stochastic gradient descent algorithm

```

1: procedure SGD RANK DIFFUSION KERNEL
   LEARNING
2:    $t \leftarrow 0$ 
3:    $\forall u \in \mathcal{U}, z_u^{(t)} \leftarrow \text{random}$ 
4:    $\tau^{(t)} \leftarrow \text{random}$ 
5:   while  $t < T$  do
6:     Sample  $c \in \mathcal{C}_\ell$ 
7:     Sample  $u_i \in S^c$ 
8:     Sample  $u_j \in \mathcal{U}, t^c(u_i) < t^c(u_j)$  or  $u_j \in \bar{S}^c$ 
9:      $d_i \leftarrow \|z_{s^c}^{(t)} - z_{u_i}^{(t)}\|^2$ 
10:     $d_j \leftarrow \|z_{s^c}^{(t)} - z_{u_j}^{(t)}\|^2$ 
11:    if  $u_j \in S^c$  then
12:      if  $(d_j - d_i) < 1$  then
13:         $z_{u_i}^{(t+1)} \leftarrow z_{u_i}^{(t)} + \alpha(t) \times 2(z_{s^c}^{(t)} - z_{u_i}^{(t)})$ 
14:         $z_{u_j}^{(t+1)} \leftarrow z_{u_j}^{(t)} + \alpha(t) \times 2(z_{u_j}^{(t)} - z_{s^c}^{(t)})$ 
15:         $z_{s^c}^{(t+1)} \leftarrow z_{s^c}^{(t)} + \alpha(t) \times 2(z_{u_i}^{(t)} - z_{u_j}^{(t)})$ 
16:      end if
17:    end if
18:    if  $(\tau^{(t)} - d_i) < 1$  then
19:       $z_{u_i}^{(t+1)} \leftarrow z_{u_i}^{(t)} + \alpha(t) \times 2(z_{s^c}^{(t)} - z_{u_i}^{(t)})$ 
20:       $\tau^{(t+1)} \leftarrow \tau^{(t)} - \alpha(t)$ 
21:    end if
22:    if  $(d_j - \tau^{(t)}) < 1$  then
23:       $z_{u_j}^{(t+1)} \leftarrow z_{u_j}^{(t)} + \alpha(t) \times 2(z_{u_j}^{(t)} - z_{s^c}^{(t)})$ 
24:       $\tau^{(t+1)} \leftarrow \tau^{(t)} + \alpha(t)$ 
25:    end if
26:     $t \leftarrow t + 1$ 
27:  end while
28:   $Z \leftarrow Z^{(t)}$ 
29: end procedure
    
```

linked together by hyperlinks. *Digg* est a platform where users can share news stories with each other. A cascade is thus the set of users who have share the same story. We filtered the users of each dataset to keep about 5000 users with the most posts.

Quality of the ranking In order to test the quality of this model, we compared it to several baselines using the same protocol we used in (Bourigault et al., 2014). The goal is to compute the average precision the model obtains on all cascades. We show the results of 3 baselines IC (Saito et al., 2008), Netrate (Gomez-Rodriguez et al., 2011) and Heat Diffusion (Ma et al., 2008) and the 2 latent models CDK and CDKT. IC obtains better results than other baselines.

CDK obtains slightly better results than CDKT. They outperform baselines on both *ICWSM* and *Digg* while IC obtains better results on *Memetracker*.

Model	Memetracker	ICWSM	Digg
CDK-500	0.363	0.773	0.280
CDKT-500	0.324	0.746	0.233
IC	0.372	0.712	0.197
Netrate	0.287	0.187	0.162
Heat Diff.	0.374	0.483	0.082

Table 1. MAP on 3 real datasets: *Memetracker*, *ICWSM* and *Digg*. Results of CDK and CDKT are given for a latent space of 500 dimensions.

Learning and Inference complexity Let T be the number of iterations. The learning complexity is $O(T \times n)$, where n is the size of the latent space. Once Z has been learned, the inference process is simple. For a cascade c , we just compute the distance between the user s^c and every other user in \mathcal{U} . The inference complexity for every cascade is then $O(N \times n)$, where N is the number of users. Considering that $n \ll N$, this turns out to be much smaller than the complexity of most alternative discrete methods. For instance, the inference step of the very famous Independant Cascade model(IC), which is a probabilistic model where diffusion propabilities are defined on edges of the network’s graph, requires to consider at each time step of the diffusion t every possible infection situation at previous time $t - 1$, which quickly becomes untractable. In practice, inference of graphical models is done by employing a Monte-Carlo approximation that consists in performing a high amount of simulations of the diffusion process starting from the source of the cascade and following the diffusion probabilities on links of the graph. The inference complexity of this approximation of IC is $O(r \times S_{\hat{u}ccs} \times |\hat{S}^c|)$, where $|\hat{S}^c|$ is the average number of infected nodes in the performed simulations, $S_{\hat{u}ccs}$ is their average outdegree and r is the number of simulations used for the MCMC approximation. The weaker the probabilities defined on links are, the greater r must be set to obtain a correct approximation of the distribution of final infection probabilities.

Comparison between CDK and CDKT We compare here the two kernel models in the task of predicting which users will be contaminated at the end of the diffusion. The main problem to achieve this task with the CDK model is that all cascades are not on the same scale and it is very difficult to find a unique threshold which properly split data in two clusters: contaminated or not. For this reason we don’t have any threshold for the CDK model and thus couldn’t compare clusters made.

We use the following protocol: after predicting a score

275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329

	Memetracker	ICWSM	Digg
CDK-50	0.0001	1.0	0.450
CDKT-50	0.297	1.0	0.543
CDK-500	0.625	0.794	0.067
CDKT-500	0.417	1.0	0.862

Table 2. P@50 on 3 real datasets: *Memetracker*, *ICWSM* and *Digg*. Results of CDK and CDKT are given for two values of n , the dimension of the latent space \mathcal{Z} (50 and 500 dimensions).

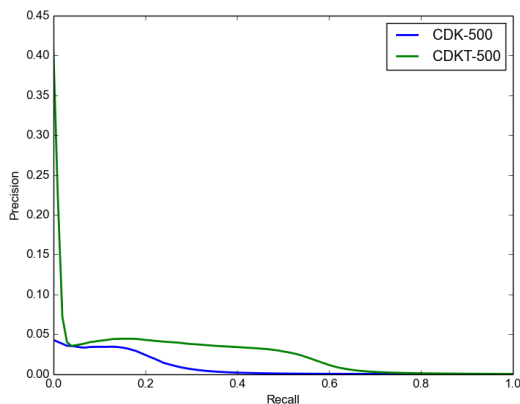


Figure 1. Precision/Recall curve for models using a latent space of 500 dimensions on the *Digg* dataset.

of contamination for each user for each cascade, we group all cascades in a unique set. The goal is to see if the models can find users contaminated by any cascade in this set. If there is a unique threshold, they should be able to do so.

Table 2 shows the precision at rank 50 (P@50) on all datasets for the two models using two latent spaces with different dimension. It corresponds to their ability to find 50 contaminated users. We see that both CDK and CDKT obtain better results on *ICWSM*. They also obtain a better MAP. This is because the *ICWSM* dataset is easier than the 2 others. While CDKT is obtain better resultats than CDK on most of the datasets and dimension spaces.

As the P@50 doesn't show all information, figure 1 shows the precision/recall curve for the *Digg* datasets in 500 dimensions spaces. As for the P@50, the curve shows that CDKT is better than CDK.

5. Conclusion

The CDK model use the phenomenon of heat diffusion to modelize the propagation of content in a latent

space. This model is based on a ranking of users and because of the different scale of each representation, there is no easy way to find which user will be contaminated. We proposed in this article an extension of this model CDKT which learns a threshold to split users in two groups: contaminated or not. On several real datasets, we showed that this model is better to find contaminated users. Our next step with this model will be to understand in which contexts (low/high diffusion, network type, etc) it outperforms CDK.

References

- Bourigault, Simon, Lagnier, Cédric, Lamprier, Sylvain, Denoyer, Ludovic, and Gallinari, Patrick. Learning social network embeddings for predicting information diffusion. In *Proceedings of the Sixth ACM International Conference on Web Search and Data Mining, WSDM '14*. ACM, 2014.
- Burton, Kevin, Java, Akshay, and Soboroff, Ian. The icwsm 2009 spinn3r dataset. In *Proceedings of the Third Annual Conference on Weblogs and Social Media*, May 2009.
- Gomez-Rodriguez, Manuel, Balduzzi, David, and Schölkopf, Bernhard. Uncovering the temporal dynamics of diffusion networks. In *Proceedings of the 28th International Conference on Machine Learning (ICML-11)*, ICML '11, pp. 561–568. ACM, 2011.
- Leskovec, Jure, Backstrom, Lars, and Kleinberg, Jon. Meme-tracking and the dynamics of the news cycle. In *Proceedings of the 15th ACM SIGKDD international conference on Knowledge discovery and data mining, KDD '09*, pp. 497–506, New York, NY, USA, 2009. ACM.
- Ma, Hao, Yang, Haixuan, Lyu, Michael R., and King, Irwin. Mining social networks using heat diffusion processes for marketing candidates selection. In *Proceedings of the 17th ACM conference on Information and knowledge management, CIKM '08*, pp. 233–242. ACM, 2008.
- Saito, Kazumi, Nakano, Ryohei, and Kimura, Masahiro. Prediction of information diffusion probabilities for independent cascade model. In *Proceedings of the 12th international conference on Knowledge-Based Intelligent Information and Engineering Systems, Part III, KES '08*, pp. 67–75. Springer-Verlag, 2008.