Quantum attacks against iterated block ciphers

M. Kaplan*

Abstract

We study the amplification of security against quantum attacks provided by iteration of block ciphers. In the classical case, the Meet-in-the-middle attack is a generic attack against those constructions. This attack reduces the time required to break double iterations to only twice the time it takes to attack a single block cipher, given that the attacker has access to a large amount of memory. More abstractly, it shows that security by composition does not achieve exact multiplicative amplification.

We prove here that for quantum adversaries, two iterated ideal block cipher are more difficult to attack than a single one. We give a quantized version of the Meet-in-the-middle attack and then use the generalized adversary method to prove that it is optimal. An interesting corollary is that the time-space product for quantum attacks is very different from what classical attacks allow. This first result seems to indicate that composition resists better to quantum attacks than to classical ones.

We investigate security amplification by composition further by examining the case of four iterations. We quantize a recent technique called the dissection attack using the framework of quantum walks. Surprisingly, this leads to better gains over classical attacks than for double iterations, which seems to indicate that when the number of iterations grows, the resistance against quantum attacks decreases.

1 Introduction

Quantum information processing has deeply changed the landscape of classical cryptography. In particular, cryptosystems based on integer factoring and discrete logarithm are known to be completely insecure against quantum computers. This opened the field of post-quantum (PQ) cryptography, which tries to restore the security of classical cryptosystems against quantum attacks. Regarding public key cryptography, PQ cryptography is investigating (or reinvestigating) a number of different approaches such as lattice-based cryptography, code-based cryptography or elliptic curve cryptography. The goal of these different approaches is to base public key encryption mechanisms on problems that are believed to be hard to solve even for quantum computers.

The situation in symmetric cryptography is more complicated. It is well known quantum computers can speed-up certain information processing tasks that are useful for the cryptanalysis of symmetric cryptosystems. This includes exhaustive search [Gro96] or collision finding [Amb07]. In fact, quantum cryptanalysis is often cited as a motivation to study quantum algorithms [BHT98, AS04, Zha13]. Since these quantum algorithms usually allow only polynomial speedups, this tends to spread the belief that the security against quantum adversaries can be restored by increasing the size of private keys.

This short answer to the question of security against quantum attacks leaves aside a number of issues. For example, it applies to generic attacks and not to cryptographic attacks. Roughly speaking, generic attacks work against constructions based on ideal functionalities, whereas cryptographic attacks try to attack their implementations. Attacking realistic, complex cryptosystems may require more effort than just applying basic quantum algorithms. This situation is well described by Daniel Bernstein [Ber10]:

"Grovers algorithm takes only square-root time compared to a brute-force key search, but this does not mean that it takes less time than the more sophisticated algorithms used to find hash

^{*}LTCI, Télécom ParisTech, 23 avenue dItalie, 75214 Paris CEDEX 13, France

collisions, McEliece error vectors, etc. Sometimes Grover's idea can be used to speed up the more sophisticated algorithms, but understanding the extent of the speedup requires careful analysis."

In this work, we argue that the tools developed to study quantum speedups in complexity theory can be applied to get new insights in cryptographic settings. In particular, the field of quantum walk algorithms is a flexible framework to develop search algorithms on complex structures [San08]. Even more interestingly, the generalized adversary method [HLŠ07] can be used to prove lower bounds, and thus resistance against quantum attacks, at least in a black box setting. Applying these tools to study the resistance against quantum attacks is an extension of the current horizon of PQ cryptography that can be though as quantum post-quantum cryptography.

We focus here on one of the most fundamental situations in symmetric cryptography: block cipher encryption. In this setting, a message m is cut into blocks of fixed size, and each block is encrypted using a permutation specified by a secret key. The original message can then be recovered by applying the inverse permutation on each block. The specification of the encryption and decryption algorithms are public, only the key remains secret through the process. Block cipher encryption is widely used in practice. It is also an important building block in the design of other cryptographic primitives such as message authentication codes, hash functions, or digital signature.

A block cipher is designed such that applying a permutation specified by an randomly sampled key "looks like" sampling a random permutation. In this paper, we work at a more abstract level and consider that a block cipher is a collection of random permutations $F_i : [M] \to [M]$ where i = 1, ..., N are the potential secret keys. The set of permutations is public, and anyone can efficiently compute $F_i(X)$ and $F_i^{-1}(X)$ for any X, i. We consider an attacker that knows a few pairs of plaintext with corresponding ciphertexts, all encrypted with the same key. The goal for the attacker is to extract the secret key that was used for encryption from the datas.

If the permutations are random, the only attack is to search exhaustively among the keys, which requires O(N) classical queries to the functions F_i or the inverse functions F_i^{-1} . Of course, a quantum attacker can use Grover search algorithm to achieve a quadratic speedup, and find the key with $O(\sqrt{N})$ quantum queries. In order to restore the same security parameter against a quantum cryptanalyst, it suffices to double the length of the key. Of course, it is unreasonable to assume that a time bound N is considered secure against quantum attacks because it is secure against classical attacks. However, the broader question we investigate here is to amplify the security against quantum attacks. We believe this question remains legitimate.

Although increasing the key length is a neat theoretical answer, it is not always clear how to implement it in practice. Block ciphers are deterministic algorithms, designed to work with specified parameters N and M. Assuming that one can double the key size is a strong structural assumption on the design of the cipher. For example, AES can be used to work with different key sizes, but it was not the case for its ancestor DES. This block cipher was designed to work with 56 bits keys, and although this was considered sufficient by the time is was standardized, the question of how to increase this size became central when brute-force attacks started looking realistic.

The simplest attempt to increase the key size is to compose permutations with independent keys. The composition of r independent permutations of a block cipher is called an r-encryption. For r=2, the size is doubled, but there is a clever attack against this construction [DH77, MH81]. Suppose that an attacker knows a pair of plaintext-ciphertext (P,C). These satisfy $C=F_{k_2}(F_{k_1}(P))$, where (k_1,k_2) are the keys used for encryption. Since inverse permutations can be computed, an attacker can construct tables $F_k(P)$ and $F_{k'}^{-1}(C)$ for every possible keys k,k'. Finding a collision $F_{k_1}(P)=F_{k_2}^{-1}(C)$ reveals the keys used for encryption.

This attack, known as the Meet-in-the-middle attack, shows that it only takes twice more time to attack double iterations than it takes to attack a single one, where a naive cryptographer would expect a quadratic increase. Equivalently, the key expansion obtained by double-iteration is only 1 bit, although the size of the key space has doubled. Of course, this attack is optimal up to a factor two. The Meet-in-the-middle attack shows that even a simple idea such as security amplification by composition should be carefully studied. It also has practical consequences, and led to the standardization of triple-DES rather than the insecure double-DES.

We address the question of how resistant composition is against quantum adversaries. An obvious quantum attack against the 2-encryption is to use a collision finding algorithm. Finding collisions has been studied extensively in classical and quantum settings. The series of quantum algorithms for this problem culminated with Ambainis' celebrated algorithm [Amb07] for the Element Distinctness problem, which is optimal with respect to the number of queries to the input [AS04]. In our case, it extracts the keys with $N^{2/3}$ quantum queries to the permutations. However, the key extraction problem for double encryption has more structure than element distinctness and there is no clear indication that this approach is optimal. The problem has a lot more possible inputs and more queries are allowed. Starting from an instance of element distinctness and embedding it to an input that is consistant with the structure of key extraction may not always be possible without a large number of queries to the input. For this reason, there is no obvious way of proving the optimality of Ambainis' algorithm for key extraction by reduction from Element Distinctness.

In Section 2, we prove using the generalized adversary method that $N^{2/3}$ queries are also required to extract the keys in the case of 2-encryption (**Theorem 3**). Starting from an adversary matrix for Element Distinctness, we build an adversary matrix for the new problem (**Lemma 1**). The underlying idea is that even if there is no obvious reduction, the two problems are equivalent because they have the same symmetries. We prove that the attack against 2-encryption that consists in searching for collision is the most time-efficient, leading to a generic attack deserving to be called the quantum Meet-in-the-middle attack. The immediate consequence is that for quantum computers, contrary to the classical ones, 2-encryption is harder to break than a single ideal cipher.

A surprising corollary is that classical and quantum time-space products are very different (**Corollary 1**). In the classical case, the Meet-in-the-middle attack is time-efficient for an attacker that is willing to pay with more space, but the global time-space product is similar to the one achieved by an exhaustive search. Using quantum algorithms, the time-space product of the optimal algorithm of Ambainis is worse than an exhaustive search. While this may not be a surprise from the point of view of quantum complexity theory (see e.g. the conclusion of [BDH⁺05]), this suggests that the time-space product, a common way of evaluating classical attacks [DDKS12], may not be the correct figure of merit to evaluate quantum attacks.

The results obtained for two iterations suggest that composition could be a good tool to amplify the resistance against quantum attacks because it prevents the quadratic speedups allowed by the quantization of an exhaustive search. We investigate this question further in Section 3, by looking at the case of 4-encryption. Once again, the tools from quantum complexity theory appear to be very helpful to tackle this question. We give a quantization of the dissection attack for four encryption recently introduced by Dinur, Dunkelman, Keller and Shamir [DDKS12]. This attack is essentially a composition of an exhaustive search with the basic Meet-in-the-middle algorithm. Surprisingly, it is better than previously known classical attacks solely based on the Meet-in-the-middle technique. Quantum query complexity theory developed good tools to quantize such compositions, but in order to quantify also time and space complexity, we use the framework of quantum walks. Our main finding in this case is that the resistance against quantum attacks decreases when the number of iterations goes from two to four (**Theorem 4**).

While these tools appear to be very helpful to study two encryptions and four encryptions, we are not in position to make a statement for general multiple encryptions. Using the generalized adversary method and quantum walks has been very fruitful for studying Merkle puzzles in a quantum world [BHK⁺11], in which these techniques were used to devise attacks and prove their optimality. We present here another important cryptographic scenario in which these tools can be applied to derive new results. A similarity between the two scenarios is that polynomial speedups are very insightful. Many specifically quantum techniques are available to study such speedups and their optimality in black-box settings. Even if the main question about successive encryption remains open, we hope that our work demonstrates that quantum techniques can be very interesting for PQ cryptography, and that it will motivate further interactions between quantum computer scientists and classical cryptographers.

2 Optimality of the quantum Meet-in-the-middle

In what follows, M and N are two integers of comparable size and [N] is the set of integers from 1 to N. We denote $\mathcal{S}_{[N]}$ the set of permutations of [N]. The space of keys is [N] and the space of blocks [M].

We consider problems with inputs given as oracles (or black-boxes). Usually, we consider these inputs as functions f, and a classical query to the input returns f(x) for some x in the domain of f. In some cases, we may also consider an input f as a string where f_i denotes the result of the classical query i to f. This notation is convenient in particular when considering adversary matrices whose entries are indexed by inputs to the problem. In the quantum setting, the only difference is that attacker can make quantum queries to the input. A brief exposition of the underlying model with the main theorems that we use to derive our results can be found in Appendix.

The Element Distinctness problem has been extensively studied in quantum query complexity. In particular, Ambainis' quantum walk based algorithm [Amb07] is known to be optimal for this problem [AS04]. The recent result of Rosmanis gives the best possible bound with respect to the range of the input function [Ros14].

Definition 1. The Element Distinctness (ED) problem takes input $O:[N] \to [M]$ with the promise that there exists a pair $i, j \in [N]$ such that O(i) = O(j). The problem is to output the pair (i, j).

In this paper, we use the slightly more structured problem known as Claw finding [BHT98].

Definition 2. Given two one-to-one functions $F:[N/2] \to [M]$ and $G:[N/2] \to [M]$, a claw is a pair $x,y \in [N]$ such that F(x) = G(y). The Claw finding (CF) problem is, on input F, G to return the pair x,y given that there is exactly one.

It is easy to prove that CF and ED are equivalent up to constant factors. Given an input O for ED, an input for CF can be obtained by randomly cutting O into two functions. The probability that the two colliding elements are splitted is 1/2 and running the algorithm for CF a few times on different random cuts is sufficient to find the collision with high probability. Therefore, upper and lower bounds for ED apply similarly to CF, up to constant factors.

Theorem 1. For $M \ge N$, the quantum query complexity and time complexity of ED and CF are $\Theta(N^{2/3})$. The most time-efficient algorithm for these problems uses memory $O(N^{2/3})$.

The goal of this section is to study the problem of extracting keys from the double iteration of a block cipher. In this context, we assume that the quantum cryptanalyst has implemented the publicly known block cipher on a quantum computer. He then receives the classical data consisting in couples of plaintext (P) and ciphertext (C), all encrypted with the same key. Finally, he uses this datas to extract the secret key with the help of the quantum computer. We assume that there is only one key that maps P to C. Equivalently, we can assume that the attacker knows a few pairs (P_i, C_i) , all encrypted with the same keys. This ensures that the key mapping P_i to C_i for all i is unique with very high probability. This can always be simulated by giving only one pair to the attacker and increasing the size of the blocks. This introduces constant factors in the complexity analysis, and enforces the permutations to have a product structure, but do not induce any fundamental change to the security proof given here. Notice that applying this trick implies that M and N are then not comparable anymore, which is an important fact in Section 3.

Definition 3. The 2-Key Extraction $(KE_2^{P,C})$ problem with $P, C \in [M]$ takes input \mathcal{F} where $\mathcal{F} = \{F_1, \dots, F_N\}$ is a collection of permutations $F_i \in \mathcal{S}_{[M]}$ with the promise that there exists a unique couple (k_1, k_2) such that $F_{k_2}(F_{k_1}(P)) = C$. The goal of the problem is to output the pair (k_1, k_2) .

It is easy to prove that the complexity of the problem is independent of the pair (P, C). An algorithm for a given pair (P, C) can be easily adapted to solve the problem for another pair (P', C'). Let σ be the permutation that transposes P' and P and C' and C. It suffices to conjugate every permutation of an input $\mathcal{F} = \{F_1, \ldots, F_N\}$ with σ before running the algorithm for $KE_2^{P,C}$. When it is clear from the context and unnecessary for proofs, we drop the exponent and write only KE_2 .




Figure 1: The 2-encryption problem consists in recovering the keys k_1 and k_2 , given a plaintext P and a corresponding ciphertext C

The next theorem shows an upper bound on the complexity of KE_2 . The idea is simply to reduce KE_2 to CF.

Theorem 2. There exists a quantum algorithm that solves KE_2 in time $O(N^{2/3})$ using memory $O(N^{2/3})$.

Proof. Assume that $\mathcal{F} = \{F_1, \dots, F_N\}$ is an input of $KE_2^{P,C}$. We construct the following input to CF: a pair of functions $G_1, G_2 : [N] \to [M]$, defined by $G_1(x) = F_x(P)$ and $G_2(y) = F_y^{-1}(C)$. Suppose that the algorithm for CF returns a pair (x^*, y^*) . This implies that it is the unique pair such that $F_{x^*}(P) = F_{y^*}^{-1}(C)$, leading to $F_{y^*}(F_{x^*}(P)) = C$. It is therefore the pair of keys used to encrypt P.

We also prove the following lower bound on the problem.

Theorem 3. A quantum algorithm that solves KE_2 needs $\Omega(N^{2/3})$ quantum queries to the input $\mathcal{F} = \{F_1, \ldots, F_N\}$, including queries to inverse permutations, except with vanishing probabilities.

A lower bound on query complexity translates into a lower bound on time complexity. Therefore, combining the upper and lower bounds on time complexity with the upper bound on memory gives the following corollary.

Corollary 1. The most time-efficient attack on KE_2 has time-space product $O(N^{4/3})$.

Notice that a simple Grover search leads to time O(N) with logarithmic space, thus having a time-space product of N, better than the best known algorithm for CF.

The rest of the section is now devoted to proving the lower bound on the attack. There are two important differences between CF and KE_2 :

- It is possible to query a permutation F_i on any input $X \in [M]$.
- It is possible to query inverse permutations F_i^{-1} .

These differences imply that there is no obvious query-preserving reduction from CF to KE_2 . One important issue is that, since F_i is a permutation, querying $F_i(X)$ with $X \neq P$ gives information on $F_i(P)$. Intuitively, we believe this information is so small that it may not be useful to solve the problem. This is even more problematic in the quantum setting, where a single query can be made in superposition of all the inputs, preventing the strategy that consists in building the reduction on the fly, when the queries to the input are done. To overcome this issue, we use a specific tool from quantum query complexity known as the generalized adversary method.

We prove a slightly stronger lower bound result by considering the decision version of KE_2 . In this case, the problem is to determine if there exists keys k_1, k_2 such that $C = F_{k_2}(F_{k_1}(P))$. We denote this version $d-KE_2$. Of course, an algorithm for the search version can easily be transformed into an algorithm for the

decision version. Consequentely, a lower bound for the decision version is also a lower bound on the search problem. We compare this algorithm with the decision version of claw finding, denoted d-CF. The bounds given in Theorem 1 apply equivalently to the decision version of these problems.

The proof of Theorem 3 is in two steps. In Lemma 1, we prove a lower bound in the *worst-case quantum* query complexity using the generalized adversary method. In the second step, which is the proof of Theorem 3, we use a self-reducibility argument to prove that the probability of solving the problem on a random input with less queries than in the worst case is vanishing.

Lemma 1. A quantum algorithm that solves d- KE_2 needs $\Omega(N^{2/3})$ quantum queries to the input $\mathcal{F} = \{F_1, \ldots, F_N\}$, including queries to inverse permutations.

Proof. We consider an optimal adversary matrix for d-CF and use it to build an explicit adversary matrix for $d-KE_2$. Details on the adversary method can be found in the Appendix. In this proof, we need the fact that the generalized adversary method gives optimal lower bounds on quantum query complexity. Therefore, we can choose an adversary matrix for CF such that the adversary value given by this matrix is exactly the quantum query complexity of the function. Let Γ_{CF} be this adversary matrix for d-CF. The rows and columns of Γ_{CF} are indexed by inputs to the problem, that is, pairs of function G_1, G_2 .

We now construct an adversary matrix Γ_{KE_2} for the problem $d-KE_2^{P,C}$. The rows and columns of Γ_{KE_2} are indexed by collections of permutations $\mathcal{F} = \{F_1, \dots F_N\}$. Given a row u, (resp. a column v), denote $u^{(P,C)}$ the row (resp. $v^{(P,C)}$ the column) of Γ_{CF} corresponding to functions G_1, G_2 defined by $G_1(k) = F_k(P)$ and $G_2(k) = F_k^{-1}(C)$. The input $u^{(P,C)}$ for the problem d-CF is called the projection of the input u for the problem $d-KE_2$. This operation is represented on figure 2. We simply define the entries of Γ_{KE_2} by $\Gamma_{KE_2}[u,v] = \Gamma_{CF}[u^{(P,C)},v^{(P,C)}]$. Our goal is now to apply Theorem 6. In order to apply it, we need to compute the values of $\parallel \Gamma_{KE_2} \parallel$ and $\max_q \parallel \Gamma_{KE_2} \bullet \Delta_q \parallel$, where " \bullet " denotes the entry-wise product of matrices¹.

This definition implies that Γ_{KE_2} has a simple tensor product structure. Notice that for two pairs (u,v) and (u',v') of inputs of $d-KE_2$ projecting onto the same pair of inputs (\tilde{u},\tilde{v}) of CF, we get by definition $\Gamma_{KE_2}[u,v] = \Gamma_{KE_2}[u',v'] = \Gamma_{CF}[\tilde{u},\tilde{v}]$. Moreover, the number of inputs to $d-KE_2$ projecting onto the same of d-CF is a constant. Denoting this constant D and $\mathbb{J}_{D\times D}$ the all-one matrix of dimension D, we get $\Gamma_{KE_2} = \Gamma_{CF} \otimes \mathbb{J}_{D\times D}$. This immediately gives the relation

$$\parallel \Gamma_{KE_2} \parallel = D \parallel \Gamma_{CF} \parallel.$$

The next step is to bound $\max_i \| \Gamma_{KE_2} \bullet \Delta_i \|$ where $\Delta_i[u,v] = 0$ if $u_i = v_i$, and 1 otherwise. A query to an input to $d-KE_2$ is a triplet (x,k,b) where $x \in [M], k \in [N]$ and $b \in \{-1,1\}$ indicates if the query is to a permutation or to its inverse. The query thus returns $F_k^b(x)$.

We show that it is sufficient to consider a special set of queries. The set of queries \mathcal{I} consists of queries q=(x,k,b) where x=P if b=1 and x=C if b=-1. We prove that if the value $\|\Gamma_{KE_2} \bullet \Delta_q\|$ is not maximized by a query from \mathcal{I} , it is possible to find another matrix with both the same norm and the same tensor product structure such that $\|\Gamma' \bullet \Delta_q\|$ is maximized by a query from \mathcal{I} . Formally, we prove the following claim.

Claim: There exists a permutation of rows and columns of Γ_{KE_2} leading to a matrix Γ' such that $\Gamma' = \Gamma'_{CF} \otimes \mathbb{J}_{D \times D}$, where Γ'_{CF} is obtained by permuting the rows and columns of Γ_{CF} and $\max_q \| \Gamma_{KE_2} \bullet \Delta_q \| = \max_{q \in \mathcal{I}} \| \Gamma' \bullet \Delta_q \|$.

We first explain how to finish the proof assuming this claim. A query $q \in \mathcal{I}$ projects onto a query \tilde{q} to inputs of d-CF. Formally, for a query $q \in \mathcal{I}$, there exists a query \tilde{q} to inputs of d-CF such that for any input u of $d-KE_2$, $u_q=u_{\tilde{q}}^{(P,C)}$. If $q=(x,k,b)\in\mathcal{I}$, the query $\tilde{q}=(k,b)$ on $u^{(P,C)}$ returns $G_1(k)$ if b=1 and $G_2(k)$ if b=1. By definition of $u^{(P,C)}$, we have $G_1(k)=F_k(P)$ and $G_2(k)=F_k^{-1}(C)$ and thus, $u_q=u_{\tilde{q}}^{(P,C)}$. This implies that for $q\in\mathcal{I}$, $(\Gamma'\bullet\Delta_q)[u,v]=(\Gamma'_{CF}\bullet\Delta_{\tilde{q}})[u^{(P,C)},v^{(P,C)}]$. The tensor product structure ensures that $\Gamma'\bullet\Delta_q=(\Gamma'_{CF}\otimes\mathbb{J}_{D\times D})\bullet\Delta_q=(\Gamma'_{CF}\bullet\Delta_{\tilde{q}})\otimes\mathbb{J}_{D\times D}$, and thus

 $^{^{1}}$ This product is usually denoted \circ , we use here a different notation to avoid confusion with the composition of permutations that is also used in this proof

$$\max_{q} \| \Gamma_{KE_2} \bullet \Delta_i \| = \max_{q \in \mathcal{I}} \| \Gamma' \bullet \Delta_q \| = D \max_{\tilde{q}} \| \Gamma'_{CF} \bullet \Delta_{\tilde{q}} \|.$$

The last equality is true because since \mathcal{I} and queries to inputs of d-CF have the same cardinality, they are in one-to-one correspondance. Maximizing over queries to \mathcal{I} is therefore equivalent to maximizing over queries to inputs to d-CF. Finally, this shows that the quantum query complexity of KE_2 is at least

$$\min_{q} \frac{\parallel \Gamma_{KE_{2}} \parallel}{\parallel \Gamma_{KE_{2}} \bullet \Delta_{q} \parallel} = \min_{q} \frac{\parallel \Gamma' \parallel}{\parallel \Gamma' \bullet \Delta_{q} \parallel} = \min_{\tilde{q}} \frac{D \parallel \Gamma'_{CF} \parallel}{D \parallel \Gamma'_{CF} \bullet \Delta_{\tilde{q}} \parallel}
= \min_{\tilde{q}} \frac{\parallel \Gamma_{CF} \parallel}{\parallel \Gamma_{CF} \bullet \Delta_{\tilde{q}} \parallel} = \Omega(N^{2/3}).$$

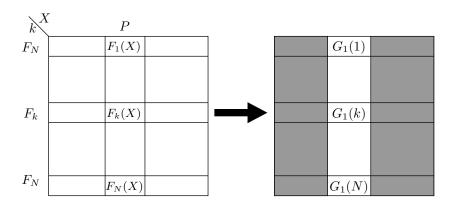


Figure 2: An input to KE_2 can be represented as a table whose rows and columns are indexed by k and X, respectively. Each line of the table is a permutation F_i . The projecting onto an input to CF is a restriction to one column. To build a complete input to CF, one also has to restrict the table of permutations F_k^{-1} .

It only remains to prove the above claim. Suppose that $\| \Gamma_{KE_2} \bullet \Delta_q \|$ is maximized by a query $q^* = (x^*, k^*, b^*)$. The intuition of the claim is that if $q^* \notin \mathcal{I}$, it can still be projected onto a query to inputs of d-CF. By mapping these to inputs of the original problems, we get the new matrix Γ' .

Assume that $b^* = 1$ and $x^* \neq P$ (the proof is similar with $b^* = -1$). Let σ denote the transposition $(x^* P)$. For an input $\mathbf{u} = \{F_i\}_{i \in [N]}$, denote $u^{\sigma} = \{F_i \circ \sigma\}_{i \in [N]}$ and define Γ' as $\Gamma'[u, v] = \Gamma_{KE_2}[u^{\sigma}, v^{\sigma}]$. The operation $u \mapsto u^{\sigma}$ corresponds to a permutations of rows and columns of Γ_{KE_2} . Denote Π_{σ} this permutation, so that $\Gamma' = \prod_{i=1}^{t} \Gamma_{KE_i} \Pi_{\sigma}$. Similarly, we have $\prod_{i=1}^{t} \Delta_{\sigma^*} \Pi_{\sigma} = \Delta_{\sigma^{**}}$, where $g^{**} = (P, k^*, b^*)$.

so that $\Gamma' = \Pi_{\sigma}^{\dagger} \Gamma_{KE_2} \Pi_{\sigma}$. Similarly, we have $\Pi_{\sigma}^{\dagger} \Delta_{q^*} \Pi_{\sigma} = \Delta_{q^{**}}$, where $q^{**} = (P, k^*, b^*)$. Finally, we show that $\Gamma' = \Gamma'_{CF} \otimes \mathbb{J}_{D \times D}$ for some matrix Γ'_{CF} . The sets $\{u^{(P,C)}\}_u$ and $\{u^{(x^*,C)}\}_u$ are equal and therefore, there exists a bijection τ sending $u^{(P,C)}$ to $u^{(x,C)}$. This bijection satisfies $(u^{\sigma})^{(P,C)} = \tau(u^{(P,C)})$. The matrix Γ'_{CF} is simply defined as $\Gamma'_{CF}[\tilde{u}, \tilde{v}] = \Gamma_{CF}[\tau(\tilde{u}), \tau(\tilde{v})]$. This gives

$$\begin{array}{lcl} \Gamma'[u,v] & = & \Gamma_{KE_2}[u^\sigma,v^\sigma] = \Gamma_{CF}[(u^\sigma)^{(P,C)},(v^\sigma)^{(P,C)}], \\ & = & \Gamma_{CF}[\tau(u^{(P,C)}),\tau(u^{(P,C)})] = \Gamma'_{CF}[u^{(P,C)},v^{(P,C)}]. \end{array}$$

This immediately leads to $\Gamma' = \Gamma'_{CF} \otimes \mathbb{J}_{D \times D}$, and finishes the proof of the claim.

Proof of Theorem 3. We now show that the lower bound proved in Lemma 1 holds on random inputs, except with vanishing probability. The proof is in three steps. In the first step, we prove that the lower bound holds for the average number of queries made by the attack. In the second step, we show that the lower bound also holds when considering the average error. Finally, we show that the lower bound hold for random inputs, except with vanishing probability.

Step 1: Let \mathcal{A} be an attack such that, given an input $\mathcal{F} = \{F_1, \dots, F_N\}$ to $KE_2^{P,C}$, returns (k_1, k_2) such that $F_{k_2}(F_{k_1}(P)) = C$ after q queries on average over the inputs and is successful with probability at least $1 - \varepsilon$ for any input. Consider then the following attack: run \mathcal{A} for q/ε queries. If \mathcal{A} stopped, then output the same value. Otherwise output a random value. By Markov's inequality, this new attach is successful with probability at least $1 - 2\varepsilon$ and therefore, by Lemma $1, q/\varepsilon \ge \Omega(N^{2/3})$.

Step 2: Let \mathcal{A}' be an attack such that, given an input $\mathcal{F} = \{F_1, \dots, F_t\}$ to $KE_2^{P,C}$, returns (k_1, k_2) such that $F_{k_2}(F_{k_1}(P)) = C$ after q queries on average and is successful with average probability $1 - \varepsilon$, both over the inputs. Consider now the following attack: Choose N random permutations $\{\sigma_1, \dots, \sigma_N\}$, and run the \mathcal{A}' on the input $\mathcal{F}' = \{\sigma_1 \circ F_1, \dots, \sigma_N \circ F_N\}$. This is equivalent to running \mathcal{A}' on a random input, so that the error made by the attack is now $1 - \varepsilon$ for any input. From Step 1, we get again $q = \Omega(N^{2/3})$.

the error made by the attack is now $1 - \varepsilon$ for any input. From Step 1, we get again $q = \Omega(N^{2/3})$. **Step 3:** Let \mathcal{A}'' be an attack that solves $KE_2^{P,C}$ with error ε on average. Denote Q the random variable indicating the number of queries made by \mathcal{A}'' and fix $q = o(N^{2/3})$. Denote $\delta = \Pr[Q \leq q]$. We want to prove that δ is vanishing. Fix two constants k and k' and consider the following attack. Repeat k/δ times the following steps:

- 1. Choose N random permutation $\sigma_1, \ldots, \sigma_N$. Run \mathcal{A}'' on a random input as explained in Step 2, and stop it after k'q queries.
- 2. If \mathcal{A}'' stopped, then output the same value and stop.

If after repeating these two steps k/δ times, no output was produced, output random values.

The number of queries of this attack is at most $kk'q/\delta$. Choosing k and k' large enough, the probability that at least one iteration of the loop is successful can be made arbitrarily close to one, so that the error probability of this attack is arbitrarily close to ε . We have constructed an attack that makes $O(q/\delta)$ queries on average and is successful with average probability $1-\varepsilon$. From Step 2, we get that $q/\delta = \Omega(N^{2/3})$, which implies $\delta = o(1)$.

In order to measure the gains obtained by quantum algorithms, we use a quantity similar to the one used by Dinur, Dunkelman, Keller and Shamir [DDKS12]. We consider $\log C/\log Q$, where C is a classical complexity measure and Q is its quantum counterpart. Intuitively, this corresponds to the factor by which the key size is decreased when the attack is quantized. For example the gain in time for Grover search over classical exhaustive search is 2. The gain for the time-space product is similar because both Grover and exhaustive search require only constant space.

The gain for the Meet-in-the-middle attack is very different. The gain in time is 3/2, using the algorithm presented above. Since this algorithm is optimal, it is the largest possible gain. The gain for the time-space product of this algorithm is also 3/2. Interestingly, there exists other algorithms for ED leading to different gains. For example, the algorithm based on amplitude amplification of [BDH+05] leads to a gain in time of 4/3 (over the classical Meet-in-the-middle attack), and a gain in time-space product of 8/5, better than the most time-efficient attack. The most time-efficient algorithm is not the one leading to the most important gain in time-space, and an attacker that is willing to pay with more time can save on the time-space product.

	Time	Time-space
Exhaustive search	2	2
MITM	3/2 = 1.5	3/2 = 1.5
Amplitude amplification [BDH ⁺ 05]	$4/3 \simeq 1.3$	8/5 = 1.6

Table 1: Gains of attacks against 4-encryption

3 Quantum attack against 4-encryption

We now apply tools from quantum complexity theory to study the case of four iterated encryptions. We assume again that the attacker knows sufficiently many pairs (P_i, C_i) of plaintextcipher-text in order to ensure that, with very high probability, there is only one quadruple of keys (k_1, k_2, k_3, k_4) that satisfies the relations $C_i = E_{k_4}(E_{k_3}(E_{k_2}(E_{k_1}(P_i))))$ for all i.

The classical Meet-in-the-middle attack can be applied in this situation by considering the pairs (k_1, k_2) and (k_2, k_3) as single keys. This requires time and memory $O(N^2)$, and thus time-space product $O(N^4)$. This was the best known algorithm the recent dissection attack [DDKS12], which still requires time $O(N^2)$ but memory only O(N). This significantly improves the time-space product to $O(N^3)$.

The basic idea of the dissection attack is to make an exhaustive search of the intermediate value after two encryptions. The candidate values are then checked using a Meet-in-the-middle procedure. A notable difference with the previous case is that the complexity of the problem is now a function of both M and N. We assumed in the beginning that M and N were of comparable sizes. In order to keep this assumption, we cannot assume anymore that the attacker has a single pair of datas. Instead, we assume that it has enough pairs, all encrypted with the same datas, to be sure that, with large probability, there is only one quadruple of keys consistant with all the datas. It can be shown that four pairs of plaintext with corresponding ciphertext.

Definition 4. The 4-Key Extraction $(KE_4^{P,C})$ problem with $P = (P_1, P_2, P_3, P_4), C = (C_1, C_2, C_3, C_4) \in [M]^4$ takes input \mathcal{F} where $\mathcal{F} = \{F_1, \ldots, F_N\}$ is a collection of permutations of [M]. The goal of the problem is to output (k_1, k_2, k_3, k_4) such that $F_{k_4}(F_{k_3}(F_{k_2}(F_{k_1}(P_i)))) = C_i$ for all i.

The attack uses the quantum Meet-in-the-middle algorithm presented in the previous section as a subroutine. The basic idea is to compose this algorithm with a Grover search of the value in the middle. Quantum query complexity has the remarkable property, derived from the generalized adversary method, that for compatible functions f and g, $Q(f(g(x^1), \ldots, g(x^n))) = O(Q(f)Q(g))$ [HLŠ07].

For simplicity, consider first the decision version of the problem. Given permutations $\mathcal{F} = \{F_1, \ldots, F_N\}$ and a pair (P, C), the problem $d-KE_4$ is to decide if there exists a 4-tuple of keys (k_1, k_2, k_3, k_4) such that $C = F_{k_4}(F_{k_3}(F_{k_2}(F_{k_1}(P))))$.

Consider the following functions:

$$f_X : (\mathcal{S}_{[M]})^N \to \{0,1\}$$

$$\{F_1, \dots, F_N\} \mapsto \begin{cases} 1 & \text{if there exists } k_1 \text{ and } k_2 \text{ such that } F_{k_2}(F_{k_1}(P)) = X, \\ 0 & \text{otherwise;} \end{cases}$$

and

$$g_X : (\mathcal{S}_{[M]})^N \to \{0,1\}$$

 $\{F_1, \dots, F_N\} \mapsto \begin{cases} 1 & \text{if there exists } k_1 \text{ and } k_2 \text{ such that } F_{k_2}(F_{k_1}(X)) = C, \\ 0 & \text{otherwise.} \end{cases}$

The function f_X returns the boolean answer of the problem $d-KE_2^{(P,X)}$ and g_X the answer of $d-KE_2^{(X,C)}$. Finally, denote SEARCH the function that, on input $u \in \{0,1\}^M$, returns 1 if there exists i such that $u_i = 1$ and 0 otherwise.

The problem $d-KE_4:(\mathcal{S}_{[M]})^N\to\{0,1\}$ can be expressed as the following composition:

$$d-KE_4 = \mathsf{SEARCH} \circ (f_0 \wedge g_0, f_1 \wedge g_1, \dots, f_N \wedge g_N). \tag{1}$$

It is well known that a quantum query complexity is multiplicative under function composition [HLŠ07], which leads to a $O(M^{1/2}N^{2/3})$ upper bound on the number of queries needed to solve the problem. However, the composition theorem that proves this upper bound holds for quantum query complexity, whereas we are interested here in bounding the *time* and *space* used by a quantum algorithm. For this purpose, we give an

explicit composed algorithm. This algorithm is a quantized version of the $Dissect_2(4,1)$ algorithm of Dinur, Dunkleman, Keller and Shamir [DDKS12]. In the classical setting, this algorithm achieves the best known time-space product for 4-encryption. We now remove the assumption that the key is unique, and suppose that the attacker has four pairs (P_i, C_i) . We also assume that M and N are of comparable sizes and state our result as a function of N.

Theorem 4. There exists a quantum algorithm that solves KE_4 in time $O(N^{7/6})$ and using memory $O(N^{2/3})$. The time-space product for this attack is $O(N^{11/6})$.

Proof. Assume that the attacker knows the pairs $(P_i, C_i)_{i=1..4}$. This is sufficient to ensure that only a single quadruple of keys is consistent with the datas. We devise a search algorithm that consists in a composition of a Grover search with a quantum Meet-in-the-middle attack presented in Section 2. We use the framework of quantum walks in order to compose these two procedures. The details of the theorems that we use are given in the Appendix.

The walk is designed on the complete graph, whose vertices are indexed by elements from [M] who are candidates for the value X after two encryptions. Once the correct value for X is found, it suffices to make $O(N^{2/3})$ queries to the input in order to find the keys, using some of the datas (P_i, C_i) . This correct value is unique, and the goal of the quantum walk is to find it.

Theorem 5 given in the Appendix states that the cost to find the correct value X is upper bounded by $S + \frac{1}{\sqrt{\varepsilon}} (\frac{1}{\sqrt{\delta}} \mathsf{U} + \mathsf{C})$, where

- S is the cost for setting up a quantum register in a state that corresponds to the stationary of the classical random walk on the graph distribution
- U is the cost of moving from one node to an adjacent one,
- C is the cost of checking if the value X is the correct one,
- ε is the probability of finding the correct value X, and
- δ is the eigenvalue gap for the complete graph.

In our case, the setup is to build a uniform superposition of all states $|X\rangle$, which can be made with no query to the input, and constant time. The update is the same procedure. The checking consists in running a quantum Meet-in-the-middle attack several times in order to check that the value X satisfies $E_{k_2}(E_{k_1}(P_i)) = X$ and $E_{k_4}(E_{k_3}(X)) = C_i$ for all i for some value k_1, k_2, k_3, k_4 . The probability of finding the correct value is $\varepsilon = 1/M$. Finally, the eigenvalue gap for the complete graph is $\delta = 1 - \frac{1}{M-1}$. Overall, this leads to an attack that makes $O(M^{1/2}N^{2/3})$ queries, and takes the same amount of time. Moreover, the checking procedure is the only procedure using non-constant memory. The attack uses in total $O(N^{2/3})$ memory, leading to a time-space product bounded by $O(M^{1/2}N^{4/3})$.

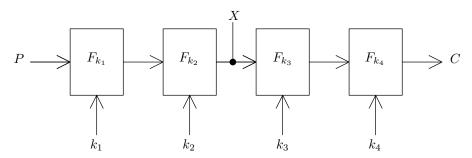


Figure 3: The attack on 4-encryption is an exhaustive search over the central value X combined with a MITM algorithm to check the consistency with the datas P, C

Our approach does not give any lower bound on the number of queries to the input. Since our attack is a composition of Grover's algorithm with a quantum Meet-in-the-middle attack, expressing the problem as a composition could allow to apply product theorems on the adversary method [HLŠ07, LMR $^+$ 11, BHK $^+$ 11], leading to a lower bound. Unfortunately, known theorems do not apply to the composition given in Equation 1. For example, the composition theorem proven by Høyer, Lee and Špalek requires the inner function to be boolean and to act on independent inputs. In our case, all the inner functions act on the same input. Equivalently, the expression given in Equation 1 could be completed with a non-boolean function that maps the input to N copies of it. The hypothesis of the composition theorem used to prove security of Merkle puzzles in a quantum world are very contrived and onot apply here [BHK $^+$ 11].

We compare three different attacks against 4-encryption:

- exhaustive search over the whole key-space,
- classical and quantum Meet-in-the-middle attack where both the first and the second pair of keys are treated as single keys,
- the dissection attack and its quantized version.

The quantization of exhaustive search gives a very good gain, but its time-performance is poor. Applying the Meet-in-the-middle attack from the previous section gives both poor gains and poor performances. The quantization of the dissection attack gives better gains than what we observed for 2-encryption, but we have no indications that this algorithm is optimal.

	Time	Time-space
Exhaustive search	2	2
MITM	3/2 = 1.5	3/2 = 1.5
Dissection	$12/7 \simeq 1.7$	$18/11 \simeq 1.63$

Table 2: Gains of attacks against 4-encryption

4 Conclusion

Iterative encryption is a natural way to amplify the security of block ciphers. It is well known that this procedure do not lead to the expected results, even for classical attacks in the case of 2-encryption. The Meet-in-the-middle attack allows an attacker to save a lot of time, if he is willing to pay with more space.

Equipped with a quantum computer, an attacker can run a quantum algorithm for collision finding. We have proven that this approach leads to optimal time complexity for extracting keys, making crucial use of the generalized adversary method, a tool from quantum complexity theory. Extracting a pair of keys (k_1, k_2) takes time $N^{2/3}$, where N is the size of the key space of a single encryption. An interesting corollary is that the most time-efficient attack is not known to give the best gain for time-space product. An attacker can pay with more time and save on space, but with a ratio that differs fundamentally from the classical case.

We have then studied the case of 4-encryption, for which we have given a quantized version of the dissection attack of Dinur, Dunkleman, Keller and Shamir. This quantization uses the framework of quantum walks, another important concept of quantum algorithms and complexity theory. We do not not know if this quantum attack is optimal with respect to the number of queries or time, and we have only compared it with the best currently know classical attack. But we can already conclude that this quantization gives better gains in time and time-space product than the optimal algorithm for 2-encryption.

This seems to indicate that successive encryptions is less resistant against quantum attacks than it is against classical ones. This intuition could be confirmed by proving lower bounds on quantum attacks, eventually allowing to consider the most time-efficient attacks in both cases. We have not been able to answer this question for 4-encryption as we did for 2-encryption. Of course, one possibility is that the

dissection algorithm is not optimal, but improving it is a challenging question in classical cryptography. Proving a quantum lower bound or improving the classical upper bounds would both give more insight on security amplification.

Another crucial element that misses in our analysis is a study of the r-encryption case. Classically, the dissection algorithm that we have discussed can be generalized iteratively applied, leading to attacks on r-encryption for arbitrary values of r. In our case, there is a barrier that prevents the scaling of our results. The composition theorem derived from the generalized adversary method, or the quantum-walk framework both introduce multiplicative factors, and it seems harder to understand how the complexity grows as a function of r.

Our work can be understood as a proof of principle that quantum complexity and algorithms theory has developed powerful tools to tackle important questions in cryptography and post-quantum cryptography. Maybe a better use of these tools can lead to improving and extending the results presented here. Or maybe these tools need to be sharpened in order to apply to specific cryptographic situations. In both cases, we hope that our work will motivate further interactions between classical cryptographers and quantum computer scientists. Such interactions seem crucial to establish a serious approach to post-quantum cryptography. In particular, iterating block ciphers is not a very good procedure to amplify security against classical adversary. We hope that the techniques presented here will be applied to more efficient cryptographic procedures in the future.

Aknowledgements

The author is grateful to Anne Canteaut, Maria Naya-Plasencia, Frédéric Magniez, Robin Kothari, Andris Ambainis and Gilles Brassard for stimulating discussions and pointers to references. M.K. acknowledges financial support from acknowledge financial support from ANR retour des post-doctorants NLQCC (ANR-12-PDOC-0022-01).

References

- [Amb07] A. Ambainis. Quantum walk algorithm for element distinctness. SIAM Journal on Computing, 37:210–239, 2007.
- [AS04] S. Aaronson and Y. Shi. Quantum lower bounds for the collision and the element distinctness problems. *Journal of the ACM*, 51(4):595 605, 2004.
- [BDH⁺05] H. Buhrman, C. Dürr, M. Heiligman, P. Høyer, F. Magniez, M. Santha, and R. de Wolf. Quantum algorithms for element distinctness. *SIAM Journal on Computing*, 34, 2005.
- [Ber10] D. Bernstein. Grover vs. McEliece. In Proc. of the Third international conference on Post-Quantum Cryptography (PQCrypto'10), pages 73–80, 2010.
- [BHK⁺11] G. Brassard, P. Høyer, K. Kallach, M. Kaplan, S. Laplante, and L. Salvail. Merkle puzzles in a quantum world. In *Advances in Cryptology CRYPTO '11*, pages 391–410, 2011.
- [BHT98] G. Brassard, P. Høyer, and A. Tapp. Quantum cryptanalysis of hash and claw-free functions. In 3rd Latin American Theoretical Informatics Symposium (LATIN'98), volume 1380, pages 163–169, 1998.
- [DDKS12] I. Dinur, O. Dunkelman, N. Keller, and A. Shamir. Efficient dissection of composite problems, with applications to cryptanalysis, knapsacks, and combinatorial search problems. In *Advances in Cryptology CRYPTO*, 2012.
- [DH77] W. Diffie and M.E. Hellman. Exhaustive cryptanalysis of the NBS data encryption standard. Computer, 10(6):74–84, 1977.

- [Gro96] L.K. Grover. A fast quatum mechanical algorithm for database search. In *Proc. of the 28th Annual ACM Symposium on Theory of Computing (STOC)*, pages 212–219, 1996.
- [HLŠ07] P. Høyer, T. Lee, and R. Špalek. Negative weights make adversaries stronger. In *Proc. of 39th Annual ACM Symposium on Theory of Computing (STOC)*, pages 526–535, 2007.
- [LMR⁺11] T. Lee, R. Mittal, B. Reichardt, R. Špalek, and M. Szegedy. Quantum query complexity of state conversion. In *Proc. 52nd IEEE Symp. on Foundations of Computer Science (FOCS)*, pages 344–353, 2011.
- [MH81] R. Merkle and M. Hellman. On the security of multiple encryption. Communication of the ACM, 1981.
- [MNRS11] F. Magniez, A. Nayak, J. Roland, and M. Santha. Search via quantum walk. In *SIAM Journal on Computing*, volume 40(1), pages 142–164, 2011.
- [Ros14] A. Rosmanis. Adversary lower bound for element distinctness with small range. Technical Report 1401.3826, arXiv e-Print archive, 2014.
- [San08] M. Santha. Quantum walk based search algorithms. In LNCS, editor, *Proceedings of 5th Theory and Applications of Models of Computation (TAMC08)*, volume 4978, pages 31–46, 2008.
- [Zha13] M. Zhandry. A note on the quantum collision and set equality problems. Technical Report 1312.1027, arXiv e-Print archive, 2013.

A Quantum query complexity

The model

In the quantum query complexity model, the goal is to compute some function $F: S \to T$ on input x. For simplicity, we assume in this short presentation that $S \subseteq \{0,1\}^n$. The input is given as a black-box and accessed through *queries*. A classical query ℓ to the input x returns x_{ℓ} .

In the quantum setting, the algorithm is executed on an architecture with three quantum registers: an input register I, a query register Q and a working register W. The state of the quantum computer when the algorithm starts is $|x\rangle_I|0,0\rangle_Q|0\rangle_W$. There are several equivalent formalism to model quantum queries. Without loss of generality, we consider a quantum query as an operator

$$O: |x\rangle_I |i, y\rangle_Q \longmapsto |x\rangle_I |i, y + x_i \mod 2\rangle_Q.$$

Considering non-boolean inputs is equivalent, up to logarithmic factors.

The quantum algorithm supposed to compute f alternates between quantum query operations O_i and work operations that are unitaries U_i acting on the query register and the working register. After t queries to the input, the state of the quantum computer is $U_tO_tU_{t-1}\dots O_2U_1O_1|x\rangle_I|0,0\rangle_O|0\rangle_W$.

We assume that the working register contains $\log |T|$ qubits to encode the value f(x). The last step of the algorithm is then to measure these qubits and output the value that is obtained. Finally, an immediate corollary of the model is that the time complexity of f is at least equal to the query complexity of the algorithm. The generalized adversary method can be used to prove a lower bound on query complexity, which in turn bounds the time complexity.

Quantum walks

We first review the paradigm of quantum walks. We use this tool to design an attack against 4-encryption. More precisely, we use it to combine an exhaustive search with a collision finding algorithm. The framework of quantum walks allows to easily analyze the ressources used by the algorithm.

A search algorithm aims to find a marked element in a finite set U. Classically, it can be seen as a walk on a graph whose nodes are indexed by subsets of elements of U. Each step of the algorithm consists in walking from one node to another. The algorithm can also maintain a data structure that is updated at each step. After each move, the algorithm checks if the node contains a marked element. The algorithm terminates when a marked element is found.

Magniez, Nayak, Roland and Santha have designed a generic theorem in order to quantize search algorithms expressed as random walks. The cost of the resulting quantum algorithm can be written as a function of S, U and C. These are the cost of setting up the quantum register in a state that corresponds to the stationary distribution, moving unitarily from one node to an adjacent node, and checking if a node is marked, respectively.

Theorem 5. [MNRS11] Let P be an ergodic and reversible Markov chain with eigenvalue gap δ , and let $\varepsilon > 0$ be a lower bound on the probability that an element chosen from the stationary distribution of P is marked, whenever the set of marked element is non-empty. Then, there exists a quantum algorithm which finds, with high probability, a marked element if there is any at cost of order $S + \frac{1}{\sqrt{\varepsilon}} (\frac{1}{\sqrt{\delta}} U + C)$.

Grover's algorithm can be seen as a trivial application of Theorem 5 (see also [San08]). The underlying graph is the complete graph whose nodes are indexed by elements of U, with no data structure. In our case however, the checking procedure is very different because it implies multiple queries to the input, and we use Theorem 5 to design our attack.

The generalized adversary method

We use the generalized adversary method to prove a lower bound on the problem KE_2 . The intuition of the method is to consider pairs of inputs leading to different outputs. Each pair is given a weight² quantifying how difficult it is to distinguish them. The key point of the method is then to measure the progress made by a single quantum query to distinguish paris of inputs. This intuition can be formalized in several different ways. We use the spectral version, an elegant algebraic formalization of the previous intuition [HLŠ07].

Definition 5. Fix a function $F: S \to T$, with $S \subseteq \{0,1\}^n$. A symmetric matrix $\Gamma: S \times S \to \mathbb{R}$ is an adversary matrix for F provided $\Gamma[x,y] = 0$ whenever F(x) = F(y). Let $\Delta_{\ell}[x,y] = 1$ if $x_{\ell} \neq y_{\ell}$ and 0 otherwise. The adversary bound of F using Γ is

$$ADV^{\pm}(F;\Gamma) = \min_{\ell} \frac{\|\Gamma\|}{\|\Gamma \bullet \Delta_{\ell}\|},$$

where \bullet denotes entrywise (or Hadamard) product, and ||A|| denotes the spectral norm of A. The adversary bound $ADV^{\pm}(F)$ is the maximum, over all adversary matrices Γ for F, of $ADV^{\pm}(F;\Gamma)$.

Høyer, Lee and Špalek introduced the generalized adversary method and proved that the adversary value is a lower bound on quantum query complexity [HLŠ07]. In our proof, we need the fact that the adversary bound characterizes quantum query complexity, up to a constant factor. Our proof starts by considering an adversary matrix for the problem CF such that the adversary bound is equal to the quantum query complexity. The fact that the generalized adversary method is tight was proven by Lee, Mittal, Reichardt, Špalek and Szegedy.

Theorem 6. [LMR⁺11] Fix a function $F: S \to T$. The bounded-error quantum query complexity of F is characterized by the general adversary bound:

$$Q(f) = \Theta(\mathsf{ADV}^{\pm}(F)).$$

²The original method uses probability distribution, the generalized method allows for negative weights as well.