

Network analysis of the state space of chaotic map in digital domain

Chengqing Li

College of Information Engineering, Xiangtan University, Xiangtan 411105, Hunan, China

Abstract

Dynamics of chaotic map under finite-precision computer are crucial for their real application. Adopting Logistic map as a typical example, this paper discloses some dynamical properties of chaotic map under fixed-point arithmetic by studying the corresponding space network, where every possible value is considered as a node and mapping relation between each pair of nodes works as a directed edge. We found some interesting properties of the state space of Logistic map. The results can be extended to the scenario of floating-point arithmetic and other chaotic maps. Understanding the real structure of network of the state space of chaotic map in digital domain will help to evaluate randomness of pseudo-random number sequences generated by chaotic map.

Keywords: chaotic dynamics, complex networks, Logistic map, state network, chaotic cryptography

1. Introduction

In digital world, implementation of chaotic map in digital computer is an inevitable problem for its real application. Under infinite-precision of mathematics, the complex dynamics of chaotic maps were studied well. But, what will happen when chaos is implemented in finite-precision computer? Based on the famous *shadowing lemma*, some researchers believed that any pseudo-random number sequence generated by iterating chaotic map remain complex dynamics of the original chaos to some extent. So, many work on designing pseudo-random number generator utilizing chaotic maps were proposed [1]. Meanwhile, some work [2, 3] pointed that dynamics of chaotic maps will degrade of different extents. In [4], a series of objective metric were proposed to measure the degree of the degradation.

Complex network has become a popular tool to study dynamics of times series since the pioneering work on it was proposed in [5]. Essentially, some earlier works on studying dynamics of digital chaos can be attributed to the scope of complex network. In 1986, Binder drew the state network of logistic map and reported that the counterparts of some metrics on measuring dynamics in continuous chaos are still work as the latter [6]. In the following years, Binder et al. did some further work: the number of limit cycles and the size of longest cycle [7], unstable periodic orbits [8]. The monograph [9, P. 535] also mentioned the space

network of logistic map under 4-bit arithmetic computing. Kurths presents an analytical framework for recurrence network analysis of time series [10, 11, 12]. In [13], dynamics of series generated by cellular automata was studied by parameters of the associate network. The properties of Chebyshev map on finite fields was also presented with directed network (graph) [14].

In [15, 16, 17], state-transition network of Logistic map

$$f(x) = \mu \cdot x \cdot (1 - x), \quad (1)$$

was built by three steps: 1) divide the phase interval into some subintervals; 2) each subinterval is considered as a node; 3) two nodes are linked by a directed edge if the map relationship between the corresponding intervals exist. In this paper, we consider the following *space network* of logistic map: every value in n -bit arithmetic computing precision is considered as a node; the direct edge between nodes u and v exist if and only if the former node is mapped to the latter one by the map. The following key parameters of space network were studied to show relationship between Logistic map and computing precision and the control parameter.

- *Loop*: (also called a self-loop) is an edge that connects a vertex to itself.
- A directed *cycle* in a directed graph is a sequence of vertices starting and ending at the same vertex such that, for each two consecutive vertices of the cycle, there exists an edge directed from the earlier vertex to the later one.

Email address: chengqingg@gmail.com (Chengqing Li)

- A *weakly connected component* is a maximal subgraph of a directed graph such that for every pair of vertices u, v in the subgraph, there is an undirected path from u to v and a directed path from v to u .

2. Analysis of space network of Logistic map in fixed-point precision

Assume that $\mu = N_\mu/2^{n_\mu}$, where N_μ is an odd integer in $\{0, \dots, 2^{n_\mu+2}\}$. Under fixed-point computing environment of precision $n \geq n_\mu^1$, the Logistic map become

$$f_n(i) = \left((N_\mu/2^{n_\mu}) \cdot (i/2^n) \cdot (1 - i/2^n) \right), \quad (2)$$

where $R(\cdot)$ is an integer quantization function, e.g. floor, ceil, and round (In this paper, only round quantization is considered.). The final operation is quantization

$$F_n(i) = R(f_n(i) \cdot 2^n). \quad (3)$$

2.1. Some theoretical properties of space network

Property 1. *The nodes of even label in the state network of F_{n+1} and that in the state network of F_n satisfy*

$$F_{n+1}(2i) = 2 \cdot F_n(i) + \begin{cases} 1 & \text{if } a \in [0.25, 0.5); \\ -1 & \text{if } a \in [0.5, 0.75); \\ 0 & \text{otherwise,} \end{cases} \quad (4)$$

where $a = \text{frac}(f_n(i) \cdot 2^n)$, and $\text{frac}(x) = x - \lfloor x \rfloor$.

Proof. The proof is straightforward from

$$\text{round}(2x) = 2\text{round}(x) + \begin{cases} 0 & \text{if } 0 \leq \text{frac}(x) < 0.25; \\ 1 & \text{if } 0.25 \leq \text{frac}(x) < 0.5; \\ -1 & \text{if } 0.5 \leq \text{frac}(x) < 0.75; \\ 0 & \text{if } 0.75 \leq \text{frac}(x) \leq 1, \end{cases}$$

□

Property 2. *The nodes of odd label in the state network of F_{n+1} and that in the state network of F_n satisfy*

$$\begin{aligned} & |F_{n+1}(2i+1) - 2 \cdot F_n(i)| \\ & \leq \left| R\left((N_\mu/2^{n_\mu+2}) \cdot (4 - (1+4i)/2^{n-1}) \right) \right| + \\ & \quad \begin{cases} 1 & \text{if } \text{frac}(f_n(i) \cdot 2^n) \in [0.25, 0.75); \\ 2 & \text{otherwise,} \end{cases} \end{aligned}$$

where $i \in \{0, \dots, 2^n\}$.

¹If precision of the given computing system is n , μ can be degraded to make $n_\mu = n$.

Proof. According to the triangle inequality, one has

$$\begin{aligned} & |F_{n+1}(2i+1) - 2 \cdot F_n(i)| \leq \\ & |F_{n+1}(2i+1) - F_{n+1}(2i)| + |F_{n+1}(2i) - 2 \cdot F_n(i)|. \end{aligned} \quad (5)$$

Utilizing property of integer quantization function, one can get

$$\begin{aligned} & |F_{n+1}(2i+1) - F_{n+1}(2i)| \\ & = \left| R(f_{n+1}(2i+1) \cdot 2^{n+1}) - R(f_{n+1}(2i) \cdot 2^{n+1}) \right| \\ & \leq \left| R(f_{n+1}(2i+1) \cdot 2^{n+1} - f_{n+1}(2i) \cdot 2^{n+1}) \right| + 1 \\ & = \left| R\left((N_\mu/2^{n_\mu+2}) \cdot (4 - (1+4i)/2^{n-1}) \right) \right| + 1 \end{aligned}$$

Combing the above equation, Eq. (5) and Property 1, the property is proved. □

Conjecture 1. *If $F_n(i_1) = F_n(i_2)$, $(i_1 + i_2) \bmod 2^n \neq 0$, one has*

$$|i_1 - i_2| < 2^{n-n_\mu+1}. \quad (6)$$

Property 3. *The necessary condition for a node in state network F_{n_μ} has in-degree larger than two is that its label is close to 2^n .*

Conjecture 2. *Denoting the number of connected components of state network of Logistic map by C , one has $C \leq 6$.*

2.2. Simulation

To verify the above theoretical analysis, we used software platform Cytoscape shown in [18] to draw some space network under some given parameters. The space networks of Logistic map of $\mu = \frac{121}{25}$ under 5-bit and 6-bit fixed-point arithmetic are shown in Fig. 1a) and b), respectively, where round quantization is adopted. To show the rule of the network with respect to increase of precision more clearly, the state network of Logistic map under 6-bit precision and the same value of control parameter is shown in Fig. 2. When the precision is further increased to 12, the network become the case shown in Fig. 3, demonstrating some fractal phenomenon, which was studied in [19].

Under control parameter $\mu = \frac{121}{25}$, the in-degree distribution of F_{18} is shown in Fig. 4. As shown in Fig. 5, the in-degree distribution of F_n approach power-law more steadily as n is increased, where F_n denote the function Logistic map implemented in n -bit precision.

3. Discussion and conclusion

Based on the above verified results, we have more guess on the properties of the space network of Logistic map, which are listed below.

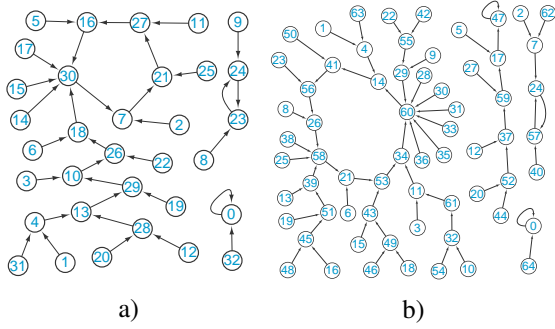


Figure 1: The state network of Logistic map of $\mu = \frac{121}{25}$ under round quantization: a) 5-bit precision; b) 6-bit precision.

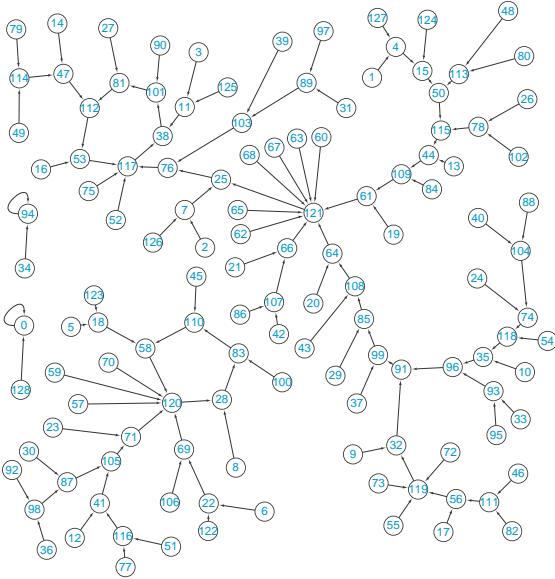


Figure 2: The state network of Logistic map under 6-bit precision and round quantization, where $\mu = \frac{484}{27}$.

- Each space network is composed of a small number of weakly connected component;
- Each weakly connected component has one and only one self-loop or cycle;
- The number of connected component is the number of solution of equation

$$F_n^{(m)}(x) = x, \quad (7)$$

in terms of (m, x) , where $F_n^{(m)}(x)$ denotes the m -th iteration of $F_n^{(1)}(x) = F_n(x)$. When m is equal to one, the solution is a fixed point.

- In each cycle whose length larger than 2, there is at least one node of larger in-degree;

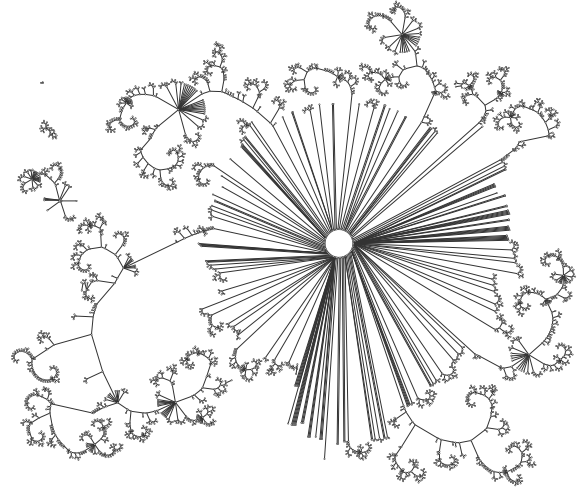


Figure 3: The state network of Logistic map under 12-bit precision and round quantization, where $\mu = \frac{15488}{2^{12}}$.

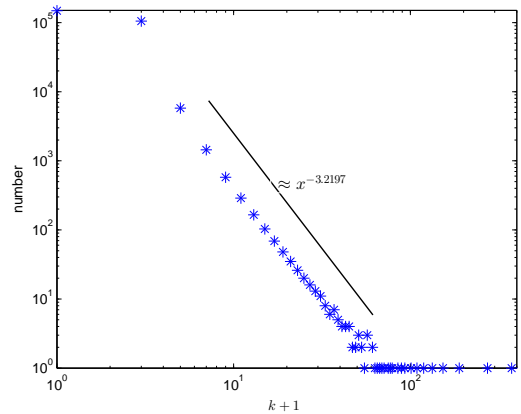


Figure 4: In-degree distribution of state network of F_{18} .

- Let $(D_n/2^n)$ denote the node of biggest degree in the state network of $F_n(x)$, one has

$$D_{n+1} \in \{2 \cdot D_n, 2 \cdot D_n + 1, 2 \cdot D_n - 1\}, \quad (8)$$

where $n \geq n_\mu$.

- One weakly connected component dominates the whole network, i.e. size of the component account for more than half of the size of the whole network. Among all the connected components have a clear decreasing order.

This paper proved some subtle properties of space network of Logistic map under fixed-point arithmetic computer, which discloses the rough structure of the network.

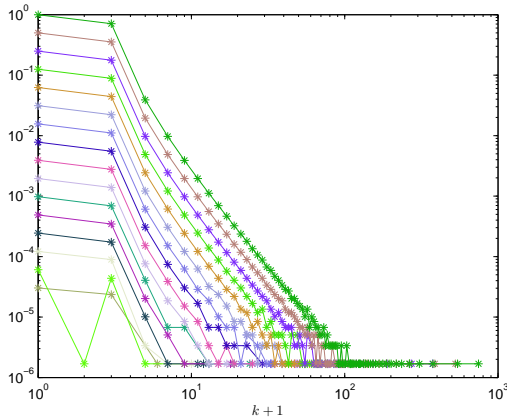


Figure 5: In-degree distribution of sate network of $F_5 \sim F_{20}$.

The properties of the network under floating-point arithmetic computer specified in [20] still need further research. This paper demonstrates that methodology of complex network provides a novel tool to study dynamics of digital chaos.

Acknowledgement

This research was supported by the National Natural Science Foundation of China (Nos. 61100216, 61211130121).

References

[1] S. C. Phatak, S. S. Rao, Logistic map: A possible random-number generator, *Physical Review E* 51 (4) (1995) 3670–3678.
 [2] S. Li, When chaos meets computers, arXiv:nlin/0405038 (2005).
 [3] K. Persohn, R. Povinelli, Analyzing logistic map pseudorandom number generators for periodicity induced by finite precision floating-point representation, *Chaos Solitons & Fractals* 45 (3) (2012) 238–245.
 [4] S. Li, G. Chen, X. Mou, On the dynamical degradation of digital piecewise linear chaotic maps, *International Journal of Bifurcation and Chaos* 15 (10) (2005) 3119–3151.
 [5] J. Zhang, M. Small, Complex network from pseudoperiodic time series: topology versus dynamics, *Physical Review Letters* 96 (23) (2006) 238701.
 [6] P. M. Binder, R. V. Jensen, Simulating chaotic behavior with finite-state machines, *Physical Review A* 34 (5) (1986) 4460–4463.
 [7] P.-M. Binder, Limit-cycles in a quadratic discrete iteration, *Physica D* 57 (1-2) (1992) 31–38.
 [8] P.-M. Binder, N. H. Okamoto, Unstable periodic orbits and discretization cycles, *Physical Review E* 68 (4) (2003) 046206.
 [9] H.-O. Peitgen, H. Jurgens, D. Saupe, *Chaos and fractals: new frontiers of science*, Springer, 2004.
 [10] N. Marwan, J. F. Donges, Y. Zou, R. V. Donner, J. Kurths, Complex network approach for recurrence analysis of time series, *Physics Letters A* 373 (46) (2009) 4246–4254.
 [11] R. V. Donner, J. Heitzig, J. F. Donges, Y. Zou, N. Marwan, J. Kurths, The geometry of chaotic dynamics – a complex network perspective, *European Physical Journal B* 84 (4) (2011) 653–672.

[12] J. F. Donges, J. Heitzig, R. V. Donner, J. Kurths, Analytical framework for recurrence network analysis of time series, *Physical Review E* 85 (4) (2012) 046105.
 [13] A. Shreim, P. Grassberger, W. Nadler, B. Samuelsson, J. E. S. Socolar, M. Paczuski, Network analysis of the state space of discrete dynamical systems, *Physical Review Letters* 98 (19) (2007) 198701.
 [14] T. A. Gassert, Chebyshev action on finite fields, *Discrete Mathematics* 315 (2014) 83–94.
 [15] T. Iba, Scale-free networks hidden in chaotic dynamical systems, arXiv:nlin/1007.4137 (2010).
 [16] T. Iba, Hidden order in chaos: The network-analysis approach to dynamical systems, in: *Proceedings of the Eighth International Conference on Complex Systems*, 2011, pp. 769–783, <http://necsi.edu/events/iccs2011/papers/70.pdf>.
 [17] F. Kyriakopoulos, S. Thurner, Directed network representation of discrete dynamical maps, in: *International Conference on Computational Science*, Vol. 4488 of *Lecture Notes in Computer Science*, Springer, 2007, pp. 625–632.
 [18] R. Saito, M. E. Smoot, et al., A travel guide to cytoscape plugins, *Nature methods* 9 (11) (2012) 1069–1076.
 [19] J.-L. Liu, Z.-G. Yu, V. Anh, Topological properties and fractal analysis of a recurrence network constructed from fractional brownian motions, *Physical Review E* 89 (3) (2014) 032814.
 [20] IEEE, IEEE standard for floating-point arithmetic, *IEEE Std 754* (2008).