

Valid auto-models for spatially autocorrelated occupancy and abundance data

David C Bardos^{1*}, Gurutzeta Guillera-Arroita¹ and Brendan A Wintle¹

¹ARC Centre of Excellence for Environmental Decisions, School of Botany, The University of Melbourne, Parkville, Victoria 3010, Australia

Abstract. Spatially autocorrelated species abundance or distribution datasets typically generate spatially autocorrelated residuals in generalized linear models; a broader modelling framework is therefore required. Auto-logistic and related auto-models, implemented approximately as autocovariate regression, provide simple and direct modelling of spatial dependence. The autologistic model has been widely applied in ecology since Augustin, Mugglestone and Buckland (*Journal of Applied Ecology*, 1996, **33**, 339) analysed red deer census data using a hybrid estimation approach, combining maximum pseudo-likelihood estimation with Gibbs sampling of missing data. However Dormann (*Ecological Modelling*, 2007, **207**, 234) questioned the validity of auto-logistic regression even for fully-observed data, giving examples of apparent underestimation of covariate parameters in analysis of simulated ‘snouter’ data. This analysis was extended by Dormann et al. (*Ecography*, 2007, **30**, 609) to include auto-Poisson and auto-normal models, finding in all cases that covariate parameter estimates bore little resemblance to the values employed to generate the data. We note that all the above studies employ neighbourhood weighting schemes inconsistent with auto-model definitions; in the auto-Poisson case, a further inconsistency was the failure to exclude cooperative interactions. We investigate the impact of these implementation errors on auto-model estimation using both empirical and simulated datasets. We show that when ‘snouter’ data is reanalysed using valid weightings, very different estimates are obtained for covariate parameters. For auto-logistic and auto-normal models, the new estimates agree closely with values used to generate the ‘snouter’ simulations. Re-analysis of the red deer data shows that invalid neighbourhood weightings generate only small estimation errors for the full dataset, but larger errors occur on geographic subsamples. A substantial fraction of papers employing auto-logistic regression use these invalid neighbourhood weightings, which are embedded as default options in the widely used ‘spdep’ spatial dependence package for R. Auto-logistic analyses conducted using invalid neighbourhood weightings will be erroneous to an extent that can vary widely. These analyses can easily be corrected by using valid neighbourhood weightings available in ‘spdep’. The hybrid estimation approach for missing data is readily adapted for valid neighbourhood weighting schemes and is implemented here in R for application to sparse presence-absence data.

Key words: abundance, autologistic, autocovariate, conditional auto regression, occupancy, species distribution model, SDM, spatial autocorrelation, spdep

*Corresponding author. E-mail: dcbardos@unimelb.edu.au

Introduction

Spatial autocorrelation (SAC) of species distribution data can arise from intrinsic population processes, such as dispersal or biotic interactions, or in response to spatially autocorrelated environmental variables (Legendre 1993; Elith & Leathwick 2009). Intrinsic processes introduce statistical dependence between observations, violating a key assumption (McCullagh & Nelder 1989) of generalized linear models (GLMs) such as the logistic model. Environmental covariates with strong SAC induce correlations between nearby observations, but these covariates will be missing when data is unavailable or if key environmental drivers for a species are unknown. Both intrinsic processes and missing covariates can result in strong SAC in GLM residuals, indicating the presence of structure in the data that cannot be modelled within the GLM framework. Species distribution modelling therefore requires some manner of directly incorporating SAC (Legendre 1993; Lichstein *et al.* 2002).

The autologistic model (Besag 1974) achieves this by extending the logistic model for presence-absence data to allow dependence between nearby observations. It is of fundamental importance in ecology where many datasets are in the form of presence-absence maps and has been widely used since its application by Augustin, Mugglestone and Buckland (1996) to spatial grids with sparse observations. The broader family of “auto-models” introduced by Besag (1974) includes auto-binomial and auto-normal models that can be applied to spatially-dependent count data and real-valued data respectively. The auto-Poisson model can be applied to count data but permits only competitive interactions in which abundance at a given site tends to be reduced by high abundance at nearby sites. The Conditional Autoregressive (CAR) family of models are the most widely applied form of auto-normal model. Autologistic and related auto-models offer distinct advantages for analysing spatially autocorrelated ecological data, including simple and direct spatial modelling of dependence between nearby observations and straightforward implementation using autocovariate regression to obtain approximate parameter estimates.

However, Dormann (2007) took issue with the validity of autologistic regression, reporting apparent underestimation of environmental covariate parameters when strong SAC was injected into simulated ‘snouter’ data. Dormann *et al.* (2007) extended this analysis to auto-normal and auto-Poisson models, likewise reporting underestimation relative to GLM estimates and to values used to generate the simulations. These papers, hereafter ‘Dormann *et al.*’, are heavily cited and their negative conclusions concerning autocovariate regression appear to be widely accepted in the literature, with some authors relying on these conclusions to choose against using auto-models. This has significant implications for ecologists dealing with spatial autocorrelation in the residuals of occupancy and abundance models such as species distribution models.

Yet no explanation has been established for the apparent estimation anomalies, nor for the conflict with previous studies (Huffer & Wu 1998; Hoeting, Leecaster & Bowden 2000; He, Zhou & Zhu 2003) in which autologistic regression estimates were close to values used to generate simulated data. In particular, Hoeting, Leecaster and Bowden (2000) obtained good performance in a challenging problem where most of the observations were missing, in contrast to Dormann *et al.*’s fully-observed simulated datasets. Dormann *et al.* (2007) suggested that this contradiction might be due to (a) more advanced estimation methods employed in the better performing studies, (b) reduced importance of the autocovariate in Hoeting, Leecaster and Bowden (2000) due to the high proportion of missing-data, or (c) different methods of generating SAC in simulated data.

The first two suggestions are problematic, however, because (a) the maximum pseudo-likelihood estimation (MPLE) method evaluated in Huffer and Wu (1998), Hoeting, Leecaster and Bowden (2000) and He, Zhou and Zhu (2003) is equivalent (Possolo 1986) to the autocovariate regression used in Dormann *et al.*, while (b) Hoeting, Leecaster and Bowden (2000) obtained strong autocovariate

parameter estimates. Suggestion (c) must be considered, but turns out to be inessential for the ‘snouter’ examples.

We note that in common with Augustin, Muggleston and Buckland (1996), Dormann et al. used weighted means to construct their autocovariates. In contrast, Huffer and Wu (1998), Hoeting, Leecaster and Bowden (2000) and He, Zhou and Zhu (2003) used weighted sums. The widely used weighted-mean construction (the default option in the ‘spdep’ spatial dependence package (Bivand 2014) for R) is mathematically inconsistent with auto-model definitions, while the weighted sum conforms to the definitions. Estimation errors will consequently arise when the weighted mean is used. However, since the two constructions differ only on boundary sites, it might reasonably be expected that errors would tend to be small in most ecological applications.

We provide a detailed investigation into estimation errors arising from using weighted-mean autocovariates, as follows:

We present essential theoretical background on auto-models and the conditions required for their valid estimation, including the requirement for *valid neighbourhood weightings*, which is fulfilled by the weighted-sum autocovariate construction. We then investigate estimation errors arising from weighted-mean autocovariates for the “snouter” data of Dormann et al. and use new simulations to investigate errors as a function of lattice size and covariate SAC and to test suggestion (c) above concerning the effect of different methods of generating intrinsic SAC. We reanalyse the red deer census dataset (Buckland & Elston 1993; Augustin, Muggleston & Buckland 1996) to explore errors due to weighted-mean autocovariates in estimates from empirical data and briefly discuss the usage of weighted-mean autocovariates in previous studies.

We provide R code implementing valid autologistic regression, using the hybrid approach of Augustin, Muggleston and Buckland (1996) to iterate MPLE (Besag 1975) for the model parameters and Gibbs sampling of missing observations. The code implements weighted-sum autocovariates without making use of ‘spdep’, allowing us to conduct numerical testing of a non-default scheme in ‘spdep’ expected to generate weighted-sum autocovariates. As an illustration we apply this code for a 20% random sample of the abovementioned red deer data.

Valid neighbourhood weightings and parameter regions

Theoretical background

We consider a collection of S sites labelled $n = 1, 2, \dots, S$, each of which has an associated observation y_n . For each site n we define a set N_n of other sites, called the neighbourhood of n . These neighbourhoods must be consistent, in the sense that if site m is in N_n , then site n is in N_m . The auto-models are a class of conditionally specified models introduced by Besag (1974). For an important subset of auto-models, including auto-logistic, auto-normal (uniform variance) and auto-Poisson models for binary, real-valued and count valued data respectively, the distribution for y_n , conditional on all other sites, takes the form (omitting normalization over y_n):

$$P(y_n | y_{-n}) \propto F_n(y_n) \exp(y_n \sum_{m \in N_n} \beta_{nm} y_m), \quad (1)$$

(see Besag 1974, p. 200) where the parameters β_{nm} quantify the strength of dependence between sites. Any pair of sites that are not neighbours do not influence each-other's conditional distributions. The structure of $F_n(y_n)$ is determined by the particular auto-model and can depend on parameters at site n (i.e. covariates) but does *not* depend on observations at other sites ($y_{m \neq n}$), so that (1) explicitly separates local site effects from interactions between sites. The full model is specified by the collection of all S conditional distributions (1); for these to be consistent, i.e. result in a valid joint distribution $P(y_1, y_2, \dots, y_S | \{\beta_{nm}\})$, the parameters β_{nm} must obey the symmetry relation (Besag 1974, p. 200)

$$\beta_{nm} = \beta_{mn}. \quad (2)$$

If we define a neighbourhood system and specify a model (1) for which it happens that $\beta_{nm} = \beta_{mn} = 0$ for some pair of neighbouring sites n and m , then we can redefine the neighbourhood of each to exclude the other without otherwise altering the form of (1). Therefore, in the context of a particular auto-model, we can *define* the neighbourhood of a site as the set of other sites on which its conditional distribution depends; this definition is adopted in Besag (1974).

Although (2) is a necessary condition, it is not always sufficient: additional conditions on the parameters β_{nm} arise for particular auto-models. Note that $\beta_{nm} > 0$ signifies a cooperative interaction between sites n and m , while $\beta_{nm} < 0$ indicates a competitive interaction. In Table 1 we give detailed formulae for models of particular relevance for ecology, including the Conditional Auto-Regressive (CAR) variant of the auto-normal model, along with sufficient conditions (Besag 1974) on the parameters β_{nm} for model validity in each case.

In a further paper, Besag (1975) extended the Conditional Auto Regressive model to allow the conditional variance to differ at each site, so that the form (1) is replaced by

$$P(y_n | y_{-n}) \propto F_n(y_n) \exp(\sigma_n^{-2} y_n \sum_{m \in N_n} \beta_{nm} y_m), \quad (3)$$

and the symmetry relation (2) must then be generalized to $\beta_{nm} \sigma_m^2 = \beta_{mn} \sigma_n^2$.

However, for the present paper we require only the common-variance CAR model used in Dormann *et al.* (2007). Thus for all auto-models investigated here, the symmetry relation (2) must hold. For the CAR model, exact maximum-likelihood methods (as distinct from MPLE) are available (Besag 1974; Cressie 1991) and are usually numerically feasible.

Defining autocovariates

A convenient approach to estimation of β_{nm} is to introduce a parameter β_{auto} representing the overall strength of interactions between sites, while assuming a fixed proportionality between the elements of β_{nm} , i.e. we write

$$\beta_{nm} = \beta_{\text{auto}} w_{nm}, \quad (4)$$

where w_{nm} are called the neighbourhood weights. Then, introducing the *autocovariate* for site n , comprising a *weighted sum* of neighbouring observations,

$$\text{autocov}_n = \sum_{m \in N_n} w_{nm} y_m, \quad (5)$$

the conditional probability for site n becomes

$$P(y_n | y_{-n}) \propto F(y_n) \exp(y_n \beta_{\text{auto}} \text{autocov}_n). \quad (6)$$

Since β_{auto} is a constant, the neighbourhood weights inherit their own symmetry relation from (2), i.e.

$$w_{nm} = w_{mn}, \quad (7)$$

Thus if sites r and s are neighbours, the coefficient of y_s in autocov_r must equal the coefficient of y_r in autocov_s .

Valid neighbourhood weighting schemes

Consistent neighbourhoods (m 's neighbour has m as a neighbour), the correct autocovariate definition (5) and symmetric weights (7) are all required for a valid *neighbourhood weighting scheme*, or '*weighting*'. For the autologistic model, a valid weighting is sufficient for the model specified via (6) to be valid. For auto-normal and auto-Poisson models, a valid weighting is necessary but β_{auto} is subject to further conditions to ensure that the parameters $\beta_{nm} = \beta_{\text{auto}} w_{nm}$ satisfy the conditions in Table 1. In particular, for auto-Poisson models the condition $\beta_{nm} \leq 0$ means that all interactions must be competitive. This implies all weights have the same sign and β_{auto} has the opposite sign: for all examples in this paper, $w_{nm} \geq 0$, so $\beta_{\text{auto}} \leq 0$ for valid auto-Poisson models and this constraint must be imposed during model estimation. For auto-normal models, the positive-definiteness condition in Table 1 can always be met for β_{auto} values of sufficiently small magnitude, but can be violated for large magnitudes. Accordingly, when estimating the model, this condition should be checked once an estimate for β_{auto} is obtained. If it violates the condition, the estimation method will need to be modified to constrain β_{auto} within a region that meets the condition.

Invalid weighting schemes

In their application of the autologistic model to sparse data via Gibbs sampling of missing data, Augustin, Muggleston and Buckland (1996) gave a *weighted-mean* construction for the autocovariate:

$$\text{autocov}_n^* = \frac{\sum_{m \in N_n} w_{nm}^* y_m}{\sum_{m \in N_n} w_{nm}^*}, \quad w_{nm}^* = w_{mn}^*, \quad (8)$$

where w_{nm}^* is a function of the distance between sites n and m . This expression differs from that in (5) and is not usually correct for the *finite* lattices of interest to ecologists; that is, where inference and prediction are undertaken for a collection of sites within defined edges or boundaries, beyond which data are not considered.

To see this, consider for example a square lattice of sites, each of which has a neighbourhood comprised only of its nearest adjacent sites, so that it has at most four neighbours (this is called a *first-order* neighbourhood, see Fig. 1). Since all distances between neighbours in this example are identical, w_{nm}^* is a constant and cancels out of (8). Now consider a border site labelled r that is not a corner site: it has three neighbours, one of which, labelled s , is an interior site that has four neighbours. Then we have

$$\text{autocov}_r^* = \frac{1}{3} \sum_{m \in N_r} y_m, \quad \text{autocov}_s^* = \frac{1}{4} \sum_{m \in N_s} y_m,$$

which breaks the required symmetry (2) for the conditional probabilities for sites r and s . That is, equating (8) with the required form (5)

$$\text{autocov}_n^* = \sum_{m \in N_n} w_{nm} y_m, \tag{9}$$

yields $w_{rs} = \frac{1}{3} \neq \frac{1}{4} = w_{sr}$, contradicting (7) and thus (2).

Ord (1975) had earlier proposed the weighting (8) for use in joint (i.e. simultaneously) autoregressive models (Whittle 1954), noting that “... the suggested scaling will usually produce asymmetric weights”. This is permissible for models with simultaneous autoregressive (SAR) structure as distinct from the conditionally autoregressive structure of the auto-models; this distinction is discussed in Besag (1974), Ord (1975), Haining (1990) and Cressie (1991).

Valid autologistic models on a rectangular lattice

We consider the common situation where presence-absence data occurs on a collection of S sites labelled $n=1, 2, \dots, S$, forming some subset of a finite rectangular lattice. Since sparse observations are the usual situation in ecological applications, we assume that covariate data is available at each of the S sites, but any of the observations y_n can be missing.

Points on the lattice occur at spacings a_1 and a_2 along the two axes respectively and we use integer lattice co-ordinates (i, j) to refer to the observations: $y_n = y_{i_n, j_n} = y_{i, j}$. The symmetry requirement $w_{nm} = w_{mn}$ for a valid autologistic model is then satisfied if we define the weights w_{nm} in terms of lattice separations $(i_m - i_n, j_m - j_n)$ of sites n and m using a neighbourhood ‘template’ $b_{k,l}$:

$$\begin{aligned} w_{nm} &= b_{i_m - i_n, j_m - j_n}, \\ b_{k,l} &= b_{-k, -l}, \\ b_{0,0} &= 0, \end{aligned} \tag{10}$$

where $b_{k,l}$ provides an image of the weights as a function of lattice separations (k, l) from a site *with a full complement of neighbours*. However, many sites do not have a full complement, both due to the boundaries of the finite lattice and because we have not assumed that sites exist at all interior lattice points; we have only assumed that all S sites lie on points of the lattice. The autocovariate definition

(5) handles this automatically by restricting the sum to actual neighbours. Implementation in software can proceed by including additional sites with observations set to zero, expanding the lattice where necessary, so that each of the S actual sites appears to have a full complement of neighbours and the autocovariate becomes a simple sum over the (k, l) for which $b_{k,l} \neq 0$.

The neighbourhood template $b_{k,l}$ must have central symmetry $b_{k,l} = b_{-k,-l}$ but this *does not rule out anisotropic weights*. For example Besag examined the simplest anisotropic scheme where $b_{k,l} = 0$ for all (k, l) except for the four nearest neighbours: $b_{-1,0} = b_{1,0} \neq b_{0,-1} = b_{0,1}$. In applications the neighbourhood template can be defined simply in terms of the Euclidean distance $d = \sqrt{k^2 + \rho^2 l^2}$ between sites:

$$\begin{aligned} b_{k,l} &= f(d) I_{k,l}, \\ I_{k,l} &= 1, \quad 0 < d \leq r, \\ I_{0,0} &= 0, \end{aligned} \tag{11}$$

where $\rho = a_2 / a_1 > 0$ and both d and the neighbourhood radius r are measured in units of a_1 . The indicator function $I_{k,l}$ defines a “radius r neighbourhood” and the function f can be tailored to the range-dependence of spatial autocorrelation for relevant species. We show the indicator function for commonly used small neighbourhoods in Fig. 1. In the case of a square lattice, $\rho = 1$ and the neighbourhood template (11) is then isotropic.

Maximum pseudo-likelihood estimation (MPLE)

The joint distributions $P(y_1, y_2, \dots, y_S | \{\beta_{nm}\})$ defined by auto-logistic and auto-Poisson variants of (1) contain intractable normalization factors that depend on the parameters β_{nm} . Maximum likelihood estimation is therefore very difficult, leading Besag (1975) to introduce an easily maximized approximation of the likelihood, known as the pseudo-likelihood (PL):

$$PL = \prod_{i=1,2,\dots,S} P(y_i | y_{-i}) \approx P(y_1, y_2, \dots, y_S | \{\beta_{nm}\}).$$

Maximum Pseudo-Likelihood Estimation (MPLE) is very widely used, often under the guise of *autocovariate regression*. The autocovariate is not actually a covariate, since it contains the observations, but MPLE is equivalent (Possolo 1986) to treating autocov_n as though it *were* just an explanatory variable. MPLE can therefore be implemented by including autocov_n as an explanatory variable in the GLM corresponding to the particular auto-model (e.g. a logistic model for autologistic estimation, etc.). Evaluating autocov_n is impossible if neighbouring observations are missing, which led Augustin, Muggleston and Buckland (1996) to combine Gibbs sampling of missing data with autocovariate regression.

Estimation on simulated ‘snouter’ data

Dormann et al. test various models against simulated ‘snouter’ data (Fig. 2) in which strong SAC is driven by an environmental covariate, ‘rain’, and strong intrinsic SAC is also injected during the simulation process. Among those tested were autocovariate models (i.e. autocovariate-regression of auto-logistic, auto-Poisson and uncentered auto-normal models) and the Condition Autoregressive (CAR) model. A spurious covariate ‘djungle’ was included in each analysis along with ‘rain’, so for example the autologistic analysis consisted of the following logistic regression:

$$\log\left(\frac{p_n}{1-p_n}\right) = \alpha + \beta_1 \text{rain}_n + \beta_2 \text{djungle}_n + \beta_{\text{auto}} \text{autocov}_n,$$

where p_n is the probability of presence at site n . The principal numerical evidence presented by Dormann et al. against the validity of auto-models is that the regression parameter β_1 for ‘rain’, estimated in the above regression (and in the analogous auto-Poisson and uncentered auto-normal regressions) is much smaller than the ‘rain’ value used to generate the simulated ‘snouter’ data. In contrast, they found no such anomaly for the CAR model (which, we reiterate, is also an auto-model).

However, Dormann (2007) quotes the invalid weighting scheme (8) for autologistic estimation; Dormann *et al.* (2007) quote both the valid (5) and invalid (8) schemes, but from the R code in the supplementary information we find that it was the incorrect form that was used for auto-logistic, auto-Poisson and uncentered auto-normal models. Autocovariates were generated using the ‘autocov_dist’ function from the ‘spdep’ package

```
ac <- autocov_dist(snouter1.1, coords, nbs = 1, type = "inverse")
```

which is equivalent to:

```
ac <- autocov_dist(snouter1.1, coords, nbs = 1, style="W", type = "inverse")
```

since the default option for ‘style’ is “W”. The same applies for the related ‘spdep’ function ‘nb2listw’ that generates neighbourhood weights. In the supplement we supply R code that tests these functions and we find that for the ‘snouter’ data, the “W” option, and thus the default option, generates asymmetric weights that agree with the invalid scheme (8) and are therefore incorrect for auto-model estimation. Note that other types of spatial models such as joint autoregressive models (Ord 1975) do not require symmetric weights and therefore the default options may be useful for such models. Testing the option ‘style=“B”’ in functions ‘nb2listw’ and ‘autocov_dist’ using the ‘snouter’ data, we find (see R code in supplement) that symmetric weights are generated and the autocovariate corresponds correctly to (5). Thus it appears that this option generates valid weighting schemes.

We find that we can reproduce the anomalous estimates obtained by Dormann et al. for the ‘rain’ parameter by using the invalid weightings generated by default in package ‘spdep’. If we instead use valid weightings (option style = “B” in ‘spdep’), we obtain estimates for ‘rain’ in the auto-logistic and uncentered auto-normal cases that are close to the values driving GLMs used in the initial generation of ‘snouter’ probability maps prior to the application of correlated distortions (Dormann *et al.* 2007). For the uncentered auto-normal case, the validity of each estimated model was tested (see supplement) and all were found to meet the positive-definiteness criteria (see Table 1).

Auto-models using invalid weightings severely underestimate the magnitude of the “rain” parameters for all 20 datasets comprising real-valued and binary ‘snouter’ simulations; our results are summarized

in Table 2. See supplement for R code generating these results, along with simpler code for valid estimation of a single fully observed dataset.

The auto-Poisson case has additional complications (see below) but in the auto-logistic and auto-normal cases, the results are meaningful. We interpret them as follows: when the environmental covariate is highly spatially autocorrelated and intrinsic SAC is absent, the species distribution will tend to cluster according to the covariate. When intrinsic SAC is injected, clustering will increase and the autocovariate will be large in the clusters. Thus regions with strong covariate and strong autocovariate will tend to coincide, *except at the boundary*, where the autocovariate must necessarily be reduced. So we can envisage a situation where most of the contrast between intrinsic and extrinsic SAC occurs in the relatively small number of observations at or near (i.e. within the neighbourhood of) boundary sites. The incorrect neighbourhood weighting (8) compensates for the smaller number of neighbours at the boundary, incorrectly increasing the value of the autocovariate there and thus washing out the contrast between covariate and autocovariate at the boundary. However, since clusters occur at locations that are partly random due to intrinsic SAC, these can be mimicked more successfully by the autocovariate than the covariate. So with its main explanatory advantage (contrast at the boundary) removed, the covariate parameter is severely underestimated.

Auto-Poisson estimation

In the auto-Poisson case, the model is valid only for competitive interactions (Besag 1974), implying $\beta_{\text{auto}} \leq 0$, so that valid weightings alone are not sufficient to ensure the model is valid (Table 1). In maximum-likelihood estimation, a constraint such as $\beta_{\text{auto}} \leq 0$ can be ignored during the model fitting procedure provided the maximum (and thus the final estimate) lies within the constraint. However, for the ‘snouter’ datasets, MPLE using valid weightings yields estimates with $\beta_{\text{auto}} > 0$, breaching the constraint. Thus a valid estimation of the model requires constrained optimization of the pseudolikelihood. Attempting (unconstrained) MPLE with the invalid weightings (8) used in Dormann *et al.* (2007) also results in $\beta_{\text{auto}} > 0$ and the covariate parameter estimates differ from the (unconstrained) valid-weighting estimates (see Table 2), but there is little point in pursuing the comparison since both sets of results are invalid.

The log-pseudo-likelihood for the auto-Poisson model (Cressie 1991), adapted for the ‘snouter’ covariates, is:

$$\begin{aligned} \log(\text{PL}) &= \sum_n y_n \log(\lambda_n) - \lambda_n - \log(y_n!), \\ \log(\lambda_n) &= \alpha + \beta_1 \text{rain}_n + \beta_2 \text{djungle}_n + \beta_{\text{auto}} \text{autocov}_n. \end{aligned} \tag{12}$$

When (12) is optimized (see supplement) subject to the $\beta_{\text{auto}} \leq 0$ constraint, we obtain β_{auto} estimates that are essentially zero and the model recovers the value of the ‘rain’ parameter used in the original GLM simulations. As the auto-Poisson model is valid only for competitive interactions and the artificial data contains strong cooperative interactions, estimates near zero for β_{auto} are reasonable.

CAR estimation

Conditional autoregressive (CAR) models are a form of auto-normal model and consequently, in the widely used common-variance case (see Table 1) the spatial weights matrix employed must also be symmetric. Dormann *et al.* (2007) state that “we used a row-standardised binary weights matrix ...”; the code given in their supplementary information for performing CAR estimations generates a spatial weights matrix using a command

```
w<-nb2listw(nb, style="W", zero.policy=FALSE)
```

that is consistent with the text inasmuch as the R documentation for the command states that “B is the basic binary coding, W is row standardised”. However, as discussed above and shown by our R code (see supplement), the “W” option for this command generates weights with broken symmetry. When the code from the Dormann *et al.* (2007) supplement is run it generates “Non-symmetric spatial weights in CAR model” warnings and gives estimates for the ‘rain’ parameter that are opposite in sign to estimates quoted in the paper. Modifying the code to generate a symmetric weights matrix (substituting “B” for “W” in the above command) results in estimates very close to those in the paper. Thus it appears that CAR estimation was performed correctly in Dormann *et al.* (2007), but described incorrectly. Consequently the reported CAR estimates for ‘rain’ were not anomalous, in contrast to the other auto-model estimates, but the key difference between the codes that generated these disparate results went unreported.

Effect of observation-grid density and covariate SAC

The underestimation (see Table 2) of the ‘rain’ parameter raises two points under our earlier interpretation. Firstly, errors due to the invalid weightings (8) are clearly a boundary effect because for ‘interior sites’, with a full complement of neighbours, these weightings are proportional to those given by the valid scheme (5). Thus, if there were no boundary sites, as for some infinite lattice models, then no errors would occur (β_{auto} estimates for each scheme would then simply be in reciprocal proportion to the weights used for each scheme). It could be expected, therefore, that errors due to invalid weightings would decrease if the number of sites increases and the proportion of boundary sites decreases. Secondly, large errors require strong spatial autocorrelation of the ‘rain’ covariate.

To investigate these points for autologistic estimation, we generate new simulated presence-absence datasets driven by the ‘rain’ covariate on the original ‘snouter’ grid as well as on two grids of higher density (smaller lattice spacing). We create the latter by subdividing each of the original cells into either 4 or 16 cells, assigning to each of them the ‘rain’ value from the original ‘snouter’ cell they lie in. We also generate simulations using an uncorrelated version of the ‘rain’ covariate: a simple normal variate with mean and standard deviation matching that of ‘rain’ but with no inter-site dependence. For each grid density and version of ‘rain’, we generate 10 simulated datasets.

We avoid the ad-hoc approach to generating SAC in simulated data used in Dormann *et al.* Instead we apply Gibbs sampling to an autologistic model including as a covariate either ‘rain’ or ‘uncorrelated rain’, using a 1st order neighbourhood template with uniform weights. We initialize each site independently $y_n \sim \text{Bernoulli}(0.5)$ and then apply $T = 400$ Gibbs sampling sweeps according to the algorithm (see supplement for R code):

For $(t=1, 2, \dots, T)$:

For $(n=1, 2, \dots, S)$:

1. Evaluate autocov_n .

2. Generate y_n by sampling from the conditional distribution given all other sites:

$$\Pr(y_n = 1) = \frac{e^{\alpha + \beta_1 \text{rain}_n + \beta_{\text{auto}} \text{autocov}_n}}{1 + e^{\alpha + \beta_1 \text{rain}_n + \beta_{\text{auto}} \text{autocov}_n}}.$$

We analyse the resulting 60 simulated datasets (see Fig. 3 for examples) using three valid autologistic models, each with a different neighbourhood template (Fig. 1) and uniform weights $w_{nm} = 1$. In all models, we include the spurious covariate ‘djungle’ along with ‘rain’ (Dormann *et al.* 2007), i.e. we specify models as:

$$\Pr(y_n = 1) = \frac{e^{\alpha + \beta_1 \text{rain}_n + \beta_2 \text{djungle}_n + \beta_{\text{auto}} \text{autocov}_n}}{1 + e^{\alpha + \beta_1 \text{rain}_n + \beta_2 \text{djungle}_n + \beta_{\text{auto}} \text{autocov}_n}}.$$

Estimation was then repeated using invalid weightings (8) with $w_{nm}^* = 1$. The results (Table 3) broadly support both elements of our interpretation: increasing grid density reduces errors due to invalid weighting and the ‘uncorrelated rain’ parameter incurs very small errors.

Autologistic estimation of red deer data

The ‘snouter’ analysis showed, using simulated data generated with high intrinsic SAC and high covariate SAC, that invalid neighbourhood weightings (8) can lead to drastic underestimation of covariate parameters for each of the three auto-models considered. We now re-examine the presence-absence dataset for red deer in the Grampians region of Scotland, previously studied using logistic (Buckland & Elston 1993) and auto-logistic (Augustin, Muggleston & Buckland 1996) models. The data consists of a full set of presence-absence observations for 1277 squares of side 1km, each aligned with the UK grid co-ordinates (*eastings* and *northings*), along with environmental covariates including *altitude*, *pine* and *mires* (Fig. 4). We consider an autologistic model

$$\log \frac{p_n}{1 - p_n} = \alpha + \beta_1 \text{easting}_n + \beta_2 \text{northing}_n + \beta_3 \text{altitude}_n^2 + \beta_4 \text{pine}_n + \beta_5 \text{mires}_n + \beta_{\text{auto}} \text{autocov}_n \quad (13)$$

that includes the full set of covariates used by Augustin, Muggleston and Buckland (1996). We also examine all submodels of (13) derived by deleting covariates (always retaining the autocovariate and at least one of the covariates). Each of the resulting 31 models is estimated on the full dataset and also on four geographic subsets arising when the study area is bisected by eastings or northings. Estimation is conducted using a second order neighbourhood (Fig. 1) with valid uniform weighting $w_{nm} = 1$ in (5). Estimation is then repeated with the invalid weighting derived by putting $w_{nm}^* = 1$ in (8). We then examine the ratio between estimates obtained with invalid and valid weightings for each covariate parameter in each model.

Our results (Table 4 and supplementary material) show that the full model used in Augustin, Muggleston et al. (1996) incurs only minor errors in covariate estimates when the entire dataset is estimated using invalid weightings with a second-order neighbourhood. However substantial errors

can arise using subsets of the covariates or when the full model is applied to geographic subsets such as the eastern half of the study area. Larger neighbourhoods could be expected to be more sensitive to invalid weightings, since more sites will have incomplete neighbourhoods. Repeating the above analysis for a radius-2 neighbourhood (12 sites) generates more extreme variation in the effect of invalid weightings (see results in supplement) than for the second-order (eight-site) case.

From the example provided by this analysis of the red deer dataset, it appears that the extent of covariate estimation errors due to invalid weightings varies widely and is sensitive to the number and type of covariates, neighbourhood size and details of the available data, including covariate behaviour near borders.

Autologistic estimation with missing data

Iteration of Gibbs sampling and MPLE

The approach described by Augustin, Muggleston and Buckland (1996) uses a series of iterations, each comprising a Gibbs sampling step for the missing data and an MPLE step for the autologistic model parameters. As we have seen already, it is essential to ensure that valid neighbourhood weightings are used in estimation. However, valid weightings are also necessary for the Gibbs sampling steps, which construct samples from the joint missing-data distribution (given the model parameter values for the current iteration) via a sequence of samples from the full conditional distributions of individual sites. If these site-wise conditional distributions use incorrect neighbourhood weightings, the Gibbs sampling procedure will not correspond to a valid joint distribution for the missing data.

Here we provide R code that implements the combined iteration of MPLE and Gibbs sampling using valid distance-based neighbourhood weighting schemes (11) for any given radius r . Weights can be uniform ($f = 1$) or can vary with inter-site distance d as a power law $f = d^{-a}$, an exponential $f = e^{-\frac{d}{R}}$ or a product of these $f = d^{-a} e^{-\frac{d}{R}}$. Our code allows covariates and observations to be given for any subset of a rectangular grid and any number S_{miss} of the presence-absence observations can be missing. Missing observations are labelled in the sequence $1, 2, \dots, S_{\text{miss}}$, according to their occurrence in the data file, so each label l in the sequence indexes one site-number $n(l)$ with missing observation $y_{n(l)}$. The code implements the following procedure:

- Using the distance-based neighbourhood template (11), calculate weights w_{nm} to be used in all autocov_n evaluations (5), resulting in a valid weighting scheme.
- Fit a logistic model to the observed presence-absence data, obtaining initial values, α^1 and β_{cov}^1 , for the intercept and covariate parameter vector respectively. Set $\beta_{\text{auto}}^1 = 0$.
- Set $y_{n(l)} = 0$ for $l = 1, 2, \dots, S_{\text{miss}}$.
- **For** ($t = 2, 3, \dots, T$):
 1. Carry out a single Gibbs sampling sweep of all missing observations:

For ($l = 1, 2, \dots, S_{\text{miss}}$):

1.1 Evaluate $\text{autocov}_{n(l)}$.

1.2 Assign a value to $y_{n(l)}$ by sampling from the conditional distribution given all other sites:

$$\Pr(y_{n(l)} = 1) = \frac{e^{\alpha^{t-1} + \beta_{\text{cov}}^{t-1} \cdot \mathbf{X}_{n(l)} + \beta_{\text{auto}}^{t-1} \text{autocov}_{n(l)}}}{1 + e^{\alpha^{t-1} + \beta_{\text{cov}}^{t-1} \cdot \mathbf{X}_{n(l)} + \beta_{\text{auto}}^{t-1} \text{autocov}_{n(l)}}},$$

where $\mathbf{X}_n$ is the vector of covariates at site n .

2. Evaluate autocov_n for all observed sites and include the results as a covariate in a logistic model, fitted to all observed sites, yielding a new set of model parameter estimates $(\alpha^t, \beta_{\text{cov}}^t, \beta_{\text{auto}}^t)$.

3. If $(t > t_{\min})$: Update running averages for parameter values and occupancy probabilities $\Pr(y_n = 1)$ for all sites, where $t_{\min}$ is large enough to ensure adequate convergence.

4. If $(t \in \{t_R\})$: Retain full set of y_n to characterize species distribution in the estimated model at a set of selected iterations $\{t_R\}$.

As an illustration, we apply the above algorithm to a 20% subsample of the red deer data, sampled from the full study area, using a second order neighbourhood, uniform weights and 100 Gibbs-MPLE iterations. Estimated occupancy probabilities and the final stochastic occupancy realization are shown in Fig. 5.

Since this code calculates weightings and autocovariates without using ‘spdep’, it can be used to numerically test the `style="B"` option in ‘spdep’ by estimating fully observed datasets (for which ‘spdep’ can generate an autocovariate). For the fully observed deer dataset we find that a logistic model, containing an autocovariate generated in ‘spdep’ using `style="B"`, yields identical estimates to the above code.

Discussion

Extent and consequences of invalid weightings

The erroneous conclusions of Dormann et al., in which invalid weightings played the principal role, have led ecologists to avoid the autologistic model, notwithstanding the partial critique of Betts, Ganio et al. (2009). For example, Ficetola, Manenti et al. (2012) decide explicitly against the autologistic model and Sol, Vila et al. (2008) exclude it from their analysis. Furthermore, reviewing the 20 papers on autologistic models listed by Miller, Franklin et al. (2007), we find that at least nine used invalid weightings (three did not specify their weighting schemes). Beale et al. (2010) used invalid weightings in uncentered auto-normal models (described as ‘simple auto-regressive’ models).

We know on theoretical grounds that invalid neighbourhood weightings of the form (8) will lead to estimation errors; since invalid weightings break symmetry only near the boundary, small errors might be anticipated. However, re-analysis of simulated ‘snouter’ data and red deer census data demonstrated otherwise, yielding dramatic errors in the former case, while a variety of errors occur for the red deer example, depending on which subset of covariates and observations are used.

Invalid weightings generated incorrect estimates, similar to estimates reported in Dormann et al., when analysing new ‘snouter’ presence-absence data generated by Gibbs sampling of an autologistic model. Therefore the large covariate estimation errors were not artefacts of Dormann et al.’s ad-hoc approach to injecting strong intrinsic SAC into simulated ‘snouter’ data. Estimation errors were reduced when analysing data simulated on a denser grid using the same covariates (i.e. reducing the grid spacing over the simulated study area), as expected due to reduced boundary effects in larger lattices. Substituting a new “rain” covariate with minimal SAC yielded very small errors. Finally, using valid weighting schemes resolved autologistic estimation problems under all of the above conditions.

For the ‘snouter’ datasets, covariate parameters estimated by correctly implemented autocovariate regression turn out to be very close to corresponding parameters driving the generating model for the data and are also similar to GLM estimates.

However, due to the much greater complexity of auto-models compared to linear models, this simple outcome need not always occur. Further analysis can therefore be required to resolve apparent estimation anomalies. We pursue such analyses elsewhere (Bardos, Guillerá-Arroita & Wintle 2015) for more complex cases (Carl & Kühn 2007; Beale *et al.* 2010) where anomalies in auto-model covariate estimation have been reported.

Current outlook

We have shown here that the estimation anomalies reported by Dormann et al., affecting covariate parameters in auto-models, arise from purely technical implementation errors and are easily resolved. Our results demonstrate that invalid neighbourhood weightings can generate large errors when autologistic models with spatially autocorrelated environmental covariates are estimated on occupancy and abundance data. Environmental covariates usually do exhibit SAC, however covariates can take arbitrary form and thus, while severe problems are clearly possible, we have no basis for making general assessments of the extent of poor estimation in other studies in the literature. The only practical way to make an assessment in a particular case is to reanalyse the data using correct weightings, which is straightforward where the data can still be obtained.

The situation for new analyses is much clearer: the family of auto-models are valid probability distributions that can be estimated correctly provided the conditions originally noted by Besag (1974) are enforced. This requires restricting auto-Poisson models to competitive interactions, limiting their utility in ecology. However, for the autologistic model, the conditions are met simply by using valid neighbourhood weightings.

Acknowledgements

We thank Nicole Augustin, David Elston and Stephen Buckland for their concerted and successful efforts to recover the original red deer dataset. This work was supported by the Australian Research Council (ARC) Centre of Excellence for Environmental Decisions and an ARC Future Fellowship to BW.

References

- Arnold, B.C., Castillo, E. & Sarabia, J. (1994) Multivariate normality via conditional specification. *Statistics & Probability Letters*, **20**, 353-354.
- Augustin, N., Muggleston, M. & Buckland, S. (1996) An autologistic model for the spatial distribution of wildlife. *Journal of Applied Ecology*, **33**, 339-347.
- Bardos, D.C., Guillera-Aroita, G. & Wintle, B.A. (2015) Covariate influence in spatially autocorrelated occupancy and abundance data. *arXiv:1501.06530 [q-bio.QM]*.
- Beale, C.M., Lennon, J.J., Yearsley, J.M., Brewer, M.J. & Elston, D.A. (2010) Regression analysis of spatial data. *Ecology letters*, **13**, 246-264.
- Besag, J. (1974) Spatial interaction and the statistical analysis of lattice systems. *Journal of the Royal Statistical Society. Series B (Methodological)*, **36**, 192-236.
- Besag, J. (1975) Statistical analysis of non-lattice data. *The statistician*, **24**, 179-195.
- Betts, M.G., Ganio, L.M., Huso, M.M., Som, N.A., Huettmann, F., Bowman, J. & Wintle, B.A. (2009) Comment on "Methods to account for spatial autocorrelation in the analysis of species distributional data: a review". *Ecography*, **32**, 374-378.
- Bivand, R. (2014) Package 'spdep'. CRAN.
- Buckland, S. & Elston, D. (1993) Empirical models for the spatial distribution of wildlife. *Journal of Applied Ecology*, **30**, 478-495.
- Carl, G. & Kühn, I. (2007) Analyzing spatial autocorrelation in species distributions using Gaussian and logit models. *Ecological Modelling*, **207**, 159-170.
- Cressie, N.A.C. (1991) *Statistics for Spatial Data*. John Wiley & Sons, New York.
- Dormann, C.F. (2007) Assessing the validity of autologistic regression. *Ecological Modelling*, **207**, 234-242.
- Dormann, C.F., McPherson, J.M., Araújo, M.B., Bivand, R., Bolliger, J., Carl, G., Davies, R.G., Hirzel, A., Jetz, W., Daniel Kissling, W., Kühn, I., Ohlemüller, R., Peres-Neto, P.R., Reineking, B., Schröder, B., Schurr, F.M. & Wilson, R. (2007) Methods to account for spatial autocorrelation in the analysis of species distributional data: a review. *Ecography*, **30**, 609-628.
- Elith, J. & Leathwick, J.R. (2009) Species distribution models: ecological explanation and prediction across space and time. *Annual Review of Ecology, Evolution, and Systematics*, **40**, 677-697.
- Ficetola, G.F., Manenti, R., De Bernardi, F. & Padoa-Schioppa, E. (2012) Can patterns of spatial autocorrelation reveal population processes? An analysis with the fire salamander. *Ecography*, **35**, 693-703.
- He, F., Zhou, J. & Zhu, H. (2003) Autologistic regression model for the distribution of vegetation. *Journal of Agricultural, Biological, and Environmental Statistics*, **8**, 205-222.
- Hoeting, J.A., Leecaster, M. & Bowden, D. (2000) An Improved Model for Spatially Correlated Binary Responses. *Journal of Agricultural, Biological, and Environmental Statistics*, **5**, 102-114.
- Huffer, F.W. & Wu, H. (1998) Markov Chain Monte Carlo for Autologistic Regression Models with Application to the Distribution of Plant Species. *Biometrics*, **54**, 509-524.
- Legendre, P. (1993) Spatial Autocorrelation: Trouble or New Paradigm? *Ecology*, **74**, 1659-1673.
- Lichstein, J.W., Simons, T.R., Shiner, S.A. & Franzreb, K.E. (2002) Spatial autocorrelation and autoregressive models in ecology. *Ecological monographs*, **72**, 445-463.
- McCullagh, P.N. & Nelder, F. (1989) *Generalized Linear Models*. *Monographs on Statistics and Applied Probability*, **37**.

- Miller, J., Franklin, J. & Aspinall, R. (2007) Incorporating spatial dependence in predictive vegetation models. *ecological modelling*, **202**, 225-242.
- Ord, K. (1975) Estimation methods for models of spatial interaction. *Journal of the American Statistical Association*, **70**, 120-126.
- Possolo, A. (1986) Estimation of binary Markov random fields. *Technical report No. 77*. Department of Statistics, University of Washington.
- Sol, D., Vila, M. & Kühn, I. (2008) The comparative analysis of historical alien introductions. *Biological Invasions*, **10**, 1119-1129.
- Whittle, P. (1954) On stationary processes in the plane. *Biometrika*, **41**, 434-449.

Appendix

The positive-definiteness condition (see Table 1) for uncentered auto-normal models, i.e. the requirement $\mathbf{y}^T \mathbf{B} \mathbf{y} > 0$ for any non-zero vector $\mathbf{y}$, can be derived as follows. The relationship between joint and conditional distributions for auto models is given by eqns (4.1) and (4.6) of Besag (1974). Applying this to the uncentered auto-normal model from Table 1, the joint probability distribution for observations $y_i, i=1, 2, \dots, N$, must be of the form

$$P(y_1, y_2, \dots, y_N) \propto e^{-\left(\frac{1}{\sigma^2} \mathbf{a}^T \mathbf{y} + \frac{1}{2\sigma^2} \mathbf{y}^T \mathbf{B} \mathbf{y}\right)}, \quad (\text{A.1})$$

where $\mathbf{a}^T = (\alpha_1, \alpha_2, \dots, \alpha_N)$ and $\mathbf{B}$, defined in Table 1, is a real symmetric matrix. For this to be a valid distribution, the N - dimensional integral over observations must be finite. i.e.

$$\int e^{-\left(\frac{1}{\sigma^2} \mathbf{a}^T \mathbf{y} + \frac{1}{2\sigma^2} \mathbf{y}^T \mathbf{B} \mathbf{y}\right)} d\mathbf{y} < \infty. \quad (\text{A.2})$$

We now use two properties related to multivariate normal distributions (see Arnold, Castillo & Sarabia 1994, final paragraph, but note an implicit assumption of matrix symmetry). These properties are that (a) an integral of the form (A.2) can be finite only if $\mathbf{B}$ is positive-definite and (b) the integrand then defines a multivariate normal distribution. Thus when the conditions in Table 1 are met, the uncentered auto-normal model is valid and has multivariate-normal joint distribution.

On p. 232 of Besag (1974), in the discussion after the main paper, Besag gives a sufficient condition for validity of the uncentered auto-normal model on a rectangular lattice of sites where the observation $x_{i,j}$ for the site with lattice co-ordinates (i, j) is normally distributed (conditional on all other sites) with mean

$$\mu_{i,j} + \sum_k \sum_l b_{k,l} x_{i-k, j-l}. \quad (\text{A.3})$$

The notation in the above formula is from Section 5.5 of Besag (1974); accordingly we assume that $b_{0,0} = 0$, $b_{-k,-1} = b_{k,1}$, only a finite number of the coefficients $b_{k,l}$ are non-zero and the distributions have a common variance σ^2 . Additionally, for (A.3) to make sense, the summations must be assumed to be restricted to exclude non-existent sites beyond the lattice boundary. A sufficient condition for validity of the above auto-normal model is given on p. 232 as

$$\sum_k \sum_l b_{k,l} z_1^k z_2^l < 1 \text{ wherever } |z_1| = |z_2| = 1, \quad (\text{A.4})$$

which will clearly be satisfied if

$$\sum_{k,l} |b_{k,l}| < 1. \quad (\text{A.5})$$

Besag states that (A.4) is derived from the validity condition for the infinite lattice case given in Section 5.5. We are unaware of any detailed proof of this derivation in the literature, however we can interpret it heuristically on the basis that the consistency conditions for a larger lattice should be more severe

than for a smaller one, since more constraints must hold simultaneously. Thus, according to this reasoning, conditions sufficient for the infinite lattice would suffice for the finite one.

Model	Conditional specification	Parameter constraints	Constraint type
auto-logistic	$y_n \sim \text{Bernoulli} \left(\frac{e^{\alpha_n + \sum_{m=1 \dots N} \beta_{nm} y_m}}{1 + e^{\alpha_n + \sum_{m=1 \dots N} \beta_{nm} y_m}} \right)$	$\beta_{nn} = 0$ $\beta_{nm} = \beta_{mn}$	$\left. \begin{array}{c} \text{necessary} \\ \text{and} \\ \text{sufficient} \end{array} \right\}$
auto-Poisson	$y_n \sim \text{Poisson} \left(e^{\alpha_n + \sum_{m=1 \dots N} \beta_{nm} y_m} \right)$	$\beta_{nn} = 0$ $\beta_{nm} = \beta_{mn}$ $\beta_{mn} \leq 0$	$\left. \begin{array}{c} \text{necessary} \\ \text{and} \\ \text{sufficient} \end{array} \right\}$
auto-normal: uncentered with common variance or Conditional Autoregressive (CAR) with common variance	$y_n \sim \text{Normal} \left(\alpha_n + \sum_{m=1 \dots N} \beta_{nm} y_m, \sigma^2 \right)$ $y_n \sim \text{Normal} \left(\alpha_n + \sum_{m=1 \dots N} \beta_{nm} (y_m - \alpha_n), \sigma^2 \right)$ Let $\mathbf{y}$ denote the column-vector of observations, i.e. $\mathbf{y}^T = (y_1, y_2, \dots, y_N)$. Define a matrix $\mathbf{B}$ with diagonal elements $B_{nn} = 1$ and off-diagonal elements $B_{nm} = -\beta_{nm}$.	$\beta_{nn} = 0$ $\beta_{nm} = \beta_{mn}$ $\mathbf{y}^T \mathbf{B} \mathbf{y} > 0$ for any non-zero vector $\mathbf{y}$. ($\mathbf{B}$ is thus 'positive definite').	$\left. \begin{array}{c} \text{necessary} \\ \text{and} \\ \text{sufficient} \end{array} \right\}$
auto-normal: uncentered with common variance, on a rectangular lattice with co- ordinates (i, j)	$y_{i,j} \sim \text{Normal} \left(\alpha_{i,j} + \sum_k \sum_l b_{k,l} y_{i-k,j-l}, \sigma^2 \right)$	(i) $b_{00} = 0$ $b_{-k,-l} = b_{k,l}$ (ii) $\sum_{k,l} b_{k,l} \leq 1$	$\left. \begin{array}{c} \text{necessary} \\ \\ \text{sufficient} \\ \text{given (i)} \end{array} \right\}$

Table 1. Validity conditions for various auto-models: the symmetry condition in each case derives from eqn (4.6) of Besag (1974, p. 200); the auto-Poisson condition is given on p. 202 of Besag (1974). The positive-definiteness condition for auto-normal models is given for the CAR model on p. 201 of Besag (1974) and can be derived for the uncentered model from eqns (4.1) and (4.6) of Besag (1974) in conjunction with properties (Arnold, Castillo & Sarabia 1994) related to multivariate normal

distributions. The rectangular-lattice condition is derived from results stated on p. 232 of Besag (1974) in the Discussion following the main paper. Further details on auto-normal conditions are given in the Appendix.

auto-model	Neighbourhood template in estimated model	'rain' parameter used to generate simulated 'snouter' data	Mean of 'rain' estimates for 10 'snouter' simulated datasets	
			valid weighting	invalid weighting
Logistic		-0.002		
	1 st order		-0.0017	-0.00070
	2 nd order		-0.0019	-0.00051
	radius-2		-0.0020	-0.00045
Poisson		-0.001		
	1 st order	Note: All Poisson estimates are invalid (even for valid weighting) due to breaching $\beta_{\text{auto}} \leq 0$ condition	-0.00055	-0.00011
	2 nd order		-0.00060	-0.00010
	radius-2		-0.00066	-0.00012
Normal		-0.015		
	1 st order		-0.014	-0.00038
	2 nd order		-0.015	-0.00020
	radius-2		-0.017	-0.00031

Table 2. Effect of invalid neighbourhood weighting on auto-model estimates for the 'rain' covariate parameter when analysing 'snouter' simulated datasets (Dormann *et al.* 2007). Auto-logistic, auto-Poisson and (uncentered) auto-normal models were fitted to 10 binary, count and real-valued datasets respectively. The 'rain' value used in binary simulations was -0.002 (Betts *et al.* 2009), not the reported -0.003 . Neighbourhood templates used are those illustrated in Fig. 1, with $w_{nm} = 1$ in eqn (5) for valid weighting and $w_{nm}^* = 1$ in eqn (8) for invalid weighting.

Driving covariate for autologistic simulations	Grid density used for simulations: number of sites per original 'snouter' site	Neighbourhood template used for autologistic estimation	Mean of 'rain' estimates for 10 simulated presence-absence datasets	
			valid weighting	invalid weighting
'rain'				
	1	1 st order	-0.0019	-0.00063
	4		-0.0021	-0.0011
	16		-0.0020	-0.0014
	1	2 nd order	-0.0020	-0.00032
	4		-0.0023	-0.00062
	16		-0.0022	-0.00094
	1	radius-2	-0.0020	0.00010
	4		-0.0021	-0.000089
	16		-0.0020	-0.00057
'uncorrelated rain'				
	1	1 st order	-0.0021	-0.0020
	4		-0.0020	-0.0019
	16		-0.0020	-0.0019
	1	2 nd order	-0.0021	-0.0020
	4		-0.0023	-0.0021
	16		-0.0022	-0.0021
	1	radius-2	-0.0021	-0.0020
	4		-0.0025	-0.0024
	16		-0.0022	-0.0021

Table 3. Effect of observation grid density and covariate spatial autocorrelation on the errors induced by invalid neighbourhood weighting. The 'rain' parameter used in the simulations is $\beta_1 = -0.002$.

	environmental covariates				
	<i>eastings</i>	<i>northings</i>	<i>altitude</i> ²	<i>pine</i>	<i>mires</i>
whole dataset					
submodel 6			89	98	
submodel 22	104		98	84	
submodel 23	105		98	71	101
full model	104	103	99	87	101
eastern sector					
submodel 2				210	
submodel 3				176	93
submodel 6			79	204	
submodel 14		-40	60	175	
submodel 15		779	53	157	96
full model	81	113	78	149	102
western sector					
submodel 5			100		-8
submodel 6			101	94	
submodel 7			101	94	55
full model	-187	96	100	95	122
northern sector					
submodel 6			79	43	
submodel 10		69		-23	
submodel 26	-76	71		-5	
full model	110	73	98	97	98
southern sector					
submodel 6			90	70	
full model	103	149	100	73	103

Table 4. Impact of invalid neighbourhood weightings for the analysis of red deer data. Covariate parameter estimates obtained using invalid neighbourhood weightings are expressed as a percentage of corresponding estimates using valid weightings. The analysis was carried out using the full dataset and also for various geographic divisions. Results are shown for the full model given in eqn (13) and for the *reduced model* of Augustin, Muggleston and Buckland (1996) - submodel 6 in our analysis. Selected submodels are also included that were particularly sensitive to errors induced by invalid weightings. Full results are available as supplementary material.

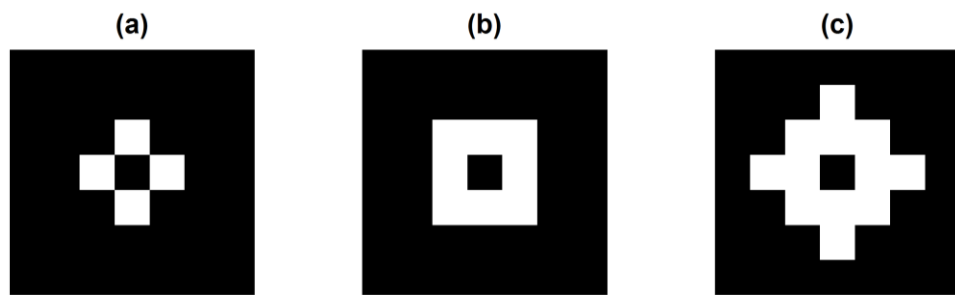


Figure 1. Images of neighbourhood templates on a square lattice: (a) 1st order, (b) 2nd order, and (c) radius-2.

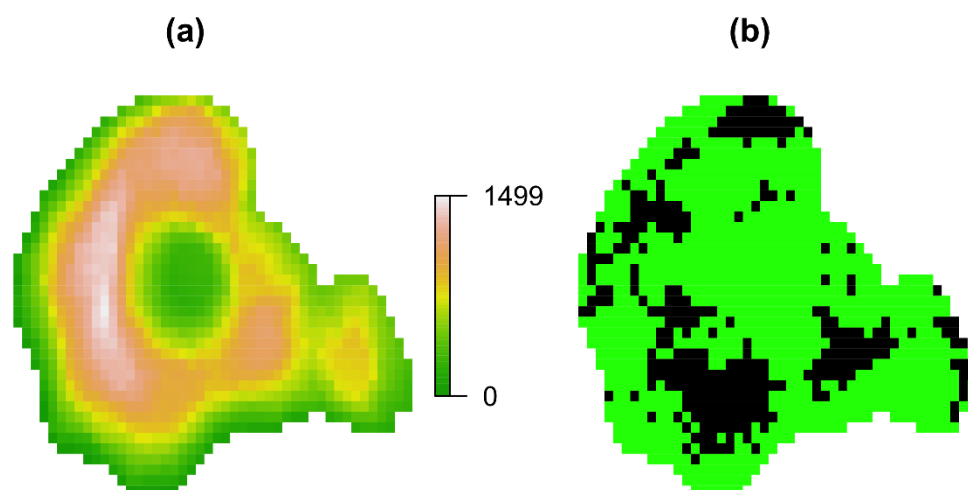


Figure 2. (a) Environmental covariate 'rain' used to drive simulated data generation in Dormann (2007) and Dormann et al. (2007). (b) One of the resulting presence-absence simulations for 'snouter' (green=presence; black=absence).

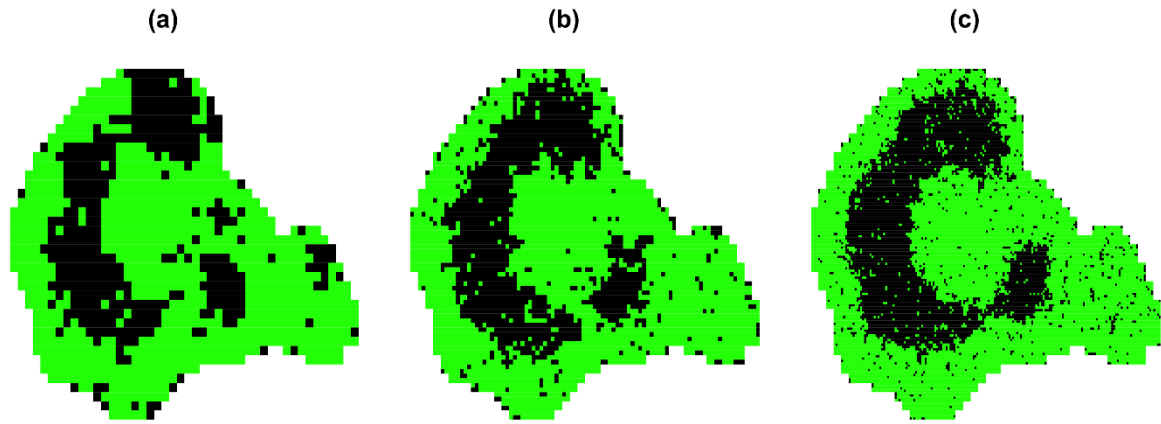


Figure 3. Presence-absence data simulated using the autologistic model on (a) the original 'snouter' grid (b) a grid with lattice spacing of 1/2 the original (c) a grid with lattice spacing 1/4 the original (green=presence; black=absence). The simulations used a 1st order uniform neighbourhood and parameters: intercept $\alpha = -1$, 'rain' parameter $\beta_1 = -0.002$ and autocovariate parameter $\beta_{\text{auto}} = 1.5$.

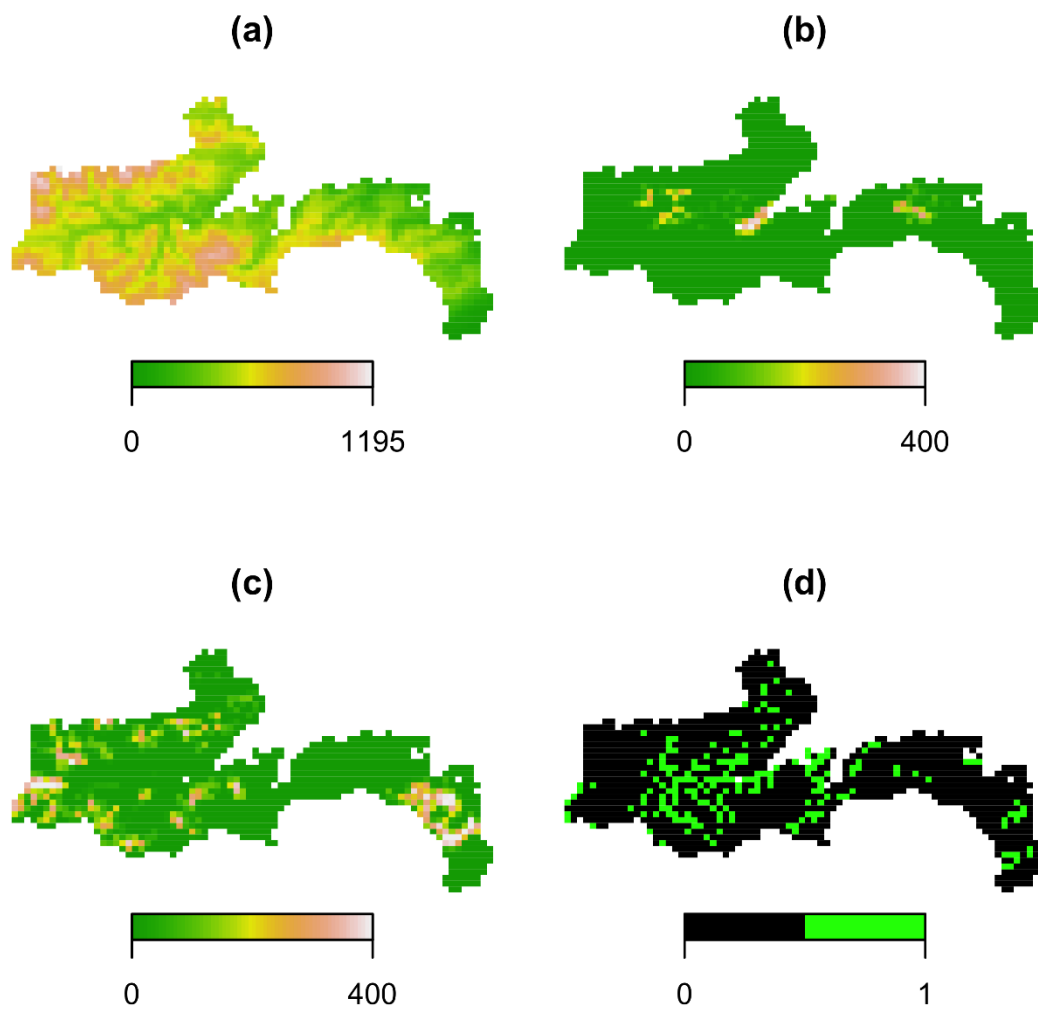


Figure 4. Environmental variables and presence-absence observations used in the red deer analysis: (a) altitude, (b) pine, (c) mires, (d) observations.

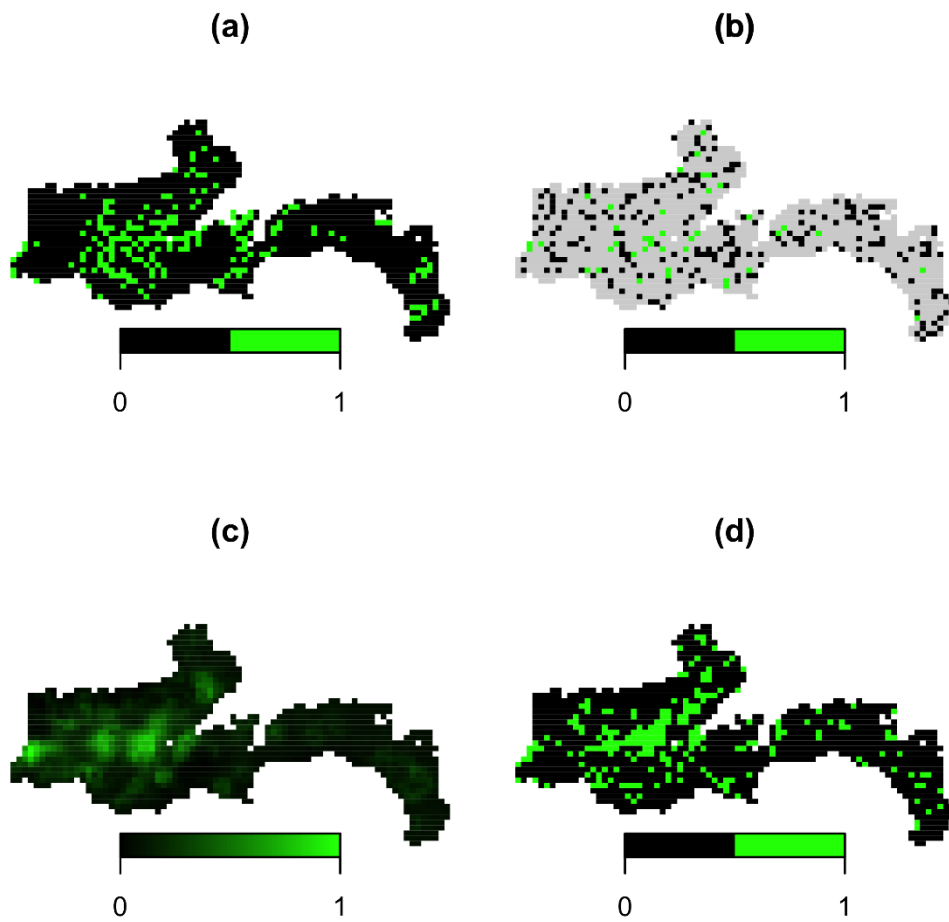


Figure 5. Analysis of a partial red deer dataset: (a) fully observed presence-absence dataset; (b) 20% random subsample of data; (c) estimated probabilities of presence; and (d) stochastic presence-absence map after 100 Gibbs-MPLE iterations.

Supplementary information

R programs and some associated data and output files.

Most of the R programs detailed below use the data file 'snouterdata.txt'

<http://www.ecography.org/sites/ecography.org/files/appendix/snouterdata.txt>

from the supplementary material of Dormann *et al.* (2007). However, 'Red deer estimation.R' and 'GibbsMPLE.R' use data files 'deer table.txt' and 'deer20%sample.txt' respectively; these data files are reproduced below along with the output file 'red deer estimate ratios.txt' generated in the former case.

CheckWeights.R

```
# Checks neighbourhood weights generated for 'snouter' data by 'nb2listw' in package 'spdep'
# Author: David C Bardos
library(lattice);
setwd("C:/auto"); #change as required
snouter.df <- read.table("snouterdata.txt", header=T, sep="\t")
attach(snouter.df)
sorted <- snouter.df[order(rain),]
rain <- snouter.df[, "rain"]
```

```
require(spdep)
```

```
#Make a matrix of coordinates
coords<-as.matrix(cbind(snouter.df$X,snouter.df$Y))
n=length(coords[,1]);wmat=matrix(0,ncol=n,nrow=n); # weights matrix
```

```
nb.list <- dneareigh(coords, 0, 1)
```

```
nb.weights <- nb2listw(nb.list) # default weights
for (i in 1:n){
  nblist=nb.list[[i]];nb.n=length(nblist);
  for (m in 1:nb.n) {j=nblist[m];wmat[i,j]=nb.weights[[3]][[i]][m];}
}
dfmat=wmat; #store default weights
DFmat=wmat-t(wmat);DFplot=levelplot(DFmat[1:100,1:100]);
max(abs(DFmat)) # =0.25 => broken symmetry
```

```
nb.weights <- nb2listw(nb.list,style="B")
for (i in 1:n){
  nblist=nb.list[[i]];nb.n=length(nblist);
  for (m in 1:nb.n) {j=nblist[m];wmat[i,j]=nb.weights[[3]][[i]][m];}
}
Bmat=wmat-t(wmat);Bplot=levelplot(Bmat[1:100,1:100]);
max(abs(Bmat)) # =0 => weights symmetric
```

```
nb.weights <- nb2listw(nb.list,style="W")
for (i in 1:n){
  nblist=nb.list[[i]];nb.n=length(nblist);
  for (m in 1:nb.n) {j=nblist[m];wmat[i,j]=nb.weights[[3]][[i]][m];}
}
wwmat=wmat; # store 'W' weights
Wmat=wmat-t(wmat);Wplot=levelplot(Wmat[1:100,1:100])
max(abs(Wmat)) # =0.25 => broken symmetry
max(abs(dfmat-wwmat)) # =0 => default weights equal 'W' weights
```

```
nb.weights <- nb2listw(nb.list,style="C")
for (i in 1:n){
  nblist=nb.list[[i]];nb.n=length(nblist);
  for (m in 1:nb.n) {j=nblist[m];wmat[i,j]=nb.weights[[3]][[i]][m];}
}
Cmat=wmat-t(wmat);Cplot=levelplot(Cmat[1:100,1:100])
```

```
max(abs(Cmat)) # =0 => weights symmetric
```

```
nb.weights <- nb2listw(nb.list,style="U")
for (i in 1:n){
  nblist=nb.list[[i]];nb.n=length(nblist);
  for (m in 1:nb.n) {j=nblist[m];wmat[i,j]=nb.weights[[3]][[i]][m];}
}
Umat=wmat-t(wmat);Uplot=levelplot(Umat[1:100,1:100])
max(abs(Umat)) # =0 => weights symmetric
```

```
nb.weights <- nb2listw(nb.list,style="S")
for (i in 1:n){
  nblist=nb.list[[i]];nb.n=length(nblist);
  for (m in 1:nb.n) {j=nblist[m];wmat[i,j]=nb.weights[[3]][[i]][m];}
}
Smat=wmat-t(wmat);Splot=levelplot(Smat[1:100,1:100])
max(abs(Smat)) # =0.105908 => broken symmetry
```

CheckAutocov.R

```
# Checks autocovariate generated for 'snouter' data by 'autocov_dist' in package 'spdep'
# Author: David C Bardos
library(spdep);library(lattice);
setwd('C:/auto'); #change as required

obs.df=read.table("snouterdata.txt", header=T, sep="\t");
obs.df=obs.df[c(1,2,3,4,23)]

#if radius=0 then a 2nd order neighbourhood is used. For radius 1,2,3 etc a neighbourhood of that radius is constructed.
radius=2;if(radius>0) {nbimage=matrix(0L,ncol=2*radius+3,nrow=2*radius+3);nbsize=radius;
nbmat=matrix(ncol=2,nrow=0,byrow=T); # start with empty list
for(i in -radius:radius) for(j in -radius:radius) if((i^2+j^2 <= radius^2) &&(!identical(c(i,j),c(0L,0L)))) {
  tmpmat=matrix(c(i,j),ncol=2,nrow=1,byrow=T);nbmat=rbind(nbmat,tmpmat);nbimage[i+radius+2,j+radius+2]=1L;}
Nnb=length(nbmat[,1]);} else {nbsize=1.5;
#2nd order (lies between radius 1 & radius 2)
Nnb=8;nbmat=matrix(c(1L,0L,-1L,0L,0L,1L,0L,-1L,-1L,-1L,1L,1L,1L,-1L,-1L,1L),ncol=2,nrow=Nnb,byrow=T);
nbimage=matrix(0L,ncol=5,nrow=5);for(i in -1:1) for(j in -1:1) nbimage[i+3,j+3]=1L; nbimage[3,3]=0L;};levelplot(nbimage);

wvec=rep(1,Nnb) # weights w
dx=max(abs(nbmat[,1]));dy=max(abs(nbmat[,2]));border=max(dx,dy); # minimum border requirements
parameters.n=2;covflag=F; # start with autocovariate and constant term

obs.len=length(obs.df[,1]);obs.width=length(obs.df[,1]);
obs.table=matrix(0L,nrow=obs.len,ncol=obs.width);
for (k in 1:obs.len) for (j in 1:obs.width) obs.table[k,j]=obs.df[k,j];
nsites=obs.len;xmin=min(obs.table[,1]);ymin=min(obs.table[,2]);
xmax=max(obs.table[,1]);ymax=max(obs.table[,2]);Length=ymax-ymin+1;width=xmax-xmin+1;
observed=1:obs.len;observed.xy=matrix(0L,nrow=obs.len,ncol=2);
datamat=matrix(0L,nrow=length+2*border,ncol=length+2*border); # use 1st array index for x (width)
for (k in 1:obs.len) {obs.table[k,1]=obs.table[k,1]-(xmin-1)+border;obs.table[k,2]=obs.table[k,2]-(ymin-1)+border;
  datamat[obs.table[k,1],obs.table[k,2]]=as.integer(obs.table[k,obs.width]);
  observed.xy[k,1]=as.integer(obs.table[k,1]);observed.xy[k,2]=as.integer(obs.table[k,2]);
}## k loop

sitemat=datamat;
autocov=rep(0,obs.len)
for (k in 1:obs.len){ for (m in 1:Nnb){
  i=nbmat[m,1];j=nbmat[m,2];autocov[k]=autocov[k]+sitemat[observed.xy[k,1]+i,observed.xy[k,2]+j];}}

sitemat=datamat;sitemat[]=0L;for (k in 1:obs.len){sitemat[observed.xy[k,1],observed.xy[k,2]]=1L;};
weightsum=rep(0,obs.len)
for (k in 1:obs.len){ for (m in 1:Nnb){
  i=nbmat[m,1];j=nbmat[m,2];weightsum[k]=weightsum[k]+sitemat[observed.xy[k,1]+i,observed.xy[k,2]+j];}}

autocovWeightedAvge=autocov/weightsum; # note this is not a valid autocovariate
levelplot(datamat)

#####
coords<-as.matrix(cbind(obs.df[,1],obs.df[,2])); #Make a matrix of coordinates
GLMtype=binomial(link = "logit");
wtype="one";

wstyle="B";
acB <- autocov_dist(obs.df[,5], coords, nbs = nbsize, style=wstyle, type = wtype);
max(abs(acB-autocov));
# =0 => autocov_dist with style='B' and type='one' agrees with a valid uniform weighting.

wstyle="W";
acW <- autocov_dist(obs.df[,5], coords, nbs = nbsize, style=wstyle, type = wtype);
max(abs(acW-autocovWeightedAvge));
# =0 => autocov_dist with style='W' and type='one' agrees with an invalid uniform weighting

acDF <- autocov_dist(obs.df[,5], coords, nbs = nbsize, type = wtype);
max(abs(acDF-autocovWeightedAvge));
# =0 => autocov_dist with default style and type='one' agrees with an invalid uniform weighting
```

SnouterGLMwithAutocovariate.R

```
# Maximum pseudolikelihood estimation for (fully observed) 'snouter' data.
# Using GLM with an autocovariate => equivalent to MPLE.
# For the gaussian case, valid only if positive-definiteness criterion is met
# For the poisson case: valid only if the estimate for beta_auto is negative or zero (=> invalid for snouter data)
# Author: David C Bardos
require(spdep);require(lattice);
setwd('C:/auto'); #change as required
snouter.df <- read.table("snouterdata.txt", header=T, sep="\t")
attach(snouter.df);
gaussflag=0L;

coords<-as.matrix(cbind(snouter.df$X,snouter.df$Y)); #Make a matrix of coordinates
len=length(coords[,1]);wmat=matrix(0,ncol=len,nrow=len);

nsims=10; #number of simulated datasets
cmat1=cmat2=matrix(0,ncol=4,nrow=nsims);
eminmax=matrix(0,ncol=2,nrow=nsims);#min and max eigenvalues from positive-definiteness test
fm1=list();fm2=list();

GLMtype=gaussian(link="identity");first=5; gaussflag=1L; # column of first gaussian dataset
#GLMtype=binomial(link = "logit"); first=15; # column of first binary dataset
#GLMtype=poisson(link = "log"); first=25; # column of first poisson dataset

wtype="one";
nbsize=1

nb <- dnearneigh(coords, 0, nbsize)
w <- nb2listw(nb,style="B",zero.policy=FALSE)
for (i in 1:len){
  nblist=nb[[i]];nb.n=length(nblist);
  for (m in 1:nb.n) {j=nblist[m];wmat[i,j]=w[[3]][[i]][m];}
}
#levelplot(wmat)

wstyle="B"; # valid weightings

for(k in 1:nsims){
ac <- autocov_dist(snouter.df[,first+k-1], coords, nbs = nbsize, style=wstyle, type = wtype);
fm1[[k]] <- glm(snouter.df[,first+k-1] ~ rain + djungle + ac,family=GLMtype);
cmat1[k,]=coefficients(fm1[[k]]);
if(gaussflag==1L) {eval=eigen(diag(len)-cmat1[k,4]*wmat)$values;eminmax[k,]=c(min(eval),max(eval));}
}
#summary(fm1[[1]])
cmat1
colMeans(cmat1)

wstyle="W"; # invalid weightings

for(k in 1:nsims){
ac <- autocov_dist(snouter.df[,first+k-1], coords, nbs = nbsize, style=wstyle, type = wtype);
fm2[[k]] <- glm(snouter.df[,first+k-1] ~ rain + djungle + ac,family=GLMtype);
cmat2[k,]=coefficients(fm2[[k]]);
}
#summary(fm2[[1]])
cmat2
colMeans(cmat2)

if(gaussflag==1L){ eminmax} # show upper & lower eigenvalues. Must be >0 for positive-definiteness.
if(gaussflag==1L){print("smallest eigenvalue");print(min(eminmax));}
```

SnouterAutologistic.R

```
# Maximum pseudolikelihood estimation for (fully observed) 'snouter' data.
# Using GLM with an autocovariate => equivalent to MPLE.
# Author: David C Bardos
require(spdep);
setwd('C:/auto'); #change as required
snouter.df <- read.table("snouterdata.txt", header=T, sep="\t")
attach(snouter.df);

coords<-as.matrix(cbind(X,Y)); # coordinates list

wtype="one";    # weights independent of distance
nbsize=1.5      # second-order neighbourhood
wstyle="B";     # valid weighting scheme
sim=snouter2.10; # choose simulation from data frame: snouter2.1 to snouter2.10 are presence-absence simulations
ac <- autocov_dist(sim, coords, nbs = nbsize, style=wstyle, type = wtype);
fm1 <- glm(sim ~ rain + djungle + ac,family=binomial);
summary(fm1)
```

ConstrainedPoisson.R

```
# Auto-Poisson pseudolikelihood is maximized subject to beta_auto<=0. Uses 'constrOptim'
# Author: David C Bardos
require(spdep);
setwd('C:/auto'); #change as required
snouter.df <- read.table("snouterdata.txt", header=T, sep="\t")
attach(snouter.df);

coords<-as.matrix(cbind(snouter.df$X,snouter.df$Y)); #Make a matrix of coordinates

nsims=10;
first=25;# first poisson dataset in file
cmat1=cmat2=matrix(0,ncol=4,nrow=nsims);
fm1=list();fm2=list();

wtype="one";
wstyle="B";
nbsize=1.5

# meaning of coeffs:
#coeffs=c(ccoeff,rcoeff,djcoeff,acoeff);

# construct log(pseudo-likelihood) function
llike=function(coeffs){llambda=coeffs[1]+coeffs[2]*rain+coeffs[3]*djungle+coeffs[4]*ac;
                      lambda=exp(llambda);
                      sum(-lambda+obs*llambda-lfac)}

for(k in 1:nsims){

obs=snouter.df[,first+k-1];lfac=lfactorial(obs);
ac <- autocov_dist(obs, coords, nbs = nbsize, style=wstyle, type = wtype);
fm1[[k]]=constrOptim(c(2,-0.0001,0.001,-0.1),llike,NULL,ui=rbind(c(0,0,0,-1)),ci=c(0),control=list(fnscale=-1))
cmat1[k,]=fm1[[k]]$par;
}
#summary(fm1[[1]])
cmat1
colMeans(cmat1)

wstyle="W";

for(k in 1:nsims){
obs=snouter.df[,first+k-1];lfac=lfactorial(obs);
ac <- autocov_dist(obs, coords, nbs = nbsize, style=wstyle, type = wtype);
fm2[[k]]=constrOptim(c(2,-0.0001,0.001,-0.1),llike,NULL,ui=rbind(c(0,0,0,-1)),ci=c(0),control=list(fnscale=-1))
cmat2[k,]=fm2[[k]]$par;
}
#summary(fm2[[1]])
cmat2
colMeans(cmat2)
```

CAR.R

```
# CAR model with fully observed data
# Author: David C Bardos
require(lattice);require(spdep);
setwd("C:/auto"); #change as required
snouter.df <- read.table("snouterdata.txt", header=T, sep="\t");

attach(snouter.df);

coords<-as.matrix(cbind(snouter.df$X,snouter.df$Y)); #Make a matrix of coordinates
len=length(coords[,1]);wmat=matrix(0,ncol=len,nrow=len);

nsims=10;
first=5;#15 #column of first dataset
cmat1=cmat2=matrix(0,ncol=4,nrow=nsims);
eminmax=matrix(0,ncol=2,nrow=nsims);#min and max eigenvalues from positive-definiteness test
fm1=list();fm2=list();

nbsize=2;
nb <- dnearneigh(coords, 0, nbsize)

w <- nb2listw(nb,style="B",zero.policy=FALSE)

for (i in 1:len){
  nblist=nb[[i]];nb.n=length(nblist);
  for (m in 1:nb.n) {j=nblist[m];wmat[i,j]=w[[3]][[i]][m];}
}
#levelplot(wmat)

for(k in 1:nsims){

fm1[[k]]<-spautolm(snouter.df[,first+k-1]~rain+djungle,listw=w,family="CAR");
cmat1[k,]=coefficients(fm1[[k]]);
eval=eigen(diag(len)-cmat1[k,4]*wmat)$values;eminmax[k,]=c(min(eval),max(eval));
}
#summary(fm1[[1]])
cmat1
colMeans(cmat1)

w <- nb2listw(nb,style="W",zero.policy=FALSE)

for(k in 1:nsims){

fm2[[k]] <- spautolm(snouter.df[,first+k-1]~rain+djungle,listw=w,family="CAR");
cmat2[k,]=coefficients(fm2[[k]]);
}
#summary(fm2[[1]])
cmat2
colMeans(cmat2)
```

SceneGen.R

```
# scene generation: simulating autologistic data
# Author: David C Bardos
library(lattice);
setwd("C:/auto"); #change as required
snouter.df <- read.table("snouterdata.txt", header=T, sep="\t")
attach(snouter.df);
snouter.occupation=mean(as.matrix(snouter.df[,15:24]));
set.seed(999);
nsims=10;
covariates.n=2;len=length(rain);rainmu=mean(rain);rainsd=sd(rain);

missingfrac=0.0;
alpha=-1.4;beta1=-0.002;beta.auto=1.4;
alpha=-1.5368776;beta1=-0.001598372; beta.auto=1.532629; # fit to sim1
alpha=-1;beta1=-0.002; beta.auto=1.5;

alpha=-1;beta1=-0.002;beta.auto=1.4; # about 60% occupation with uncorrelated rain

Ymax=38;Xmax=46;border=2;
cov1=cov2=matrix(0,nrow=Xmax+2*border,ncol=Ymax+2*border);
for(k in 1:len){i=X[k]+border; j=Y[k]+border;
cov1[i,j]= morm(1,rainmu,rainsd); #uncorrelated covariate
#cov1[i,j]=rain[k];
cov2[i,j]=djungle[k];
} #end k loop
trutharray=array(0L,dim=c(Xmax+2*border,Ymax+2*border,nsims));

for(n in 1:nsims){
randmat=matrix(0L,nrow=Xmax+2*border,ncol=Ymax+2*border);
for(k in 1:len){i=X[k]+border; j=Y[k]+border;
randmat[i,j]=as.integer(rbinom(1,1,0.5))==1); #logical coerced into integer
} #end k loop

# randmat=initial scene (just independent random ~50% filling)
truthmat=randmat; # starting scene for Gibbs sampling draw of true "data"

for (iter in 1:400) {
  for(k in 1:len) {i=X[k]+border;j=Y[k]+border;
    #1st order
    prob=exp(alpha+beta1*cov1[i,j]+beta.auto*(truthmat[i+1,j] + truthmat[i-1,j] + truthmat[i,j+1] + truthmat[i,j-1] ));

    # 2nd order
    # prob=exp(alpha+beta1*cov1[i,j]+beta.auto*(truthmat[i+1,j] + truthmat[i-1,j] + truthmat[i,j+1] + truthmat[i,j-1] +
    # truthmat[i+1,j-1] + truthmat[i-1,j+1] + truthmat[i-1,j-1] + truthmat[i+1,j+1] ));
    # n=2
    # prob=exp(alpha+beta1*cov1[i,j]+beta.auto*(truthmat[i+1,j] + truthmat[i-1,j] + truthmat[i,j+1] + truthmat[i,j-1] +
    # truthmat[i+1,j-1] + truthmat[i-1,j+1] + truthmat[i-1,j-1] + truthmat[i+1,j+1] +
    # truthmat[i+2,j] + truthmat[i-2,j] + truthmat[i,j+2] + truthmat[i,j-2] ));

    prob=prob/(1+prob);
    truthmat[i,j]<-as.integer(rbinom(1,1,prob))==1); #logical coerced into integer
  } # k loop
} # iter loop
trutharray[,n]=truthmat;
} # n loop
#levelplot(cov1);
levelplot(truthmat);
# this is now the true scene resulting from gibbs sampling at true parameter values, starting with initial scene "randmat"

tableoftruth=matrix(0L,ncol=2+covariates.n+nsims,nrow=len);#ncol=4=> (x,y,cov,obs)
for(k in 1:len) {i=X[k]+border;j=Y[k]+border;
  tableoftruth[k,]=c(X[k],Y[k],cov1[i,j],cov2[i,j],trutharray[i,j,]);
  if(rbinom(1,1,missingfrac)==1) tableoftruth[k,4]=NA; }

write.table(tableoftruth,"1stOrderAuto.C-1B0.002B_auto1.4.uncorrRain.txt",col.names=c("X","Y","cov1","cov2",rep("obs",nsims)))
#write.table(tableoftruth,"alpha=-1beta1=-0.002beta.auto=1.5.txt",col.names=c("X","Y","cov1","cov2",rep("obs",nsims)))

sum(tableoftruth[,5])/len #occupied fraction for first simulation
sum(tableoftruth[, (2+covariates.n)+1:nsims])/(nsims*len) # occupied fraction across all simulations
```

SceneGen.g.R

```
# scene generation: simulating autologistic data on grids differing from the supplied covariate grid
# Author: David C Bardos
library(lattice);
setwd("C:/auto"); #change as required
snouter.df <- read.table("snouterdata.txt", header=T, sep="\t")
attach(snouter.df);
snouter.occupation=mean(as.matrix(snouter.df[,15:24]));
set.seed(999);
nsims=10;
covariates.n=2;len=length(rain);rainmu=mean(rain);rainsd=sd(rain);

missingfrac=0.0;
alpha=-1.4;beta1=-0.002;beta.auto=1.4;
alpha=-1.5368776;beta1=-0.001598372; beta.auto=1.532629; # fit to sim1
alpha=-1;beta1=-0.002; beta.auto=1.5;

alpha=-1;beta1=-0.002;beta.auto=1.4; # about 60% occupation with uncorrelated rain

Ymax=38;Xmax=46;border=2;
cov1=cov2=matrix(0,nrow=Xmax+2*border,ncol=Ymax+2*border);
keymat=matrix(0L,nrow=Xmax+2*border,ncol=Ymax+2*border);
for(k in 1:len){i=X[k]+border; j=Y[k]+border;
cov1[i,j]= morm(1,rainmu,rainsd); #uncorrelated covariate
#cov1[i,j]=rain[k];
cov2[i,j]=djungle[k];
keymat[i,j]=1L;
} #end k loop
levelplot(cov1);

#now create new grid with associated objects
border.g=2;
scalefac=4; # increase linear grid density by this factor (number of cells increases by its square)
Ymax.g=scalefac*Ymax;Xmax.g=scalefac*Xmax;
#Ymax.g=20;Xmax.g=17; # or can just give numbers here.
Yfac=Ymax.g/Ymax;Xfac=Xmax.g/Xmax;
keymat.g=matrix(0L,nrow=Xmax.g+2*border.g,ncol=Ymax.g+2*border.g);
cov1.g=cov2.g=matrix(0,nrow=Xmax.g+2*border.g,ncol=Ymax.g+2*border.g);
X.g=Y.g=1L[-1]; #empty integer vectors
for(i.g in 1:Xmax.g) for(j.g in 1:Ymax.g)
{i=ceiling((i.g-0.5)/Xfac);j=ceiling((j.g-0.5)/Yfac);
if(keymat[border+i,border+j]==1) {keymat.g[border.g+i.g,border.g+j.g]=1;
cov1.g[border.g+i.g,border.g+j.g]=cov1[border+i,border+j];
cov2.g[border.g+i.g,border.g+j.g]=cov2[border+i,border+j];
X.g=append(X.g,i.g);Y.g=append(Y.g,j.g)
}
} #end x,y loops
len.g=length(X.g);
trutharray=array(0L,dim=c(Xmax.g+2*border.g,Ymax.g+2*border.g,nsims));

for(n in 1:nsims){
randmat.g=matrix(0L,nrow=Xmax.g+2*border.g,ncol=Ymax.g+2*border.g);
for(k in 1:len.g) {i=X.g[k]+border.g;j=Y.g[k]+border.g;
randmat.g[i,j]=as.integer(rbinom(1,1,0.5)==1);#logical coerced into integer
} #end k loop

# randmat.g=initial scene (just independent random ~~50% filling)
truthmat.g=randmat.g; # starting scene for Gibbs sampling draw of true "data"

for (iter in 1:400) {
for(k in 1:len.g) {i=X.g[k]+border.g;j=Y.g[k]+border.g;
#1st order
prob=exp(alpha+beta1*cov1.g[i,j]+beta.auto*(truthmat.g[i+1,j] + truthmat.g[i-1,j] + truthmat.g[i,j+1] + truthmat.g[i,j-1] ));

# 2nd order
# prob=exp(alpha+beta1*cov1.g[i,j]+beta.auto*(truthmat.g[i+1,j] + truthmat.g[i-1,j] + truthmat.g[i,j+1] + truthmat.g[i,j-1] +
# truthmat.g[i+1,j-1] + truthmat.g[i-1,j+1] + truthmat.g[i-1,j-1] + truthmat.g[i+1,j+1] ));
# n=2
# prob=exp(alpha+beta1*cov1.g[i,j]+beta.auto*(truthmat.g[i+1,j] + truthmat.g[i-1,j] + truthmat.g[i,j+1] + truthmat.g[i,j-1] +
# truthmat.g[i+1,j-1] + truthmat.g[i-1,j+1] + truthmat.g[i-1,j-1] + truthmat.g[i+1,j+1] +
# truthmat.g[i+2,j] + truthmat.g[i-2,j] + truthmat.g[i,j+2] + truthmat.g[i,j-2]
));
```

```

    prob=prob/(1+prob);
    truthmat.g[i,j]<-as.integer(rbinom(1,1,prob)==1); #logical coerced into integer
  } # k loop
} # iter loop
trutharray[,,n]=truthmat.g;
} # n loop

levelplot(truthmat.g);
# this is now the true scene resulting from gibbs sampling at true parameter values, starting with initial scene "randmat"

# new grid
tableoftruth=matrix(0L,ncol=2+covariates.n+nsims,nrow=len.g);#ncol=4=> (x,y,cov,obs)
for(k in 1:len.g) {i=X.g[k]+border.g;j=Y.g[k]+border.g;
  tableoftruth[k,]=c(X.g[k],Y.g[k],cov1.g[i,j],cov2.g[i,j],trutharray[i,j,]);
  if(rbinom(1,1,missingfrac)==1) tableoftruth[k,4]=NA; }

write.table(tableoftruth,"1stOrderAuto.C-1B0.002B_auto1.4.uncorrRain.g4.txt",col.names=c("X","Y","cov1","cov2",rep("obs",nsims)))
#write.table(tableoftruth,"alpha=-1beta1=-0.002beta.auto=1.5.g2.txt",col.names=c("X","Y","cov1","cov2",rep("obs",nsims)))
#write.table(tableoftruth,"alpha=-1beta1=-0.002beta.auto=1.5.g4.txt",col.names=c("X","Y","cov1","cov2",rep("obs",nsims)))

sum(tableoftruth[,5])/len.g #occupied fraction for first simulation
sum(tableoftruth[(2+covariates.n)+1:nsims])/(nsims*len.g) # occupied fraction across all simulations

```

SimGLMauto.R

```
# Maximum Pseudo-Likelihood Estimation for autologistic model with fully observed data
# Author: David C Bardos
require(spdep);
setwd('C:/auto'); #change as required
#snouter.df <- read.table("snouterdata.txt", header=T, sep="\t");
#snouter.df <- read.table("alpha=-1beta1=-0.002beta.auto=1.5.txt", header=T, sep=" ");
#snouter.df <- read.table("alpha=-1beta1=-0.002beta.auto=1.5.g2.txt", header=T, sep=" ");
snouter.df <- read.table("alpha=-1beta1=-0.002beta.auto=1.5.g4.txt", header=T, sep=" ");
attach(snouter.df);
rain <- cov1; djungle <- cov2;
coords<-as.matrix(cbind(snouter.df$X,snouter.df$Y)); #Make a matrix of coordinates

nsims=10;
first=5;#15 #column of first dataset
cmat1=cmat2=matrix(0,ncol=4,nrow=nsims);
fm1=list();fm2=list();

wtype="one";
wstyle="B";
nbsize=1

for(k in 1:nsims){
ac <- autocov_dist(snouter.df[,first+k-1], coords, nbs = nbsize, style=wstyle, type = wtype);
fm1[[k]] <- glm(snouter.df[,first+k-1] ~ rain + djungle + ac,family=binomial, data=snouter.df);
cmat1[k,]=coefficients(fm1[[k]]);
}
#summary(fm1[[1]])
cmat1
colMeans(cmat1)

wstyle="W";

for(k in 1:nsims){
ac <- autocov_dist(snouter.df[,first+k-1], coords, nbs = nbsize, style=wstyle, type = wtype);
fm2[[k]] <- glm(snouter.df[,first+k-1] ~ rain + djungle + ac,family=binomial, data=snouter.df);
cmat2[k,]=coefficients(fm2[[k]]);
}
#summary(fm2[[1]])
cmat2
colMeans(cmat2)
```

Red deer estimation.R

(Requires 'deer table.txt' as input, generates 'red deer estimate ratios.txt' as output)

```
# Calculate relative percentage errors in covariate estimates due to invalid neighbourhoods.
# Loops over neighbourhood size and geographic subsets of red deer data.
# Author: David C. Bardos
require(lattice);require(spdep);
setwd('C:/deer'); #change as required
dat.df <- read.table("deer table.txt", header=T, sep="");
data.mat=unname(as.matrix(dat.df));
X=data.mat[,1]; Y=data.mat[,2];
maxX=max(X);minX=min(X);midX= minX+(maxX-minX)/2;
maxY=max(Y);minY=min(Y);midY= minY+(maxY-minY)/2;
len=length(X); #numberof data points
subsets=list();subsets[['F']]=1L:len; # full dataset
subsets[['E']]=subsets[['W']]=subsets[['N']]=subsets[['S']]=0L[-1]; #empty integer vectors
for(k in 1L:len){
  if(X[k]<midX) subsets[['W']]=append(subsets[['W']],k) else subsets[['E']]=append(subsets[['E']],k);
  if(Y[k]<midY) subsets[['S']]=append(subsets[['S']],k) else subsets[['N']]=append(subsets[['N']],k);
} #k loop

ncovs=5;covlist=c("east + ","north + ","alt2 + ","pine + ","mires + ");
nmodels=2^ncovs;abin=2^(ncovs-1);0;bbin=2*abin;
combins=matrix(0L,ncol=ncovs,nrow=2^ncovs);
for(i in 1:2^ncovs) combins[i,]=as.integer((i %% bbin)>=abin);

models=rep("ac",2^ncovs);
for(k in 1:nmodels) {
  for (j in ncovs:1) if(combins[k,j]==1L) models[k]=paste(covlist[j],models[k]);
  models[k]=paste("pa ~ ",models[k]);
} #k loop, model list
elist1=elist2=dlist=plist1=plist2=plistm=ratiolist=sgnlist=list();

results=list()
write("", "red deer estimate ratios.txt",append=F);

for (nbsize in c(1.5,2)){
  for (sset in c('F','E','W','N','S')) { dat.mat=data.mat[subsets[[sset]],];

  X=east=dat.mat[,1]; Y=north=dat.mat[,2]; alt=dat.mat[,3]; pine=dat.mat[,4]; mires=dat.mat[,5]; obs=dat.mat[,6];
  maxX=max(X);minX=min(X);maxY=max(Y);minY=min(Y);
  len=length(X); #numberof data points
  coords<-as.matrix(cbind(X,Y))
  pa=obs; alt2=alt^2;
  mat=matPA=list();

  for(m in 3:6){
    mat[[m]]=matPA[[m]]=matrix(0,nrow=maxX-minX+1,ncol=maxY-minY+1);
    for(k in 1:len){
      mat[[m]][X[k]-minX+1,Y[k]-minY+1]=dat.mat[k,m]; if(dat.mat[k,m]>0) matPA[[m]][X[k]-minX+1,Y[k]-minY+1]=1;
    } #k loop (map entries)
  } # m loop

  #levelplot(mat[[3]]); #alt
  #levelplot(matPA[[3]]);
  #levelplot(mat[[4]]); #pine
  #levelplot(matPA[[4]]);
  #levelplot(mat[[5]]); #mires
  #levelplot(matPA[[5]]);
  #levelplot(mat[[6]]); #pa

  wtype="one";
  #nbsize=1.5;

  for(k in 1:nmodels) {
    wstyle="B";
    ac <- autocov_dist(pa, coords, nbs = nbsize, style=wstyle, type = wtype);
    fmA <- glm(models[k],family=binomial);
    elist1[[k]]=coefficients(fmA);

    wstyle="W";
    ac <- autocov_dist(pa, coords, nbs = nbsize, style=wstyle, type = wtype);
    fmB <- glm(models[k],family=binomial);
```

```

elist2[[k]]=coefficients(fmB);

dlist[[k]]=(elist2[[k]]-elist1[[k]] ); # difference between incorrect and correct estimates
ratiolist[[k]]=elist2[[k]]/elist1[[k]];
sgnlist[[k]]=sign(ratiolist[[k]]);
plist1[[k]]=sgnlist[[k]]*abs((elist2[[k]]-elist1[[k]] )/elist1[[k]]); # proportional difference
plist2[[k]]=sgnlist[[k]]*abs((elist2[[k]]-elist1[[k]] )/elist2[[k]]); # proportional difference
plism[[k]]=sgnlist[[k]]*abs(elist2[[k]]-elist1[[k]] )/pmin( abs(elist1[[k]]), abs(elist2[[k]] ) ); # max proportional difference
} #k (models)

df0=data.frame(east=rep(0,nmodels),north=rep(0,nmodels),alt.squared=rep(0,nmodels),pine=rep(0,nmodels),mires=rep(0,nmodels))

ratio=em1=em2=dm=pc1=pc2=pcm=pm1=pm2=sgm=df0;sigfigs=3;
for(k in 1:nmodels) {count=1;
for (j in 1:ncovs) if(combins[k,j]==1L) {count=count+1;
ratio[k,j]=round(unname(100*ratiolist[[k]][count]));#invalid estimates as percentages of valid estimates
em1[k,j]=signif(unname(elist1[[k]][count]),sigfigs);#correct estimates
em2[k,j]=signif(unname(elist2[[k]][count]),sigfigs);#invalid estimates
dm[k,j]=signif(unname(dlist[[k]][count]),sigfigs);# error (difference)
pm1[k,j]=signif(unname(100*plist1[[k]][count]),sigfigs);# % error relative to correct estimate
pm2[k,j]=signif(unname(100*plist2[[k]][count]),sigfigs);# % error relative to invalid estimate
sgm[k,j]=unname(sgnlist[[k]][count]); # relative sign of the two estimates
pc1[k,j]=round(unname(100*plist1[[k]][count]));# rounded % error relative to correct estimate
pc2[k,j]=round(unname(100*plist2[[k]][count]));# rounded % error relative to invalid estimate
pcm[k,j]=round(unname(100*plism[[k]][count]));# rounded % error relative to smallest of the two estimates
} #k loop, model list
for(k in 1:nmodels) for (j in 1:ncovs) {if(combins[k,j]==0L) ratio[k,j]=em1[k,j]=em2[k,j]=dm[k,j]=pc1[k,j]=pc2[k,j]=pcm[k,j]=sgm[k,j]="";
} #k & j loops

results[[paste(sset,nbsize)]]=list(ratio,em1,em2,dm,pm1,pm2,pc1,pc2,pcm);
if(sset=="F") {
write("#####\n","red deer estimate ratios.txt",append=T);
write(paste("Invalid estimates as percentages of valid estimates: radius=",nbsize),"red deer estimate ratios.txt",append=T);
write("\n\n Full red deer dataset\n","red deer estimate ratios.txt",append=T);
}
else {write(paste(sset,"half of red deer dataset: \n\n"),"red deer estimate ratios.txt",append=T);};
write("model# east north alt.sq pine mires","red deer estimate ratios.txt",append=T);
write.table(cbind(1:nmodels,ratio)[1:(nmodels-1),],"red deer estimate ratios.txt",append=T,row.names=F,col.names=F,quote=F,sep="\t");
write("\n\n","red deer estimate ratios.txt",append=T);
} #sset (subsets)
} #nbsize

results[["F 1.5"]][[8]]

```

deer table.txt

"east"	"north"	"alt"	"pine"	"mires"	"obs"
346	798	220.44	0	0	0
347	798	217.08	0	0	0
350	798	162.6	0	0	0
340	797	316.8	34	0	0
341	797	213.36	0	0	0
344	797	287.52	0	0	0
345	797	332.7	78	0	0
346	797	314.22	61	0	0
347	797	215.58	0	0	0
348	797	199.38	0	0	0
349	797	215.58	0	0	0
351	797	298.2	0	0	0
352	797	258.42	0	0	0
353	797	175.56	0	0	0
354	797	158.34	0	0	0
355	797	173.1	0	0	0
338	796	421.56	0	0	0
339	796	457.32	0	0	1
340	796	357.12	0	0	1
341	796	273.6	0	0	0
342	796	285.54	0	0	0
343	796	335.7	0	0	0
344	796	414	0	0	0
345	796	356.88	11	0	0
346	796	319.02	91	0	0
347	796	220.68	31	0	0
348	796	213.18	0	0	0

349	796	301.74	0	0	0
350	796	299.22	0	0	0
351	796	328.68	0	0	0
353	796	212.28	0	0	0
354	796	230.34	0	0	0
329	795	402.12	78	0	1
332	795	360.36	56	0	1
333	795	339.48	111	0	0
337	795	344.16	0	0	0
338	795	500.04	0	0	1
339	795	510.12	0	0	0
340	795	409.68	0	0	0
341	795	392.1	0	0	0
342	795	445.8	0	0	0
343	795	461.76	0	0	0
344	795	364.62	2	0	0
345	795	284.52	74	0	0
346	795	234.42	24	0	0
347	795	213.78	9	0	0
348	795	300.54	1	0	0
349	795	385.56	89	0	0
350	795	397.26	0	0	0
351	795	370.2	0	0	0
352	795	361.74	0	0	0
353	795	295.56	0	0	0
329	794	418.74	17	0	1
330	794	458.16	0	0	0
331	794	352.56	0	0	1
332	794	367.68	0	0	1
333	794	356.76	0	0	0
336	794	350.7	0	0	0
337	794	460.92	0	0	0
338	794	540.54	0	0	0
339	794	517.26	0	0	0
340	794	492.48	0	0	0
341	794	495.48	0	0	0
342	794	446.46	0	0	0
343	794	350.94	147	0	0
344	794	308.04	267	0	0
345	794	351.9	95	0	0
346	794	254.4	11	0	0
347	794	288.3	0	0	0
348	794	348.96	34	0	0
349	794	436.32	53	0	0
350	794	436.32	0	0	0
351	794	424.2	28	0	0
352	794	421.32	0	0	0
353	794	287.34	0	0	0
356	794	226.8	0	0	0
326	793	450.24	0	0	0
327	793	411.18	0	0	1
330	793	413.52	0	0	1
331	793	337.2	0	0	1
332	793	452.34	0	0	0
335	793	306.36	0	0	0
336	793	398.94	0	0	0
337	793	536.34	0	0	1
338	793	550.92	0	0	0
339	793	552.12	0	0	0
340	793	520.14	0	0	0
341	793	475.98	0	0	0
342	793	380.1	3	0	0
343	793	335.94	293	0	0
344	793	421.98	175	0	0
345	793	398.16	167	0	0
346	793	298.32	298	0	0
347	793	294.9	168	0	0
348	793	315.78	16	0	0
349	793	372.3	5	0	0
350	793	435.24	0	0	0
351	793	416.94	0	0	0
352	793	402.66	0	0	0
353	793	317.64	0	0	0
354	793	325.8	0	0	1
355	793	349.14	0	0	1

356	793	311.58	0	0	1
315	792	382.44	0	0	0
322	792	358.5	286	0	0
324	792	397.86	0	0	1
325	792	419.4	0	0	0
326	792	533.64	0	0	0
327	792	482.88	0	0	0
328	792	424.08	0	0	0
329	792	367.62	0	0	1
330	792	347.16	0	0	1
331	792	375.9	0	0	0
332	792	491.7	0	0	0
335	792	351.48	0	0	0
336	792	444.42	0	0	1
337	792	575.76	0	0	1
338	792	597.06	0	0	0
339	792	582.96	0	0	0
340	792	467.22	0	0	0
341	792	368.58	0	0	0
342	792	401.94	0	0	0
343	792	455.34	6	0	1
344	792	521.82	0	0	0
345	792	388.02	57	0	0
346	792	381.3	96	0	0
347	792	385.56	322	0	0
348	792	373.5	173	0	0
349	792	476.22	70	0	0
350	792	479.82	0	0	0
351	792	388.86	0	0	0
352	792	349.08	0	0	0
353	792	332.46	0	0	0
354	792	310.92	0	0	0
355	792	279.54	0	0	0
356	792	286.8	0	0	0
360	792	124.38	0	0	0
361	792	114.66	0	0	0
362	792	102.54	0	0	0
363	792	100.2	0	0	0
315	791	389.64	0	0	0
316	791	562.74	0	0	1
317	791	524.88	42	0	0
321	791	447.54	378	0	1
322	791	478.68	188	0	1
323	791	444.72	70	0	1
324	791	440.4	0	0	0
325	791	434.1	0	19	0
326	791	502.14	0	0	0
327	791	479.7	0	0	0
328	791	399.72	0	0	0
329	791	382.86	0	0	1
330	791	374.22	0	0	0
331	791	417.84	0	0	0
332	791	424.38	0	0	1
335	791	415.62	0	0	0
336	791	557.7	0	0	1
337	791	651.54	0	0	0
338	791	633.06	0	0	0
339	791	606.96	0	0	0
340	791	478.5	0	0	0
341	791	437.46	0	0	0
342	791	556.32	0	0	0
343	791	555.84	0	0	1
344	791	489.6	0	0	0
345	791	419.82	108	0	0
346	791	467.88	6	0	1
347	791	451.14	98	0	0
348	791	464.52	105	0	0
349	791	510.9	0	0	0
350	791	408.24	0	0	0
351	791	299.46	0	0	0
352	791	254.34	0	0	0
353	791	253.32	0	0	0
354	791	261.66	0	0	0
355	791	246.9	0	0	0
356	791	226.8	0	0	0

359	791	218.4	0	0	0
360	791	177.72	0	0	0
362	791	144.42	0	0	0
363	791	138.9	0	0	0
315	790	401.16	0	0	1
316	790	596.34	0	0	1
317	790	638.46	0	0	1
319	790	392.22	362	0	1
320	790	433.32	400	0	1
321	790	541.32	266	0	1
322	790	585.72	2	68	0
323	790	558.12	0	21	1
324	790	511.86	0	0	0
325	790	469.26	0	95	0
326	790	506.22	0	124	0
327	790	494.28	0	0	0
328	790	424.44	0	0	0
329	790	444.24	0	0	0
330	790	412.26	0	0	1
331	790	464.58	0	0	1
332	790	387.6	0	0	0
335	790	475.92	0	0	0
336	790	617.7	0	0	0
337	790	616.2	0	0	0
338	790	541.86	0	0	0
339	790	510.96	0	0	0
340	790	428.28	0	0	0
341	790	476.76	0	0	0
342	790	565.8	0	0	0
343	790	515.58	0	0	0
344	790	479.04	0	0	0
345	790	546.9	0	0	0
346	790	580.86	0	0	0
347	790	451.98	0	0	0
348	790	514.68	0	0	1
349	790	526.5	0	0	0
350	790	432.66	0	0	0
351	790	317.7	0	0	0
352	790	310.44	0	0	0
353	790	377.64	0	0	0
354	790	379.32	0	14	0
355	790	429.9	0	20	0
356	790	365.04	0	60	0
357	790	432.06	0	0	0
358	790	432.36	0	0	0
359	790	356.4	0	76	0
360	790	225	0	0	0
315	789	399.6	0	0	0
316	789	550.74	0	0	0
317	789	701.88	0	0	0
318	789	579.06	141	0	1
319	789	522	193	44	0
320	789	542.7	182	106	0
321	789	633.6	47	120	1
322	789	754.26	0	119	0
323	789	724.68	0	95	1
324	789	694.32	0	3	0
325	789	555.48	0	197	0
326	789	537.9	0	372	0
327	789	570.06	0	40	0
328	789	528.6	0	0	0
329	789	464.04	0	0	0
330	789	455.46	0	0	0
331	789	413.4	0	0	1
333	789	454.32	0	0	0
334	789	489.66	0	0	0
335	789	552.9	0	0	0
336	789	664.38	0	0	0
337	789	599.34	0	0	0
338	789	560.04	0	0	0
339	789	565.26	0	0	0
340	789	531.42	0	0	0
341	789	621.9	0	0	0
342	789	716.58	0	0	0
343	789	573	0	0	0

344	789	614.16	0	0	0
345	789	670.56	0	0	0
346	789	649.68	0	0	0
347	789	541.26	0	0	0
348	789	575.46	0	0	0
349	789	648.48	0	0	0
350	789	520.98	0	0	0
351	789	355.32	0	0	0
352	789	424.02	0	0	0
353	789	535.08	0	40	0
354	789	511.38	0	259	0
355	789	526.86	0	222	0
356	789	499.38	0	295	0
357	789	534.54	0	13	0
358	789	402.42	0	2	0
359	789	300.72	0	46	0
360	789	322.68	0	0	0
361	789	311.28	0	0	0
362	789	244.44	0	0	0
363	789	290.34	0	0	0
364	789	188.04	0	0	0
315	788	454.56	0	0	0
316	788	504	0	0	1
317	788	673.14	0	0	0
318	788	589.74	20	0	1
319	788	630.6	0	172	0
320	788	605.88	0	254	1
321	788	666.06	0	147	1
322	788	804.36	0	25	0
323	788	818.94	0	36	0
324	788	823.56	0	4	0
325	788	670.32	0	24	0
326	788	591.12	0	356	0
327	788	703.2	0	142	0
328	788	735.6	0	0	0
329	788	507.66	0	0	0
330	788	436.68	0	0	1
331	788	408.12	0	0	1
332	788	472.44	0	0	0
333	788	566.76	0	0	0
334	788	623.82	0	0	0
335	788	621.18	0	0	0
336	788	650.7	0	0	1
337	788	642.12	0	0	0
338	788	650.1	0	0	0
339	788	696.06	0	0	0
340	788	722.76	0	0	0
341	788	723.72	0	0	0
342	788	810.24	0	0	0
343	788	696.78	0	0	0
344	788	711.96	0	0	0
347	788	629.7	0	0	0
348	788	669.24	0	0	0
349	788	692.58	0	1	0
350	788	534.84	0	111	0
351	788	390.12	0	1	0
352	788	516.96	0	0	0
353	788	563.1	0	78	0
354	788	505.14	0	384	0
355	788	477.36	0	269	0
356	788	427.5	0	219	0
357	788	398.04	0	143	0
358	788	392.82	0	291	0
359	788	438.3	0	160	0
360	788	448.32	0	132	0
361	788	380.7	0	0	0
362	788	395.46	0	0	0
363	788	351.84	0	0	0
315	787	539.58	0	0	1
316	787	499.02	0	0	0
317	787	689.1	0	91	0
318	787	710.4	0	0	0
319	787	702.48	0	305	0
320	787	683.04	0	275	0
321	787	741.96	0	117	0

322	787	799.98	0	112	0
323	787	905.58	0	8	0
324	787	891.72	0	0	0
325	787	781.2	0	0	0
326	787	686.58	0	160	0
327	787	742.74	0	137	0
328	787	707.28	0	0	0
329	787	501.42	0	0	0
330	787	410.22	0	0	0
331	787	424.38	0	0	0
332	787	501.6	0	0	1
333	787	624.6	0	0	0
334	787	642.36	0	0	1
335	787	636.36	0	0	1
336	787	645	0	0	0
337	787	636.72	0	0	0
338	787	711.18	0	0	0
339	787	728.28	0	0	0
340	787	803.94	0	0	0
341	787	781.92	0	0	0
342	787	798.42	0	0	0
349	787	664.08	0	0	0
350	787	567.06	0	43	0
351	787	543.84	0	58	0
352	787	525.36	0	214	0
353	787	521.04	0	274	0
354	787	486.66	0	224	0
355	787	495.96	0	281	0
356	787	430.32	0	391	0
357	787	491.22	0	296	0
358	787	530.22	0	378	0
359	787	518.64	0	394	0
360	787	514.92	0	400	0
361	787	480.9	0	62	0
362	787	345.72	0	0	0
363	787	229.74	0	0	0
364	787	193.8	0	0	0
315	786	629.4	0	0	1
316	786	510	0	0	0
317	786	627	0	56	0
318	786	742.74	0	105	0
319	786	723.96	0	336	0
320	786	802.02	0	18	0
321	786	917.82	0	0	0
322	786	915.6	0	0	0
323	786	955.74	0	0	0
324	786	1022.28	0	0	0
325	786	941.28	0	0	0
326	786	803.22	0	0	0
327	786	673.44	0	0	0
328	786	576.12	0	0	0
329	786	456.42	0	0	1
330	786	400.98	0	0	0
331	786	480.96	0	0	1
332	786	541.14	0	0	0
333	786	655.74	0	0	0
334	786	689.64	0	0	0
350	786	594.18	0	9	0
351	786	608.04	0	20	0
352	786	566.4	0	84	0
353	786	515.1	0	160	0
354	786	537.24	0	289	0
355	786	571.98	0	134	0
356	786	520.38	0	320	0
357	786	534.42	0	178	0
358	786	541.08	0	359	0
359	786	542.28	0	400	0
360	786	508.86	0	396	0
361	786	414.36	0	183	0
362	786	332.22	0	0	1
363	786	239.1	0	0	0
364	786	205.26	0	0	0
314	785	474.42	0	0	1
315	785	713.16	0	0	0
316	785	601.68	0	0	1

317	785	552	0	8	0
318	785	644.7	0	63	0
319	785	754.92	0	112	0
320	785	953.82	0	0	0
321	785	971.58	0	0	0
322	785	1044.3	0	0	0
323	785	1022.22	0	0	0
324	785	994.38	0	0	0
325	785	943.02	0	0	0
326	785	839.64	0	0	0
327	785	694.92	0	0	0
328	785	647.4	0	0	0
329	785	441.78	0	0	0
330	785	444.24	0	0	0
331	785	566.52	0	0	0
332	785	614.82	0	0	0
333	785	669.54	0	0	0
354	785	678	0	37	0
355	785	654.12	0	197	0
356	785	557.88	0	353	0
357	785	453.84	0	185	0
358	785	411.9	0	28	0
359	785	419.7	0	108	0
360	785	418.68	0	336	0
361	785	394.8	0	208	0
362	785	311.52	0	0	0
363	785	271.62	0	0	1
364	785	227.1	0	0	0
314	784	561.12	0	0	0
315	784	662.04	0	18	1
316	784	662.64	0	171	0
317	784	604.2	0	124	1
318	784	556.38	0	39	0
319	784	700.26	0	23	0
320	784	917.52	0	12	0
321	784	919.98	0	0	0
322	784	884.16	0	0	0
323	784	906.06	0	0	0
324	784	901.32	0	0	0
325	784	845.46	0	0	0
326	784	753.36	0	0	0
327	784	672.3	0	0	0
328	784	526.26	0	0	0
329	784	406.92	0	0	1
330	784	543.3	0	0	1
331	784	618	0	0	1
332	784	624.96	0	0	0
355	784	590.64	0	243	0
356	784	475.14	0	324	0
357	784	386.1	0	20	0
358	784	348.78	0	12	0
359	784	340.02	0	22	0
360	784	374.4	0	194	0
361	784	306.12	0	73	1
362	784	274.86	0	0	1
363	784	264.48	0	78	1
364	784	267.18	0	4	0
314	783	613.44	0	0	0
315	783	714.84	0	19	1
316	783	705.48	0	258	0
317	783	733.92	0	350	1
318	783	695.22	0	77	0
319	783	658.92	0	18	0
320	783	875.52	0	79	0
321	783	955.26	0	0	0
322	783	910.26	0	0	0
323	783	729.06	0	0	0
324	783	695.1	0	0	0
325	783	631.08	0	0	0
326	783	562.2	0	0	0
327	783	446.7	0	0	0
328	783	419.94	0	0	1
329	783	558.42	0	0	0
330	783	664.56	0	0	1
331	783	647.94	0	0	0

332	783	648.36	0	0	0
356	783	408.48	0	303	0
357	783	368.46	0	59	0
358	783	393.48	0	96	0
359	783	361.68	0	203	0
360	783	299.52	0	30	1
361	783	302.52	0	0	0
362	783	400.14	0	5	1
363	783	388.98	0	395	0
364	783	357.84	0	92	0
314	782	605.58	0	0	0
315	782	769.02	0	0	0
316	782	770.58	0	44	0
317	782	854.1	0	273	0
318	782	825.9	0	65	0
319	782	664.68	0	33	0
320	782	744.9	0	1	0
321	782	920.22	0	0	0
322	782	921.96	0	0	0
323	782	907.08	0	0	0
324	782	806.76	0	0	0
325	782	671.4	0	0	0
326	782	605.58	0	0	1
327	782	576.9	0	0	1
328	782	605.7	0	0	0
329	782	633.42	0	0	0
330	782	678.3	0	0	0
331	782	667.14	0	0	0
332	782	719.16	0	0	0
356	782	439.02	0	148	0
357	782	435.06	0	313	0
358	782	429.36	0	383	0
359	782	353.52	0	161	0
360	782	346.98	0	0	1
361	782	332.4	0	3	0
362	782	420.84	0	148	0
363	782	430.5	0	400	0
364	782	396.24	0	338	0
314	781	602.34	0	4	0
315	781	633.96	0	0	1
316	781	732.66	0	0	0
317	781	955.26	0	0	0
318	781	908.46	0	0	0
319	781	877.86	0	234	0
320	781	763.98	0	83	0
321	781	863.04	0	0	0
325	781	683.94	0	0	0
326	781	707.7	0	0	0
327	781	652.2	0	0	1
328	781	651.24	0	0	0
329	781	672.96	0	0	0
330	781	708.06	0	0	0
331	781	693.78	0	0	0
357	781	410.82	0	10	0
358	781	441.18	0	279	0
359	781	405.6	0	360	0
360	781	383.04	0	150	0
361	781	354.96	0	280	0
362	781	409.56	0	400	0
363	781	448.68	0	348	0
364	781	408.54	0	212	0
314	780	608.7	0	0	0
315	780	615.42	0	0	0
316	780	700.92	0	0	0
317	780	855.78	0	0	0
318	780	1006.26	0	0	0
319	780	945.42	0	19	0
320	780	882.96	0	10	0
321	780	856.68	0	0	0
327	780	484.92	0	0	0
328	780	614.22	0	0	0
329	780	679.26	0	0	0
330	780	742.14	0	0	0
331	780	704.52	0	0	0
358	780	455.88	0	131	0

359	780	434.34	0	400	0
360	780	386.1	0	400	0
361	780	456.3	0	400	0
362	780	462.12	0	230	0
363	780	419.52	0	12	0
364	780	346.74	0	0	0
315	779	717.84	0	0	0
316	779	804	0	0	0
317	779	879.6	0	0	0
318	779	984.96	0	0	0
331	779	757.62	0	0	0
332	779	754.32	0	0	0
359	779	475.02	0	373	0
360	779	465.54	0	386	0
361	779	483.66	0	285	0
362	779	378.78	0	3	0
363	779	317.34	0	0	0
364	779	287.58	0	0	0
365	779	233.16	0	0	0
314	778	723.84	0	0	0
315	778	820.26	0	0	0
316	778	910.26	0	0	0
317	778	894.54	0	0	0
359	778	455.82	0	50	0
360	778	454.86	0	77	0
361	778	402.42	0	34	0
362	778	311.88	0	0	0
363	778	279.54	0	0	0
364	778	230.94	0	0	1
365	778	204.48	0	0	0
366	778	150.42	0	0	0
316	777	1012.38	0	0	0
359	777	315.12	0	0	0
360	777	328.98	0	0	1
361	777	299.52	0	0	1
362	777	243	0	0	1
363	777	223.86	0	0	0
364	777	168.6	0	0	1
365	777	151.98	0	0	0
366	777	130.38	0	0	0
360	776	291.06	0	0	0
361	776	240.9	0	0	0
362	776	182.1	0	0	1
363	776	144.36	0	0	0
364	776	122.7	0	0	0
365	776	115.32	0	0	0
360	775	223.62	0	0	1
361	775	172.2	0	0	1
362	775	133.56	0	0	0
363	775	108.18	0	0	0
364	775	93.84	0	0	0
365	775	86.46	0	0	0
360	774	143.64	0	0	0
361	774	115.38	0	0	0
362	774	108.12	0	0	0
363	774	103.14	0	0	0
364	774	84.06	0	0	0
365	774	73.08	0	0	0
359	773	100.02	0	0	0
360	773	100.86	0	0	0
361	773	103.98	0	0	0
362	773	85.44	0	0	0
359	772	91.26	0	0	0
360	772	85.86	0	0	0
361	772	80.58	0	0	0
362	772	66.96	0	0	0
364	772	60.78	0	0	0
360	771	64.26	0	0	0
361	771	67.98	0	0	0
350	797	242.46	0	0	0
356	797	175.08	0	0	0
352	796	298.38	0	0	0
355	796	244.44	0	0	0
356	796	188.88	0	0	0
355	795	259.26	0	0	0

361	791	177.36	0	0	0
362	790	175.38	0	0	0
363	790	160.02	0	0	0
366	776	96.36	0	0	0
363	773	68.46	0	0	0
364	773	64.26	0	0	0
363	772	58.86	0	0	0
321	812	587.04	0	0	0
323	812	699.54	0	0	0
324	812	554.1	0	0	0
320	811	548.46	0	0	0
321	811	523.98	0	0	0
322	811	546.42	0	0	0
323	811	639.42	0	0	0
324	811	514.92	0	0	0
319	810	468.36	0	0	0
320	810	489.66	0	0	0
321	810	498.96	0	0	0
322	810	466.44	0	0	0
323	810	457.2	0	0	1
324	810	451.14	0	12	0
318	809	485.34	0	0	0
319	809	495.12	0	0	0
320	809	485.64	0	0	0
321	809	458.22	0	0	0
322	809	466.02	0	0	0
323	809	512.7	0	0	0
324	809	490.2	0	0	0
325	809	450.9	0	0	0
319	808	582.12	0	0	0
320	808	628.62	0	58	0
321	808	526.56	0	0	0
322	808	524.34	0	0	0
323	808	629.4	0	47	0
324	808	588.12	0	0	0
325	808	472.5	0	0	0
319	807	650.22	0	0	0
320	807	622.74	0	9	0
321	807	572.58	0	0	0
322	807	618.42	0	0	0
323	807	647.34	0	0	0
324	807	600.48	0	0	1
325	807	506.7	0	0	0
326	807	563.22	0	0	0
327	807	530.82	0	0	0
328	807	449.94	0	0	0
319	806	672.66	0	0	0
320	806	705.84	0	0	0
321	806	670.38	0	0	0
322	806	678.78	0	0	1
323	806	730.44	0	0	0
324	806	657.54	0	0	0
325	806	593.1	0	0	0
326	806	639.42	0	0	0
327	806	628.26	0	0	0
328	806	566.04	0	0	0
329	806	501.66	0	0	0
320	805	710.52	0	0	0
321	805	793.86	0	0	0
322	805	798.48	0	0	1
323	805	750	0	0	0
324	805	650.7	0	0	0
325	805	587.58	0	0	0
326	805	604.56	0	0	1
327	805	624.36	0	0	0
328	805	623.16	0	22	0
329	805	624.24	0	40	0
320	804	619.08	0	0	0
321	804	681.9	0	0	0
322	804	679.86	0	0	0
323	804	581.82	0	0	0
324	804	519	0	0	0
325	804	506.82	0	82	0
326	804	497.28	0	77	0
327	804	499.08	0	120	0

328	804	578.1	0	124	0
329	804	632.28	0	1	0
330	804	516.18	0	0	0
319	803	490.08	0	0	1
320	803	504.3	0	0	0
321	803	509.4	0	0	0
322	803	501.66	0	0	1
323	803	502.2	0	0	0
324	803	487.68	0	0	0
325	803	454.02	0	81	0
326	803	426.96	0	7	0
327	803	455.34	0	37	0
328	803	579.24	0	0	0
329	803	488.82	0	62	0
330	803	478.26	0	0	0
317	802	618.6	0	0	0
318	802	528.12	0	0	0
319	802	545.16	0	0	0
320	802	485.7	0	0	0
321	802	492.18	0	0	1
322	802	492.84	0	0	0
323	802	460.26	0	22	1
324	802	443.46	0	0	1
325	802	411.9	0	23	0
326	802	403.62	0	67	0
327	802	402.78	0	0	0
328	802	455.22	0	0	0
329	802	414.06	0	42	0
330	802	392.58	0	0	0
313	801	999.9	0	0	0
314	801	901.68	0	0	0
315	801	762.48	0	0	0
316	801	633.12	0	0	0
317	801	547.86	0	0	0
318	801	612.66	0	0	0
319	801	653.04	0	0	0
320	801	578.22	0	0	0
321	801	578.28	0	0	0
322	801	584.22	0	119	0
323	801	473.52	0	223	0
324	801	452.76	0	0	0
325	801	453.72	0	0	0
326	801	429.42	0	0	0
327	801	398.88	0	0	0
328	801	377.82	0	46	0
329	801	405.36	0	4	0
297	800	845.58	0	155	0
298	800	1195.02	0	0	0
302	800	800.22	0	0	0
303	800	737.16	0	30	0
304	800	825.36	0	238	0
306	800	824.94	0	317	0
307	800	886.44	0	47	0
309	800	1005.72	0	0	0
310	800	911.4	0	0	0
311	800	882.3	0	0	0
312	800	1039.98	0	0	0
313	800	928.56	0	0	0
314	800	722.16	0	3	0
315	800	582.72	0	142	0
316	800	565.56	0	208	0
317	800	569.88	0	345	0
318	800	690.3	0	222	0
319	800	774.12	0	158	0
320	800	643.02	0	129	0
321	800	612.3	0	6	0
322	800	627.48	0	3	0
323	800	550.26	0	67	0
324	800	522	0	0	0
325	800	478.08	0	13	0
326	800	409.86	0	38	1
327	800	424.08	0	0	0
328	800	455.7	0	0	0
329	800	569.1	0	0	0
294	799	1097.64	0	0	0

295	799	896.7	0	0	0
296	799	757.62	0	31	0
297	799	674.7	0	231	0
298	799	1033.98	0	0	0
300	799	983.52	0	0	0
301	799	1063.8	0	0	0
302	799	808.26	0	0	0
303	799	606.42	0	30	0
304	799	848.88	0	223	0
305	799	836.1	0	47	0
306	799	768.78	0	114	0
307	799	894.78	0	11	0
308	799	1060.62	0	0	0
309	799	1087.26	0	0	0
310	799	832.14	0	69	0
311	799	772.32	0	142	0
312	799	918	0	0	0
313	799	858.12	0	0	0
314	799	638.7	0	74	0
315	799	748.32	0	9	0
316	799	710.22	0	45	0
317	799	658.56	0	148	0
318	799	698.76	0	113	0
319	799	782.16	0	0	0
320	799	679.14	0	35	0
321	799	619.92	0	235	0
322	799	584.76	0	6	1
323	799	544.02	0	230	0
324	799	481.32	0	100	1
325	799	443.76	0	72	0
326	799	473.58	0	14	0
327	799	505.44	0	0	0
294	798	1053.48	0	0	0
295	798	1120.2	0	0	0
296	798	1035.3	0	0	0
297	798	674.28	0	177	0
298	798	741.36	0	15	0
299	798	926.34	0	0	0
300	798	865.26	0	95	0
301	798	949.2	0	0	0
302	798	839.46	0	0	0
303	798	587.76	4	19	1
304	798	803.28	0	8	0
305	798	865.26	0	12	0
306	798	652.38	0	0	0
307	798	794.28	0	0	0
308	798	984	0	0	0
309	798	971.1	0	0	0
310	798	729.72	0	117	0
311	798	642.96	0	280	0
312	798	752.52	0	27	0
313	798	667.2	0	185	0
314	798	658.26	0	136	0
315	798	759.06	0	0	0
316	798	797.16	0	0	0
317	798	682.56	0	23	1
318	798	592.98	0	380	1
319	798	588	0	149	0
320	798	636	0	175	0
321	798	674.4	0	39	0
322	798	591.84	0	61	0
323	798	526.14	0	0	0
324	798	466.68	0	53	0
325	798	417.78	0	40	0
326	798	484.38	0	0	0
294	797	984.96	0	0	0
295	797	1070.16	0	0	0
296	797	1092.6	0	0	0
297	797	742.86	0	42	0
298	797	688.38	0	153	0
299	797	797.1	0	55	0
300	797	771.18	0	132	0
301	797	805.92	0	66	0
302	797	809.4	0	0	0
303	797	560.58	63	91	0

304	797	662.28	18	0	0
305	797	792.72	0	0	0
306	797	649.32	20	0	0
307	797	670.98	2	0	1
308	797	743.1	0	0	1
309	797	772.74	0	56	0
310	797	635.46	0	199	0
311	797	608.76	0	267	0
312	797	693.96	0	136	0
313	797	646.32	0	73	0
314	797	631.2	0	14	0
315	797	640.08	0	0	0
316	797	722.88	0	0	0
317	797	587.46	0	19	0
318	797	544.02	0	137	0
319	797	525.84	0	32	0
320	797	603.72	0	0	0
321	797	592.86	0	0	0
322	797	559.44	0	0	0
323	797	483.54	0	0	1
324	797	450.84	0	0	0
325	797	393.54	0	0	0
294	796	837.48	0	52	0
295	796	933.48	0	0	0
296	796	951.06	0	0	0
297	796	738.96	0	0	0
298	796	626.88	0	196	0
299	796	871.68	0	10	0
300	796	687.06	0	191	0
301	796	694.2	0	214	0
302	796	785.16	0	71	0
303	796	562.38	34	101	0
304	796	554.76	222	116	0
305	796	663.36	0	110	0
306	796	566.4	52	0	0
307	796	523.92	204	0	1
308	796	529.98	135	0	0
309	796	551.22	244	16	0
310	796	575.34	207	3	0
311	796	603.9	0	118	0
312	796	650.76	0	74	0
313	796	623.64	0	108	0
314	796	594	0	0	1
315	796	622.5	0	0	0
316	796	639	0	0	0
317	796	578.58	45	0	0
318	796	448.92	13	0	0
319	796	432.48	0	0	1
320	796	455.04	0	43	0
321	796	480.06	0	144	0
322	796	494.52	0	0	1
323	796	397.08	0	0	0
324	796	360.96	10	0	0
325	796	324.18	0	0	0
294	795	827.7	0	0	0
295	795	692.34	0	43	0
296	795	709.98	0	80	0
297	795	629.94	0	134	0
298	795	591.36	0	292	0
299	795	831.84	0	4	0
300	795	704.34	0	0	0
301	795	638.4	0	107	0
302	795	657.84	0	0	0
303	795	580.8	60	0	0
304	795	522.36	253	29	0
305	795	687	0	146	0
306	795	680.58	0	62	0
307	795	503.4	8	9	1
308	795	478.86	212	0	1
309	795	578.1	53	0	0
310	795	648.42	2	0	0
311	795	680.46	0	35	0
312	795	628.62	0	8	0
313	795	496.38	0	0	0
314	795	473.22	0	0	0

315	795	505.86	3	0	0
316	795	543.48	47	0	1
317	795	497.34	0	0	0
318	795	536.88	13	0	0
319	795	506.04	58	0	0
320	795	392.4	13	65	0
321	795	377.58	0	0	0
322	795	403.74	0	0	0
323	795	373.44	0	0	0
324	795	300.36	0	0	0
294	794	907.98	0	0	0
295	794	721.98	0	0	0
296	794	779.22	0	0	0
297	794	662.28	0	21	0
298	794	551.28	0	339	0
299	794	580.02	0	338	0
300	794	572.16	0	289	0
301	794	516.42	17	316	0
302	794	475.5	112	96	0
303	794	464.52	198	0	0
304	794	489.3	165	0	0
305	794	595.14	0	110	0
306	794	591.42	0	147	1
307	794	484.14	1	0	0
308	794	484.92	76	0	0
309	794	553.2	0	0	0
310	794	576.54	0	0	0
311	794	643.2	0	0	0
312	794	743.82	0	0	0
313	794	634.74	0	0	1
314	794	527.82	31	0	0
315	794	395.82	0	0	0
316	794	405	11	0	0
317	794	435.54	12	0	0
318	794	519.54	23	0	1
319	794	443.28	0	0	1
320	794	372.3	2	0	0
321	794	369	0	0	0
322	794	309.36	6	0	0
323	794	302.34	169	0	0
294	793	970.68	0	0	0
295	793	1055.34	0	0	0
296	793	1021.56	0	0	0
297	793	833.7	0	0	0
298	793	552.9	0	153	0
299	793	647.88	0	151	0
300	793	605.52	0	400	0
301	793	580.5	0	302	0
302	793	594.12	0	219	0
303	793	620.88	15	0	0
304	793	485.04	0	0	1
305	793	486	0	0	0
306	793	539.82	8	17	1
307	793	539.28	0	0	0
308	793	455.28	216	0	0
309	793	446.46	173	0	0
310	793	454.26	14	0	0
311	793	530.76	0	0	1
312	793	562.44	14	0	0
313	793	503.46	2	0	0
314	793	414	30	0	0
315	793	344.88	0	0	1
316	793	346.5	0	0	1
317	793	387.6	5	0	1
318	793	480.06	70	0	1
319	793	361.68	0	0	1
320	793	391.44	0	0	0
321	793	348.72	117	0	0
322	793	324.72	339	0	0
294	792	895.2	0	0	0
295	792	995.1	0	0	0
296	792	938.46	0	0	0
297	792	748.2	0	0	0
298	792	550.2	0	141	0
299	792	624.24	0	116	0

300	792	709.14	0	41	0
301	792	697.98	0	0	0
302	792	669.36	0	0	0
303	792	671.52	0	0	0
304	792	583.44	0	0	0
305	792	478.86	2	0	0
306	792	469.08	221	0	1
307	792	545.76	201	0	1
308	792	561	22	0	1
309	792	533.16	31	0	0
310	792	465.42	132	0	0
311	792	392.1	50	0	1
312	792	367.5	19	0	1
313	792	347.52	0	0	1
314	792	346.08	0	0	0
316	792	425.82	47	0	0
317	792	376.98	10	0	1
318	792	365.28	0	0	0
319	792	390.84	0	0	0
320	792	435.3	18	0	0
321	792	346.44	280	0	0
294	791	756.36	0	90	0
295	791	807.06	0	71	0
296	791	852.6	0	11	0
297	791	709.74	0	0	0
298	791	595.74	0	26	0
299	791	562.38	0	33	0
300	791	637.98	0	0	0
301	791	620.1	0	0	0
302	791	603.12	0	0	0
303	791	590.34	0	0	1
304	791	589.14	0	0	0
305	791	479.4	72	0	0
306	791	403.38	200	0	0
307	791	441.84	103	0	1
308	791	503.58	138	0	0
309	791	521.58	59	0	0
310	791	481.08	24	0	1
311	791	358.38	2	0	0
312	791	387.42	0	0	0
313	791	407.82	0	14	0
314	791	389.34	0	0	0
318	791	376.38	105	0	0
319	791	328.32	240	0	0
320	791	342.72	369	0	0
294	790	678.24	0	324	0
295	790	628.2	0	370	0
296	790	649.98	0	195	0
297	790	617.64	0	327	0
298	790	578.46	0	257	0
299	790	497.04	0	5	0
300	790	499.62	0	0	0
301	790	533.76	0	0	0
302	790	480.48	0	0	0
303	790	446.34	0	0	0
304	790	426	32	0	0
305	790	413.16	85	0	1
306	790	405.72	0	0	0
307	790	372.54	13	0	0
308	790	355.08	9	0	1
310	790	381.66	0	0	1
311	790	397.44	0	0	1
312	790	537.54	48	0	0
313	790	644.7	22	0	1
314	790	511.26	0	0	1
293	789	638.28	0	354	1
294	789	611.46	0	400	0
295	789	593.46	0	400	1
296	789	586.44	0	398	0
297	789	588.9	0	400	0
298	789	573.3	0	385	0
299	789	567.48	0	188	0
300	789	465.42	0	0	0
301	789	440.04	0	0	0
302	789	433.8	0	2	0

303	789	489.18	0	17	0
304	789	505.14	0	40	0
305	789	561.24	0	40	0
306	789	573.3	0	43	1
307	789	518.4	0	44	0
308	789	400.68	0	0	1
309	789	550.44	0	0	0
310	789	492.24	0	0	0
311	789	542.4	0	0	0
312	789	689.94	0	0	1
313	789	738.54	0	0	0
314	789	520.14	0	0	1
293	788	553.92	0	304	1
294	788	549.36	0	184	0
295	788	545.46	0	166	0
296	788	514.74	0	119	0
297	788	512.28	0	215	0
298	788	513.36	0	159	0
299	788	517.38	0	6	0
300	788	462.48	0	0	0
301	788	482.94	0	0	0
302	788	583.08	0	17	0
303	788	668.52	0	32	0
304	788	655.26	0	2	1
305	788	687.66	0	4	0
306	788	637.2	0	0	0
307	788	502.68	0	0	1
308	788	429.12	0	0	1
309	788	569.88	0	0	0
310	788	578.64	0	0	1
311	788	600.24	0	90	1
312	788	742.8	0	174	0
313	788	687.3	0	26	1
314	788	487.38	0	0	0
292	787	564.18	0	161	1
293	787	569.52	0	55	0
294	787	562.92	0	329	0
295	787	551.94	0	131	0
296	787	569.16	0	230	0
297	787	585	0	46	0
298	787	544.8	0	66	0
299	787	483.54	0	0	0
300	787	471.24	0	0	0
301	787	573.72	0	55	0
302	787	660.24	0	9	0
303	787	751.92	0	87	1
304	787	661.5	0	0	0
305	787	604.08	0	0	0
306	787	551.1	0	0	1
307	787	490.32	0	0	0
308	787	463.02	0	0	1
309	787	571.02	0	0	0
310	787	637.62	0	0	0
311	787	668.34	0	242	1
312	787	747.18	0	172	0
313	787	681.06	0	0	0
314	787	451.2	0	0	0
291	786	643.92	0	346	1
292	786	637.5	0	241	0
293	786	688.86	0	22	0
294	786	625.92	0	274	0
295	786	636.18	0	0	0
296	786	650.4	0	5	0
297	786	597.72	0	190	0
298	786	560.22	0	74	0
299	786	501.84	0	0	0
300	786	498.42	0	0	0
301	786	631.62	0	0	0
302	786	669.24	0	11	0
303	786	743.94	0	315	1
304	786	665.16	0	69	0
305	786	679.68	0	51	0
306	786	594.78	0	0	1
307	786	578.58	0	3	0
308	786	545.16	0	0	1

309	786	475.14	0	0	0
310	786	559.2	0	7	0
311	786	671.52	0	46	0
312	786	709.2	0	7	1
313	786	570.96	0	0	1
314	786	437.64	0	0	0
291	785	699.18	0	345	0
292	785	720	0	274	0
293	785	814.8	0	95	0
294	785	748.86	0	16	0
295	785	710.04	0	0	0
296	785	652.98	0	66	0
297	785	608.22	0	317	0
298	785	620.34	0	107	0
299	785	529.44	0	78	0
300	785	522.78	0	18	0
301	785	619.02	0	69	1
302	785	652.5	0	45	0
303	785	742.92	0	222	0
304	785	669.24	0	165	0
305	785	608.04	0	68	0
306	785	616.56	0	26	1
307	785	685.5	0	206	1
308	785	730.68	0	0	0
309	785	560.1	0	0	0
310	785	576.84	0	22	0
311	785	721.02	0	0	0
312	785	712.2	0	0	0
313	785	533.16	0	0	0
291	784	753.9	0	185	1
292	784	860.4	0	73	0
293	784	935.4	0	0	0
294	784	892.32	0	0	0
295	784	784.56	0	9	0
296	784	627.48	0	170	0
297	784	649.2	0	236	0
298	784	651.6	0	22	0
299	784	521.76	0	86	0
300	784	550.74	0	81	0
301	784	657.12	0	234	0
302	784	734.16	0	103	0
303	784	794.94	0	78	1
304	784	763.14	0	117	0
305	784	777.9	0	93	1
306	784	744.42	0	228	0
307	784	823.74	0	64	1
308	784	678.6	0	0	1
309	784	635.82	0	0	0
310	784	653.34	0	0	1
311	784	783.48	0	0	0
312	784	628.08	0	0	0
313	784	455.52	0	0	0
291	783	765.96	0	9	1
292	783	801.24	0	0	0
294	783	824.04	0	4	0
295	783	798.42	0	152	0
296	783	676.5	0	207	0
297	783	688.26	0	95	0
298	783	584.58	0	0	0
299	783	503.58	0	8	0
300	783	574.98	0	34	0
301	783	621.48	0	33	0
303	783	832.38	0	0	0
304	783	835.5	0	139	0
305	783	772.02	0	196	0
306	783	758.88	0	167	0
307	783	680.7	0	34	0
308	783	583.56	0	0	1
309	783	728.4	0	11	1
310	783	740.64	0	0	1
311	783	803.76	0	0	1
312	783	542.64	0	0	0
313	783	452.76	0	0	0
295	782	735.42	0	0	1
296	782	745.8	0	0	0

297	782	710.1	0	0	0
304	782	765.72	0	167	0
305	782	724.02	0	282	0
306	782	625.08	0	251	0
307	782	589.68	0	71	0
308	782	679.68	0	35	0
309	782	783.42	0	0	0
310	782	739.8	0	0	0
311	782	623.1	0	0	1
312	782	484.2	0	0	1
313	782	532.02	0	0	0
304	781	787.62	0	45	1
305	781	795.72	0	151	0
306	781	667.44	0	52	0
307	781	734.64	0	18	0
308	781	808.8	0	34	0
309	781	867.78	0	0	0
310	781	715.74	0	0	1
311	781	590.4	0	0	0
312	781	600.06	0	0	0
313	781	663.54	0	48	0
305	780	869.1	0	41	0
306	780	804.72	0	5	0
307	780	780.42	0	129	0
308	780	815.58	0	50	0
309	780	701.52	0	106	0
310	780	598.26	0	147	0
311	780	609.96	0	21	0
312	780	751.5	0	54	0
313	780	810.72	0	53	1
305	779	852.48	0	97	0
306	779	820.56	0	80	1
307	779	796.92	0	116	0
308	779	743.7	0	199	0
309	779	625.5	0	369	0
310	779	631.98	0	214	0
311	779	705.72	0	282	0
312	779	782.4	0	79	0
313	779	739.32	0	0	0
314	779	664.74	0	0	1
308	778	711	0	32	0
309	778	749.94	0	252	0
310	778	810.9	0	15	0
311	778	822	0	124	0
312	778	800.16	0	3	0
313	778	785.82	0	0	0
309	777	830.7	0	0	0
310	777	863.28	0	0	0
311	777	829.38	0	0	0
309	790	383.58	0	0	1

red deer estimate ratios.txt

#####

Invalid estimates as percentages of valid estimates: radius= 1.5

Full red deer dataset

model#	east	north	alt.sq	pine	mires	
1						95
2					95	
3					95	95
4				89		
5				89		96
6				89	98	
7				89	98	96
8		107				
9		105				96
10		106			96	

11		104		96	96
12		109	90		
13		107	90		97
14		108	90	99	
15		106	89	99	97
16	118				
17	117				99
18	119			94	
19	117			93	99
20	104		97		
21	104		98		101
22	104		98	84	
23	105		98	71	101
24	115	107			
25	114	105			99
26	115	106		95	
27	113	105		95	100
28	103	104	98		
29	103	104	99		101
30	103	104	99	91	
31	104	103	99	87	101

E half of red deer dataset:

model#	east	north	alt.sq	pine	mires	
1						92
2					210	
3					176	93
4				63		
5				60		92
6				79	204	
7				77	173	93
8		-175				
9		316				96
10		-59			182	
11		453			161	96
12		-140	40			
13		371	24			96
14		-40	60		175	
15		779	53		157	96
16	68					
17	50					98
18	71				193	
19	56				172	99
20	71			69		
21	55			56		103
22	76			77	161	
23	64			67	154	102
24	86	149				
25	83	142				98
26	85	143			187	
27	81	138			165	99
28	86	117	81			
29	80	117	74			102
30	87	113	84		157	
31	81	113	78		149	102

W half of red deer dataset:

model#	east	north	alt.sq	pine	mires	
1						120
2					97	
3					97	138
4				101		
5				100		-8
6				101	94	
7				101	94	55
8		90				
9		90				108

10		91		97	
11		92		97	112
12		96	100		
13		97	100		108
14		97	100	95	
15		97	100	95	111
16	101				
17	86				125
18	101			97	
19	82			97	150
20	103		101		
21	106		101		129
22	103		101	94	
23	106		101	93	148
24	94	90			
25	89	91			113
26	94	91		97	
27	89	92		97	121
28	29	96	100		
29	-397	96	100		116
30	29	96	100	95	
31	-187	96	100	95	122

N half of red deer dataset:

model#	east	north	alt.sq	pine	mires	
1						83
2					86	
3					90	83
4				79		
5				80		90
6				79	43	
7				80	65	90
8		69				
9		71				87
10		69			-23	
11		71			47	87
12		70		83		
13		72		84		91
14		70		83	65	
15		72		84	71	91
16	-31					
17	-443					94
18	-28				80	
19	-391				70	95
20	114			93		
21	110			94		98
22	113			94	107	
23	109			95	105	98
24	-75	72				
25	618	74				97
26	-76	71			-5	
27	539	74			71	97
28	117	64		98		
29	112	69		98		98
30	115	67		98	96	
31	110	73		98	97	98

S half of red deer dataset:

model#	east	north	alt.sq	pine	mires	
1						94
2					70	
3					70	98
4				85		
5				85		95
6				90	70	
7				90	70	98
8		67				

9		68			95
10		69		71	
11		70		71	98
12		66	85		
13		67	85		96
14		68	89	70	
15		70	90	70	99
16	100				
17	101				97
18	101			72	
19	102			72	100
20	98		94		
21	99		95		100
22	100		97	69	
23	101		98	69	103
24	104	50			
25	104	49			98
26	104	31		74	
27	104	28		74	100
28	101	405	97		
29	102	325	97		101
30	102	153	99	73	
31	103	149	100	73	103

#####

Invalid estimates as percentages of valid estimates: radius= 2

Full red deer dataset

model#	east	north	alt.sq	pine	mires	
1						94
2					98	
3					98	94
4				84		
5				83		97
6				83	106	
7				83	107	97
8		113				
9		110				96
10		112			99	
11		109			100	95
12		114		85		
13		111		84		98
14		114		84	107	
15		111		83	108	98
16	140					
17	137					100
18	141				96	
19	137				95	100
20	108			96		
21	108			96		103
22	108			96	96	
23	108			97	86	103
24	133	116				
25	129	112				101
26	133	114			98	
27	129	111			98	101
28	106	107		98		
29	106	106		98		103
30	106	107		98	100	
31	107	106		98	97	103

E half of red deer dataset:

model#	east	north	alt.sq	pine	mires	
1						91
2					234	
3					194	92

4			80		
5			74		91
6			93	227	
7			88	190	92
8		-152			
9		455			95
10		-60		198	
11		975		175	95
12		-119	51		
13		617	38		95
14		-39	68	190	
15		-6164	62	170	95
16	58				
17	24				97
18	62			213	
19	33			188	98
20	65		67		
21	40		48		102
22	72		75	176	
23	53		62	167	102
24	84	176			
25	79	167			98
26	82	172		202	
27	75	165		177	98
28	86	126	82		
29	78	128	72		101
30	87	120	84	167	
31	78	122	76	160	101

W half of red deer dataset:

model#	east	north	alt.sq	pine	mires	
1						-504
2					96	
3					96	25
4				100		
5				99		78
6				100	94	
7				100	93	80
8		86				
9		87				143
10		87			96	
11		88			96	216
12		94		99		
13		95		99		465
14		95		99	95	
15		95		99	95	-41
16	83					
17	69					-49
18	73				96	
19	63				96	36
20	107			100		
21	113			100		27
22	107			101	93	
23	113			101	93	46
24	85	86				
25	80	87				339
26	84	88			96	
27	80	88			96	-58
28	-25	93		99		
29	-48	94		99		-618
30	-33	94		99	95	
31	-34	94		99	95	-39

N half of red deer dataset:

model#	east	north	alt.sq	pine	mires	
1						83
2					93	

3				102	83
4			80		
5			80		90
6			80	49	
7			80	65	90
8		73			
9		75			87
10		72		-2	
11		74		50	87
12		75	83		
13		77	84		92
14		75	83	68	
15		77	84	74	91
16	-15				
17	-183				95
18	-13			83	
19	-169			76	96
20	120		96		
21	115		97		99
22	119		97	109	
23	113		97	106	99
24	-41	76			
25	-2951	78			98
26	-42	75		14	
27	43121	78		74	98
28	123	68	100		
29	116	74	100		100
30	120	71	100	98	
31	113	77	100	99	99

S half of red deer dataset:

model#	east	north	alt.sq	pine	mires	
1						92
2					53	
3					53	96
4				71		
5				69		94
6				76	52	
7				74	52	98
8		47				
9		48				93
10		47			54	
11		49			53	97
12		47		71		
13		48		70		95
14		48		76	53	
15		50		74	52	98
16	102					
17	103					96
18	103				55	
19	104				55	101
20	95			88		
21	96			88		101
22	98			92	50	
23	99			93	50	105
24	109	8				
25	109	5				97
26	107	-88			58	
27	108	-109			58	101
28	100	316		91		
29	101	291		92		102
30	101	157		95	56	
31	102	155		95	56	105

GibbsMPLE.R

(Uses 'deer20%sample.txt' as input)

```
# Maximum pseudo-likelihood estimation of autologistic model with Gibbs sampling of missing data.
# Author: David C Bardos
library(lattice);set.seed(999);
setwd('C:/auto'); #change as required

nML=100L;# number >2 of MPLE phases (= number of iterations `T' in the pseudocode)
Tmin=50; # start running averages (must have Tmin > 1)
Tmin=min(Tmin,nML-1); # ensures Tmin < nML
t.R=95:100; # iteration numbers to retain full set of y_n maps
pa.maps=list(); # store presence-absence maps here
nMiss=1L; #number of Gibbs cycles after each MPLE phase

covCentFlag=F; # center covariates or not

obs.df=read.table("deer20%sample.txt",header=T,sep="");
# data file must have columns in the format: X, Y, covariate1, covariate2, ... , observations
# observations can be 0, 1 or 'NA'

radius=1.5; # neighbourhood radius r
lattice.ratio=1; #ratio of lattice spacings,i.e. lattice.ratio=a.y/a.x where a.x & a.y are lattice spacing in the x & y directions
# for square lattice set lattice.ratio=1. Putting radius=1.5 with lattice.ratio=1 gives 2nd-order (8-cell) neighbourhood
nbimage=matrix(0L,ncol=2*radius+3,nrow=2*radius+3);
l.x=as.integer(ceiling(radius));l.y=as.integer(ceiling(radius/lattice.ratio));lr2=lattice.ratio^2;
nbimage=matrix(0L,ncol=2*l.y+3,nrow=2*l.x+3);
nbmat=matrix(ncol=2,nrow=0,byrow=T); # start with empty list
for (i in (-l.x:l.x)) for (j in (-l.y:l.y))
  if ((i^2 + lr2*j^2<=radius^2)&& (!identical(c(i,j),c(0L,0L)))) { nbmat=rbind(nbmat,t(c(i,j)));nbimage[i+l.x+2,j+l.y+2]=1L; }
Nnb=length(nbmat[,1]);levelplot(nbimage)

power=2.0;range=2.5; # power law and exponential decay parameters
r.nb= sqrt(nbmat[,1]^2+lr2*nbmat[,2]^2);
# 4 otions for specifying weight vs distance:
# wvec=r.nb^(-power); # weights w, power-law decline vs. central distance
# wvec=exp(-r.nb/range);# weights w, exponential decline vs. central distance
#wvec=r.nb^(-power)*exp(-r.nb/range);# weights w, exponential and powerlaw decline vs. central distance
wvec=rep(1,Nnb) # or just use uniform weights

dx=max(abs(nbmat[,1]));dy=max(abs(nbmat[,2]));border=max(dx,dy); # minimum border requirements
parameters.n=2;covflag=F; # start with autocovariate and constant term

obs.len=length(obs.df[,1]);obs.width=length(obs.df[,1]);covariate.data.n=obs.width-3;# number of columns aside from x,y and observation.

# user specifies covariates included in estimation:

#covariates.estimated=c("rain","djungle");
#covariates.estimated=c("east","north","alt.squared","pine","mires");
#covariates.estimated=c("alt.squared","pine","mires");
#covariates.estimated=c("alt.squared","pine","mires");
#covariates.estimated=c("alt.squared")

if(covariate.data.n > 0) {
  covariates.list=colnames(obs.df)[3:(obs.width-1)];
  if(length(which(covariates.estimated%in%covariates.list))==length(covariates.estimated)) {
    covindex=match(covariates.estimated,colnames(obs.df));covindex=unique(covindex);
    covflag=T;covariate.param.n=length(covindex);parameters.n=2+covariate.param.n} else warning("Covariate mismatch");
  }

obs.table=matrix(0L,nrow=obs.len,ncol=obs.width);
for (j in 1:obs.width) obs.table[,j]=obs.df[,j];
nsites=obs.len;xmin=min(obs.table[,1]);ymin=min(obs.table[,2]);
xmax=max(obs.table[,1]);ymax=max(obs.table[,2]);Length=ymax-ymin+1;width=xmax-xmin+1;
observed=missing=1L[-1]; #initially empty index vectors
datamat=matrix(0L,nrow=width+2*border,ncol=Length+2*border); # use 1st array index for x (width)
p.hat=p.hat.sum=p.hat.mean=0.0*datamat;p.hat=p.hat-1; # occupation probabilities
for (k in t.R) pa.maps[[k]]=datamat-1L;
if(covCentFlag) for (l in covindex) obs.table[,l]=obs.table[,l]-mean(obs.table[,l]); # center covariates
```

```

obs.table[,1]=obs.table[,1]-(xmin-1)+border; obs.table[,2]=obs.table[,2]-(ymin-1)+border;
for (k in 1:obs.len) {if(is.na(obs.table[k,obs.width])) missing=append(missing,k) else
    {observed=append(observed,k);datamat[obs.table[k,1],obs.table[k,2]]=as.integer(obs.table[k,obs.width]);}
    #x is 1st coord in matrix
}# k loop

observed.n=length(observed);missing.n=length(missing);
observed.xy=matrix(0L,nrow=observed.n,ncol=2);missing.xy=matrix(0L,nrow=missing.n,ncol=2);
observed.pa=as.integer(obs.table[observed,obs.width]);
missing.pa=as.integer(obs.table[missing,obs.width]);#init to NA so we can check all values are set

if(observed.n>0) { for (k in 1:observed.n) {# generate observed.xy using "observed" to give sequence of entries in data file
    observed.xy[k,1]=as.integer(obs.table[observed[k],1]);observed.xy[k,2]=as.integer(obs.table[observed[k],2]);}# end k loop
} #endif observed.n>0

if(missing.n>0) {for (k in 1:missing.n) {# generate missing.xy using "missing" to give sequences of entries in data file
    missing.xy[k,1]=as.integer(obs.table[missing[k],1]);missing.xy[k,2]=as.integer(obs.table[missing[k],2]);}# end k loop
} #endif missing.n>0

observed.covariates=as.matrix(obs.table[observed,covindex]);
# as.matrix so %*% product with parameter vector is OK when only 1 covariate.
missing.covariates=as.matrix(obs.table[missing,covindex]);#nb: it is observations that are missing, these are the associated covariates
h.observed=h.observed.proposed=rep(0,observed.n);h.missing=h.missing.proposed=rep(0,missing.n);

theta=matrix(0,nrow=nML,ncol=parameters.n);

f1=glm(observed.pa~observed.covariates,family=binomial);c1=as.vector(coefficients(f1));
theta[,1]=c(c1,0);

if(covflag){ # initialize objects depending on parameters
covariate.params=theta[,1,2:(1+covariate.param.n)];auto=theta[,1,parameters.n];
h.observed[]=observed.covariates%*%covariate.params+theta[,1,1]; # X_i.beta + alpha
h.missing[]=missing.covariates%*%covariate.params+theta[,1,1]} else{
auto=theta[,1,parameters.n]; h.observed[]=h.missing[]=theta[,1,1];}

full.n=observed.n+missing.n;
full.xy=rbind(observed.xy,missing.xy);
observed.ac=rep(0,observed.n);

for(n in 2L:nML){ # n='t' in the pseudocode

# update missing data via gibbs sampling
if(missing.n>0){ pvec=runif(nMiss*missing.n,0,1);pcount=0L; # Bernoulli draws for nMiss Gibbs cycles

for(k in 1:nMiss) {
for(m in 1:missing.n) {

pcount=pcount+1;
i=missing.xy[m,1]; j=missing.xy[m,2];
autocov=0;
for(l in 1:Nnb) {autocov=autocov+datamat[i+nbmat[l,1],j+nbmat[l,2]]*wvec[l] ;}

prob=exp(h.missing[m]+auto*autocov);
prob=prob/(1+prob);

if(pvec[pcount]<prob) {datamat[i,j]=1L;missing.pa[m]=1L;} else {datamat[i,j]=0L;missing.pa[m]=0L;}

} # m loop
} # k loop

} # if(missing.n>0)

#ML step

observed.ac[]=0;
for(m in 1:observed.n) {

i=observed.xy[m,1]; j=observed.xy[m,2];
for(l in 1:Nnb) {observed.ac[m]=observed.ac[m]+datamat[i+nbmat[l,1],j+nbmat[l,2]]*wvec[l] ;}

```

```

    }

f1=glm(observed.pa~observed.covariates+observed.ac,family=binomial);c1=as.vector(coefficients(f1));
theta[n,]=c1;

print("n=");print(n);
print("theta[n,]=");print(theta[n,]);
if(n %in% t.R) for(m in 1:full.n) {i=full.xy[m,1]; j=full.xy[m,2]; pa.maps[[n]][i,j]=datamat[i,j];}

if(covflag){ # calculate objects depending on parameters
covariate.params=theta[n,2:(1+covariate.param.n)];auto=theta[n,parameters.n];
h.observed[ ]=observed.covariates%*%covariate.params+theta[n,1]; # X_i.beta + alpha
h.missing[ ]=missing.covariates%*%covariate.params+theta[n,1]} else{
auto=theta[n,parameters.n]; h.observed[ ]=h.missing[ ]=theta[n,1];}

if(n>Tmin) {h.full=c(h.observed,h.missing);
for(m in 1:full.n) {
i=full.xy[m,1]; j=full.xy[m,2];
autocov=0;
for(l in 1:Nnb) {autocov=autocov+datamat[i+nbmat[l,1],j+nbmat[l,2]]*wvec[l];}
prob=exp(h.full[m]+auto*autocov);
prob=prob/(1+prob); p.hat[i,j]=prob;
} # m loop
p.hat.sum=p.hat.sum+p.hat;
}# if(n>Tmin)

} #end main loop (n)

p.hat.mean=p.hat.sum/(nML-Tmin)

( parameter.means=colMeans(theta[Tmin:nML,]) );
levelplot(pa.maps[[max(t.R)]] ) #show last retained presence-absence map
sum(datamat) # number of occupied sites at final iteration
levelplot(p.hat.mean) # show map of estimated occupation probabilities

```

deer20%sample.txt

"x"	"y"	"east"	"north"	"alt.squared"	"pine"	"mires"	"obs"
346	798	346	798	48593.7936	0	0	NA
347	798	347	798	47123.7264	0	0	NA
350	798	350	798	26438.76 0	0	NA	
340	797	340	797	100362.24 34	0	NA	
341	797	341	797	45522.4896	0	0	NA
344	797	344	797	82667.7504	0	0	NA
345	797	345	797	110689.29 78	0	NA	
346	797	346	797	98734.2084	61	0	0
347	797	347	797	46474.7364	0	0	NA
348	797	348	797	39752.3844	0	0	0
349	797	349	797	46474.7364	0	0	NA
351	797	351	797	88923.24 0	0	NA	
352	797	352	797	66780.8964	0	0	NA
353	797	353	797	30821.3136	0	0	NA
354	797	354	797	25071.5556	0	0	NA
355	797	355	797	29963.61 0	0	NA	
338	796	338	796	177712.8336	0	0	NA
339	796	339	796	209141.5824	0	0	NA
340	796	340	796	127534.6944	0	0	NA
341	796	341	796	74856.96 0	0	NA	
342	796	342	796	81533.0916	0	0	NA
343	796	343	796	112694.49 0	0	NA	
344	796	344	796	171396 0	0	NA	
345	796	345	796	127363.3344	11	0	NA
346	796	346	796	101773.7604	91	0	NA
347	796	347	796	48699.6624	31	0	NA
348	796	348	796	45445.7124	0	0	0
349	796	349	796	91047.0276	0	0	0
350	796	350	796	89532.6084	0	0	NA
351	796	351	796	108030.5424	0	0	NA
353	796	353	796	45062.7984	0	0	0
354	796	354	796	53056.5156	0	0	0
329	795	329	795	161700.4944	78	0	NA
332	795	332	795	129859.3296	56	0	NA
333	795	333	795	115246.6704	111	0	0

337	795	337	795	118446.1056	0	0	NA
338	795	338	795	250040.0016	0	0	NA
339	795	339	795	260222.4144	0	0	NA
340	795	340	795	167837.7024	0	0	0
341	795	341	795	153742.41 0	0	NA	
342	795	342	795	198737.64 0	0	0	
343	795	343	795	213222.2976	0	0	NA
344	795	344	795	132947.7444	2	0	NA
345	795	345	795	80951.6304	74	0	NA
346	795	346	795	54952.7364	24	0	NA
347	795	347	795	45701.8884	9	0	NA
348	795	348	795	90324.2916	1	0	NA
349	795	349	795	148656.5136	89	0	0
350	795	350	795	157815.5076	0	0	NA
351	795	351	795	137048.04 0	0	0	
352	795	352	795	130855.8276	0	0	NA
353	795	353	795	87355.7136	0	0	NA
329	794	329	794	175343.1876	17	0	NA
330	794	330	794	209910.5856	0	0	0
331	794	331	794	124298.5536	0	0	1
332	794	332	794	135188.5824	0	0	NA
333	794	333	794	127277.6976	0	0	NA
336	794	336	794	122990.49 0	0	NA	
337	794	337	794	212447.2464	0	0	NA
338	794	338	794	292183.4916	0	0	NA
339	794	339	794	267557.9076	0	0	NA
340	794	340	794	242536.5504	0	0	NA
341	794	341	794	245500.4304	0	0	NA
342	794	342	794	199326.5316	0	0	NA
343	794	343	794	123158.8836	147	0	NA
344	794	344	794	94888.6416	267	0	0
345	794	345	794	123833.61 95	0	NA	
346	794	346	794	64719.36 11	0	NA	
347	794	347	794	83116.89 0	0	NA	
348	794	348	794	121773.0816	34	0	0
349	794	349	794	190375.1424	53	0	0
350	794	350	794	190375.1424	0	0	NA
351	794	351	794	179945.64 28	0	NA	
352	794	352	794	177510.5424	0	0	0
353	794	353	794	82564.2756	0	0	0
356	794	356	794	51438.24 0	0	NA	
326	793	326	793	202716.0576	0	0	0
327	793	327	793	169068.9924	0	0	NA
330	793	330	793	170998.7904	0	0	NA
331	793	331	793	113703.84 0	0	NA	
332	793	332	793	204611.4756	0	0	0
335	793	335	793	93856.4496	0	0	NA
336	793	336	793	159153.1236	0	0	NA
337	793	337	793	287660.5956	0	0	NA
338	793	338	793	303512.8464	0	0	NA
339	793	339	793	304836.4944	0	0	NA
340	793	340	793	270545.6196	0	0	0
341	793	341	793	226556.9604	0	0	NA
342	793	342	793	144476.01 3	0	NA	
343	793	343	793	112855.6836	293	0	NA
344	793	344	793	178067.1204	175	0	NA
345	793	345	793	158531.3856	167	0	NA
346	793	346	793	88994.8224	298	0	0
347	793	347	793	86966.01 168	0	NA	
348	793	348	793	99717.0084	16	0	NA
349	793	349	793	138607.29 5	0	NA	
350	793	350	793	189433.8576	0	0	0
351	793	351	793	173838.9636	0	0	NA
352	793	352	793	162135.0756	0	0	NA
353	793	353	793	100895.1696	0	0	NA
354	793	354	793	106145.64 0	0	NA	
355	793	355	793	121898.7396	0	0	NA
356	793	356	793	97082.0964	0	0	NA
315	792	315	792	146260.3536	0	0	NA
322	792	322	792	128522.25 286	0	NA	
324	792	324	792	158292.5796	0	0	NA
325	792	325	792	175896.36 0	0	NA	
326	792	326	792	284771.6496	0	0	NA
327	792	327	792	233173.0944	0	0	0
328	792	328	792	179843.8464	0	0	0

329	792	329	792	135144.4644	0	0	NA
330	792	330	792	120520.0656	0	0	NA
331	792	331	792	141300.81 0	0	NA	
332	792	332	792	241768.89 0	0	NA	
335	792	335	792	123538.1904	0	0	NA
336	792	336	792	197509.1364	0	0	NA
337	792	337	792	331499.5776	0	0	1
338	792	338	792	356480.6436	0	0	NA
339	792	339	792	339842.3616	0	0	NA
340	792	340	792	218294.5284	0	0	NA
341	792	341	792	135851.2164	0	0	NA
342	792	342	792	161555.7636	0	0	0
343	792	343	792	207334.5156	6	0	NA
344	792	344	792	272296.1124	0	0	NA
345	792	345	792	150559.5204	57	0	NA
346	792	346	792	145389.69 96	0	NA	
347	792	347	792	148656.5136	322	0	NA
348	792	348	792	139502.25 173	0	NA	
349	792	349	792	226785.4884	70	0	NA
350	792	350	792	230227.2324	0	0	NA
351	792	351	792	151212.0996	0	0	NA
352	792	352	792	121856.8464	0	0	NA
353	792	353	792	110529.6516	0	0	0
354	792	354	792	96671.2464	0	0	NA
355	792	355	792	78142.6116	0	0	NA
356	792	356	792	82254.24 0	0	NA	
360	792	360	792	15470.3844	0	0	NA
361	792	361	792	13146.9156	0	0	NA
362	792	362	792	10514.4516	0	0	NA
363	792	363	792	10040.04 0	0	0	
315	791	315	791	151819.3296	0	0	NA
316	791	316	791	316676.3076	0	0	1
317	791	317	791	275499.0144	42	0	NA
321	791	321	791	200292.0516	378	0	NA
322	791	322	791	229134.5424	188	0	1
323	791	323	791	197775.8784	70	0	NA
324	791	324	791	193952.16 0	0	NA	
325	791	325	791	188442.81 0	19	NA	
326	791	326	791	252144.5796	0	0	NA
327	791	327	791	230112.09 0	0	0	
328	791	328	791	159776.0784	0	0	NA
329	791	329	791	146581.7796	0	0	NA
330	791	330	791	140040.6084	0	0	NA
331	791	331	791	174590.2656	0	0	NA
332	791	332	791	180098.3844	0	0	NA
335	791	335	791	172739.9844	0	0	0
336	791	336	791	311029.29 0	0	1	
337	791	337	791	424504.3716	0	0	NA
338	791	338	791	400764.9636	0	0	0
339	791	339	791	368400.4416	0	0	NA
340	791	340	791	228962.25 0	0	NA	
341	791	341	791	191371.2516	0	0	0
342	791	342	791	309491.9424	0	0	NA
343	791	343	791	308958.1056	0	0	1
344	791	344	791	239708.16 0	0	NA	
345	791	345	791	176248.8324	108	0	NA
346	791	346	791	218911.6944	6	0	NA
347	791	347	791	203527.2996	98	0	NA
348	791	348	791	215778.8304	105	0	NA
349	791	349	791	261018.81 0	0	NA	
350	791	350	791	166659.8976	0	0	NA
351	791	351	791	89676.2916	0	0	NA
352	791	352	791	64688.8356	0	0	NA
353	791	353	791	64171.0224	0	0	NA
354	791	354	791	68465.9556	0	0	NA
355	791	355	791	60959.61 0	0	NA	
356	791	356	791	51438.24 0	0	NA	
359	791	359	791	47698.56 0	0	NA	
360	791	360	791	31584.3984	0	0	NA
362	791	362	791	20857.1364	0	0	NA
363	791	363	791	19293.21 0	0	0	
315	790	315	790	160929.3456	0	0	NA
316	790	316	790	355621.3956	0	0	NA
317	790	317	790	407631.1716	0	0	NA
319	790	319	790	153836.5284	362	0	NA

320	790	320	790	187766.2224	400	0	NA
321	790	321	790	293027.3424	266	0	1
322	790	322	790	343067.9184	2	68	NA
323	790	323	790	311497.9344	0	21	NA
324	790	324	790	262000.6596	0	0	NA
325	790	325	790	220204.9476	0	95	NA
326	790	326	790	256258.6884	0	124	NA
327	790	327	790	244312.7184	0	0	NA
328	790	328	790	180149.3136	0	0	0
329	790	329	790	197349.1776	0	0	NA
330	790	330	790	169958.3076	0	0	NA
331	790	331	790	215834.5764	0	0	NA
332	790	332	790	150233.76 0	0	NA	
335	790	335	790	226499.8464	0	0	NA
336	790	336	790	381553.29 0	0	0	
337	790	337	790	379702.44 0	0	NA	
338	790	338	790	293612.2596	0	0	NA
339	790	339	790	261080.1216	0	0	0
340	790	340	790	183423.7584	0	0	0
341	790	341	790	227300.0976	0	0	NA
342	790	342	790	320129.64 0	0	NA	
343	790	343	790	265822.7364	0	0	NA
344	790	344	790	229479.3216	0	0	NA
345	790	345	790	299099.61 0	0	NA	
346	790	346	790	337398.3396	0	0	NA
347	790	347	790	204285.9204	0	0	NA
348	790	348	790	264895.5024	0	0	NA
349	790	349	790	277202.25 0	0	NA	
350	790	350	790	187194.6756	0	0	0
351	790	351	790	100933.29 0	0	NA	
352	790	352	790	96372.9936	0	0	NA
353	790	353	790	142611.9696	0	0	NA
354	790	354	790	143883.6624	0	14	0
355	790	355	790	184814.01 0	20	NA	
356	790	356	790	133254.2016	0	60	NA
357	790	357	790	186675.8436	0	0	NA
358	790	358	790	186935.1696	0	0	NA
359	790	359	790	127020.96 0	76	NA	
360	790	360	790	50625 0	0	NA	
315	789	315	789	159680.16 0	0	0	
316	789	316	789	303314.5476	0	0	NA
317	789	317	789	492635.5344	0	0	NA
318	789	318	789	335310.4836	141	0	NA
319	789	319	789	272484 193	44	NA	
320	789	320	789	294523.29 182	106	NA	
321	789	321	789	401448.96 47	120	NA	
322	789	322	789	568908.1476	0	119	NA
323	789	323	789	525161.1024	0	95	NA
324	789	324	789	482080.2624	0	3	NA
325	789	325	789	308558.0304	0	197	NA
326	789	326	789	289336.41 0	372	NA	
327	789	327	789	324968.4036	0	40	0
328	789	328	789	279417.96 0	0	0	
329	789	329	789	215333.1216	0	0	NA
330	789	330	789	207443.8116	0	0	NA
331	789	331	789	170899.56 0	0	NA	
333	789	333	789	206406.6624	0	0	NA
334	789	334	789	239766.9156	0	0	NA
335	789	335	789	305698.41 0	0	NA	
336	789	336	789	441400.7844	0	0	NA
337	789	337	789	359208.4356	0	0	0
338	789	338	789	313644.8016	0	0	NA
339	789	339	789	319518.8676	0	0	NA
340	789	340	789	282407.2164	0	0	0
341	789	341	789	386759.61 0	0	NA	
342	789	342	789	513486.8964	0	0	NA
343	789	343	789	328329 0	0	NA	
344	789	344	789	377192.5056	0	0	NA
345	789	345	789	449650.7136	0	0	NA
346	789	346	789	422084.1024	0	0	0
347	789	347	789	292962.3876	0	0	NA
348	789	348	789	331154.2116	0	0	NA
349	789	349	789	420526.3104	0	0	NA
350	789	350	789	271420.1604	0	0	NA
351	789	351	789	126252.3024	0	0	NA

352	789	352	789	179792.9604	0	0	0
353	789	353	789	286310.6064	0	40	0
354	789	354	789	261509.5044	0	259	0
355	789	355	789	277581.4596	0	222	NA
356	789	356	789	249380.3844	0	295	NA
357	789	357	789	285733.0116	0	13	NA
358	789	358	789	161941.8564	0	2	NA
359	789	359	789	90432.5184	0	46	NA
360	789	360	789	104122.3824	0	0	NA
361	789	361	789	96895.2384	0	0	0
362	789	362	789	59750.9136	0	0	0
363	789	363	789	84297.3156	0	0	NA
364	789	364	789	35359.0416	0	0	NA
315	788	315	788	206624.7936	0	0	NA
316	788	316	788	254016 0	0	1	
317	788	317	788	453117.4596	0	0	NA
318	788	318	788	347793.2676	20	0	NA
319	788	319	788	397656.36 0	172	NA	
320	788	320	788	367090.5744	0	254	1
321	788	321	788	443635.9236	0	147	NA
322	788	322	788	646995.0096	0	25	0
323	788	323	788	670662.7236	0	36	NA
324	788	324	788	678251.0736	0	4	0
325	788	325	788	449328.9024	0	24	NA
326	788	326	788	349422.8544	0	356	0
327	788	327	788	494490.24 0	142	NA	
328	788	328	788	541107.36 0	0	NA	
329	788	329	788	257718.6756	0	0	0
330	788	330	788	190689.4224	0	0	NA
331	788	331	788	166561.9344	0	0	NA
332	788	332	788	223199.5536	0	0	NA
333	788	333	788	321216.8976	0	0	NA
334	788	334	788	389151.3924	0	0	NA
335	788	335	788	385864.5924	0	0	NA
336	788	336	788	423410.49 0	0	NA	
337	788	337	788	412318.0944	0	0	NA
338	788	338	788	422630.01 0	0	NA	
339	788	339	788	484499.5236	0	0	NA
340	788	340	788	522382.0176	0	0	NA
341	788	341	788	523770.6384	0	0	NA
342	788	342	788	656488.8576	0	0	NA
343	788	343	788	485502.3684	0	0	0
344	788	344	788	506887.0416	0	0	NA
347	788	347	788	396522.09 0	0	0	
348	788	348	788	447882.1776	0	0	NA
349	788	349	788	479667.0564	0	1	NA
350	788	350	788	286053.8256	0	111	0
351	788	351	788	152193.6144	0	1	NA
352	788	352	788	267247.6416	0	0	NA
353	788	353	788	317081.61 0	78	NA	
354	788	354	788	255166.4196	0	384	NA
355	788	355	788	227872.5696	0	269	NA
356	788	356	788	182756.25 0	219	NA	
357	788	357	788	158435.8416	0	143	NA
358	788	358	788	154307.5524	0	291	NA
359	788	359	788	192106.89 0	160	0	
360	788	360	788	200990.8224	0	132	NA
361	788	361	788	144932.49 0	0	NA	
362	788	362	788	156388.6116	0	0	0
363	788	363	788	123791.3856	0	0	NA
315	787	315	787	291146.5764	0	0	NA
316	787	316	787	249020.9604	0	0	NA
317	787	317	787	474858.81 0	91	NA	
318	787	318	787	504668.16 0	0	0	
319	787	319	787	493478.1504	0	305	NA
320	787	320	787	466543.6416	0	275	NA
321	787	321	787	550504.6416	0	117	NA
322	787	322	787	639968.0004	0	112	0
323	787	323	787	820075.1364	0	8	0
324	787	324	787	795164.5584	0	0	0
325	787	325	787	610273.44 0	0	0	
326	787	326	787	471392.0964	0	160	NA
327	787	327	787	551662.7076	0	137	NA
328	787	328	787	500244.9984	0	0	0
329	787	329	787	251422.0164	0	0	0

330	787	330	787	168280.4484	0	0	NA
331	787	331	787	180098.3844	0	0	0
332	787	332	787	251602.56 0	0	NA	
333	787	333	787	390125.16 0	0	0	
334	787	334	787	412626.3696	0	0	NA
335	787	335	787	404954.0496	0	0	NA
336	787	336	787	416025 0	0	NA	
337	787	337	787	405412.3584	0	0	NA
338	787	338	787	505776.9924	0	0	NA
339	787	339	787	530391.7584	0	0	NA
340	787	340	787	646319.5236	0	0	NA
341	787	341	787	611398.8864	0	0	NA
342	787	342	787	637474.4964	0	0	NA
349	787	349	787	441002.2464	0	0	NA
350	787	350	787	321557.0436	0	43	NA
351	787	351	787	295761.9456	0	58	NA
352	787	352	787	276003.1296	0	214	NA
353	787	353	787	271482.6816	0	274	NA
354	787	354	787	236837.9556	0	224	NA
355	787	355	787	245976.3216	0	281	NA
356	787	356	787	185175.3024	0	391	NA
357	787	357	787	241297.0884	0	296	0
358	787	358	787	281133.2484	0	378	NA
359	787	359	787	268987.4496	0	394	NA
360	787	360	787	265142.6064	0	400	NA
361	787	361	787	231264.81 0	62	0	
362	787	362	787	119522.3184	0	0	0
363	787	363	787	52780.4676	0	0	NA
364	787	364	787	37558.44 0	0	0	
315	786	315	786	396144.36 0	0	NA	
316	786	316	786	260100 0	0	0	
317	786	317	786	393129 0	56	NA	
318	786	318	786	551662.7076	0	105	NA
319	786	319	786	524118.0816	0	336	NA
320	786	320	786	643236.0804	0	18	0
321	786	321	786	842393.5524	0	0	NA
322	786	322	786	838323.36 0	0	NA	
323	786	323	786	913438.9476	0	0	NA
324	786	324	786	1045056.3984	0	0	NA
325	786	325	786	886008.0384	0	0	0
326	786	326	786	645162.3684	0	0	NA
327	786	327	786	453521.4336	0	0	NA
328	786	328	786	331914.2544	0	0	0
329	786	329	786	208319.2164	0	0	NA
330	786	330	786	160784.9604	0	0	NA
331	786	331	786	231322.5216	0	0	NA
332	786	332	786	292832.4996	0	0	NA
333	786	333	786	429994.9476	0	0	NA
334	786	334	786	475603.3296	0	0	NA
350	786	350	786	353049.8724	0	9	0
351	786	351	786	369712.6416	0	20	NA
352	786	352	786	320808.96 0	84	0	
353	786	353	786	265328.01 0	160	NA	
354	786	354	786	288626.8176	0	289	NA
355	786	355	786	327161.1204	0	134	NA
356	786	356	786	270795.3444	0	320	NA
357	786	357	786	285604.7364	0	178	NA
358	786	358	786	292767.5664	0	359	0
359	786	359	786	294067.5984	0	400	NA
360	786	360	786	258938.4996	0	396	NA
361	786	361	786	171694.2096	0	183	NA
362	786	362	786	110370.1284	0	0	NA
363	786	363	786	57168.81 0	0	NA	
364	786	364	786	42131.6676	0	0	NA
314	785	314	785	225074.3364	0	0	NA
315	785	315	785	508597.1856	0	0	NA
316	785	316	785	362018.8224	0	0	NA
317	785	317	785	304704 0	8	NA	
318	785	318	785	415638.09 0	63	NA	
319	785	319	785	569904.2064	0	112	NA
320	785	320	785	909772.5924	0	0	NA
321	785	321	785	943967.6964	0	0	NA
322	785	322	785	1090562.49	0	0	NA
323	785	323	785	1044933.7284	0	0	NA
324	785	324	785	988791.5844	0	0	NA

325	785	325	785	889286.7204	0	0	NA
326	785	326	785	704995.3296	0	0	NA
327	785	327	785	482913.8064	0	0	0
328	785	328	785	419126.76 0	0	0	
329	785	329	785	195169.5684	0	0	NA
330	785	330	785	197349.1776	0	0	NA
331	785	331	785	320944.9104	0	0	NA
332	785	332	785	378003.6324	0	0	NA
333	785	333	785	448283.8116	0	0	0
354	785	354	785	459684 0	37	NA	
355	785	355	785	427872.9744	0	197	NA
356	785	356	785	311230.0944	0	353	NA
357	785	357	785	205970.7456	0	185	NA
358	785	358	785	169661.61 0	28	NA	
359	785	359	785	176148.09 0	108	NA	
360	785	360	785	175292.9424	0	336	NA
361	785	361	785	155867.04 0	208	NA	
362	785	362	785	97044.7104	0	0	NA
363	785	363	785	73777.4244	0	0	NA
364	785	364	785	51574.41 0	0	NA	
314	784	314	784	314855.6544	0	0	NA
315	784	315	784	438296.9616	0	18	NA
316	784	316	784	439091.7696	0	171	NA
317	784	317	784	365057.64 0	124	1	
318	784	318	784	309558.7044	0	39	NA
319	784	319	784	490364.0676	0	23	0
320	784	320	784	841842.9504	0	12	NA
321	784	321	784	846363.2004	0	0	NA
322	784	322	784	781738.9056	0	0	0
323	784	323	784	820944.7236	0	0	NA
324	784	324	784	812377.7424	0	0	NA
325	784	325	784	714802.6116	0	0	NA
326	784	326	784	567551.2896	0	0	NA
327	784	327	784	451987.29 0	0	NA	
328	784	328	784	276949.5876	0	0	NA
329	784	329	784	165583.8864	0	0	NA
330	784	330	784	295174.89 0	0	NA	
331	784	331	784	381924 0	0	1	
332	784	332	784	390575.0016	0	0	NA
355	784	355	784	348855.6096	0	243	0
356	784	356	784	225758.0196	0	324	NA
357	784	357	784	149073.21 0	20	NA	
358	784	358	784	121647.4884	0	12	NA
359	784	359	784	115613.6004	0	22	NA
360	784	360	784	140175.36 0	194	NA	
361	784	361	784	93709.4544	0	73	1
362	784	362	784	75548.0196	0	0	NA
363	784	363	784	69949.6704	0	78	NA
364	784	364	784	71385.1524	0	4	NA
314	783	314	783	376308.6336	0	0	0
315	783	315	783	510996.2256	0	19	NA
316	783	316	783	497702.0304	0	258	NA
317	783	317	783	538638.5664	0	350	1
318	783	318	783	483330.8484	0	77	NA
319	783	319	783	434175.5664	0	18	NA
320	783	320	783	766535.2704	0	79	NA
321	783	321	783	912521.6676	0	0	0
322	783	322	783	828573.2676	0	0	NA
323	783	323	783	531528.4836	0	0	NA
324	783	324	783	483164.01 0	0	NA	
325	783	325	783	398261.9664	0	0	NA
326	783	326	783	316068.84 0	0	NA	
327	783	327	783	199540.89 0	0	NA	
328	783	328	783	176349.6036	0	0	NA
329	783	329	783	311832.8964	0	0	0
330	783	330	783	441639.9936	0	0	NA
331	783	331	783	419826.2436	0	0	0
332	783	332	783	420370.6896	0	0	0
356	783	356	783	166855.9104	0	303	0
357	783	357	783	135762.7716	0	59	NA
358	783	358	783	154826.5104	0	96	NA
359	783	359	783	130812.4224	0	203	NA
360	783	360	783	89712.2304	0	30	NA
361	783	361	783	91518.3504	0	0	NA
362	783	362	783	160112.0196	0	5	NA

363	783	363	783	151305.4404	0	395	NA
364	783	364	783	128049.4656	0	92	NA
314	782	314	782	366727.1364	0	0	NA
315	782	315	782	591391.7604	0	0	NA
316	782	316	782	593793.5364	0	44	NA
317	782	317	782	729486.81 0	273	0	
318	782	318	782	682110.81 0	65	NA	
319	782	319	782	441799.5024	0	33	NA
320	782	320	782	554876.01 0	1	NA	
321	782	321	782	846804.8484	0	0	NA
322	782	322	782	850010.2416	0	0	NA
323	782	323	782	822794.1264	0	0	0
324	782	324	782	650861.6976	0	0	NA
325	782	325	782	450777.96 0	0	NA	
326	782	326	782	366727.1364	0	0	NA
327	782	327	782	332813.61 0	0	1	
328	782	328	782	366872.49 0	0	NA	
329	782	329	782	401220.8964	0	0	0
330	782	330	782	460090.89 0	0	NA	
331	782	331	782	445075.7796	0	0	NA
332	782	332	782	517191.1056	0	0	NA
356	782	356	782	192738.5604	0	148	NA
357	782	357	782	189277.2036	0	313	NA
358	782	358	782	184350.0096	0	383	NA
359	782	359	782	124976.3904	0	161	0
360	782	360	782	120395.1204	0	0	NA
361	782	361	782	110489.76 0	3	NA	
362	782	362	782	177106.3056	0	148	NA
363	782	363	782	185330.25 0	400	NA	
364	782	364	782	157006.1376	0	338	NA
314	781	314	781	362813.4756	0	4	NA
315	781	315	781	401905.2816	0	0	NA
316	781	316	781	536790.6756	0	0	NA
317	781	317	781	912521.6676	0	0	NA
318	781	318	781	825299.5716	0	0	NA
319	781	319	781	770638.1796	0	234	NA
320	781	320	781	583665.4404	0	83	NA
321	781	321	781	744838.0416	0	0	0
325	781	325	781	467773.9236	0	0	NA
326	781	326	781	500839.29 0	0	NA	
327	781	327	781	425364.84 0	0	1	
328	781	328	781	424113.5376	0	0	NA
329	781	329	781	452875.1616	0	0	NA
330	781	330	781	501348.9636	0	0	NA
331	781	331	781	481330.6884	0	0	NA
357	781	357	781	168773.0724	0	10	NA
358	781	358	781	194639.7924	0	279	NA
359	781	359	781	164511.36 0	360	NA	
360	781	360	781	146719.6416	0	150	NA
361	781	361	781	125996.6016	0	280	NA
362	781	362	781	167739.3936	0	400	NA
363	781	363	781	201313.7424	0	348	NA
364	781	364	781	166904.9316	0	212	NA
314	780	314	780	370515.69 0	0	NA	
315	780	315	780	378741.7764	0	0	NA
316	780	316	780	491288.8464	0	0	NA
317	780	317	780	732359.4084	0	0	NA
318	780	318	780	1012559.1876	0	0	NA
319	780	319	780	893818.9764	0	19	NA
320	780	320	780	779618.3616	0	10	NA
321	780	321	780	733900.6224	0	0	NA
327	780	327	780	235147.4064	0	0	NA
328	780	328	780	377266.2084	0	0	NA
329	780	329	780	461394.1476	0	0	NA
330	780	330	780	550771.7796	0	0	NA
331	780	331	780	496348.4304	0	0	NA
358	780	358	780	207826.5744	0	131	NA
359	780	359	780	188651.2356	0	400	NA
360	780	360	780	149073.21 0	400	NA	
361	780	361	780	208209.69 0	400	NA	
362	780	362	780	213554.8944	0	230	NA
363	780	363	780	175997.0304	0	12	0
364	780	364	780	120228.6276	0	0	0
315	779	315	779	515294.2656	0	0	NA
316	779	316	779	646416 0	0	NA	

317	779	317	779	773696.16 0	0	0	
318	779	318	779	970146.2016	0	0	NA
331	779	331	779	573988.0644	0	0	NA
332	779	332	779	568998.6624	0	0	NA
359	779	359	779	225644.0004	0	373	NA
360	779	360	779	216727.4916	0	386	NA
361	779	361	779	233926.9956	0	285	NA
362	779	362	779	143474.2884	0	3	NA
363	779	363	779	100704.6756	0	0	0
364	779	364	779	82702.2564	0	0	NA
365	779	365	779	54363.5856	0	0	0
314	778	314	778	523944.3456	0	0	0
315	778	315	778	672826.4676	0	0	0
316	778	316	778	828573.2676	0	0	NA
317	778	317	778	800201.8116	0	0	NA
359	778	359	778	207771.8724	0	50	NA
360	778	360	778	206897.6196	0	77	0
361	778	361	778	161941.8564	0	34	NA
362	778	362	778	97269.1344	0	0	NA
363	778	363	778	78142.6116	0	0	NA
364	778	364	778	53333.2836	0	0	NA
365	778	365	778	41812.0704	0	0	NA
366	778	366	778	22626.1764	0	0	0
316	777	316	777	1024913.2644	0	0	0
359	777	359	777	99300.6144	0	0	NA
360	777	360	777	108227.8404	0	0	NA
361	777	361	777	89712.2304	0	0	NA
362	777	362	777	59049 0	0	NA	
363	777	363	777	50113.2996	0	0	NA
364	777	364	777	28425.96 0	0	NA	
365	777	365	777	23097.9204	0	0	NA
366	777	366	777	16998.9444	0	0	NA
360	776	360	776	84715.9236	0	0	0
361	776	361	776	58032.81 0	0	NA	
362	776	362	776	33160.41 0	0	NA	
363	776	363	776	20839.8096	0	0	NA
364	776	364	776	15055.29 0	0	NA	
365	776	365	776	13298.7024	0	0	0
360	775	360	775	50005.9044	0	0	1
361	775	361	775	29652.84 0	0	NA	
362	775	362	775	17838.2736	0	0	NA
363	775	363	775	11702.9124	0	0	NA
364	775	364	775	8805.9456 0	0	0	
365	775	365	775	7475.3316 0	0	NA	
360	774	360	774	20632.4496	0	0	NA
361	774	361	774	13312.5444	0	0	0
362	774	362	774	11689.9344	0	0	NA
363	774	363	774	10637.8596	0	0	0
364	774	364	774	7066.0836 0	0	NA	
365	774	365	774	5340.6864 0	0	NA	
359	773	359	773	10004.0004	0	0	NA
360	773	360	773	10172.7396	0	0	NA
361	773	361	773	10811.8404	0	0	0
362	773	362	773	7299.9936 0	0	NA	
359	772	359	772	8328.3876 0	0	NA	
360	772	360	772	7371.9396 0	0	0	
361	772	361	772	6493.1364 0	0	NA	
362	772	362	772	4483.6416 0	0	0	
364	772	364	772	3694.2084 0	0	NA	
360	771	360	771	4129.3476 0	0	NA	
361	771	361	771	4621.2804 0	0	0	
350	797	350	797	58786.8516	0	0	NA
356	797	356	797	30653.0064	0	0	NA
352	796	352	796	89030.6244	0	0	0
355	796	355	796	59750.9136	0	0	NA
356	796	356	796	35675.6544	0	0	NA
355	795	355	795	67215.7476	0	0	NA
361	791	361	791	31456.5696	0	0	NA
362	790	362	790	30758.1444	0	0	NA
363	790	363	790	25606.4004	0	0	NA
366	776	366	776	9285.2496 0	0	NA	
363	773	363	773	4686.7716 0	0	NA	
364	773	364	773	4129.3476 0	0	0	
363	772	363	772	3464.4996 0	0	0	
321	812	321	812	344615.9616	0	0	0

323	812	323	812	489356.2116	0	0	NA
324	812	324	812	307026.81 0	0	NA	
320	811	320	811	300808.3716	0	0	NA
321	811	321	811	274555.0404	0	0	NA
322	811	322	811	298574.8164	0	0	NA
323	811	323	811	408857.9364	0	0	NA
324	811	324	811	265142.6064	0	0	0
319	810	319	810	219361.0896	0	0	NA
320	810	320	810	239766.9156	0	0	NA
321	810	321	810	248961.0816	0	0	NA
322	810	322	810	217566.2736	0	0	NA
323	810	323	810	209031.84 0	0	1	
324	810	324	810	203527.2996	0	12	NA
318	809	318	809	235554.9156	0	0	0
319	809	319	809	245143.8144	0	0	NA
320	809	320	809	235846.2096	0	0	NA
321	809	321	809	209965.5684	0	0	NA
322	809	322	809	217174.6404	0	0	0
323	809	323	809	262861.29 0	0	NA	
324	809	324	809	240296.04 0	0	NA	
325	809	325	809	203310.81 0	0	0	
319	808	319	808	338863.6944	0	0	NA
320	808	320	808	395163.1044	0	58	NA
321	808	321	808	277265.4336	0	0	NA
322	808	322	808	274932.4356	0	0	0
323	808	323	808	396144.36 0	47	NA	
324	808	324	808	345885.1344	0	0	NA
325	808	325	808	223256.25 0	0	NA	
319	807	319	807	422786.0484	0	0	NA
320	807	320	807	387805.1076	0	9	NA
321	807	321	807	327847.8564	0	0	NA
322	807	322	807	382443.2964	0	0	NA
323	807	323	807	419049.0756	0	0	0
324	807	324	807	360576.2304	0	0	NA
325	807	325	807	256744.89 0	0	0	
326	807	326	807	317216.7684	0	0	NA
327	807	327	807	281769.8724	0	0	NA
328	807	328	807	202446.0036	0	0	NA
319	806	319	806	452471.4756	0	0	NA
320	806	320	806	498210.1056	0	0	NA
321	806	321	806	449409.3444	0	0	0
322	806	322	806	460742.2884	0	0	1
323	806	323	806	533542.5936	0	0	NA
324	806	324	806	432358.8516	0	0	NA
325	806	325	806	351767.61 0	0	NA	
326	806	326	806	408857.9364	0	0	NA
327	806	327	806	394710.6276	0	0	NA
328	806	328	806	320401.2816	0	0	NA
329	806	329	806	251662.7556	0	0	NA
320	805	320	805	504838.6704	0	0	0
321	805	321	805	630213.6996	0	0	NA
322	805	322	805	637570.3104	0	0	NA
323	805	323	805	562500 0	0	NA	
324	805	324	805	423410.49 0	0	0	
325	805	325	805	345250.2564	0	0	NA
326	805	326	805	365492.7936	0	0	NA
327	805	327	805	389825.4096	0	0	NA
328	805	328	805	388328.3856	0	22	NA
329	805	329	805	389675.5776	0	40	NA
320	804	320	804	383260.0464	0	0	NA
321	804	321	804	464987.61 0	0	NA	
322	804	322	804	462209.6196	0	0	NA
323	804	323	804	338514.5124	0	0	NA
324	804	324	804	269361 0	0	NA	
325	804	325	804	256866.5124	0	82	NA
326	804	326	804	247287.3984	0	77	NA
327	804	327	804	249080.8464	0	120	NA
328	804	328	804	334199.61 0	124	0	
329	804	329	804	399777.9984	0	1	0
330	804	330	804	266441.7924	0	0	NA
319	803	319	803	240178.4064	0	0	1
320	803	320	803	254318.49 0	0	NA	
321	803	321	803	259488.36 0	0	NA	
322	803	322	803	251662.7556	0	0	NA
323	803	323	803	252204.84 0	0	NA	

324	803	324	803	237831.7824	0	0	NA
325	803	325	803	206134.1604	0	81	NA
326	803	326	803	182294.8416	0	7	NA
327	803	327	803	207334.5156	0	37	0
328	803	328	803	335518.9776	0	0	0
329	803	329	803	238944.9924	0	62	NA
330	803	330	803	228732.6276	0	0	NA
317	802	317	802	382665.96 0	0	0	
318	802	318	802	278910.7344	0	0	NA
319	802	319	802	297199.4256	0	0	0
320	802	320	802	235904.49 0	0	0	
321	802	321	802	242241.1524	0	0	NA
322	802	322	802	242891.2656	0	0	0
323	802	323	802	211839.2676	0	22	1
324	802	324	802	196656.7716	0	0	1
325	802	325	802	169661.61 0	23	0	
326	802	326	802	162909.1044	0	67	NA
327	802	327	802	162231.7284	0	0	NA
328	802	328	802	207225.2484	0	0	NA
329	802	329	802	171445.6836	0	42	NA
330	802	330	802	154119.0564	0	0	NA
313	801	313	801	999800.01 0	0	NA	
314	801	314	801	813026.8224	0	0	NA
315	801	315	801	581375.7504	0	0	NA
316	801	316	801	400840.9344	0	0	NA
317	801	317	801	300150.5796	0	0	NA
318	801	318	801	375352.2756	0	0	0
319	801	319	801	426461.2416	0	0	NA
320	801	320	801	334338.3684	0	0	NA
321	801	321	801	334407.7584	0	0	0
322	801	322	801	341313.0084	0	119	0
323	801	323	801	224221.1904	0	223	NA
324	801	324	801	204991.6176	0	0	NA
325	801	325	801	205861.8384	0	0	NA
326	801	326	801	184401.5364	0	0	NA
327	801	327	801	159105.2544	0	0	NA
328	801	328	801	142747.9524	0	46	NA
329	801	329	801	164316.7296	0	4	NA
297	800	297	800	715005.5364	0	155	NA
298	800	298	800	1428072.8004	0	0	NA
302	800	302	800	640352.0484	0	0	NA
303	800	303	800	543404.8656	0	30	0
304	800	304	800	681219.1296	0	238	NA
306	800	306	800	680526.0036	0	317	NA
307	800	307	800	785775.8736	0	47	NA
309	800	309	800	1011472.7184	0	0	NA
310	800	310	800	830649.96 0	0	NA	
311	800	311	800	778453.29 0	0	NA	
312	800	312	800	1081558.4004	0	0	NA
313	800	313	800	862223.6736	0	0	0
314	800	314	800	521515.0656	0	3	0
315	800	315	800	339562.5984	0	142	NA
316	800	316	800	319858.1136	0	208	0
317	800	317	800	324763.2144	0	345	NA
318	800	318	800	476514.09 0	222	NA	
319	800	319	800	599261.7744	0	158	NA
320	800	320	800	413474.7204	0	129	NA
321	800	321	800	374911.29 0	6	NA	
322	800	322	800	393731.1504	0	3	NA
323	800	323	800	302786.0676	0	67	0
324	800	324	800	272484 0	0	NA	
325	800	325	800	228560.4864	0	13	NA
326	800	326	800	167985.2196	0	38	1
327	800	327	800	179843.8464	0	0	0
328	800	328	800	207662.49 0	0	NA	
329	800	329	800	323874.81 0	0	NA	
294	799	294	799	1204813.5696	0	0	NA
295	799	295	799	804070.89 0	0	NA	
296	799	296	799	573988.0644	0	31	0
297	799	297	799	455220.09 0	231	NA	
298	799	298	799	1069114.6404	0	0	NA
300	799	300	799	967311.5904	0	0	NA
301	799	301	799	1131670.44	0	0	0
302	799	302	799	653284.2276	0	0	NA
303	799	303	799	367745.2164	0	30	0

304	799	304	799	720597.2544	0	223	NA
305	799	305	799	699063.21 0	47	NA	
306	799	306	799	591022.6884	0	114	0
307	799	307	799	800631.2484	0	11	NA
308	799	308	799	1124914.7844	0	0	NA
309	799	309	799	1182134.3076	0	0	NA
310	799	310	799	692456.9796	0	69	NA
311	799	311	799	596478.1824	0	142	NA
312	799	312	799	842724 0	0	NA	
313	799	313	799	736369.9344	0	0	0
314	799	314	799	407937.69 0	74	NA	
315	799	315	799	559982.8224	0	9	NA
316	799	316	799	504412.4484	0	45	NA
317	799	317	799	433701.2736	0	148	NA
318	799	318	799	488265.5376	0	113	NA
319	799	319	799	611774.2656	0	0	NA
320	799	320	799	461231.1396	0	35	NA
321	799	321	799	384300.8064	0	235	0
322	799	322	799	341944.2576	0	6	NA
323	799	323	799	295957.7604	0	230	NA
324	799	324	799	231668.9424	0	100	1
325	799	325	799	196922.9376	0	72	NA
326	799	326	799	224278.0164	0	14	NA
327	799	327	799	255469.5936	0	0	NA
294	798	294	798	1109820.1104	0	0	NA
295	798	295	798	1254848.04	0	0	0
296	798	296	798	1071846.09	0	0	NA
297	798	297	798	454653.5184	0	177	0
298	798	298	798	549614.6496	0	15	NA
299	798	299	798	858105.7956	0	0	NA
300	798	300	798	748674.8676	0	95	NA
301	798	301	798	900980.64 0	0	NA	
302	798	302	798	704693.0916	0	0	NA
303	798	303	798	345461.8176	4	19	1
304	798	304	798	645258.7584	0	8	NA
305	798	305	798	748674.8676	0	12	NA
306	798	306	798	425599.6644	0	0	NA
307	798	307	798	630880.7184	0	0	NA
308	798	308	798	968256 0	0	NA	
309	798	309	798	943035.21 0	0	NA	
310	798	310	798	532491.2784	0	117	0
311	798	311	798	413397.5616	0	280	0
312	798	312	798	566286.3504	0	27	NA
313	798	313	798	445155.84 0	185	NA	
314	798	314	798	433306.2276	0	136	NA
315	798	315	798	576172.0836	0	0	NA
316	798	316	798	635464.0656	0	0	NA
317	798	317	798	465888.1536	0	23	NA
318	798	318	798	351625.2804	0	380	NA
319	798	319	798	345744 0	149	0	
320	798	320	798	404496 0	175	NA	
321	798	321	798	454815.36 0	39	NA	
322	798	322	798	350274.5856	0	61	NA
323	798	323	798	276823.2996	0	0	NA
324	798	324	798	217790.2224	0	53	NA
325	798	325	798	174540.1284	0	40	NA
326	798	326	798	234623.9844	0	0	NA
294	797	294	797	970146.2016	0	0	NA
295	797	295	797	1145242.4256	0	0	NA
296	797	296	797	1193774.76	0	0	NA
297	797	297	797	551840.9796	0	42	0
298	797	298	797	473867.0244	0	153	NA
299	797	299	797	635368.41 0	55	NA	
300	797	300	797	594718.5924	0	132	0
301	797	301	797	649507.0464	0	66	NA
302	797	302	797	655128.36 0	0	NA	
303	797	303	797	314249.9364	63	91	NA
304	797	304	797	438614.7984	18	0	0
305	797	305	797	628404.9984	0	0	NA
306	797	306	797	421616.4624	20	0	NA
307	797	307	797	450214.1604	2	0	NA
308	797	308	797	552197.61 0	0	NA	
309	797	309	797	597127.1076	0	56	NA
310	797	310	797	403809.4116	0	199	0
311	797	311	797	370588.7376	0	267	NA

312	797	312	797	481580.4816	0	136	NA
313	797	313	797	417729.5424	0	73	NA
314	797	314	797	398413.44 0	14	NA	
315	797	315	797	409702.4064	0	0	0
316	797	316	797	522555.4944	0	0	NA
317	797	317	797	345109.2516	0	19	NA
318	797	318	797	295957.7604	0	137	NA
319	797	319	797	276507.7056	0	32	NA
320	797	320	797	364477.8384	0	0	NA
321	797	321	797	351482.9796	0	0	NA
322	797	322	797	312973.1136	0	0	NA
323	797	323	797	233810.9316	0	0	NA
324	797	324	797	203256.7056	0	0	NA
325	797	325	797	154873.7316	0	0	NA
294	796	294	796	701372.7504	0	52	NA
295	796	295	796	871384.9104	0	0	0
296	796	296	796	904515.1236	0	0	NA
297	796	297	796	546061.8816	0	0	0
298	796	298	796	392978.5344	0	196	NA
299	796	299	796	759826.0224	0	10	NA
300	796	300	796	472051.4436	0	191	NA
301	796	301	796	481913.64 0	214	NA	
302	796	302	796	616476.2256	0	71	NA
303	796	303	796	316271.2644	34	101	NA
304	796	304	796	307758.6576	222	116	NA
305	796	305	796	440046.4896	0	110	NA
306	796	306	796	320808.96 52	0	NA	
307	796	307	796	274492.1664	204	0	1
308	796	308	796	280878.8004	135	0	NA
309	796	309	796	303843.4884	244	16	0
310	796	310	796	331016.1156	207	3	NA
311	796	311	796	364695.21 0	118	NA	
312	796	312	796	423488.5776	0	74	NA
313	796	313	796	388926.8496	0	108	NA
314	796	314	796	352836 0	0	NA	
315	796	315	796	387506.25 0	0	NA	
316	796	316	796	408321 0	0	NA	
317	796	317	796	334754.8164	45	0	NA
318	796	318	796	201529.1664	13	0	NA
319	796	319	796	187038.9504	0	0	NA
320	796	320	796	207061.4016	0	43	NA
321	796	321	796	230457.6036	0	144	NA
322	796	322	796	244550.0304	0	0	NA
323	796	323	796	157672.5264	0	0	0
324	796	324	796	130292.1216	10	0	0
325	796	325	796	105092.6724	0	0	NA
294	795	294	795	685087.29 0	0	NA	
295	795	295	795	479334.6756	0	43	NA
296	795	296	795	504071.6004	0	80	NA
297	795	297	795	396824.4036	0	134	0
298	795	298	795	349706.6496	0	292	NA
299	795	299	795	691957.7856	0	4	0
300	795	300	795	496094.8356	0	0	NA
301	795	301	795	407554.56 0	107	NA	
302	795	302	795	432753.4656	0	0	0
303	795	303	795	337328.64 60	0	NA	
304	795	304	795	272859.9696	253	29	NA
305	795	305	795	471969 0	146	NA	
306	795	306	795	463189.1364	0	62	0
307	795	307	795	253411.56 8	9	NA	
308	795	308	795	229306.8996	212	0	NA
309	795	309	795	334199.61 53	0	NA	
310	795	310	795	420448.4964	2	0	NA
311	795	311	795	463025.8116	0	35	NA
312	795	312	795	395163.1044	0	8	0
313	795	313	795	246393.1044	0	0	NA
314	795	314	795	223937.1684	0	0	NA
315	795	315	795	255894.3396	3	0	NA
316	795	316	795	295370.5104	47	0	1
317	795	317	795	247347.0756	0	0	NA
318	795	318	795	288240.1344	13	0	NA
319	795	319	795	256076.4816	58	0	NA
320	795	320	795	153977.76 13	65	NA	
321	795	321	795	142566.6564	0	0	NA
322	795	322	795	163005.9876	0	0	NA

323	795	323	795	139457.4336	0	0	NA
324	795	324	795	90216.1296	0	0	0
294	794	294	794	824427.6804	0	0	0
295	794	295	794	521255.1204	0	0	NA
296	794	296	794	607183.8084	0	0	0
297	794	297	794	438614.7984	0	21	NA
298	794	298	794	303909.6384	0	339	NA
299	794	299	794	336423.2004	0	338	0
300	794	300	794	327367.0656	0	289	NA
301	794	301	794	266689.6164	17	316	NA
302	794	302	794	226100.25 112	96	NA	
303	794	303	794	215778.8304	198	0	0
304	794	304	794	239414.49 165	0	0	
305	794	305	794	354191.6196	0	110	NA
306	794	306	794	349777.6164	0	147	NA
307	794	307	794	234391.5396	1	0	0
308	794	308	794	235147.4064	76	0	NA
309	794	309	794	306030.24 0	0	0	
310	794	310	794	332398.3716	0	0	NA
311	794	311	794	413706.24 0	0	0	
312	794	312	794	553268.1924	0	0	NA
313	794	313	794	402894.8676	0	0	NA
314	794	314	794	278593.9524	31	0	0
315	794	315	794	156673.4724	0	0	NA
316	794	316	794	164025 11	0	NA	
317	794	317	794	189695.0916	12	0	NA
318	794	318	794	269921.8116	23	0	NA
319	794	319	794	196497.1584	0	0	NA
320	794	320	794	138607.29 2	0	NA	
321	794	321	794	136161 0	0	0	
322	794	322	794	95703.6096	6	0	NA
323	794	323	794	91409.4756	169	0	NA
294	793	294	793	942219.6624	0	0	NA
295	793	295	793	1113742.5156	0	0	NA
296	793	296	793	1043584.8336	0	0	NA
297	793	297	793	695055.69 0	0	NA	
298	793	298	793	305698.41 0	153	NA	
299	793	299	793	419748.4944	0	151	NA
300	793	300	793	366654.4704	0	400	NA
301	793	301	793	336980.25 0	302	NA	
302	793	302	793	352978.5744	0	219	NA
303	793	303	793	385491.9744	15	0	NA
304	793	304	793	235263.8016	0	0	NA
305	793	305	793	236196 0	0	NA	
306	793	306	793	291405.6324	8	17	NA
307	793	307	793	290822.9184	0	0	NA
308	793	308	793	207279.8784	216	0	NA
309	793	309	793	199326.5316	173	0	NA
310	793	310	793	206352.1476	14	0	NA
311	793	311	793	281706.1776	0	0	NA
312	793	312	793	316338.7536	14	0	NA
313	793	313	793	253471.9716	2	0	0
314	793	314	793	171396 30	0	NA	
315	793	315	793	118942.2144	0	0	NA
316	793	316	793	120062.25 0	0	NA	
317	793	317	793	150233.76 5	0	NA	
318	793	318	793	230457.6036	70	0	NA
319	793	319	793	130812.4224	0	0	NA
320	793	320	793	153225.2736	0	0	0
321	793	321	793	121605.6384	117	0	NA
322	793	322	793	105443.0784	339	0	NA
294	792	294	792	801383.04 0	0	NA	
295	792	295	792	990224.01 0	0	0	
296	792	296	792	880707.1716	0	0	NA
297	792	297	792	559803.24 0	0	NA	
298	792	298	792	302720.04 0	141	0	
299	792	299	792	389675.5776	0	116	NA
300	792	300	792	502879.5396	0	41	NA
301	792	301	792	487176.0804	0	0	NA
302	792	302	792	448042.8096	0	0	NA
303	792	303	792	450939.1104	0	0	NA
304	792	304	792	340402.2336	0	0	0
305	792	305	792	229306.8996	2	0	NA
306	792	306	792	220036.0464	221	0	NA
307	792	307	792	297853.9776	201	0	NA

308	792	308	792	314721 22	0	1	
309	792	309	792	284259.5856	31	0	NA
310	792	310	792	216615.7764	132	0	NA
311	792	311	792	153742.41 50	0	NA	
312	792	312	792	135056.25 19	0	NA	
313	792	313	792	120770.1504	0	0	NA
314	792	314	792	119771.3664	0	0	NA
316	792	316	792	181322.6724	47	0	NA
317	792	317	792	142113.9204	10	0	NA
318	792	318	792	133429.4784	0	0	NA
319	792	319	792	152755.9056	0	0	NA
320	792	320	792	189486.09 18	0	NA	
321	792	321	792	120020.6736	280	0	NA
294	791	294	791	572080.4496	0	90	0
295	791	295	791	651345.8436	0	71	NA
296	791	296	791	726926.76 0	11	NA	
297	791	297	791	503730.8676	0	0	0
298	791	298	791	354906.1476	0	26	NA
299	791	299	791	316271.2644	0	33	NA
300	791	300	791	407018.4804	0	0	NA
301	791	301	791	384524.01 0	0	NA	
302	791	302	791	363753.7344	0	0	NA
303	791	303	791	348501.3156	0	0	NA
304	791	304	791	347085.9396	0	0	NA
305	791	305	791	229824.36 72	0	NA	
306	791	306	791	162715.4244	200	0	NA
307	791	307	791	195222.5856	103	0	NA
308	791	308	791	253592.8164	138	0	0
309	791	309	791	272045.6964	59	0	0
310	791	310	791	231437.9664	24	0	NA
311	791	311	791	128436.2244	2	0	NA
312	791	312	791	150094.2564	0	0	NA
313	791	313	791	166317.1524	0	14	NA
314	791	314	791	151585.6356	0	0	NA
318	791	318	791	141661.9044	105	0	NA
319	791	319	791	107794.0224	240	0	NA
320	791	320	791	117456.9984	369	0	0
294	790	294	790	460009.4976	0	324	NA
295	790	295	790	394635.24 0	370	NA	
296	790	296	790	422474.0004	0	195	NA
297	790	297	790	381479.1696	0	327	NA
298	790	298	790	334615.9716	0	257	NA
299	790	299	790	247048.7616	0	5	NA
300	790	300	790	249620.1444	0	0	NA
301	790	301	790	284899.7376	0	0	NA
302	790	302	790	230861.0304	0	0	0
303	790	303	790	199219.3956	0	0	NA
304	790	304	790	181476 32	0	NA	
305	790	305	790	170701.1856	85	0	NA
306	790	306	790	164608.7184	0	0	NA
307	790	307	790	138786.0516	13	0	NA
308	790	308	790	126081.8064	9	0	NA
310	790	310	790	145664.3556	0	0	NA
311	790	311	790	157958.5536	0	0	NA
312	790	312	790	288949.2516	48	0	NA
313	790	313	790	415638.09 22	0	1	
314	790	314	790	261386.7876	0	0	1
293	789	293	789	407401.3584	0	354	1
294	789	294	789	373883.3316	0	400	NA
295	789	295	789	352194.7716	0	400	1
296	789	296	789	343911.8736	0	398	NA
297	789	297	789	346803.21 0	400	0	
298	789	298	789	328672.89 0	385	NA	
299	789	299	789	322033.5504	0	188	NA
300	789	300	789	216615.7764	0	0	0
301	789	301	789	193635.2016	0	0	0
302	789	302	789	188182.44 0	2	NA	
303	789	303	789	239297.0724	0	17	NA
304	789	304	789	255166.4196	0	40	NA
305	789	305	789	314990.3376	0	40	NA
306	789	306	789	328672.89 0	43	NA	
307	789	307	789	268738.56 0	44	NA	
308	789	308	789	160544.4624	0	0	1
309	789	309	789	302984.1936	0	0	0
310	789	310	789	242300.2176	0	0	NA

311	789	311	789	294197.76 0	0	NA	
312	789	312	789	476017.2036	0	0	NA
313	789	313	789	545441.3316	0	0	NA
314	789	314	789	270545.6196	0	0	1
293	788	293	788	306827.3664	0	304	1
294	788	294	788	301796.4096	0	184	NA
295	788	295	788	297526.6116	0	166	NA
296	788	296	788	264957.2676	0	119	0
297	788	297	788	262430.7984	0	215	NA
298	788	298	788	263538.4896	0	159	NA
299	788	299	788	267682.0644	0	6	NA
300	788	300	788	213887.7504	0	0	NA
301	788	301	788	233231.0436	0	0	NA
302	788	302	788	339982.2864	0	17	NA
303	788	303	788	446918.9904	0	32	0
304	788	304	788	429365.6676	0	2	NA
305	788	305	788	472876.2756	0	4	NA
306	788	306	788	406023.84 0	0	NA	
307	788	307	788	252687.1824	0	0	1
308	788	308	788	184143.9744	0	0	NA
309	788	309	788	324763.2144	0	0	0
310	788	310	788	334824.2496	0	0	NA
311	788	311	788	360288.0576	0	90	NA
312	788	312	788	551751.84 0	174	NA	
313	788	313	788	472381.29 0	26	1	
314	788	314	788	237539.2644	0	0	NA
292	787	292	787	318299.0724	0	161	NA
293	787	293	787	324353.0304	0	55	NA
294	787	294	787	316878.9264	0	329	NA
295	787	295	787	304637.7636	0	131	NA
296	787	296	787	323943.1056	0	230	NA
297	787	297	787	342225 0	46	0	
298	787	298	787	296807.04 0	66	NA	
299	787	299	787	233810.9316	0	0	NA
300	787	300	787	222067.1376	0	0	NA
301	787	301	787	329154.6384	0	55	NA
302	787	302	787	435916.8576	0	9	NA
303	787	303	787	565383.6864	0	87	NA
304	787	304	787	437582.25 0	0	NA	
305	787	305	787	364912.6464	0	0	NA
306	787	306	787	303711.21 0	0	NA	
307	787	307	787	240413.7024	0	0	NA
308	787	308	787	214387.5204	0	0	NA
309	787	309	787	326063.8404	0	0	0
310	787	310	787	406559.2644	0	0	0
311	787	311	787	446678.3556	0	242	1
312	787	312	787	558277.9524	0	172	NA
313	787	313	787	463842.7236	0	0	NA
314	787	314	787	203581.44 0	0	NA	
291	786	291	786	414632.9664	0	346	NA
292	786	292	786	406406.25 0	241	0	
293	786	293	786	474528.0996	0	22	NA
294	786	294	786	391775.8464	0	274	NA
295	786	295	786	404724.9924	0	0	NA
296	786	296	786	423020.16 0	5	NA	
297	786	297	786	357269.1984	0	190	0
298	786	298	786	313846.4484	0	74	0
299	786	299	786	251843.3856	0	0	0
300	786	300	786	248422.4964	0	0	NA
301	786	301	786	398943.8244	0	0	NA
302	786	302	786	447882.1776	0	11	NA
303	786	303	786	553446.7236	0	315	NA
304	786	304	786	442437.8256	0	69	NA
305	786	305	786	461964.9024	0	51	NA
306	786	306	786	353763.2484	0	0	NA
307	786	307	786	334754.8164	0	3	NA
308	786	308	786	297199.4256	0	0	NA
309	786	309	786	225758.0196	0	0	NA
310	786	310	786	312704.64 0	7	0	
311	786	311	786	450939.1104	0	46	NA
312	786	312	786	502964.64 0	7	NA	
313	786	313	786	325995.3216	0	0	NA
314	786	314	786	191528.7696	0	0	NA
291	785	291	785	488852.6724	0	345	NA
292	785	292	785	518400 0	274	NA	

293	785	293	785	663899.04 0	95	NA	
294	785	294	785	560791.2996	0	16	NA
295	785	295	785	504156.8016	0	0	NA
296	785	296	785	426382.8804	0	66	NA
297	785	297	785	369931.5684	0	317	NA
298	785	298	785	384821.7156	0	107	NA
299	785	299	785	280306.7136	0	78	NA
300	785	300	785	273298.9284	0	18	NA
301	785	301	785	383185.7604	0	69	NA
302	785	302	785	425756.25 0	45	NA	
303	785	303	785	551930.1264	0	222	NA
304	785	304	785	447882.1776	0	165	NA
305	785	305	785	369712.6416	0	68	NA
306	785	306	785	380146.2336	0	26	NA
307	785	307	785	469910.25 0	206	NA	
308	785	308	785	533893.2624	0	0	NA
309	785	309	785	313712.01 0	0	NA	
310	785	310	785	332744.3856	0	22	NA
311	785	311	785	519869.8404	0	0	0
312	785	312	785	507228.84 0	0	NA	
313	785	313	785	284259.5856	0	0	NA
291	784	291	784	568365.21 0	185	NA	
292	784	292	784	740288.16 0	73	0	
293	784	293	784	874973.16 0	0	NA	
294	784	294	784	796234.9824	0	0	NA
295	784	295	784	615534.3936	0	9	NA
296	784	296	784	393731.1504	0	170	0
297	784	297	784	421460.64 0	236	NA	
298	784	298	784	424582.56 0	22	0	
299	784	299	784	272233.4976	0	86	NA
300	784	300	784	303314.5476	0	81	NA
301	784	301	784	431806.6944	0	234	NA
302	784	302	784	538990.9056	0	103	0
303	784	303	784	631929.6036	0	78	1
304	784	304	784	582382.6596	0	117	NA
305	784	305	784	605128.41 0	93	1	
306	784	306	784	554161.1364	0	228	0
307	784	307	784	678547.5876	0	64	NA
308	784	308	784	460497.96 0	0	NA	
309	784	309	784	404267.0724	0	0	0
310	784	310	784	426853.1556	0	0	NA
311	784	311	784	613840.9104	0	0	NA
312	784	312	784	394484.4864	0	0	NA
313	784	313	784	207498.4704	0	0	NA
291	783	291	783	586694.7216	0	9	NA
292	783	292	783	641985.5376	0	0	NA
294	783	294	783	679041.9216	0	4	NA
295	783	295	783	637474.4964	0	152	NA
296	783	296	783	457652.25 0	207	NA	
297	783	297	783	473701.8276	0	95	NA
298	783	298	783	341733.7764	0	0	NA
299	783	299	783	253592.8164	0	8	NA
300	783	300	783	330602.0004	0	34	NA
301	783	301	783	386237.3904	0	33	NA
303	783	303	783	692856.4644	0	0	NA
304	783	304	783	698060.25 0	139	0	
305	783	305	783	596014.8804	0	196	NA
306	783	306	783	575898.8544	0	167	NA
307	783	307	783	463352.49 0	34	NA	
308	783	308	783	340542.2736	0	0	NA
309	783	309	783	530566.56 0	11	NA	
310	783	310	783	548547.6096	0	0	NA
311	783	311	783	646030.1376	0	0	NA
312	783	312	783	294458.1696	0	0	0
313	783	313	783	204991.6176	0	0	NA
295	782	295	782	540842.5764	0	0	NA
296	782	296	782	556217.64 0	0	NA	
297	782	297	782	504242.01 0	0	NA	
304	782	304	782	586327.1184	0	167	NA
305	782	305	782	524204.9604	0	282	NA
306	782	306	782	390725.0064	0	251	NA
307	782	307	782	347722.5024	0	71	0
308	782	308	782	461964.9024	0	35	NA
309	782	309	782	613746.8964	0	0	NA
310	782	310	782	547304.04 0	0	NA	

311	782	311	782	388253.61 0	0	NA	
312	782	312	782	234449.64 0	0	1	
313	782	313	782	283045.2804	0	0	NA
304	781	304	781	620345.2644	0	45	NA
305	781	305	781	633170.3184	0	151	NA
306	781	306	781	445476.1536	0	52	NA
307	781	307	781	539695.9296	0	18	0
308	781	308	781	654157.44 0	34	NA	
309	781	309	781	753042.1284	0	0	NA
310	781	310	781	512283.7476	0	0	NA
311	781	311	781	348572.16 0	0	NA	
312	781	312	781	360072.0036	0	0	NA
313	781	313	781	440285.3316	0	48	NA
305	780	305	780	755334.81 0	41	NA	
306	780	306	780	647574.2784	0	5	NA
307	780	307	780	609055.3764	0	129	NA
308	780	308	780	665170.7364	0	50	NA
309	780	309	780	492130.3104	0	106	0
310	780	310	780	357915.0276	0	147	NA
311	780	311	780	372051.2016	0	21	NA
312	780	312	780	564752.25 0	54	NA	
313	780	313	780	657266.9184	0	53	NA
305	779	305	779	726722.1504	0	97	NA
306	779	306	779	673318.7136	0	80	NA
307	779	307	779	635081.4864	0	116	NA
308	779	308	779	553089.69 0	199	NA	
309	779	309	779	391250.25 0	369	NA	
310	779	310	779	399398.7204	0	214	NA
311	779	311	779	498040.7184	0	282	NA
312	779	312	779	612149.76 0	79	0	
313	779	313	779	546594.0624	0	0	NA
314	779	314	779	441879.2676	0	0	NA
308	778	308	778	505521 0	32	NA	
309	778	309	778	562410.0036	0	252	NA
310	778	310	778	657558.81 0	15	NA	
311	778	311	778	675684 0	124	NA	
312	778	312	778	640256.0256	0	3	NA
313	778	313	778	617513.0724	0	0	NA
309	777	309	777	690062.49 0	0	NA	
310	777	310	777	745252.3584	0	0	NA
311	777	311	777	687871.1844	0	0	NA
309	790	309	790	147133.6164	0	0	NA