

Don't Trust the Cloud, Verify: Integrity and Consistency for Cloud Object Stores*

Marcus Brandenburger
IBM Research - Zurich
bur@zurich.ibm.com

Christian Cachin
IBM Research - Zurich
cca@zurich.ibm.com

Nikola Knežević†
IMC Financial Markets
nikkne@gmx.ch

2016-07-13

Abstract

Cloud services have turned remote computation into a commodity and enable convenient online collaboration. However, they require that clients fully trust the service provider in terms of confidentiality, integrity, and availability. Towards reducing this dependency, this paper introduces a protocol for *verification of integrity and consistency for cloud object storage (VICOS)*, which enables a group of mutually trusting clients to detect data-integrity and consistency violations for a cloud object-storage service. It aims at services where multiple clients cooperate on data stored remotely on a potentially misbehaving service. VICOS enforces the consistency notion of fork-linearizability, supports wait-free client semantics for most operations, and reduces the computation and communication overhead compared to previous protocols. VICOS is based in a generic way on any *authenticated data structure*. Moreover, its operations cover the hierarchical name space of a cloud object store, supporting a real-world interface and not only a simplistic abstraction. A prototype of VICOS that works with the key-value store interface of commodity cloud storage services has been implemented, and an evaluation demonstrates its advantage compared to existing systems.

1 Introduction

More and more data is outsourced to the cloud, and collaborating on a *shared resource* using cloud services has become easier than ever. Programmers work together on online source code repositories, global project teams produce technical deliverables, and friends share their photo albums. Nevertheless, the clients need to *trust* the cloud provider as rely on it for the confidentiality and correctness of their data. *Encryption* may preserve the confidentiality of data but cannot prevent inadvertent or malicious data modifications. This work shows how to protect the *integrity* and *consistency* of data on an untrusted cloud storage service accessed by multiple clients.

With a single client only, the client may locally keep a short *cryptographic hash value* of the outsourced data. Later, this can be used to verify the integrity of the data returned by the cloud storage service. However, with multiple disconnected clients, no common synchronization, and no communication among the clients, neither hashing nor digital signatures are sufficient by themselves. The reason is that a malicious or *Byzantine* server may violate the consistency of the data, for example, by reordering or omitting properly authenticated operations, so that the *views* of the storage state at different clients

* A short version of this work appears in the proceedings of SYSTOR 2015. DOI: 10.1145/2757667.2757681

† Work done at IBM Research -Zurich

diverge. A malicious cloud server may pretend to one set of clients that some operations by others simply did not occur. In other words, *freshness* can be violated and the clients cannot detect such replay attacks until they communicate directly. The problem is particularly relevant in cryptographic online voting and for web certificate transparency [22].

The strongest achievable notion of consistency in this multi-client model is captured by *fork-linearizability*, introduced by Mazières and Shasha [26]. A consistency and integrity verification protocol may guarantee this notion by adding condensed data about the causal evolution of the client’s views into their interaction with the server. This ensures that if the server creates only a single discrepancy between the views of two clients, these clients may never observe operations of each other afterwards. In other words, if the server ever lies to some clients and these clients communicate later, they will immediately discover the violation. Hence, with only one check they can verify a large number of past operations.

The SUNDR system [23] pioneered fork-linearizable consistency and demonstrated a network file system protected by a hash tree of every user’s files. SUNDR uses an expensive protocol, requiring messages of size $\Omega(n^2)$ for n clients [10]. Like other systems providing fork-linearizability, it suffers from the inherent limitation that sometimes, even with a correct server, clients have to block and cannot proceed with their next operation because other clients are concurrently executing operations [10].

In order to prevent blocking, FAUST [8], SPORC [13], and Venus [30] relax their guarantees to *weak fork-linearizability*, which establishes consistency only eventually, after further operations occur; this is not desirable because a client may only know later that a protocol output was not correct. SPORC and the related Blind Stone Tablet (BST) [34] protocol shift the maintenance of state to the clients, such that the server is merely responsible for coordination; every client holds a complete copy of the system’s state. This contradicts the goal of outsourcing data to the cloud. Another way to avoid blocking is explored by BST and COP [9]: they let any commuting operations proceed immediately.

In this paper, we present *VICOS*, a *verification protocol for the integrity and consistency of cloud object storage*, which overcomes these limitations and demonstrates a complete practical system. VICOS supports the optimal consistency notion of fork-linearizability, provides wait-free semantics for all *compatible* client operations, and has smaller overhead than previous protocols. The notion of compatible operations, as introduced here, generalizes the progress condition over commuting operations, which are considered in past work. Informally, two operations o and ω are compatible if executing o before ω does not influence the behavior of ω (neither its effects nor its output value). Conceptually, VICOS is based on abstract *authenticated data structures* in a modular way. Moreover, it unifies the two different lines of work on this problem so far, namely, the untrusted storage protocols [23, 10, 8] that feature remote state and are based on vector clocks, and the remote service verification protocols [34, 13, 9], which create local copies of the state and use hash chains. In particular, VICOS maintains state remotely, at the server, but uses hash chains for consistency verification. Furthermore, VICOS incurs only a constant communication overhead per operation, independent of the number of clients, whereas FAUST and Venus require vector clocks of size $\Omega(n)$ with n clients.

We have implemented and evaluated VICOS with a commodity cloud object store; the results demonstrate that the overhead for distributed, multi-client integrity and consistency verification is low. VICOS protects a complete cloud storage service (assuming it has atomic semantics), spanning many objects and offering read, write, delete, and directory listing operations; this stands in contrast to Venus [30], which only provided consistency for a *single* data object. Furthermore, VICOS notifies the clients whenever the integrity or consistency is violated but does not address recovery operations.

1.1 Contributions

This work makes the following contributions towards ensuring integrity for data stored on untrusted cloud providers:

- A novel abstract protocol to verify the integrity and consistency of a generic service based on an authenticated data structure [32], which ensures fork-linearizability, supports wait-free semantics for compatible operations, and incurs only constant communication overhead. This protocol also generalizes authenticated data structures to multiple writers.
- An instantiation of this protocol for a commodity cloud object store, called VICOS. It represents the first integrity protection protocol with all of the above features for the standard operations of a cloud object store.
- An implementation and evaluation of VICOS using *COSBench*, demonstrating its practicality. In particular, the overhead of VICOS for integrity protection remains acceptably small with moderate concurrency and increases slightly when many clients access the same data concurrently. The prototype is available open-source.

1.2 Organization

The paper continues with introducing the model and defines our notion of an authenticated data structure (ADS). Sec. 3 presents the abstract integrity protocol for ADS and discusses its properties. VICOS is introduced in Sec. 4 and the evaluation appears in Sec. 6. Related work is discussed in Sec. 7.

2 Model

We consider an asynchronous distributed system with n mutually trusting *clients* C_1, \dots, C_n and a *server* S . The communication between the server and the clients is reliable and respects *first-in first-out* (FIFO) semantics. Clients cannot communicate with each other. A protocol P specifies the behavior of the clients and the server. All clients are *correct* and hence follow P ; in particular, they do not crash (although crashes could be tolerated with extra measures in the protocols). The server is either correct and follows P or *Byzantine*, deviating arbitrarily from P .

The clients invoke operations of a stateful functionality F , implementing a set of deterministic operations; F defines a response and a state change for every operation. We use the standard notions of executions, histories, sequential histories, real-time order, concurrency, and well-formed executions from the literature [3]. In particular, every operation in an execution is represented by an *invocation event* and a *response event*. We extend F with a special return value ABORT that allows an operation to abort without taking effect, which may be used when concurrent operations would cause it to block [24, 9].

2.1 Consistency properties

When S is correct, the protocols should provide the standard notion of *linearizability* [19] with respect to F . It requires that an execution of operations by all clients together is equivalent to an imaginary sequential execution of F . More precisely, for an execution to be linearizable, all invocation and response events occurring at all clients can be permuted into one totally ordered sequence, where (1) every operation invocation is followed immediately by the corresponding response; (2) all operations are correct according to the specification of F ; and (3) the operations in the sequence respect the real-time order among operations observed in the execution.

Fork-linearizability [26, 10] relaxes this common global view and permits that the clients observe an execution that may split into multiple linearizable “forks,” which must never join again. More precisely, an execution is *fork-linearizable* when every client observes a linearizable history (containing all operations that the client executes itself) and for any operation observed by multiple clients, the history

of events occurring before the operation is the same at those clients. This implies that if the views of the execution at two clients ever diverge, they cannot observe each other’s operations any more, and makes it easy to spot consistency violations by the server.

Furthermore, we recall the concept of a *fork-linearizable Byzantine emulation* [10]. It requires that our protocol among the clients and the Byzantine server satisfies two conditions: When the server is correct, then the service is linearizable; otherwise, it is still fork-linearizable. Finally, our protocol may only abort (by returning ABORT) if there is some reason for this; in other words, when the clients execute operations sequentially, then no client ever aborts.

2.2 Cryptographic primitives

Our protocols use a cryptographic *hash function* and *digital signature schemes* for protecting data against modification. We model them in an idealized way, as if implemented by a distributed oracle [7].

A cryptographic *hash function* $hash$ maps a bit string x of arbitrary length to a short, unique hash value h . Its implementation is deterministic and maintains a list L of all x that have been queried so far. When the invocation contains $x \in L$, then $hash$ responds with the index of x in L ; otherwise, $hash$ appends x to L and returns its index. This ideal implementation models only collision resistance, i.e., that it is not feasible to find two different values x_1 and x_2 such that $hash(x_1) = hash(x_2)$.

A *digital signature scheme* as used here provides two functions, $sign_i$ and $verify_i$, to ensure the authenticity of a message created by a known client. The scheme works as follows: A client C_i invokes $sign_i(m)$ with a message m as argument and obtains a signature $\phi \in \{0, 1\}^*$ with the response. Only client C_i can invoke $sign_i$. When m and ϕ are sent to another client, that client may verify the integrity of m . It invokes $verify_i(\phi, m)$ and obtains TRUE as a response if and only if C_i has executed $sign_i(m)$; otherwise, $verify_i(\phi, m)$ returns FALSE. Every client, as well as S , may invoke $verify$.

2.3 Authenticated data structures

This section defines the model of *authenticated data structures* (ADS) used here. Authenticated data structures [28, 25, 32] are a well-known tool for verifying operations and their results over data outsourced to untrusted servers. Popular instantiations rely on Merkle hash trees or other hierarchical authenticated search structures [17, 27].

We model an ADS for an arbitrary deterministic *functionality* F . Departing from the literature on ADSs, we eliminate the special role of the single writer or “source” and let any client perform update operations; likewise, we unify queries and updates into one type of *operation* from a set \mathcal{O} . Operations may contain arguments according to F , but these are subsumed into the different $o \in \mathcal{O}$. The functionality specifies a state $s \in \mathcal{S}$, which will be maintained by the server, starting with an initial state s_0 . For example, this may include all data stored on a cloud storage service. Given s , applying an operation o of F means to compute $(s', r) \leftarrow F(s, o)$, resulting in a new state $s' \in \mathcal{S}$ and a response $r \in \mathcal{R}$.

Operations are executed by the clients and formally described by an invocation event and a response event occurring at the client. In order to verify the responses of S , a client stores an *authenticator* a , a short value also called a *digest*. Initially, the authenticator is a special value a_0 .

For executing an operation o , the client invokes algorithm $query_F$ on S ,

$$(r, \sigma_o) \leftarrow query_F(s, o),$$

producing a *response* r and *auxiliary data* σ_o for o ; the latter may serve as a *proof* for the validity of the response. Then the client locally performs an operation $authexec_F$ to validate the response on the basis

of the authenticator. From this the client obtains an output

$$(a', \sigma'_o, v) \leftarrow \text{authexec}_F(o, a, r, \sigma_o).$$

Here a' and σ'_o are the updated authenticator and auxiliary data, respectively, and $v \in \{\text{FALSE}, \text{TRUE}\}$ denotes a Boolean verification value that tells the client whether the response r from S is valid.

The client should then send σ'_o back to S , so that the server may actually execute o and update its state from s to s' by running refresh_F as

$$s' \leftarrow \text{refresh}_F(s, o, \sigma'_o).$$

Note we may also consider these operations for *sequences* of operations.

An ADS [28, 25, 32] is a special case of this formalization, in which the operations \mathcal{O} can be partitioned into *update-operations* \mathcal{U} and *query-operations* \mathcal{Q} . Update operations generate no response, i.e., $F(s, u) = (s', \perp)$ for all $u \in \mathcal{U}$ and queries do not change the state, that is, $F(s, q) = (s, r)$ for all $q \in \mathcal{Q}$.

Furthermore, an ADS may contain initialization and key-generation routines and all algorithms may take public and private keys as inputs in addition. For simplicity, and because our ADS implementations are unkeyed, we omit them here.

An ADS satisfies *correctness* and *security*. Consider the execution of a sequence $\langle o_1, \dots, o_m \rangle$ of operations, $F(s_0, \langle o_1, \dots, o_m \rangle)$, which means to compute $(s_j, r_j) \leftarrow F(s_{j-1}, o_j)$ for $j = 1, \dots, m$. A *proper authenticated execution* of $\langle o_1, \dots, o_m \rangle$ computes the steps

$$\begin{aligned} (r_j, \sigma_{o,j}) &\leftarrow \text{query}_F(s_{j-1}, o_j) \\ (a_j, \sigma'_{o,j}, v_j) &\leftarrow \text{authexec}_F(o_j, a_{j-1}, r_j, \sigma_{o,j}) \\ s_j &\leftarrow \text{refresh}_F(s_{j-1}, o_j, \sigma'_{o,j}). \end{aligned}$$

such that $v_j = \text{TRUE}$, for $j = 1, \dots, m$.

An ADS is *correct* if the proper authenticated execution of any operation sequence $\langle o_1, \dots, o_m \rangle$ outputs state s_m and response r_m such that $(s_m, r_m) = F(s_0, \langle o_1, \dots, o_m \rangle)$.

Furthermore, an ADS must be *secure* against an adversary \mathcal{A} that tries to forge a response and auxiliary data that are considered valid by a client. More precisely, \mathcal{A} adaptively determines an operation sequence $\langle o_1, \dots, o_m \rangle$, which is taken through a proper authenticated execution by a challenger; at every step, \mathcal{A} obtains a_j and $\sigma'_{o,j}$ and then determines o_{j+1} and whether the execution continues. Finally, after obtaining a_m and s_m , \mathcal{A} outputs an operation o^* , a response r^* , and a value σ_o^* . The ADS is secure if no \mathcal{A} succeeds in creating o^* , r^* , s_m^* , and σ_o^* such that

$$(\cdot, \cdot, \text{TRUE}) = \text{authexec}_F(o^*, a_m, r^*, \sigma_o^*)$$

but $F(s_m, o^*) = (s_{m+1}, r_{m+1})$ with $r_{m+1} \neq r^*$. (The “don’t-care” symbol \cdot in the tuple indicates that only a subset of the tuple elements are needed.) In other words, \mathcal{A} cannot find any o^* executed on s_m and forge a response r^* and a proof for o^* that is accepted by the client, unless the response is correct according to F and $r^* = r_{m+1}$.

Note that this formalization represents an “idealized” security notion. It is easy to formulate an equivalent computational security condition using the language of modern cryptology [15]. This model subsumes the one of Cachin [6] and generalizes ADS [32] to multiple writing clients, where here the authenticator is implicitly synchronized among the clients.

2.4 Compatible operations

Our protocol takes advantage of *compatible* operations that permit “concurrent” execution without compromising the goal of ensuring fork-linearizability to the clients. An operation o' is compatible with another operation o (in a state s) if the presence of o' before o does not influence the return value of o (in s). Compatible operations can be executed without blocking; this improves the throughput compared to earlier protocols, in particular with respect to COP [9], which considered the stronger notion of commutative operations.

Formally, we say an operation sequence ω is *compatible with* an operation o in a state s whenever the responses of o remain the same regardless of whether ω executed before o . Hence, with

$$\begin{aligned}(s', r) &\leftarrow F(s, \omega); & (s'', p) &\leftarrow F(s', o); & \text{and} \\ (t', q) &\leftarrow F(s, o)\end{aligned}$$

it holds $p = q$. Moreover, we say that ω is *compatible with* o if and only if ω is compatible with o in all states $s \in \mathcal{S}$ of F .

In algorithms we use a function compatible_F , which takes ω and o as inputs and returns TRUE if and only if ω and o are compatible.

In the terminology of the database literature [33], two operations are compatible if and only if they do not exhibit a “write-read” conflict, which is also known as a “dirty read.”

Note that compatible operations are not necessarily commutative, but commutative operations are always compatible. For instance, a query operation q is compatible with an update u in any state; but when q returns data modified by u , then q and u do not commute.

3 The ADS integrity protocol (AIP)

This section introduces the *ADS integrity protocol (AIP)*, a generic protocol to verify the integrity and consistency for any authenticated data structure (ADS) operated by a remote untrusted server. AIP extends and improves upon the *commutative-operation verification protocol (COP)* and its authenticated variant (ACOP) of Cachin and Ohrimenko [9]. Sec. 4 shows how to instantiate AIP with an authenticated dictionary for protecting cloud storage; the result forms the core of VICOS.

3.1 Overview

The processing of one operation in AIP is structured into an *active* and a *passive* phase, as shown in Fig. 1. The active phase begins when the client invokes an operation and ends when the client completes it and outputs a response; this takes one message roundtrip between the client and the server. Different from past protocols, the client stays further involved with processing authentication data for this operation during the passive phase, which is decoupled from the execution of further operations.

More precisely, when client C_i invokes an operation $o \in \mathcal{O}$, it sends a signed INVOKE message carrying o to the server S . The server assigns a global sequence number (t) to o and responds with a REPLY message containing a list of *pending* operations, the response, an authenticator, and auxiliary data needed by the client for verification. Operations are pending (for o) because they have been started by other clients and S has ordered them before o , but S has not yet finished processing them. We distinguish between *pending-other* operations, which have been invoked by other clients, and *pending-self* operations, which C_i has executed before o .

After receiving the REPLY message, the client checks its content. In particular, if the pending-other operations are compatible with o , then C_i verifies the pending-self operations including o with the help

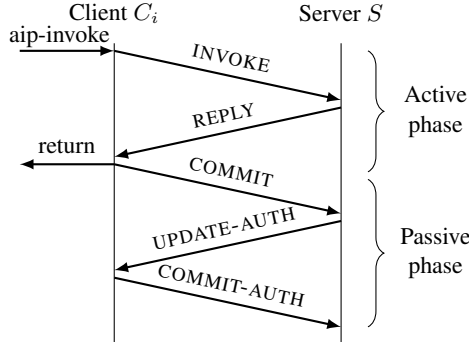


Figure 1. Protocol messages in AIP.

of the authenticator; if they are correct, C_i proceeds and outputs the response immediately. Along the way C_i verifies that all data received from S satisfies conditions to ensure fork-linearizability. An operation that terminates like this is called *successful*; alternatively, when the pending-other operations are not compatible with o , then o *aborts*. In this case, C_i returns the symbol ABORT. In any case, the client subsequently *commits* o and sends a signed COMMIT message to S (note that also aborted operations are committed in that sense). This step terminates the active phase of the operation. The client may now invoke the next operation or retry o if it was aborted.

Processing of o continues with the passive phase. At some (later) time, as soon as the operation immediately preceding o in the assigned order has terminated its own passive phase, S sends an UPDATE-AUTH message with auxiliary data and the authenticator of the preceding operation to C_i . When C_i receives this, it validates the message content and verifies the execution of o unless o had been aborted. Using the methods of the ADS, the client now computes and signs a new authenticator that it sends to S in a COMMIT-AUTH message. We say that C_i *authenticates* o at this time. When S receives this message, then it *applies* o by executing it on the state and stores the corresponding authenticator; this completes the passive phase of o .

Note that the server may receive COMMIT messages in an order that differs from the one of the globally assigned sequence numbers due to asynchrony. Still, the authentication steps in the passive phases of the different operations must proceed according to the assigned operation order. For this reason, the server maintains a second sequence number (b), which indicates the last authenticated operation that the server has applied to its state. Hence, S buffers the incoming COMMIT messages and runs the passive phases sequentially in the assigned order.

For ensuring consistency, every client needs to know about all operations that the server has executed. Therefore, when S responds to the invocation of an operation by C_i , it includes in the REPLY message a summary (including the corresponding signatures) of all those operations that C_i has missed since it last executed an operation. Prior to committing o , the client verifies these operations and thereby *clears* them.

3.2 Notation

The protocol is shown in Alg. 1–3 and formulated reactively. The clients and the server are state machines whose actions are triggered by events such as receiving messages. An ordered list with elements e_1, e_2, \dots, e_k is denoted by $E = \langle e_1, e_2, \dots, e_k \rangle$; the element with index j may be accessed as $E[j]$. We also use maps that operate as associative arrays and store values under unique keys. A value v is stored in a map H by assigning it to a key k , denoted by $H[k] \leftarrow v$; for non-assigned keys, the map returns \perp . The symbol \parallel denotes the concatenation of bit strings. The **assert** statement, parameterized

by a condition, catches an error and immediately terminates the protocol when the condition is false. Clients use this to signal that the server misbehaved.

3.3 Data structures

This section describes the data structures maintained by every client and by the server. For simplicity, the pseudo code does not describe garbage collection, but we note where this is possible.

Every *client* C_i (Alg. 1) stores the sequence number of its last cleared operation in a variable c . The *hash chain* H represents the condensed view that C_i has of the sequence of all operations. It is computed over the sequence of all applied operations and the sequence of pending operations announced by S . Formally, H is a map indexed by operation sequence number; an entry $H[l]$ is equal to $\text{hash}(H[l-1] \parallel o \parallel l \parallel j)$ when the l -th operation o is executed by C_j , with $H[0] = \text{NULL}$. Variable Z is a map that represents the status (SUCCESS or ABORT) of every operation, according to the result of the test for compatibility. The client only needs the entries in H and Z with indices greater than c and may garbage-collect older entries. Finally, C_i uses a variable u that is set to o whenever C_i has invoked operation o but not yet completed it; otherwise u is \perp .

The *server* (Alg. 3) maintains the sequence number of the most recently invoked operation in a counter t . In addition to that, the counter b contains the sequence number of the most recently applied operation and governs the authentication of operations in the passive phase. Every invoked operation is stored in a map I and every committed operation in a map O ; both maps are indexed by sequence number. The server only needs the entries in I with sequence numbers greater than b . An entry in O , at a sequence number b or greater, has to be stored until every client has committed some operation with a higher sequence number and may be removed later. Most importantly, the server keeps the state s of the ADS for F , which reflects all successful operations up to sequence number b . In contrast to COP [9] and SPORC [13], where every client maintains a complete copy of the state, here only the server stores that state. Moreover, S stores the authenticator for every operation in a map A indexed by sequence number.

3.4 The protocol in detail

This section describes the ADS integrity protocol (AIP) as shown in Alg. 1–3. AIP is parameterized by an ADS and a functionality F that specifies its operations through query_F , authexec_F , and refresh_F . The client invokes AIP with an ADS-operation o by calling $\text{aip-invoke}(o)$; it completes when AIP executes **return** at the end of the handler for the REPLY message. This ends the active phase of AIP, and the passive phase continues asynchronously in the background.

3.4.1 Active phase

When client C_i invokes an operation o , it computes an INVOKE-signature τ over o and i ; this proves to other clients that C_i has invoked o . Then C_i stores o in u and sends an INVOKE message with o and τ to the server.

Upon receiving an INVOKE message with o , the server increments the sequence number t , assigns it to o , and assembles the REPLY message for C_i . First, S stores o and the accompanying signature in $I[t]$; the value t is also called the *position* of o . The pending operations for o , assigned to ω , are found in $I[b+1], \dots, I[t]$, i.e., starting with the oldest non-applied operation, and include o . In order to compute the response and the auxiliary data for o from the correct state, the server must then extract the *successful* pending-self operations μ of C_i , using the following method:


```

function separate-pending( $i, \omega$ )
   $\mu \leftarrow \langle \rangle; \gamma \leftarrow \langle \rangle$ 
  for  $k = 1, \dots, \text{length}(\omega)$  do
     $(o', \cdot, j) \leftarrow \omega[k]$ 
    if  $j = i$  then
      if  $k = \text{length}(\omega) \vee$  status of  $o'$  is SUCCESS then
         $\mu \leftarrow \mu \circ \langle o' \rangle$  // see text how to get status of  $o'$ 
      else if  $j \neq i$  then
         $\gamma \leftarrow \gamma \circ \langle o' \rangle$ 
  return  $(\mu, \gamma)$ 

```

This method is common to the server and the clients. Note that μ includes the current operation (which appears at the end of ω) but not the aborted operations of C_i . The server finds the status of a pending-self operation o' of C_i in $O[b+k]$ (except for o itself, obviously) because C_i has already committed o' prior to invoking o and because the messages between C_i and S are FIFO-ordered. On the other hand, C_i retrieves the status of o' from $Z[b+k]$.

Then S computes the response r and auxiliary data σ_o by calling $query_F(s, \mu)$ from the ADS for F ; the response therefore takes into account the state reached after the successful pending-self operations of C_i but excludes any pending-other operations present in ω . However, the client will only execute o and output r when γ is compatible with o and, therefore, C_i is guaranteed a view in which the operations of γ occur after o . This will ensure fork-linearizability. The REPLY message to C_i also includes $A[b]$ containing the authenticator and its AUTH-signature, for the operation with sequence number b . The client passes these to $authexec_F$ of μ for verifying the correctness of the response. Furthermore, the REPLY message contains δ , the list of all operations that have been authenticated since C_i 's last operation. In particular, when c is the sequence number from the INVOKE message, δ contains the operations at sequence numbers $c+1, \dots, b$; when $c = b$, however, δ contains still $O[b]$.

After receiving the REPLY message from S , the client (1) processes and clears the authenticated operations in δ , (2) verifies the pending operations in ω , and (3) verifies that r is the correct response for o . These steps are explained next.

For verifying and processing δ and the last signed authenticator in α , client C_i calls a function *check-view* and verifies and/or extends the hash chain for every operation and verifies the corresponding COMMIT-signature. In particular, this ensures for any operation which has been pending for C_i and must be cleared, that the *same* operation was also authenticated by its originator. Finally, C_i also checks the AUTH-signature on the authenticator a , which is contained in α . If successful, all operations in δ are cleared and C_i 's operation counter c is advanced to the position of the last operation in δ . (The check for $b = c$ ensures that δ contains at least one operation at position c .)

The client continues in *check-pending* by verifying that the pending operations are announced correctly: for every operation in ω , it determines the sequence number l , verifies the corresponding INVOKE-signature τ , and checks the hash chain entry $H[l]$. If there is no entry in H for l , then C_i computes the new entry from o, l, j , and $H[l-1]$; otherwise, C_i verifies that existing entry matches the expected value. If this validation succeeds, it means the operation is consistent with a pending operation sent previously by S . After iterating through the pending operations, the client checks also that the last operation in ω is indeed its own current operation o .

Next, C_i invokes *separate-pending* to extract μ and γ from ω (see earlier). Then, C_i checks whether γ is compatible with u (the last invoked operation). If yes, C_i calls the ADS operation $authexec_F(\mu, a, r, \sigma_o)$ for verifying that applying the operations in μ yields r as the response (recall that μ includes o at the end). The goal of this step is only to check the correctness of the response, and the authenticator and auxiliary data output by $authexec_F$ are ignored. Finally, C_i commits o by generating a COMMIT-signature

Algorithm 1 ADS integrity protocol (AIP) for client C_i

state

$c \in \mathbb{N}_0$: sequence number of last cleared operation, initially 0
 $H : \mathbb{N}_0 \rightarrow \{0, 1\}^*$: the hash chain, initially only $H[0] = \perp$
 $Z : \mathbb{N}_0 \rightarrow \mathcal{Z}$: status map, initially empty
 $u \in \mathcal{O} \cup \{\perp\}$: current operation or \perp if none, initially \perp

function $aip\text{-}invoke(o)$

$u \leftarrow o$
 $\tau \leftarrow \text{sign}_i(\text{INVOKE} \| o \| i)$
send message $[\text{INVOKE}, o, \tau, c]$ to S

upon receiving message $[\text{REPLY}, \delta, b, \alpha, \omega, t, r, \sigma_o]$ from S **do**

$(a, \psi) \leftarrow \alpha$
 $\text{check-view}(\delta, b, a, \psi)$
 $\text{check-pending}(\omega)$
 $(\mu, \gamma) \leftarrow \text{separate-pending}(i, \omega)$
 $t \leftarrow b + \text{length}(\omega)$
if $\text{compatible}_F(\gamma, u)$ **then**
 $(\cdot, \cdot, v) \leftarrow \text{authexec}_F(\mu, a, r, \sigma_o)$
 assert v
 $Z[t] \leftarrow \text{SUCCESS}$
else
 $r \leftarrow \text{ABORT}$
 $Z[t] \leftarrow \text{ABORT}$
 $\phi \leftarrow \text{sign}_i(\text{COMMIT} \| t \| u \| i \| Z[t] \| H[t])$
send message $[\text{COMMIT}, u, t, Z[t], \phi]$ to S
 $u \leftarrow \perp$
return r

// response of operation $aip\text{-}invoke(o)$

upon recv. msg. $[\text{UPDATE-AUTH}, o, r, \sigma_o, \phi, q, \delta, \alpha]$ from S **do**

assert $\text{verify}_i(\phi, \text{COMMIT} \| q \| o \| i \| Z[q] \| H[q])$
 $(o_\delta, \cdot, \cdot, j) \leftarrow \delta$
 $(a, \psi) \leftarrow \alpha$
assert $\text{verify}_j(\psi, \text{AUTH} \| o_\delta \| q - 1 \| H[q - 1] \| a)$
if $Z[q] = \text{SUCCESS}$ **then**
 $(a', \sigma'_o, v) \leftarrow \text{authexec}_F(o, a, r, \sigma_o)$
 assert v
else
 $(a', \sigma'_o) \leftarrow (a, \perp)$
 $\psi' \leftarrow \text{sign}_i(\text{AUTH} \| o \| q \| H[q] \| a')$
send message $[\text{COMMIT-AUTH}, a', \sigma'_o, \psi']$ to S

Algorithm 2 ADS integrity protocol (AIP) for client C_i , continued

```
function extend-chain( $o, l, j$ )
  if  $H[l] = \perp$  then
     $H[l] \leftarrow \text{hash}(H[l-1] \parallel o \parallel l \parallel j)$  // extend by one
  else if  $H[l] \neq \text{hash}(H[l-1] \parallel o \parallel l \parallel j)$  then
    return FALSE // server replies are inconsistent
  return TRUE

function check-view( $\delta, b, a, \psi$ )
  assert  $\text{length}(\delta) \geq 1$ 
  if  $b = c$  then  $d \leftarrow c - 1$  else  $d \leftarrow c$ 
  for  $k = 1, \dots, \text{length}(\delta)$  do
     $l \leftarrow d + k$ 
     $(o, z, \phi, j) \leftarrow \delta[k]$ 
    assert extend-chain( $o, l, j$ )
    assert  $\text{verify}_j(\phi, \text{COMMIT} \parallel l \parallel o \parallel j \parallel z \parallel H[l])$ 
  assert  $\text{verify}_j(\psi, \text{AUTH} \parallel o \parallel b \parallel H[b] \parallel a)$  // variables  $o$  and  $j$  keep their values
   $c \leftarrow d + \text{length}(\delta)$  // all operations in  $\delta$  have been cleared

function check-pending( $\omega$ )
  assert  $\text{length}(\omega) \geq 1$ 
  for  $k = 1, \dots, \text{length}(\omega)$  do
     $l \leftarrow c + k$ 
     $(o, \tau, j) \leftarrow \omega[k]$ 
    assert  $\text{extend-chain}(o, l, j) \wedge \text{verify}_j(\tau, \text{INVOKE} \parallel o \parallel j)$ 
  assert  $o = u \wedge j = i$  // variables  $o$  and  $j$  keep their values
```

over t , the sequence number of o , its status, and its hash chain entry, sends a COMMIT message (with t , the operation, and the signature) to S , and outputs the response r .

3.4.2 Passive phase

The server stores the content of all incoming COMMIT messages in O and processes them in the order of their sequence numbers, indicated by b . When an operation with sequence number $b + 1$ has been committed but not yet authenticated by the client and applied by S (i.e., $\text{upon } O[b+1] \neq \perp \wedge A[b+1] = \perp$), the server uses query_F to compute the response r and to extract the auxiliary data s_o from the current state s . It sends this in an UPDATE-AUTH message to C_i , also including the operation at position b (from $O[b]$) and its authenticator (taken from $A[b]$), which have been computed before. These values allow the client to verify the authenticity of the response for the operation at position $b + 1$.

The client C_i then receives this UPDATE-AUTH message (for o and sequence number q), and first validates the message contents. In particular, C_i verifies that the authenticator a is covered by a valid AUTH-signature by client C_j with sequence number $q - 1$, using C_i 's hash chain entry $H[q - 1]$.

Next, if o was not aborted, i.e., $Z[q] = \text{SUCCESS}$, the client invokes authexec_F to verify that the auxiliary data and the response are correct, and to generate new auxiliary data s'_o and a new authenticator a' , which vouches for the correctness of the state updates induced by o . Otherwise, C_i skips this step, as the authenticator does not change. Then C_i issues an AUTH-signature ψ' and sends it back to S together with a' and s'_o in a COMMIT-AUTH message.

As the last step in the passive phase, S increments b , stores the data in the COMMIT-AUTH message at $A[b]$, and if the operation did not abort, S applies it to s through refresh_F .

Algorithm 3 ADS integrity protocol (AIP) for server S

state

$t \in \mathbb{N}_0$: seqno. of last invoked op., initially 0
 $b \in \mathbb{N}_0$: seqno. of last applied op., initially 0
 $I : \mathbb{N} \rightarrow \mathcal{O} \times \{0, 1\}^* \times \mathbb{N}$: invoked ops., initially empty
 $O : \mathbb{N} \rightarrow \mathcal{O} \times \{0, 1\}^* \times \mathcal{Z} \times \{0, 1\}^* \times \mathbb{N}$: committed ops., initially empty
 $A : \mathbb{N}_0 \rightarrow \{0, 1\}^* \times \{0, 1\}^*$: authenticators, init. $A[0] = a_0$
 $s \in \{0, 1\}^*$: state of the service, initially $s = s_0$

upon receiving message [INVOKE, o, τ, c] from C_i **do**

$t \leftarrow t + 1$
 $I[t] \leftarrow (o, \tau, i)$
if $b = c$ **then** $\delta \leftarrow \langle O[b] \rangle$ **else** $\delta \leftarrow \langle O[c + 1], \dots, O[b] \rangle$
 $\omega \leftarrow \langle I[b + 1], I[b + 2], \dots, I[t] \rangle$ // all pending operations
 $(\mu, \cdot) \leftarrow \text{separate-pending}(i, \omega)$
 $(r, \sigma_o) \leftarrow \text{query}_F(s, \mu)$
send message [REPLY, $\delta, b, A[b], \omega, t, r, \sigma_o$] to C_i

upon receiving message [COMMIT, o, q, z, ϕ] from C_i **do** $O[q] \leftarrow (o, z, \phi, i)$ **upon** $O[b + 1] \neq \perp \wedge A[b + 1] = \perp$ **do**

$(o, z, \phi, j) \leftarrow O[b + 1]$
if $z = \text{SUCCESS}$ **then**
 $(r, \sigma_o) \leftarrow \text{query}_F(s, o)$
else
 $(r, \sigma_o) \leftarrow (\perp, \perp)$
send msg. [UPDATE-AUTH, $o, r, \sigma_o, \phi, b + 1, O[b], A[b]$] to C_j

upon receiving message [COMMIT-AUTH, a, σ_o, ψ] from C_i **do**

$b \leftarrow b + 1$
 $A[b] \leftarrow (a, \psi)$
 $(o, z, \cdot, \cdot) \leftarrow O[b]$
if $z = \text{SUCCESS}$ **then**
 $s \leftarrow \text{refresh}_F(s, o, \sigma_o)$

3.5 Remarks

As in BST [34] and in COP [9], operations that do not interfere with each other may proceed without blocking. More precisely, if some pending operation is not compatible with the current operation, the latter is aborted and must be retried later. Preventing clients from blocking is highly desirable but cannot always be guaranteed without introducing aborts [10]. The potential for blocking has led other systems, including SPORC [13] and FAUST [8], to adopt weaker and less desirable guarantees than fork-linearizability.

Obviously, it makes no sense for a client to retry its operation while the non-compatible operation is still pending. However, the client does not know when the contending operation commits. Additional communication between the server and the clients could be introduced to signal this. Alternatively, the client may employ a probabilistic waiting strategy and retry after a random delay.

In the following we assume that S is correct. The communication cost of AIP amounts to the five messages per operation. Every client eventually learns about all operations of all clients, as it must

clear them and include them in its hash chain. However, this occurs only when the client executes an operation (in REPLY). At all other times between operations, the client may be offline and inactive. In a system with n clients that performs h operations in total, BST [34] and COP [9] require $\Theta(nh)$ messages overall. AIP reduces this cost to $\Theta(h)$ messages, which means that each client only processes a small constant number of messages per operation.

The size of the INVOKE, COMMIT, UPDATE-AUTH, and COMMIT-AUTH messages does not depend on the number of clients and on the number operations they execute. The size of the REPLY message is influenced by the amount of contention, as it contains the pending operations. If one client is slow, the pending operations may grow with the number of further operations executed by other clients. Note that the oldest pending operation is the one at sequence number $b + 1$; hence, all operations ordered afterwards are treated as pending, even when they already have been committed. The REPLY message can easily be compressed to constant size, however, by omitting the pending operations that have already been sent in a previous message to the same client. See the protocol extensions in Sec. 3.7 for further discussion.

The functionality-dependent cost, in terms of communicated state and auxiliary data, is directly related to the ADS for F . In practice, hierarchical authenticated search structures, such as hash trees and authenticated skip lists, permit small authenticators and auxiliary data [12].

3.6 Correctness

We consider three cases: (1) S is correct and the clients execute operations (1a) sequentially or (1b) concurrently; and (2) S is malicious.

In case (1a), all operations execute one after each other. When, furthermore, the COMMIT-AUTH message from a client reaches S before the next operation is invoked, then AIP is similar to “serialized” SUNDR [23] and the “lock-step protocol” of Cachin [6]. This means that a client C_i executing an operation o receives a REPLY message with all authenticated operations that exist in the system and only o as pending operation. Then $t = b + 1$, and later C_i commits o and authenticates o without further operations intermixed at S nor at any client. Clearly, this execution is linearizable and satisfies the first condition of a fork-linearizable Byzantine emulation.

In case (1b), there may exist pending-other operations, but since C_i verifies that its own operations are compatible with them, the response value is correct. As S is correct, the views of all clients are equal, i.e., prefixes of each other, and this ensures linearizability.

For case (2), note that every client C_i starts to extend its view from a cleared, authenticated operation and the corresponding signed authenticator a . If the pending-other operations in γ are compatible with o and the response is valid w.r.t. a (according to $authexec_F$), then it is safe for C_i to output the response and thereby include it into its view. The malicious S may order the operations in γ differently at other clients, creating a fork, but they can be omitted from the view of C_i . The hash chain maintained by C_i contains a condensed representation of its entire view. By using its own hash chain entry during the verification of the COMMIT and AUTH signatures of other clients, C_i ensures that the views of these other clients are equal. Hence, whenever an operation o appears in the views of two clients, also their views are the same up to o . This ensures fork-linearizability.

3.7 Extensions

In order to keep the complexity of the protocol description for AIP at a comprehensible level, we present important efficiency improvements informally here.

Eliminating aborted operations. The first extension removes aborted operations from being considered as pending. Recall that in AIP, an operation o is included with the pending operations until the executing client has authenticated o and the server has processed it during the respective background phase, even if the operation was aborted. This has the drawback that later operations may not be compatible with o and abort unnecessarily. However, if o was aborted, this has been committed by the client, and S has received its COMMIT message, then S can include this with the list of pending operations sent for a later operation o' . The client that executes o' will take into account that o was aborted and ignore it for determining whether o' is compatible with the pending operations. Depending on the workload, this reduces further aborts.

Batching and delegating operation authentication. Recall that the clients authenticate operations in the order of the server-assigned sequence numbers. Some client C_{slow} may fall behind with this step, and when the other clients proceed faster and execute more operations, the number of pending operations grows continuously. This creates much more work for the faster clients for processing the REPLY message and slows them down.

However, since all clients trust each other, one can modify AIP such that another client C_{fast} may step in for C_{slow} , handle the UPDATE-AUTH message, and sign the authenticator for the operation of C_{slow} . Only small changes to the data structures are needed to accommodate this change. Ideally C_{fast} has more processing power or is closer to S on the network than C_{slow} ; this choice should be determined heuristically based on the measured performance or network delays.

Extending the above idea, S may actually batch all non-authenticated operations when an operation from C_i commits at sequence number q . Hence, S sends the UPDATE-AUTH messages for all operations between b and q to C_i and delegates the step of authenticating them to C_i . This works because a client can authenticate two consecutive operations without going back to S . The server may then record the COMMIT-AUTH responses from the fastest client and inform the others that their help with authenticating operations is no longer needed.

Passive phase only for update operations. Recall that the protocol executes a functionality F whose operations can be separated into query and update operations (\mathcal{Q} and \mathcal{U} , respectively). Queries do not change the state; as is easy to see, they are compatible with *every* subsequent operation. But the passive phase of AIP is only needed for creating a new authenticator, after the state has changed. Therefore we can eliminate the passive phase for all query operations; this considerably improves the efficiency of the protocol for read-intensive applications.

In particular, for every operation $o \in \mathcal{Q}$, the passive phase is skipped and the verification operations are adjusted accordingly. When a client C_i has committed a query operation, the server immediately “applies” it and does not send an UPDATE-AUTH message later. For implementing this, the server has to maintain another variable d with the sequence number of the operation that most recently modified the state. The REPLY and UPDATE-AUTH messages now contain the operation $O[d]$ that allows clients to verify the corresponding authenticator $A[d]$.

Tolerate client crashes. Crashes of clients are not included in the formal model here, but must be considered in practice. In order to tolerate crashes, we reuse the second extension above. Since a client C_{fail} may crash before it finishes both protocol phases, the server will never receive the missing message(s) and the operation is never authenticated. Going beyond our formal model, suppose that another client C_i has determined that C_{fail} has crashed. Then C_i may take over, abort the hanging operations, and commit and authenticated in place of the failed client. It is important that C_{fail} must not execute any operations again later, hence the failure detection should be reliable; if C_{fail} may join

again later, it must be given a new identity. Group management protocols for adding and removing clients dynamically have been discussed in the context of existing systems, such as VENUS [30] and SPORC [13].

4 Verification of integrity and consistency of cloud object storage (VICOS)

We are now ready to introduce our main contribution, the protocol for *verifying the integrity and consistency of cloud object storage*, abbreviated *VICOS*. It leverages AIP from the previous section and provides a fork-linearizable Byzantine emulation for a practical object-store service, in a manner that is transparent to the storage provider. We first define the operations of the cloud storage service and outline the architecture of VICOS. Next we instantiate AIP for verifying the integrity of a simple object store and show how VICOS extends this to practical cloud storage.

More precisely, VICOS consists of the following components (see Fig. 2):

1. A *cloud object store (COS)* service with a key-value store interface, as offered by commercial providers. It maintains the object data stored by the clients using VICOS.
2. An *AIP client* and an *AIP server*, which implement the protocol from the previous section for the functionality of an *authenticated dictionary (ADICT)* and authenticate the objects at the cloud object store. The AIP server runs remotely as a cloud service accessed by the AIP client. This is abbreviated as *AIP with ADICT*.
3. The *VICOS client* exposes a cloud object store interface to the client application and transparently performs integrity and consistency verification. During each operation, the client consults the cloud object store for the object data itself and the AIP server for integrity-specific metadata. In particular, AIP server running ADICT stores a cryptographic hash of every object.

Note that the cloud object store as well as the AIP server are in the untrusted domain; they may, in fact, collude together against the clients.

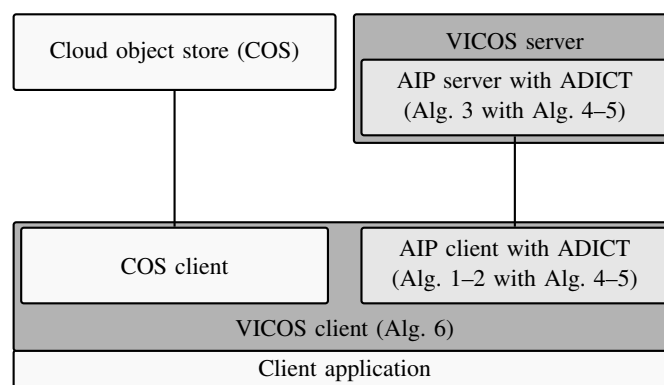


Figure 2. Architecture of VICOS: the two untrusted components of the cloud service are shown at the top, the trusted client is at the bottom.

4.1 Cloud object store (COS)

The *cloud object store* is modeled by *key-value store (KVS)* and provides a “simple” storage service to multiple clients. It stores a practically unbounded number of objects in a flat namespace, where each *object* is an arbitrary sequence of bytes (or a “blob,” a binary large object), identified by a unique *name* or *key*. We assume that clients may only read and write entire objects, i.e., it is not possible to read from or write into the middle of an object, as in a file system.

Our formal notion of a KVS internally maintains a map M that stores the values in \mathcal{V} under their respective keys taken from a universe \mathcal{K} . It provides four operations:

1. $kvs-put(k, v)$: Stores a value $v \in \mathcal{V}$ under key $k \in \mathcal{K}$, that is, $M[k] \leftarrow v$.
2. $kvs-get(k)$: Returns the value stored under key $k \in \mathcal{K}$, that is, $M[k]$.
3. $kvs-del(k)$: Deletes the value stored under key $k \in \mathcal{K}$, that is, $M[k] \leftarrow \perp$.
4. $kvs-list()$: Returns a list of all keys for which a value is stored, that is, the list $\langle k \in \mathcal{K} | M[k] \neq \perp \rangle$.

This API forms the core of many real-world cloud storage services, such as Amazon S3 or OpenStack Swift. Typically there is a bound on the length of the keys, such as a few hundred bytes, but the stored values can be much larger and practically unbounded (on the order of several Gigabytes). For simplicity, we assume that the object store provides atomic semantics during concurrent access, being aware that cloud storage systems may only be eventually consistent [4] due to network partitions.

Many practical cloud object stores support a single-level hierarchical name space, formed by *containers* or *buckets*. We abstract this separation into the keys here; however, a production-grade system would introduce this separation again by applying the design of VICOS for every container.

4.2 Authenticated dictionary implementation (ADICT)

VICOS instantiates AIP with the functionality of a KVS that stores only *short values*. In order to distinguish it from the cloud object store, we refer to it as *authenticated dictionary*, denoted by *ADICT*, with operations $adict-put$, $adict-get$, $adict-del$, and $adict-list$.

The implementation of ADICT uses the well-known approach of building a hash tree over its entries [5, 28, 12]; see Alg. 4–5 for the details of how ADICT is implemented within AIP. The AIP server stores the values in a map D and maintains a hash tree T , constructed over the list of key-value pairs stored in the map, according to a fixed sort order on the keys. That is, every leaf node of the hash tree is computed by hashing the node key, its value, and the key of the successor leaf node together. The next node has to be included in order to authenticate the *absence* of a key in response to a query for a non-existing key (e.g., [28]). The root of the hash tree serves as the authenticator for ADICT.

For the $adict-put$, $adict-get$, and $adict-del$ operations, the server extracts those paths from T that are necessary to verify the correctness of the retrieved value and places them in s_o . For $adict-put$ and $adict-del$ operations, $query_{ADICT}$ also places these paths into s_o because the client needs them to construct the updated root hash. For $adict-list$, the complete hash tree is included in s_o . The asterisks (*) in Alg. 4–5 denote some additional data and steps necessary to verify the predecessor or successor leaves for authenticating an absent key (details of this are omitted here and can be found in the literature [12]).

The $compatible_{ADICT}(\mu, u)$ function of Alg. 4–5 defines the compatibility relation among the operations of the authenticated dictionary; VICOS supports the same KVS interface and inherits this notion of compatibility for the cloud-storage operations. For more general services like databases, one would invoke a transaction manager here. For ADICT, the compatibility between a first (pending) operation u and a second (current) operation o is given by Table 1. For instance, $adict-put$ followed by $adict-get$ for the same key or followed by $adict-list$ are not compatible, whereas two $adict-list$ and $adict-get$ operations are always compatible.

Algorithm 4 Authenticated dictionary implementation (ADICT) for AIP, Part 1

state

$D : \mathcal{K} \rightarrow \{0, 1\}^*$: authenticated dictionary, initially empty
 T : hash tree over D , initially empty

function $query_{ADICT}((D, T), o)$

if $o = \text{adict-put}(k, v) \vee o = \text{adict-del}(k)$ **then**

$r \leftarrow \perp$

$s_o \leftarrow$ sibling nodes on path (*) from k to root in T

else if $o = \text{adict-get}(k)$ **then**

$r \leftarrow D[k]$

$s_o \leftarrow$ sibling nodes on path (*) from k to root in T

else $// o = \text{adict-list}()$

$r \leftarrow \langle k \in \mathcal{K} \mid D[k] \neq \perp \rangle$

$s_o \leftarrow T$

return (r, s_o)

function $authexec_{ADICT}(o, a, r, s_o)$

if $o = \text{adict-put}(k, v) \vee o = \text{adict-get}(k) \vee o = \text{adict-del}(k)$ **then**

if s_o is not a valid path (*) from k to tree root a **then**

return $(\cdot, \cdot, \text{FALSE})$

if $o = \text{adict-put}(k, v)$ **then**

insert leaf node k with value v in the tree

$s'_o \leftarrow$ updated path from k to tree root

$a' \leftarrow$ updated hash-tree root

else if $o = \text{adict-get}(k)$ **then**

if path (*) not consistent with node k holding r **then**

return $(\cdot, \cdot, \text{FALSE})$

$s'_o \leftarrow \perp$

$a' \leftarrow a$

else if $o = \text{adict-del}(k)$ **then**

delete leaf node k from the tree

$s'_o \leftarrow$ updated paths from siblings of k to tree root

$a' \leftarrow$ updated hash-tree root

else $// o = \text{adict-list}()$

if r is not list of keys in leaves of tree with root a **then**

return $(\cdot, \cdot, \text{FALSE})$

$s'_o \leftarrow \perp$

$a' \leftarrow a$

return (a', s'_o, TRUE)

The advantage of considering operation compatibility over commutativity (as used in ACOP [9], for instance) becomes apparent here: only 8 pairs among the 49 cases shown are not compatible, whereas 22 among 49 cases do not commute and would be aborted with commutativity.

Algorithm 5 Authenticated dictionary implementation (ADICT) for AIP, Part 2

function $\text{refresh}_{\text{ADICT}}((D, T), o, s_o)$
if $o = \text{adict-put}(k, v)$ **then**
 $D[k] \leftarrow v$

 update path in T from k to root, as taken from s_o
else if $o = \text{adict-del}(k)$ **then**
 $D[k] \leftarrow \perp$

 update path in T from k to root, as taken from s_o
return (D, T)
function $\text{compatible}_{\text{ADICT}}(\mu, u)$
for $o \in \mu$ **do**
if $\neg \text{compatible}_{\text{ADICT}}(u, o)$ **then** // See Table 1 for the $\text{compatible}_{\text{ADICT}}()$ relation on operations

return FALSE

return TRUE

	$\text{adict-put}(x, \cdot)$	$\text{adict-put}(y, \cdot)$	$\text{adict-get}(x)$	$\text{adict-get}(y)$	$\text{adict-del}(x)$	$\text{adict-del}(y)$	adict-list
$\text{adict-put}(x, \cdot)$	✓	✓	—	✓	✓	✓	—
$\text{adict-put}(y, \cdot)$	✓	✓	✓	—	✓	✓	—
$\text{adict-get}(x)$	✓	✓	✓	✓	✓	✓	✓
$\text{adict-get}(y)$	✓	✓	✓	✓	✓	✓	✓
$\text{adict-del}(x)$	✓	✓	—	✓	✓	✓	—
$\text{adict-del}(y)$	✓	✓	✓	—	✓	✓	—
$\text{adict-list}()$	✓	✓	✓	✓	✓	✓	✓

Table 1. The $\text{compatible}_{\text{ADICT}}(\cdot, \cdot)$ relation for ADICT and the KVS interface, where $x, y \in \mathcal{K}$ denote distinct keys

4.3 VICOS client implementation

VICOS emulates the key-value store API of a cloud object store (COS) to the client and transparently adds integrity and consistency verification. As with AIP, consistency or data integrity violations committed by the server are detected through **assert**; any failing assertion triggers an alarm. It must be followed by a recovery action whose details go beyond the scope of this paper. Analogously to AIP, VICOS may return ABORT; this means that the operation was not executed and the client should retry it.

Algorithm 6 Implementation of VICOS at the client.

```

function vicos-put( $k, v$ )
   $x \leftarrow$  a random nonce
  cos-put( $k||x, v$ )
   $h \leftarrow \text{hash}(v)$ 
   $r \leftarrow \text{aip-invoke}(\text{adict-put}(k, \langle x, h \rangle))$ 
  if  $r = \text{ABORT}$  then                                     // concurrent incompatible operation
    cos-del( $k||x$ )
  return  $r$ 

function vicos-get( $k$ )
   $r \leftarrow \text{aip-invoke}(\text{adict-get}(k))$ 
  if  $r = \text{ABORT}$  then                                     // concurrent incompatible operation
    return ABORT
   $\langle x, h \rangle \leftarrow r$ 
   $v \leftarrow \text{cos-get}(k||x)$ 
  assert  $\text{hash}(v) = h$ 
  return  $v$ 

function vicos-del( $k$ )
   $r \leftarrow \text{aip-invoke}(\text{adict-del}(k))$ 
  if  $r = \text{ABORT}$  then                                     // concurrent incompatible operation
    return ABORT
  cos-del( $k||*$ )                                           // deletes all keys with prefix  $k$ 
  return  $r$ 

function vicos-list()
   $r \leftarrow \text{aip-invoke}(\text{adict-list}())$ 
  if  $r = \text{ABORT}$  then                                     // concurrent incompatible operation
    return ABORT
  return  $r$ 

```

Algorithm 6 presents the pseudo code of the VICOS client. Basically, it protects every object in the COS by storing its cryptographic hash in the authenticated dictionary (ADICT). Operations on the object store trigger corresponding operations on COS and on ADICT, as provided by AIP for consistency enforcement.

In order to prevent race conditions, VICOS does not store the hash of an object under the object's key in COS directly, but *translates* every object key to a unique key for COS. Otherwise, two concurrent operations accessing the same object might interfere with each other and leave the system in an inconsistent state. More precisely, in a *vicos-put*(k, v) operation, the client chooses a nonce x (a value guaranteed to be unique in the system, such as a random string) and stores v in COS using *cos-put*($k||x, v$) with the translated key $k||x$. Furthermore, it computes $h \leftarrow \text{hash}(v)$ and stores $\langle x, h \rangle$ in AD using *adict-put* at key k . The *cos-put* and *cos-get* operations actually stream long values. When *adict-put* aborts due to

concurrent operations, the client deletes v again from COS using $\text{cos-del}(k||x)$.

For a $\text{vicos-get}(k)$ operation, the client first calls $\text{adict-get}(k)$ and retrieves $\langle x, h \rangle$. Unless this operation aborts, the client translates the key and calls $\text{cos-get}(k||x)$ to retrieve the value v . After v has been read (or streamed), the client compares its hash value to h , asserts that they match, and then outputs v .

Without key translation, two concurrent vicos-put operations o_1 and o_2 writing different values to the same key k might both succeed with $\text{cos-put}(k, v_1)$ and $\text{cos-put}(k, v_2)$, respectively, but the adict-put for o_2 might abort due to another concurrent operation. Then COS might store v_2 but ADICT stores the hash of v_1 and readers would observe a false integrity violation. Thanks to key translation, no versioning conflicts arise in the COS. Atomicity for multiple operations on the same object key follows from the properties of AIP with the ADICT implementation. The $\text{vicos-del}(k)$ and $\text{vicos-list}()$ operations proceed analogously; but the latter does not access COS.

4.4 Correctness

It is easy to see that the implementation of VICOS satisfies the two properties of a fork-linearizable Byzantine emulation. First, when S is correct, then the clients proceed with their operations and all verification steps succeed. Hence, VICOS produces a linearizable execution. The linearization order is established by AIP running ADICT. Furthermore, when the clients execute sequentially, then by the corresponding property of AIP, no client ever receives ABORT from ADICT.

Second, consider the case of a malicious server controlling COS and the AIP server together. AIP ensures that the operations on ADICT (adict-put , adict-get , etc.) are fork-linearizable according to Sec. 4. The implementation of ADICT follows the known approach of memory checking with hash trees [5, 28] and therefore authenticates the object hash values that VICOS writes to ADICT. According to the properties of the hash function, the object data is uniquely represented by its hash value. Since VICOS ensures the object data written to COS or returned to the client corresponds to the hash value stored in ADICT, it follows that all operations of VICOS are also fork-linearizable.

5 Prototype

We have implemented a prototype of VICOS in Java; it consists of a client-side library (“VICOS client”) and the server code (“VICOS server”). The system can be integrated with applications that require cryptographic integrity and consistency guarantees for data in untrusted cloud storage services. It is available as open-source on GitHub (<https://github.com/ibm-research/vicos>).

5.1 VICOS implementation

The client-side library uses the *BlobStore* interface of Apache *jclouds* (Version 2.0.0-Snapshot, <https://jclouds.apache.org/>) for connecting to different cloud object stores. The server runs as a standalone web service, communicating with the client-side library using the *Akka* framework (Version 2.4.4, <http://www.akka.io>).

Akka is an event-driven framework which supports the actor model [20]. It fits perfectly into the system model of VICOS and allows for rapid development. This simplifies the actual protocol implementation because of the high level of abstraction, especially relating to network operations and concurrency.

The client library as well as the server code are implemented as actors within the framework. Actors are independent units which can only communicate by exchanging messages. Every actor has a mailbox that buffers all incoming messages. By default messages are processed in FIFO order by the actor. This

allows the server protocol implementation to process all incoming messages sequentially and execute each protocol step atomically, that is, mutually exclusive with respect to all others. The implementation of VICOS therefore closely follows the high-level description according to Sec. 3. Note that this clearly limits the systems performance by not utilizing modern multi-core architecture, on the other hand.

We developed the VICOS client library so that it may easily be integrated into existing applications to provide integrity protection. It uses the modular approach of AIP instantiated with an authenticated data structure (ADS). A developer only needs to implement the desired functionality, by defining the state (e.g., the internal KVS data structure), a set of operations, and their compatibility relation. For that reason, we have defined two interfaces: *state* and *operation processor*. Operations are described using Google’s Protocol Buffers (<https://developers.google.com/protocol-buffers/>) executed by the operation processor. This modular concept allows us to reuse and extend the core implementation of the protocol.

The VICOS prototype provides a simple KVS functionality by implementing these interfaces. More precisely, the KVS state is a map supporting GET, PUT, DEL and LIST operations. The KVS operation processor provides the implementations of *query*, *authexec*, *refresh*, and *compatible* as described in Alg. 4–5. The client and the server protocol each contain an instance of the KVS operation processor. The client exposes a simple KVS interface, adding Java Exceptions for signaling integrity and consistency violations. Furthermore, the client library is completely asynchronous and supports processing the AIP passive phase in the background without blocking the client process.

The cryptographic signatures can be implemented in multiple ways. According to the security assumptions of the model, all clients trust each other, the server alone may act maliciously, and only clients issue digital signatures. Therefore, one can also adopt a simplified trust model with “signatures” provided by a message-authentication code (MAC). For many applications, where strong mutual trust exists among the clients, MACs suffice and will result in faster execution. On the other hand, this simplification renders the system more fragile and exposes it easily to attacks by clients.

In particular, VICOS uses HMAC-SHA1 with 128-bit keys provided by the Java Cryptography Extension as the default signature implementation. The code also supports RSA and DSA signatures with 2048-bit keys. A user can choose between these signature implementations via a configuration file. This approach also allows developers to change to a different signature implementation, or even implement their own according to new requirements. Particularly, this might be useful for porting the code to other platforms such as mobile devices, with less computation power.

The core implementation of VICOS consists of ~ 3400 sloc, the server part is ~ 400 sloc more, whereas the client part including the integration with the evaluation platform (see below) takes ~ 800 sloc extra.

5.2 Practical issues and optimizations

While developing VICOS and experimenting with it, we obtained experience with Akka and gained insight into the protocol’s operation itself. This has led to further optimizations described here.

Bounded pending list. An issue that we discovered in Akka while implementing VICOS is Akka’s default maximum message size of only 128 kB. In particular, this becomes a problem in VICOS when REPLY messages include a large partial state or a very long list of pending operations. By configuring Akka with larger message sizes (we used a maximum size of 128 MB), the direct limitation disappears.

However, we experienced that large messages impact the overall performance negatively. When the number of pending operations increases, the resulting very large messages slow down the operations of VICOS. Therefore, we implemented a way to bound the length of the pending-operations list, that is, we introduced a maximum number of pending operations as a configurable value and modified the protocol.

When this maximum is reached, the server buffers all new incoming requests (INVOKE messages) until enough other operations have completed and the number of pending operations goes below the limit. We tested with different maximum sizes for the pending list from 32 up to 1024 operations, and chose a limit of 128 for the evaluations.

A more robust solution of that issue would be to signal the clients to wait before sending more requests, instead of just buffering them at the server. Although limiting the number of pending operations under high server load increases the latency of client requests, it also increases the overall performance and stability of the system. In summary we found that the benefits of this optimization outweigh its drawbacks.

Message delivery order. During development we experienced slow performance caused by the FIFO order in which the protocol actors processed the arriving messages. Therefore, we implemented priority mailboxes for the server and the client actor and defined a priority rule to prefer COMMIT, UPDATE-AUTH, COMMIT-AUTH messages over INVOKE and REPLY messages. This has the immediate benefit that the server processes UPDATE-AUTH messages and thereby completes the PASSIVE PHASE of already authenticated operations *before* it starts working on new INVOKE messages. This preference shortens the list of pending operations directly. Certainly, this may increase the response time for new operations again, but eventually, it prevents more operations from aborting due to conflicts under high load.

6 Evaluation

This section reports on performance measurements with the VICOS prototype. They study the general overhead of integrity protection, the scalability of the protocol, and the effect of (in-)compatible operations.

6.1 Experimental setup

The experiments use cloud servers and an OpenStack Swift-based object storage service (<http://swift.openstack.org>) of a major cloud provider with about two dozen data centers world-wide (Softlayer — an IBM Company, <http://www.softlayer.com/object-storage>).

The VICOS server runs on a dedicated “baremetal” cloud server with a 3.5GHz Intel Xeon-Haswell (E3-1270-V3-Quadcore) CPU, 8 GB DDR3 RAM, and a 1 Gbps network connection. The clients run on six baremetal servers in total, each server with 2x 2GHz Intel Xeon-SandyBridge (E5-2620-HexCore) CPUs, 16 GB DD3 RAM, and a 1 Gbps network connection. All clients are hosted in the same data center. All machines run Ubuntu 14.04-64 Linux and Oracle Java (JRE 8, build 1.8.0_77-b03).

To simulate a realistic environment, we conduct experiments in two settings as shows in Table 2. A *datacenter* setting, with all components in the same data center (“Amsterdam”), and a *wide-area* setting, where the VICOS server and COS are located together in one data center (“Milan”), and the clients at a remote site (“Amsterdam”).

Setting	Clients	VICOS server	Cloud object storage	Latency [ms]
Datacenter	Amsterdam	Amsterdam	Amsterdam	< 1
Wide-area	Amsterdam	Milan	Milan	~ 10

Table 2. Evaluation setting

The datacenter setting establishes a best-case baseline due to the very low network latencies (<1 ms). This deployment is not very realistic in terms of the security model because the clients and the storage service are co-located.

The wide-area setting exhibits a moderate network latency (round-trip delay time of ~ 20 ms) between the two data centers and models the typical case of geographically distributed clients accessing a cloud service with its point-of-access on the same continent but in different countries.

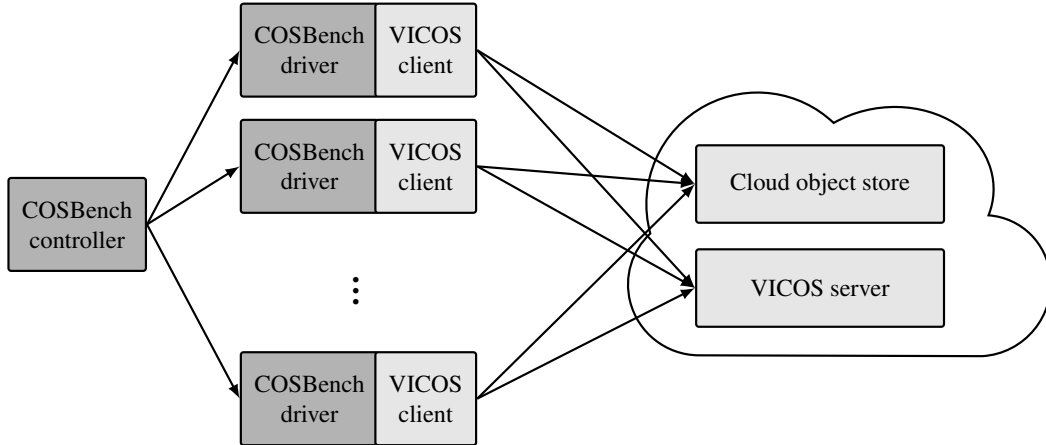


Figure 3. The experimental setup, with one COSBench controller and many COSBench drivers, accessing the cloud storage service through the VICOS client.

The evaluation is driven by COSBench (Version 0.4.2 – <https://github.com/intel-cloud/cosbench>), an extensible tool for benchmarking cloud object stores. We have created an adapter to drive VICOS from COSBench, as shown in Fig. 3. COSBench uses a distributed architecture, consisting of multiple *drivers*, which generate the workload and simulate many clients invoking concurrent operations on a cloud object store, and one *controller*, which controls the drivers, selects the workload parameters, collects results, and outputs aggregated statistics. In particular, the COSBench setup for VICOS reports the *operation latency*, defined as the time that an operation takes from invocation to completion, and the aggregated *throughput*, defined as the data rate between all clients and the cloud storage service.

COSBench invokes “read” and “write” operations, implemented by *vicos-get* and *vicos-put*, respectively. Every reported data point involves read and write operations taken over a period of at least 30 s after a 30 s warm-up. In the experiments two configurations are measured:

1. The *native* object storage service as a baseline, with direct unprotected access from COSBench to cloud storage, but accessing the cloud storage through the *jclouds* interface; and
2. *VICOS*, running all operations from COSBench through *jclouds* and the verification the protocol.

6.2 Results

6.2.1 Cryptography microbenchmark

In a first experiment we study how different signature implementation affect the computation and network overhead of VICOS. We implemented digital signatures using RSA and DSA with 2048 bit keys, and additionally HMAC-SHA1 with 128 bit keys. The cryptographic algorithms are provided by the SunJCE version 1.8 provider.

We measured the time it takes on a client to sign and verify an invoke message using the three signature implementations. Figure 4 shows that the RSA signing takes around 5 ms, while the verification takes around 220 μ s. DSA takes around 4 ms for signing and around 1.5 ms for verification, whereas HMAC signing and verification only takes less than 20 μ s. Additionally, the resulting signature sizes have a direct effect on the message sizes and the network load. RSA signatures are 256 byte, while DSA signatures are only 40 byte. HMAC reduces the signature size to 20 byte.

We use HMAC-SHA1 as the default implementation of signatures in the remainder of the evaluation. Its operations are much faster than for RSA and DSA signatures, reducing the computation overhead at the client. Moreover, the smaller signature size of HMAC-SHA1 also reduces the network overhead of VICOS.

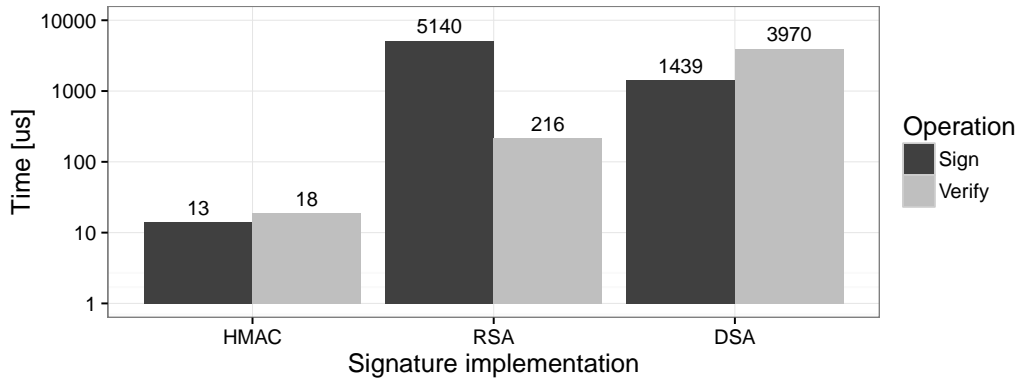


Figure 4. The average time for digital-signature operations (HMAC, RSA, and DSA); note that the y-axis uses log-scale.

6.2.2 Object size

In this experiment we study how the object size affects the latency and the throughput of VICOS. We define a workload with a single client executing read and write operations for objects of size 1 kB, 10 kB, 100 kB, and 1 MB.

Fig. 5 shows that the latency and throughput of VICOS behave very similar to the native system. As expected, we observe that VICOS introduces an overhead that incurs a small cost compared to unprotected access to storage. In particular, for the datacenter setting, VICOS increases latency by an average of 16.2% for *read*, and 24.0% for *write*; it decreases throughput by an average of 15.8% for *read*, and 17.7% for *write*. We also expect the overhead to decrease with bigger objects. However, we could not find this effect in the datacenter setting: here the overhead remains practically constant, from the small to the large objects. In the wide-area setting, the overhead is approximately the same for the smaller objects (1 kB and 10 kB), but it indeed decreases as the object size grows and disappears at the largest object size (1000 kB).

Interestingly, in the wide-area setting, the relative performance in terms of throughput is reversed between *read* and *write* for 1000 kB objects. Whereas *read* has lower latency and achieves better throughput than *write* in all other experiments, this relation is reversed in the right-most data points of Fig. 5. This may be caused by caching data on the cloud object store, which improves read performance for smaller objects, but disappears when larger objects are stored and accessed less frequently than in the datacenter setting.

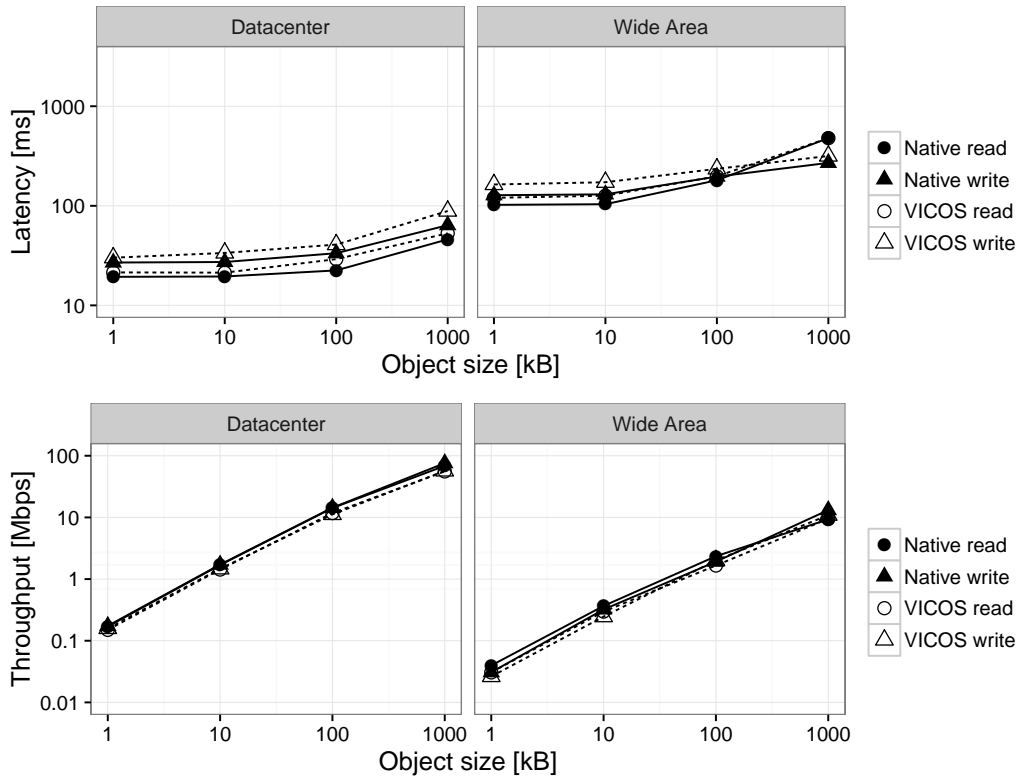


Figure 5. The effect of different object sizes: Latency and throughput of read and write operations with one client.

6.2.3 Number of clients

We also study the scalability of VICOS by increasing the number of clients. The workload uses up to 128 clients (spread uniformly over the six COSBench drivers), and 64 objects with a fixed size of 10kB. One half of the objects are designated for read operations and the other half for write operations, respectively. This division prevents concurrency conflicts among the client operations. As mentioned in Sec. 5.2, we restrict the size of the pending list in the protocol to 128 operations. We do not use a large number of clients because of the underlying assumption that clients trust each other, which might not be realistic in much larger groups.

As Fig. 6 shows, the native system throughput scales linearly until the network is saturated with 64 clients in the data center setting. VICOS follows the same behavior but reaches saturation already with 32 clients. In contrast, in the wide-area setting, VICOS becomes saturated with 8 clients, from where throughput remains almost constant and latency grows. No saturation is evident with the native configuration and up to 128 clients.

The reason for the slower operation in the wide-area experiment is that all requests of the clients are handled by the VICOS server sequentially and thus it becomes a bottleneck of the system. Due to the higher latency in the wide-area setting, operations remain longer in the pending queue. This means more work for the clients and the server. Since the active and passive protocol phases are asynchronous, clients may invoke the next operation already before they have completed a previous operation. Hence, they reach limit of the bounded pending queue and the throughput of VICOS remains limited at the rate imposed by the server's operation.

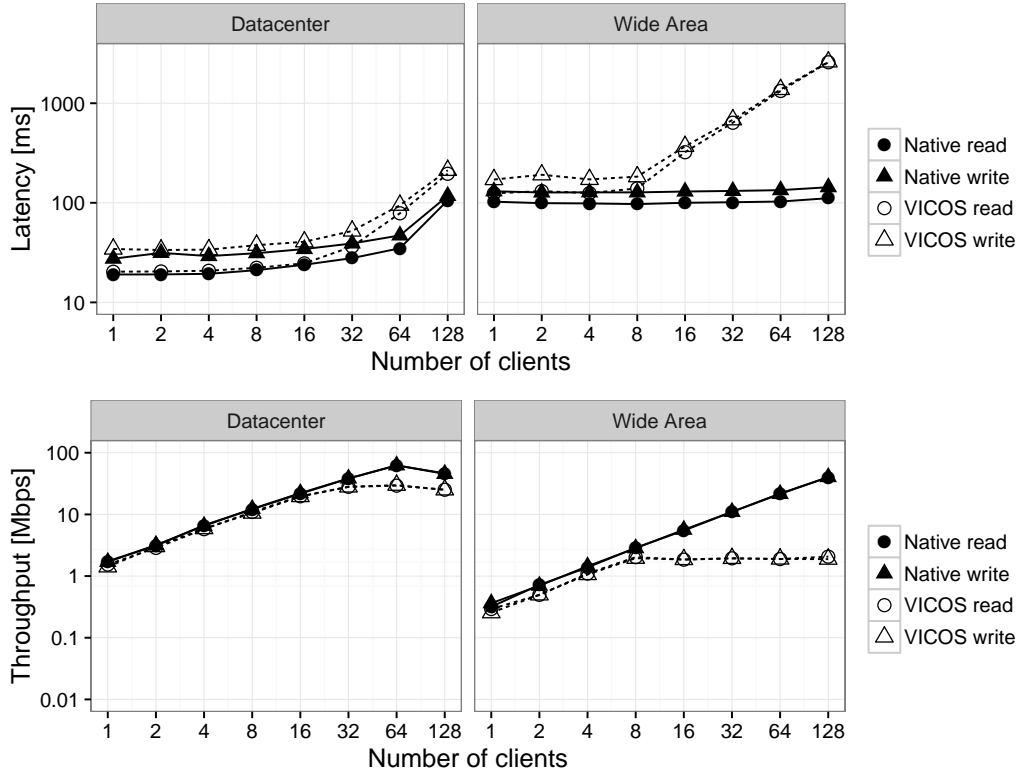


Figure 6. Scalability with the number of clients: Latency and throughput of read and write operations with 10 kB objects.

6.2.4 Concurrent operations

Finally, we investigate the effect of conflicting concurrent operations. VICOS aborts an operation if it is not compatible with one of the pending operations (according to Sec. 2.4). In that case the client has to retry later. Protocols like BST [34] and ACOP [9] are more cautious and abort as soon as two operations do *not commute*, which occurs more often. Hence, we define ACOP as our baseline for this experiment. The implementation throws an abort exception when a conflict occurs; that causes COSBench to report the operation as failed and to continue immediately with the next operation. At the end of each experiment COSBench reports the overall operation success rate. We expect a higher success rate for VICOS compared to ACOP as already discussed in Sec. 4.2.

To evaluate this behavior we created a workload with sixteen clients each invoking read and write operations over 64 objects with a fixed size of 10 kB. Object accesses are chosen according to “Zipf’s law”, which approximates many types of data series found in natural and social structures. The Zipf distribution is based on a ranking of the elements in a universe and postulates that the frequency of any element is inversely proportional to its rank in the frequency table. Thus, the most “popular” object will occur approximately twice as often as the second most popular one, three times as often as the third most popular and so on. Zipf distributions are often observed when users access websites [1]. Figure 7 shows the object access rate using four different values for the Zipf factor θ . For $\theta = 0.99$ the access rate for the first object (with the biggest contention) is about 20%, and the least often accessed object is selected only with probability about 0.3%. With $\theta = 0$ the Zipf distribution corresponds to uniformly random access over the objects.

Since COSBench does not support Zipf distributions by default, we implemented the algorithm

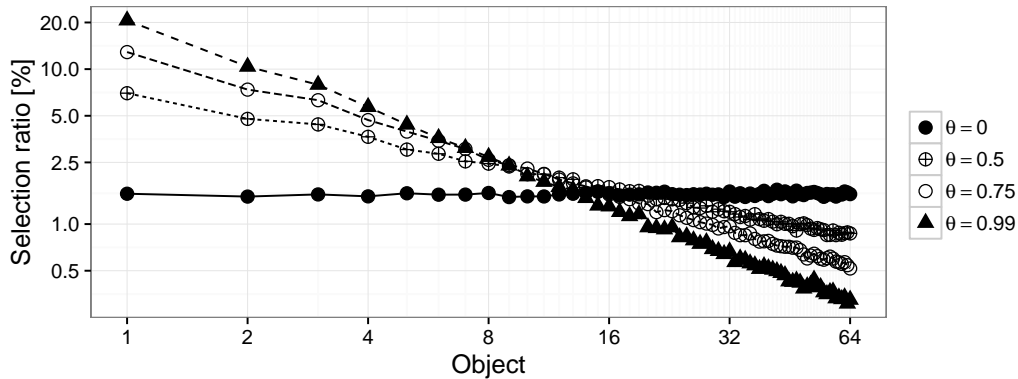


Figure 7. The effect of different values for the Zipf distribution factor θ of the COSBench object selector: Selection rate for each object with 10000 selections, 64 objects, and varying θ .

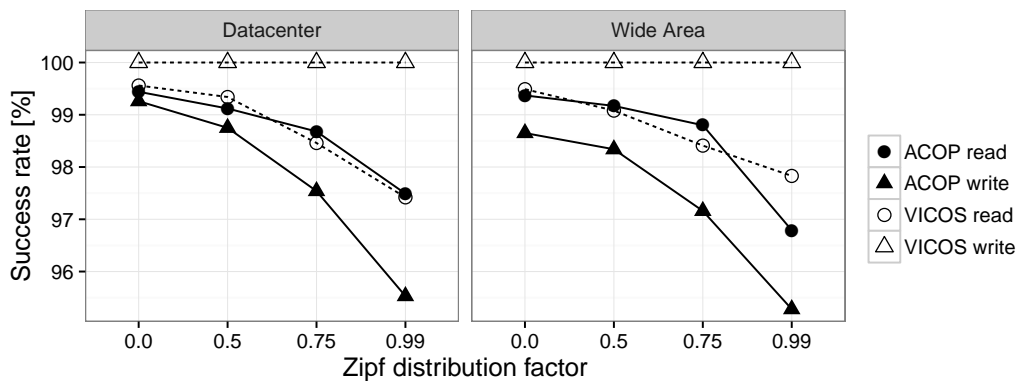


Figure 8. The effect of conflicting concurrent operations: Success rate of read and write operations with 10 kB objects, sixteen clients, and varying Zipf distribution factors θ .

of Gray et al. [18] for generating a Zipf-like access distribution, as also used in YCSB (<https://github.com/brianfrankcooper/YCSB>). With this workload we cause operations to conflict by progressively increasing $\theta \in \{0, 0.5, 0.75, 0.99\}$. The higher the Zipf factor θ , the more clients concurrently access the same objects and invoke non-compatible operations, causing aborts.

Figure 8 shows the operation success rates for VICOS and for ACOP, using the four different Zipf factors. Recall from Sec. 2.4 and from Table 1 that a *put* operation in the KVS interface is always compatible with every preceding operation and never aborts. Therefore, the *write* operations show 100% success rate for VICOS. For the commuting operations in ACOP, on the other hand, *writes* are progressively more often aborted with increasing θ . The behavior of *reads* is similar for VICOS and ACOP because preceding *writes* cause aborts equally often.

The advantage of VICOS over protocols considering only operation commutativity becomes evident here, in that *write* operations always succeed, and overall the abort rate is significantly reduced.

6.2.5 Summary

The performance evaluation shows that VICOS achieves its goal of adding consistency and integrity protection while remaining almost transparent to clients using cloud object stores. The cost added over the raw performance is most visible in the datacenter setting, which is not a realistic deployment for

the intended applications. Still this overhead remains limited to about 20% for accesses with high throughput (Sec. 6.2.2). With many clients performing operations concurrently, the extra cost may become noticeable (Sec. 6.2.3), and further work is needed for decreasing this. It should be added that the VICOS prototype is currently a proof of concept and not product-level code.

7 Related Work

Many previous systems providing data integrity rely on trusted components. Distributed file systems with cryptographic protection provide stronger notions of integrity and consistency than given by VICOS; there are many examples for this, from early research prototypes like FARSITE [2] or SiR-iUS [14] to production file-systems today (e.g., IBM Spectrum Scale, <http://www-03.ibm.com/systems/storage/spectrum/scale/>). However, they rely on trusted directory services for freshness. Such a trusted coordinator is often missing or considered to be impractical. Iris [31] relies on a trusted gateway appliance, which mediates all requests between the clients and the untrusted cloud storage. Several recent systems ensure data integrity with the help of trusted hardware, such as CATS [35], which offers accountability based on an immutable public publishing medium, or A2M [11], which assumes an append-only memory. They all require some form of global synchronization, usually done by the trusted component, for critical metadata to ensure linearizability. In the absence of such communication, as assumed here, they cannot protect consistency and prevent replay attacks.

In CloudProof [29], an object-storage protection system with accountable and proof-based data integrity and consistency support, clients may verify the freshness of returned objects with the help of the data owner. Its auditing operation works in epochs and verifies operations on one object only with a certain probability and only at the end of an epoch. Moreover, the clients need to communicate directly with the owner of an object for establishing integrity and consistency.

Cryptographic integrity guarantees are of increasing interest for many diverse domains: Verena [21], for example, is a recent enhancement for web applications that involve database queries and updates by multiple clients. It targets a patient database holding diagnostic data and treatment information. In contrast to VICOS, however, it relies on a trusted server that supplies hash values of data objects to clients during every operation.

The remainder of this section discusses related work without trusted components for synchronization. With only one client, the classic solution for memory checking by Blum et al. [5] provides data integrity through a hash tree and by storing its root at the client. Many systems have exemplified this approach for remote file systems and for cloud storage (e.g., Athos [16]).

With *authenticated data structures* [28, 25], the single-writer, multi-reader model of remote storage can be authenticated, assuming there is a trusted and timely way to distribute authenticators from the writer to all readers. In practice, this approach is often taken for software distribution, where new releases are posted to a repository and authenticated by broadcasting hash values of the packages over a mailing list. AIP as introduced in Sec. 3 represents one way to generalize ADS for multiple writers.

In the multi-client model, Mazières et al. [26, 23] have introduced the notion of fork-linearizability and implemented SUNDR, the first system to guarantee fork-linearizable views to all clients. It detects integrity and consistency violations among all clients that become aware of each other's operations. The SUNDR system uses messages of size $\Omega(n^2)$ for n clients [10], which might be expensive. The SUNDR prototype [23] description also claims to handle multiple files and directory trees; however, the protocol description and guarantees are stated informally only, so that it remains unclear whether it achieves fork-linearizability under all circumstances.

As mentioned in Sec. 1, several systems have expanded the guarantees of fork-linearizability to different applications [13] and improved the general efficiency of protocols for achieving it [10]. Others

have explored aborting operations [24] or introduced weak fork-linearizability in order to avoid blocking operations. In particular, SPORC [13], FAUST [8], and Venus [30] sacrifice full linearizability to avoid aborts and blocking, respectively, and achieve weak fork-linearizability instead. The latter is a relaxation of fork-linearizability in which the most recent operation of a client may violate atomicity.

The SPORC system [13] is a groupware collaboration service whose operations may conflict with each other, but can be made to commute by applying a specific technique called “operational transformations.” Through this mechanism, different execution orders still converge to the same state; still SPORC achieves only weak fork-linearizability.

Furthermore, VICOS also reduces the communication overhead compared to past systems considerably, since SUNDR, FAUST, and Venus all use messages of size $\Theta(n)$ or more with n clients, whereas the message size in VICOS does not depend on n .

The BST protocol [34] supports an encrypted remote database hosted by an untrusted server that is accessed by multiple clients. Its consistency checking algorithm allows some commuting client operations to proceed concurrently; COP and ACOP [9] extend BST and also guarantee fork-linearizability for arbitrary services run by a Byzantine server, going beyond data storage services, and support wait-freedom for commuting operations. VICOS builds directly on COP, but improves the efficiency by avoiding the local state copies at clients and by reducing the computation and communication overhead. The main advantage is that clients can remain offline between executing operations without stalling the protocol.

8 Conclusion

This paper has presented VICOS, a complete system for protecting the integrity and consistency of data outsourced to untrusted commodity cloud object stores. It shows, for the first time, how to realize multi-client integrity protection for generic functions with an authenticated data structure (ADS). Its two-phase protocol structure reduces the communication overhead compared to previous algorithms.

VICOS works with commodity cloud storage services and ensures the best possible consistency notion of fork-linearizability. It supports wait-free client operations and does not require any additional trusted components.

There are several challenges that this paper not address, which remain open for future work. An interesting question, for instance, is how to recover from an integrity violation. Since we assume only a single untrusted server and that client data resides at the cloud storage service, orthogonal techniques are needed for resilience of the data itself.

Another interesting challenge would be to consider malicious clients, as one further step towards a more realistic system. For small groups of clients our system model makes sense, but for groups with hundreds of clients it seems difficult to maintain this assumption. The situation is especially interesting when a client colludes with the malicious server.

Finally, the approach of AIP also be applied to services beyond cloud storage; for example, cloud and NoSQL databases, interactions in a social network, or certificate and key management services.

Acknowledgments

We thank Rüdiger Kapitza, Dieter Sommer and Sören Bleikertz for helpful discussions and the anonymous reviewers of SYSTOR 2015 for valuable comments.

This work has been supported in part by the European Commission through the Horizon 2020 Framework Programme (H2020-ICT-2014-1) under grant agreements number 644371 WITDOM and

644579 ESCUDO-CLOUD and in part by the Swiss State Secretariat for Education, Research and Innovation (SERI) under contracts number 15.0098 and 15.0087.

References

- [1] L. A. Adamic and B. A. Huberman, “Zipfs law and the internet,” *Glottometrics*, vol. 3, no. 1, pp. 143–150, 2002.
- [2] A. Adya, W. J. Bolosky, M. Castro, G. Cermak, R. Chaiken, J. R. Douceur, J. Howell, J. R. Lorch, M. Theimer, and R. P. Wattenhofer, “FARSITE: Federated, available, and reliable storage for an incompletely trusted environment,” in *Proc. 5th Symp. Operating Systems Design and Implementation (OSDI)*, 2002.
- [3] H. Attiya and J. Welch, *Distributed Computing: Fundamentals, Simulations and Advanced Topics*, 2nd ed. Wiley, 2004.
- [4] P. Bailis and A. Ghodsi, “Eventual consistency today: Limitations, extensions, and beyond,” *ACM Queue*, vol. 11, no. 3, Apr. 2013.
- [5] M. Blum, W. S. Evans, P. Gemmell, S. Kannan, and M. Naor, “Checking the correctness of memories,” *Algorithmica*, vol. 12, no. 2/3, pp. 225–244, 1994.
- [6] C. Cachin, “Integrity and consistency for untrusted services,” in *Proc. Theory and Practice of Computer Science (SOFSEM)*, ser. Lecture Notes in Computer Science, vol. 6543. Springer, 2011, pp. 1–14.
- [7] C. Cachin, R. Guerraoui, and L. Rodrigues, *Introduction to Reliable and Secure Distributed Programming (Second Edition)*. Springer, 2011.
- [8] C. Cachin, I. Keidar, and A. Shraer, “Fail-aware untrusted storage,” *SIAM Journal on Computing*, vol. 40, no. 2, Apr. 2011.
- [9] C. Cachin and O. Ohrimenko, “Verifying the consistency of remote untrusted services with commutative operations,” in *Proc. 18th Intl. Conference on Principles of Distributed Systems (OPODIS)*, ser. Lecture Notes in Computer Science, M. K. Aguilera, L. Querzoni, and M. Shapiro, Eds., vol. 8878. Springer, 2014.
- [10] C. Cachin, A. Shelat, and A. Shraer, “Efficient fork-linearizable access to untrusted shared memory,” in *Proc. 26th Annual ACM Symposium on Principles of Distributed Computing (PODC)*. ACM, 2007.
- [11] B.-G. Chun, P. Maniatis, S. Shenker, and J. Kubiawicz, “Attested append-only memory: Making adversaries stick to their word,” in *Proc. 21st ACM Symposium on Operating Systems Principles (SOSP)*, 2007.
- [12] S. A. Crosby and D. S. Wallach, “Authenticated dictionaries: Real-world costs and trade-offs,” *ACM Transactions on Information and System Security*, vol. 14, no. 2, 2011.
- [13] A. J. Feldman, W. P. Zeller, M. J. Freedman, and E. W. Felten, “SPORC: Group collaboration using untrusted cloud resources,” in *Proc. 9th Symp. on Operating Systems Design and Implementation (OSDI)*, 2010.

- [14] E.-J. Goh, H. Shacham, N. Modadugu, and D. Boneh, “SiRiUS: Securing remote untrusted storage,” in *Proc. Network and Distributed Systems Security Symposium (NDSS)*, 2003.
- [15] O. Goldreich, *The Foundations of Cryptography - Volume 1, Basic Techniques*. Cambridge University Press, 2001.
- [16] M. T. Goodrich, C. Papamanthou, R. Tamassia, and N. Triandopoulos, “Athos: Efficient authentication of outsourced file systems,” in *Proc. 11th Intl. Conference on Information Security (ISC)*, ser. Lecture Notes in Computer Science, vol. 5222. Springer, 2008.
- [17] M. T. Goodrich, R. Tamassia, and N. Triandopoulos, “Efficient authenticated data structures for graph connectivity and geometric search problems,” *Algorithmica*, vol. 60, pp. 505–552, 2011.
- [18] J. Gray, P. Sundaresan, S. Englert, K. Baclawski, and P. J. Weinberger, “Quickly generating billion-record synthetic databases,” in *Proceedings of the 1994 ACM SIGMOD International Conference on Management of Data*, ser. SIGMOD ’94. New York, NY, USA: ACM, 1994, pp. 243–252. [Online]. Available: <http://doi.acm.org/10.1145/191839.191886>
- [19] M. P. Herlihy and J. M. Wing, “Linearizability: A correctness condition for concurrent objects,” *ACM Transactions on Programming Languages and Systems*, vol. 12, no. 3, Jul. 1990.
- [20] C. Hewitt, P. Bishop, and R. Steiger, “A universal modular actor formalism for artificial intelligence,” in *Proc. 3rd International Joint Conference on Artificial Intelligence (IJCAI)*. Morgan Kaufmann Publishers Inc., 1973.
- [21] N. Karapanos, A. Filios, R. A. Popa, , and S. Capkun, “Verena: End-to-end integrity protection for web applications,” in *Proc. 37th IEEE Symposium on Security & Privacy*, 2016.
- [22] B. Laurie, “Certificate transparency,” *Communications of the ACM*, vol. 57, no. 10, Sep. 2014.
- [23] J. Li, M. Krohn, D. Mazières, and D. Shasha, “Secure untrusted data repository (SUNDR),” in *Proc. 6th Symp. Operating Systems Design and Implementation (OSDI)*, 2004.
- [24] M. Majuntke, D. Dobre, M. Serafini, and N. Suri, “Abortable fork-linearizable storage,” in *Proc. 13th Conference on Principles of Distributed Systems (OPODIS)*, vol. 5923. Springer, 2009.
- [25] C. Martel, G. Nuckolls, P. Devanbu, M. Gertz, A. Kwong, and S. G. Stubblebine, “A general model for authenticated data structures,” *Algorithmica*, vol. 39, no. 1, Jan. 2004.
- [26] D. Mazières and D. Shasha, “Building secure file systems out of byzantine storage,” in *Proc. 21st Annual Symposium on Principles of Distributed Computing (PODC)*. ACM, 2002.
- [27] A. Miller, M. Hicks, J. Katz, and E. Shi, “Authenticated data structures, generically,” in *Proc. 41st ACM Symposium on Principles of Programming Languages (POPL)*, 2014.
- [28] M. Naor and K. Nissim, “Certificate revocation and certificate update,” *IEEE J. Selected Areas in Communications*, vol. 18, no. 4, Apr. 2000.
- [29] R. A. Popa, J. R. Lorch, D. Molnar, H. J. Wang, and L. Zhuang, “Enabling security in cloud storage SLAs with CloudProof,” in *Proc. USENIX Annual Technical Conference*, 2011.
- [30] A. Shraer, C. Cachin, A. Cidon, I. Keidar, Y. Michalevsky, and D. Shaket, “Venus: Verification for untrusted cloud storage,” in *Proc. 2010 ACM Cloud Computing Security Workshop (CCSW)*, 2010.

- [31] E. Stefanov, M. van Dijk, A. Juels, and A. Oprea, “Iris: A scalable cloud file system with efficient integrity checks,” in *Proc. 28th Annual Computer Security Applications Conference (ACSAC)*, 2012.
- [32] R. Tamassia, “Authenticated data structures,” in *Proc. 11th European Symposium on Algorithms (ESA)*, ser. Lecture Notes in Computer Science, G. Di Battista and U. Zwick, Eds., vol. 2832, 2003.
- [33] G. Weikum and G. Vossen, *Transactional Information Systems*. Morgan Kaufmann, 2002.
- [34] P. Williams, R. Sion, and D. Shasha, “The blind stone tablet: Outsourcing durability to untrusted parties,” in *Proc. 16th Annual Network and Distributed Systems Security Symposium (NDSS)*, 2009.
- [35] A. R. Yumerefendi and J. S. Chase, “Strong accountability for network storage,” *ACM Transactions on Storage*, vol. 3, no. 3, 2007.